



# **GHC User's Guide Documentation**

***Release 9.10.2.20250725***

**GHC Team**

**Jul 25, 2025**



# CONTENTS

<b>1 Introduction</b>	<b>3</b>
1.1 Obtaining GHC	3
1.2 Meta-information: Web sites, mailing lists, etc.	4
1.3 Reporting bugs in GHC	4
1.4 GHC version numbering policy	4
1.5 The Glasgow Haskell Compiler License	5
<b>2 Release notes</b>	<b>7</b>
2.1 Version 9.10.1	7
2.1.1 Language	7
2.1.2 Compiler	10
2.1.3 JavaScript backend	11
2.1.4 WebAssembly backend	11
2.1.5 GHCi	12
2.1.6 Runtime system	12
2.1.7 Packaging & Build System	12
2.1.8 base library	12
2.1.9 ghc-prim library	13
2.1.10 ghc library	13
2.1.11 ghc-heap library	13
2.1.12 ghc-experimental library	13
2.1.13 template-haskell library	14
2.1.14 Included libraries	14
2.2 Version 9.10.2	16
2.2.1 Compiler	16
2.2.2 Profiling	17
2.2.3 Native code generator backend	18
2.2.4 LLVM backend	18
2.2.5 JavaScript backend	18
2.2.6 WebAssembly backend	18
2.2.7 GHCi	18
2.2.8 Runtime system	19
2.2.9 Build system and packaging	19
2.2.10 ghc library	20
2.2.11 ghc-heap library	20
2.2.12 ghc-experimental library	20
2.2.13 Included libraries	20
<b>3 Using GHCi</b>	<b>23</b>
3.1 Introduction to GHCi	23

3.2 Loading source files . . . . .	24
3.2.1 Modules vs. filenames . . . . .	25
3.2.2 Making changes and recompilation . . . . .	25
3.3 Loading compiled code . . . . .	25
3.4 Interactive evaluation at the prompt . . . . .	28
3.4.1 I/O actions at the prompt . . . . .	28
3.4.2 Using <code>do</code> notation at the prompt . . . . .	28
3.4.3 Multiline input . . . . .	30
3.4.4 Type, class and other declarations . . . . .	31
3.4.5 What's really in scope at the prompt? . . . . .	33
3.4.5.1 The effect of <code>:load</code> on what is in scope . . . . .	33
3.4.5.2 Controlling what is in scope with <code>import</code> . . . . .	34
3.4.5.3 Controlling what is in scope with the <code>:module</code> command . . . . .	34
3.4.5.4 Qualified names . . . . .	35
3.4.5.5 <code>:module</code> and <code>:load</code> . . . . .	35
3.4.5.6 Shadowing and the <code>Ghci1</code> module name . . . . .	35
3.4.6 The <code>it</code> variable . . . . .	36
3.4.7 Type defaulting in <code>GHCi</code> . . . . .	37
3.4.7.1 Interactive classes . . . . .	38
3.4.7.2 Extended rules around <code>default</code> declarations . . . . .	38
3.4.8 Using a custom interactive printing function . . . . .	39
3.4.9 Stack Traces in <code>GHCi</code> . . . . .	40
3.5 The <code>GHCi</code> Debugger . . . . .	40
3.5.1 Breakpoints and inspecting variables . . . . .	41
3.5.1.1 Setting breakpoints . . . . .	44
3.5.1.2 Managing breakpoints . . . . .	45
3.5.2 Single-stepping . . . . .	45
3.5.3 Nested breakpoints . . . . .	46
3.5.4 The <code>_result</code> variable . . . . .	47
3.5.5 Tracing and history . . . . .	47
3.5.6 Debugging exceptions . . . . .	49
3.5.7 Example: inspecting functions . . . . .	50
3.5.8 Limitations . . . . .	51
3.6 Invoking <code>GHCi</code> . . . . .	51
3.6.1 Packages . . . . .	52
3.6.2 Extra libraries . . . . .	52
3.7 <code>GHCi</code> commands . . . . .	53
3.8 The <code>:set</code> and <code>:seti</code> commands . . . . .	65
3.8.1 <code>GHCi</code> options . . . . .	66
3.8.2 Setting GHC command-line options in <code>GHCi</code> . . . . .	66
3.8.3 Setting options for interactive evaluation only . . . . .	67
3.9 The <code>.ghci</code> and <code>.haskeline</code> files . . . . .	68
3.9.1 The <code>.ghci</code> files . . . . .	68
3.9.2 The <code>.haskeline</code> file . . . . .	69
3.10 Compiling to object code inside <code>GHCi</code> . . . . .	69
3.11 Running the interpreter in a separate process . . . . .	70
3.12 Running the interpreter on a different host . . . . .	70
3.13 Building <code>GHCi</code> libraries . . . . .	71
3.14 FAQ and Things To Watch Out For . . . . .	71
<b>4 Using <code>runghc</code></b> . . . . .	<b>73</b>
4.1 Usage . . . . .	73
4.2 <code>runghc</code> flags . . . . .	73
4.3 GHC Flags . . . . .	74

<b>5 Using GHC</b>	<b>75</b>
5.1 Using GHC	75
5.1.1 Getting started: compiling programs	75
5.1.2 Options overview	76
5.1.2.1 Command-line arguments	76
5.1.2.2 Command line options in source files	76
5.1.2.3 Setting options in GHCi	77
5.1.3 Dynamic and Mode options	77
5.1.4 Meaningful file suffixes	77
5.1.5 Modes of operation	78
5.1.5.1 Using ghc --make	82
5.1.5.2 GHC Jobserver Protocol	83
5.1.5.3 Multiple Home Units	83
5.1.5.4 Expression evaluation mode	85
5.1.5.5 Batch compiler mode	85
5.1.6 Verbosity options	86
5.1.7 Platform-specific Flags	93
5.1.8 Haddock	95
5.1.9 Miscellaneous flags	95
5.1.9.1 Other environment variables	95
5.2 Warnings and sanity-checking	96
5.2.1 Warning groups	96
5.2.2 Treating warnings as fatal errors	98
5.2.3 Individual warning options	99
5.3 Optimisation (code improvement)	127
5.3.1 -O*: convenient “packages” of optimisation flags.	127
5.3.2 -f*: platform-independent flags	128
5.4 Using Concurrent Haskell	150
5.5 Using SMP parallelism	150
5.5.1 Compile-time options for SMP parallelism	151
5.5.2 RTS options for SMP parallelism	151
5.5.3 Hints for using SMP parallelism	152
5.6 Flag reference	153
5.6.1 Verbosity options	153
5.6.2 Alternative modes of operation	157
5.6.3 Which phases to run	159
5.6.4 Redirecting output	160
5.6.5 Keeping intermediate files	161
5.6.6 Temporary files	162
5.6.7 Finding imports	162
5.6.8 Interface file options	163
5.6.9 Extended interface file options	163
5.6.10 Recompilation checking	164
5.6.11 Interactive-mode options	164
5.6.12 Packages	166
5.6.13 Language options	167
5.6.14 Warnings	168
5.6.15 Optimisation levels	180
5.6.16 Individual optimisations	180
5.6.17 Profiling options	189
5.6.18 Program coverage options	191
5.6.19 C pre-processor options	191
5.6.20 Code generation options	192
5.6.21 Linking options	193

5.6.22	Plugin options	197
5.6.23	Replacing phases	197
5.6.24	Forcing options to particular phases	199
5.6.25	Platform-specific options	201
5.6.26	Compiler debugging options	202
5.6.27	Miscellaneous compiler options	215
5.7	Runtime system (RTS) options	217
5.7.1	Setting RTS options	217
5.7.1.1	Setting RTS options on the command line	217
5.7.1.2	Setting RTS options at compile time	218
5.7.1.3	Setting RTS options with the <code>GHCRTS</code> environment variable	218
5.7.1.4	“Hooks” to change RTS behaviour	218
5.7.2	Miscellaneous RTS options	220
5.7.3	RTS options to control the garbage collector	222
5.7.4	RTS options to produce runtime statistics	231
5.7.5	RTS options for concurrency and parallelism	234
5.7.6	RTS options for profiling	234
5.7.7	Tracing	234
5.7.8	RTS options for Haskell program coverage	236
5.7.9	RTS options for hackers, debuggers, and over-interested souls	236
5.7.10	Getting information about the RTS	238
5.8	Filenames and separate compilation	240
5.8.1	Haskell source files	240
5.8.2	Output files	240
5.8.3	The search path	241
5.8.4	Redirecting the compilation output(s)	242
5.8.5	Keeping Intermediate Files	244
5.8.6	Redirecting temporary files	245
5.8.7	Other options related to interface files	245
5.8.8	Options related to extended interface files	246
5.8.9	The recompilation checker	246
5.8.9.1	Recompilation for Template Haskell and Plugins	247
5.8.10	How to compile mutually recursive modules	247
5.8.11	Module signatures	250
5.8.12	Using <code>make</code>	255
5.8.13	Dependency generation	256
5.8.14	Orphan modules and instance declarations	258
5.9	Packages	259
5.9.1	Using Packages	260
5.9.2	The main package	263
5.9.3	Consequences of packages for the Haskell language	263
5.9.4	Thinning and renaming modules	264
5.9.5	Package Databases	264
5.9.5.1	The <code>GHC_PACKAGE_PATH</code> environment variable	265
5.9.5.2	Package environments	266
5.9.6	Installed package IDs, dependencies, and broken packages	267
5.9.7	Package management (the <code>ghc-pkg</code> command)	269
5.9.8	Building a package from Haskell source	272
5.9.9	<code>InstalledPackageInfo</code> : a package specification	273
5.9.10	Linking against C++ libraries	277
5.10	GHC Backends	278
5.10.1	Native Code Generator ( <code>-fasm</code> )	278
5.10.2	LLVM Code Generator ( <code>-fllvm</code> )	278
5.10.3	C Code Generator ( <code>-fvia-C</code> )	278

5.10.4	JavaScript Code Generator . . . . .	279
5.10.5	Unregisterised compilation . . . . .	279
5.11	Options related to a particular phase . . . . .	279
5.11.1	Replacing the program for one or more phases . . . . .	279
5.11.2	Forcing options to a particular phase . . . . .	281
5.11.3	Options affecting the C pre-processor . . . . .	282
5.11.3.1	Standard CPP macros . . . . .	283
5.11.3.2	CPP and string gaps . . . . .	285
5.11.4	Options affecting a Haskell pre-processor . . . . .	285
5.11.5	Options affecting code generation . . . . .	286
5.11.6	Options affecting linking . . . . .	288
5.12	Using shared libraries . . . . .	294
5.12.1	Building programs that use shared libraries . . . . .	295
5.12.2	Shared libraries for Haskell packages . . . . .	295
5.12.3	Shared libraries that export a C API . . . . .	295
5.12.4	Finding shared libraries at runtime . . . . .	296
5.12.4.1	Unix . . . . .	296
5.12.4.2	Mac OS X . . . . .	297
5.13	Debugging the compiler . . . . .	297
5.13.1	Dumping out compiler intermediate structures . . . . .	298
5.13.1.1	Front-end . . . . .	299
5.13.1.2	Type-checking and renaming . . . . .	300
5.13.1.3	Core representation and simplification . . . . .	301
5.13.1.4	STG representation . . . . .	303
5.13.1.5	C-\- representation . . . . .	304
5.13.1.6	LLVM code generator . . . . .	305
5.13.1.7	C code generator . . . . .	305
5.13.1.8	Native code generator . . . . .	305
5.13.1.9	JavaScript code generator . . . . .	306
5.13.1.10	Miscellaneous backend dumps . . . . .	306
5.13.2	Formatting dumps . . . . .	307
5.13.3	Suppressing unwanted information . . . . .	307
5.13.4	Checking for consistency . . . . .	308
5.13.5	Checking for determinism . . . . .	310
5.13.6	Other . . . . .	310
<b>6</b>	<b>Language extensions</b>	<b>313</b>
6.1	Introduction . . . . .	313
6.1.1	Controlling editions and extensions . . . . .	313
6.1.2	Overview of all language extensions . . . . .	317
6.1.3	Summary of stolen syntax . . . . .	319
6.2	Syntax . . . . .	320
6.2.1	Unicode syntax . . . . .	320
6.2.2	The magic hash . . . . .	321
6.2.3	The recursive do-notation . . . . .	322
6.2.3.1	Recursive binding groups . . . . .	323
6.2.3.2	The mdo notation . . . . .	323
6.2.4	Applicative do-notation . . . . .	325
6.2.4.1	Strict patterns . . . . .	326
6.2.4.2	Things to watch out for . . . . .	327
6.2.5	Qualified do-notation . . . . .	328
6.2.5.1	Examples . . . . .	330
6.2.6	Parallel List Comprehensions . . . . .	331
6.2.7	Generalised (SQL-like) List Comprehensions . . . . .	332

6.2.8	Monad comprehensions	333
6.2.9	Overloaded lists	336
6.2.9.1	The <code>IsList</code> class	337
6.2.9.2	Rebindable syntax	338
6.2.9.3	Defaulting	338
6.2.9.4	Speculation about the future	339
6.2.10	Rebindable syntax and the implicit <code>Prelude</code> import	339
6.2.10.1	Custom <code>Prelude</code> modules named <code>Prelude</code>	340
6.2.10.2	Things unaffected by <code>RebindableSyntax</code>	341
6.2.11	Postfix operators	341
6.2.12	Tuple sections	342
6.2.13	Lambda-case	343
6.2.14	Empty case alternatives	343
6.2.15	Multi-way if-expressions	344
6.2.16	Local Fixity Declarations	345
6.2.17	More liberal syntax for function arguments	346
6.2.17.1	Changes to the grammar	346
6.2.18	Typed Holes	347
6.2.18.1	Valid Hole Fits	352
6.2.19	Arrow notation	355
6.2.19.1	do-notation for commands	357
6.2.19.2	Conditional commands	358
6.2.19.3	Defining your own control structures	359
6.2.19.4	Primitive constructs	360
6.2.19.5	Differences with the paper	361
6.2.19.6	Portability	362
6.2.20	Lexical negation	362
6.3	Import and export	363
6.3.1	Hiding things the imported module doesn't export	363
6.3.2	Package-qualified imports	363
6.3.3	Safe imports	364
6.3.4	Explicit namespaces in <code>import/export</code>	364
6.3.5	Writing qualified in postpositive position	366
6.4	Types	366
6.4.1	Data types with no constructors	366
6.4.2	Data type contexts	367
6.4.3	Infix type constructors, classes, and type variables	367
6.4.4	Type operators	368
6.4.5	Liberalised type synonyms	369
6.4.6	Existentially quantified data constructors	370
6.4.6.1	Why existential?	371
6.4.6.2	Existentials and type classes	371
6.4.6.3	Record Constructors	372
6.4.6.4	Restrictions	373
6.4.7	Declaring data types with explicit constructor signatures	374
6.4.7.1	Formal syntax for GADTs	376
6.4.7.2	GADT syntax odds and ends	378
6.4.8	Generalised Algebraic Data Types (GADTs)	380
6.4.9	Type families	384
6.4.9.1	Data families	385
6.4.9.2	Synonym families	388
6.4.9.3	Wildcards on the LHS of data and type family instances	394
6.4.9.4	Associated data and type families	394
6.4.9.5	Import and export	399



6.4.9.6	Type families and instance declarations . . . . .	401
6.4.9.7	Injective type families . . . . .	402
6.4.10	Datatype promotion . . . . .	404
6.4.10.1	Motivation . . . . .	404
6.4.10.2	Overview . . . . .	405
6.4.10.3	Distinguishing between types and constructors . . . . .	406
6.4.10.4	Type-level literals . . . . .	406
6.4.10.5	Promoted list and tuple types . . . . .	406
6.4.10.6	Promoting existential data constructors . . . . .	407
6.4.10.7	DataKinds and type synonyms . . . . .	408
6.4.11	Unique syntax for type-level lists and tuples . . . . .	409
6.4.12	Type-level data declarations . . . . .	410
6.4.13	Kind polymorphism . . . . .	411
6.4.13.1	Overview of kind polymorphism . . . . .	412
6.4.13.2	Overview of Type-in-Type . . . . .	412
6.4.13.3	Principles of kind inference . . . . .	412
6.4.13.4	Kind inference in type signatures . . . . .	413
6.4.13.5	Explicit kind quantification . . . . .	414
6.4.13.6	Inferring the order of variables in a type/class declaration . . . . .	414
6.4.13.7	Complete user-supplied kind signatures and polymorphic recursion . . . . .	415
6.4.13.8	Standalone kind signatures and polymorphic recursion . . . . .	417
6.4.13.9	Standalone kind signatures and declaration headers . . . . .	419
6.4.13.10	Kind inference in data type declarations . . . . .	421
6.4.13.11	Kind inference for data/newtype instance declarations . . . . .	422
6.4.13.12	Kind inference in class instance declarations . . . . .	422
6.4.13.13	Kind inference in type synonyms and type family instances . . . . .	423
6.4.13.14	Kind inference in closed type families . . . . .	425
6.4.13.15	Higher-rank kinds . . . . .	426
6.4.13.16	The kind Type . . . . .	426
6.4.13.17	Inferring dependency in datatype declarations . . . . .	427
6.4.13.18	Inferring dependency in user-written forall's . . . . .	427
6.4.13.19	Kind defaulting without PolyKinds . . . . .	428
6.4.13.20	Pretty-printing in the presence of kind polymorphism . . . . .	428
6.4.13.21	Datatype return kinds . . . . .	428
6.4.14	Representation polymorphism . . . . .	430
6.4.14.1	Levity polymorphism . . . . .	430
6.4.14.2	No representation-polymorphic variables or arguments . . . . .	431
6.4.14.3	Representation-polymorphic bottoms . . . . .	431
6.4.14.4	Inference and defaulting . . . . .	432
6.4.14.5	Printing representation-polymorphic types . . . . .	432
6.4.15	Type-Level Literals . . . . .	433
6.4.15.1	Runtime Values for Type-Level Literals . . . . .	434
6.4.15.2	Computing With Type-Level Naturals . . . . .	434
6.4.16	Visible type application . . . . .	435
6.4.16.1	Inferred vs. specified type variables . . . . .	435
6.4.16.2	Ordering of specified variables . . . . .	436
6.4.16.3	Manually defining inferred variables . . . . .	437
6.4.17	Type abstractions . . . . .	439
6.4.17.1	Type Abstractions in Patterns . . . . .	439
6.4.17.2	Type Abstractions in Functions . . . . .	440
6.4.17.3	Invisible Binders in Type Declarations . . . . .	442
6.4.18	Required type arguments . . . . .	444
6.4.18.1	Terminology: Dependent quantifier . . . . .	444
6.4.18.2	Terminology: Visible quantifier . . . . .	445

6.4.18.3	Relation to <code>TypeApplications</code>	446
6.4.18.4	Relation to <code>ExplicitNamespaces</code>	446
6.4.18.5	Effect on implicit quantification	449
6.4.18.6	Relation to $\Pi$ -types	450
6.4.19	Arbitrary-rank polymorphism	451
6.4.19.1	Examples	452
6.4.19.2	Subsumption	454
6.4.19.3	Type inference	455
6.4.19.4	Implicit quantification	456
6.4.20	Impredicative polymorphism	457
6.4.21	Linear types	458
6.4.21.1	Expressions	459
6.4.21.2	Data types	461
6.4.21.3	Printing multiplicity-polymorphic types	462
6.4.21.4	Limitations	462
6.4.21.5	Design and further reading	462
6.4.22	Custom compile-time errors	463
6.4.23	Deferring type errors to runtime	464
6.4.23.1	Enabling deferring of type errors	464
6.4.23.2	Deferred type errors in GHCi	465
6.4.23.3	Limitations of deferred type errors	466
6.4.24	Roles	467
6.4.24.1	Nominal, Representational, and Phantom	467
6.4.24.2	Role inference	468
6.4.24.3	Role annotations	469
6.5	Records	470
6.5.1	Record field name resolution	470
6.5.2	Traditional record syntax	471
6.5.3	Field selectors and <code>TypeApplications</code>	471
6.5.3.1	Field selectors for Haskell98-style data constructors	472
6.5.3.2	Field selectors for GADT constructors	472
6.5.3.3	Field selectors for pattern synonyms	473
6.5.4	Record field disambiguation	473
6.5.5	Duplicate record fields	475
6.5.5.1	Import and export of record fields	475
6.5.6	Field selectors	476
6.5.6.1	Import and export of selector functions	477
6.5.7	Record puns	478
6.5.8	Record wildcards	479
6.5.9	Record field selector polymorphism	480
6.5.9.1	Solving <code>HasField</code> constraints	481
6.5.9.2	Virtual record fields	482
6.5.10	Overloaded record dot	483
6.5.11	Overloaded record update	484
6.6	Deriving mechanism	485
6.6.1	Deriving instances for empty data types	486
6.6.2	Inferred context for deriving clauses	487
6.6.3	Stand-alone deriving declarations	487
6.6.4	Deriving instances of extra classes ( <code>Data</code> , etc.)	489
6.6.4.1	Deriving <code>Functor</code> instances	489
6.6.4.2	Deriving <code>Foldable</code> instances	493
6.6.4.3	Deriving <code>Traversable</code> instances	495
6.6.4.4	Deriving <code>Data</code> instances	496
6.6.4.5	Deriving <code>Typeable</code> instances	497

6.6.4.6 Deriving Lift instances	497
6.6.5 Generalised derived instances for newtypes	499
6.6.5.1 Generalising the deriving clause	499
6.6.5.2 A more precise specification	501
6.6.5.3 Associated type families	502
6.6.6 Deriving any other class	504
6.6.7 Deriving strategies	507
6.6.7.1 Default deriving strategy	508
6.6.8 Deriving via	508
6.7 Patterns	510
6.7.1 Pattern guards	510
6.7.2 View patterns	511
6.7.3 n+k patterns	513
6.7.4 Pattern synonyms	513
6.7.4.1 Record Pattern Synonyms	516
6.7.4.2 Syntax and scoping of pattern synonyms	516
6.7.4.3 Import and export of pattern synonyms	517
6.7.4.4 Typing of pattern synonyms	518
6.7.4.5 Matching of pattern synonyms	520
6.7.4.6 Pragmas for pattern synonyms	521
6.8 Class and instances declarations	522
6.8.1 Multi-parameter type classes	522
6.8.2 Undecidable (or recursive) superclasses	522
6.8.3 Constrained class method types	523
6.8.4 Default method signatures	524
6.8.5 Detailed requirements for default type signatures	525
6.8.6 Nullary type classes	527
6.8.7 Functional dependencies	528
6.8.7.1 Rules for functional dependencies	528
6.8.7.2 Background on functional dependencies	529
6.8.8 Instance declarations and resolution	532
6.8.8.1 Relaxed rules for the instance head	533
6.8.8.2 Formal syntax for instance declaration types	534
6.8.8.3 Instance termination rules	535
6.8.8.4 Undecidable instances and loopy superclasses	537
6.8.8.5 Overlapping instances	538
6.8.8.6 Instance signatures: type signatures in instance declarations	542
6.9 Literals	543
6.9.1 Negative literals	543
6.9.2 Binary integer literals	544
6.9.3 Hexadecimal floating point literals	544
6.9.4 Fractional looking integer literals	545
6.9.5 Sized primitive literal syntax	546
6.9.6 Numeric underscores	546
6.9.7 Overloaded string literals	548
6.9.8 Overloaded labels	549
6.10 Constraints	552
6.10.1 Loosening restrictions on class contexts	552
6.10.2 Equality constraints and Coercible constraint	552
6.10.2.1 Equality constraints	552
6.10.2.2 Heterogeneous equality	553
6.10.2.3 Unlifted heterogeneous equality	553
6.10.2.4 The Coercible constraint	553
6.10.3 The Constraint kind	553

6.10.4	Quantified constraints	555
6.10.4.1	Motivation	555
6.10.4.2	Syntax changes	556
6.10.4.3	Typing changes	557
6.10.4.4	Superclasses	557
6.10.4.5	Overlap	557
6.10.4.6	Instance lookup	559
6.10.4.7	Termination	559
6.10.4.8	Coherence	559
6.11	Type signatures	560
6.11.1	Explicit universal quantification (forall)	560
6.11.1.1	The forall-or-nothing rule	561
6.11.2	Ambiguous types and the ambiguity check	562
6.11.3	Explicitly-kinded quantification	564
6.11.4	Lexically scoped type variables	565
6.11.4.1	Overview	566
6.11.4.2	Declaration type signatures	567
6.11.4.3	Expression type signatures	568
6.11.4.4	Pattern type signatures	568
6.11.4.5	Class and instance declarations	569
6.11.5	Implicit parameters	570
6.11.5.1	Implicit-parameter type constraints	571
6.11.5.2	Implicit-parameter bindings	572
6.11.5.3	Implicit parameters and polymorphic recursion	572
6.11.5.4	Implicit parameters scoping guarantees	573
6.11.5.5	Implicit parameters and monomorphism	573
6.11.6	Partial Type Signatures	574
6.11.6.1	Syntax	574
6.11.6.2	Where can they occur?	578
6.12	Bindings and generalisation	579
6.12.1	Switching off the Monomorphism Restriction	579
6.12.2	Let-generalisation	580
6.13	Template Haskell	581
6.13.1	Syntax	582
6.13.2	Using Template Haskell	589
6.13.3	Viewing Template Haskell generated code	589
6.13.4	A Template Haskell Worked Example	590
6.13.5	Template Haskell quotes and Rebindable Syntax	591
6.13.6	Using Template Haskell with Profiling	591
6.13.7	Template Haskell Quasi-quotation	592
6.14	Bang patterns and Strict Haskell	594
6.14.1	Bang patterns	595
6.14.1.1	Strict bindings	596
6.14.2	Strict-by-default data types	597
6.14.3	Strict-by-default pattern bindings	597
6.14.4	Modularity	599
6.14.5	Dynamic semantics of bang patterns	600
6.15	Parallel and Concurrent	604
6.15.1	Concurrent and Parallel Haskell	604
6.15.1.1	Concurrent Haskell	604
6.15.1.2	Parallel Haskell	605
6.15.1.3	Annotating pure code for parallelism	605
6.15.2	Software Transactional Memory	606
6.15.3	Static pointers	606

6.15.3.1	Using static pointers . . . . .	607
6.15.3.2	Static semantics of static pointers . . . . .	607
6.16	Unboxed types and primitive operations . . . . .	609
6.16.1	Unboxed types . . . . .	609
6.16.2	Unboxed type kinds . . . . .	610
6.16.3	Unboxed tuples . . . . .	611
6.16.4	Unboxed sums . . . . .	612
6.16.5	Unlifted Newtypes . . . . .	613
6.16.6	Unlifted Datatypes . . . . .	615
6.17	Foreign function interface (FFI) . . . . .	616
6.17.1	GHC differences to the FFI Chapter . . . . .	617
6.17.1.1	Guaranteed call safety . . . . .	617
6.17.1.2	Interactions between safe calls and bound threads . . . . .	617
6.17.1.3	Varargs not supported by ccall calling convention . . . . .	617
6.17.2	GHC extensions to the FFI Chapter . . . . .	618
6.17.2.1	Unlifted FFI Types . . . . .	618
6.17.2.2	Newtype wrapping of the IO monad . . . . .	620
6.17.2.3	Explicit “forall”s in foreign types . . . . .	620
6.17.2.4	Primitive imports . . . . .	621
6.17.2.5	Interruptible foreign calls . . . . .	621
6.17.2.6	The CAPI calling convention . . . . .	622
6.17.2.7	hs_thread_done() . . . . .	623
6.17.2.8	Freeing many stable pointers efficiently . . . . .	623
6.17.3	Using the FFI with GHC . . . . .	624
6.17.3.1	Using foreign export and foreign import ccall “wrapper” with GHC . . . . .	624
6.17.3.2	Using header files . . . . .	628
6.17.3.3	Memory Allocation . . . . .	628
6.17.3.4	Multi-threading and the FFI . . . . .	629
6.17.3.5	Floating point and the FFI . . . . .	632
6.17.3.6	Pinned Byte Arrays . . . . .	633
6.18	Safe Haskell . . . . .	633
6.18.1	Uses of Safe Haskell . . . . .	634
6.18.1.1	Strict type-safety (good style) . . . . .	634
6.18.1.2	Building secure systems (restricted IO Monads) . . . . .	634
6.18.2	Safe Language . . . . .	636
6.18.2.1	Safe Overlapping Instances . . . . .	637
6.18.3	Safe Imports . . . . .	639
6.18.4	Trust and Safe Haskell Modes . . . . .	639
6.18.4.1	Trust check (-fpackage-trust disabled) . . . . .	639
6.18.4.2	Trust check (-fpackage-trust enabled) . . . . .	640
6.18.4.3	Example . . . . .	641
6.18.4.4	Trustworthy Requirements . . . . .	641
6.18.4.5	Package Trust . . . . .	641
6.18.5	Safe Haskell Inference . . . . .	642
6.18.6	Safe Haskell Flag Summary . . . . .	642
6.18.7	Safe Compilation . . . . .	644
6.19	Miscellaneous . . . . .	645
6.19.1	Rewrite rules . . . . .	645
6.19.1.1	Syntax . . . . .	645
6.19.1.2	Semantics . . . . .	647
6.19.1.3	How rules interact with INLINE/NOINLINE pragmas . . . . .	649
6.19.1.4	How rules interact with CONLIKE pragmas . . . . .	649
6.19.1.5	How rules interact with class methods . . . . .	650

6.19.1.6 List fusion . . . . .	651
6.19.1.7 Specialisation . . . . .	652
6.19.1.8 Controlling what’s going on in rewrite rules . . . . .	653
6.19.2 Special built-in functions . . . . .	653
6.19.3 Generic programming . . . . .	653
6.19.3.1 Deriving representations . . . . .	654
6.19.3.2 Writing generic functions . . . . .	656
6.19.3.3 Unlifted representation types . . . . .	657
6.19.3.4 Generic defaults . . . . .	657
6.19.3.5 More information . . . . .	658
6.19.4 Assertions . . . . .	658
6.19.5 HasCallStack . . . . .	659
6.19.5.1 Compared with other sources of stack traces . . . . .	661
6.19.6 Whitespace . . . . .	661
6.20 Pragma . . . . .	661
6.20.1 LANGUAGE pragma . . . . .	662
6.20.2 OPTIONS_GHC pragma . . . . .	662
6.20.3 INCLUDE pragma . . . . .	662
6.20.4 WARNING and DEPRECATED pragmas . . . . .	663
6.20.5 MINIMAL pragma . . . . .	666
6.20.6 INLINE and NOINLINE pragmas . . . . .	666
6.20.6.1 INLINE pragma . . . . .	666
6.20.6.2 INLINABLE pragma . . . . .	669
6.20.6.3 NOINLINE pragma . . . . .	669
6.20.6.4 CONLIKE modifier . . . . .	670
6.20.6.5 Phase control . . . . .	670
6.20.7 OPAQUE pragma . . . . .	671
6.20.8 LINE pragma . . . . .	671
6.20.9 COLUMN pragma . . . . .	671
6.20.10 RULES pragma . . . . .	672
6.20.11 SPECIALIZE pragma . . . . .	672
6.20.11.1 SPECIALIZE INLINE . . . . .	673
6.20.11.2 SPECIALIZE for imported functions . . . . .	674
6.20.12 SPECIALIZE instance pragma . . . . .	675
6.20.13 UNPACK pragma . . . . .	675
6.20.14 NOUNPACK pragma . . . . .	676
6.20.15 SOURCE pragma . . . . .	676
6.20.16 COMPLETE pragmas . . . . .	676
6.20.17 OVERLAPPING, OVERLAPPABLE, OVERLAPS, and INCOHERENT pragmas . . . . .	678
<b>7 Extending and using GHC as a Library</b> . . . . .	<b>679</b>
7.1 Source annotations . . . . .	679
7.1.1 Annotating values . . . . .	679
7.1.2 Annotating types . . . . .	680
7.1.3 Annotating modules . . . . .	680
7.2 Using GHC as a Library . . . . .	680
7.3 Compiler Plugins . . . . .	681
7.3.1 Using compiler plugins . . . . .	681
7.3.2 Writing compiler plugins . . . . .	683
7.3.3 Core plugins in more detail . . . . .	684
7.3.3.1 Manipulating bindings . . . . .	685
7.3.3.2 Late Plugins . . . . .	685
7.3.3.3 Using Annotations . . . . .	686
7.3.4 Typechecker plugins . . . . .	687



7.3.4.1 Constraint solving with plugins . . . . .	689
7.3.4.2 Type family rewriting with plugins . . . . .	690
7.3.5 Source plugins . . . . .	690
7.3.5.1 Parsed representation . . . . .	691
7.3.5.2 Type checked representation . . . . .	691
7.3.5.3 Evaluated code . . . . .	692
7.3.5.4 Interface files . . . . .	692
7.3.5.5 Source plugin example . . . . .	693
7.3.6 Hole fit plugins . . . . .	695
7.3.6.1 Stateful hole fit plugins . . . . .	696
7.3.6.2 Hole fit plugin example . . . . .	696
7.3.7 Defaulting plugins . . . . .	701
7.3.8 Controlling Recompilation . . . . .	702
7.3.9 Frontend plugins . . . . .	703
7.3.10 DynFlags plugins . . . . .	704
7.4 Referring to back ends . . . . .	705
7.4.1 Client code that only names back ends . . . . .	705
7.4.2 Client code that discriminates among back ends . . . . .	706
7.4.3 General migration strategy for client code . . . . .	706
<b>8 Profiling</b>	<b>709</b>
8.1 Cost centres and cost-centre stacks . . . . .	709
8.1.1 Inserting cost centres by hand . . . . .	712
8.1.2 Rules for attributing costs . . . . .	714
8.2 Profiling and foreign calls . . . . .	714
8.3 Compiler options for profiling . . . . .	715
8.3.1 Automatically placing cost-centres . . . . .	715
8.4 Time and allocation profiling . . . . .	718
8.4.1 JSON profile format . . . . .	719
8.4.2 Eventlog profile format . . . . .	722
8.5 Profiling memory usage . . . . .	722
8.5.1 RTS options for heap profiling . . . . .	724
8.5.2 Retainer Profiling . . . . .	727
8.5.2.1 Hints for using retainer profiling . . . . .	727
8.5.3 Precise Retainer Analysis . . . . .	728
8.5.4 Biographical Profiling . . . . .	728
8.5.5 Actual memory residency . . . . .	728
8.6 hp2ps – Rendering heap profiles to PostScript . . . . .	729
8.7 Profiling Parallel and Concurrent Programs . . . . .	730
8.8 Observing Code Coverage . . . . .	731
8.8.1 A small example: Reciprocity . . . . .	731
8.8.2 Options for instrumenting code for coverage . . . . .	733
8.8.3 The hpc toolkit . . . . .	733
8.8.3.1 hpc report . . . . .	734
8.8.3.2 hpc markup . . . . .	734
8.8.3.3 hpc sum . . . . .	735
8.8.3.4 hpc combine . . . . .	735
8.8.3.5 hpc map . . . . .	735
8.8.3.6 hpc overlay and hpc draft . . . . .	736
8.8.4 Caveats and Shortcomings of Haskell Program Coverage . . . . .	737
8.9 Using “ticky-ticky” profiling (for implementors) . . . . .	737
8.9.1 Additional Ticky Flags . . . . .	737
8.9.2 Understanding the Output of Ticky-Ticky profiles . . . . .	738
8.9.3 Information about name-specific counters . . . . .	739

8.9.4 Examples . . . . .	739
8.9.5 Notes about ticky profiling . . . . .	740
<b>9 Debugging compiled programs</b>	<b>741</b>
9.1 Tutorial . . . . .	742
9.2 Requesting a stack trace from Haskell code . . . . .	744
9.3 Requesting a stack trace with SIGQUIT . . . . .	745
9.4 Implementor’s notes: DWARF annotations . . . . .	745
9.4.1 Debugging information entities . . . . .	746
9.4.1.1 DW_TAG_ghc_src_note . . . . .	747
9.5 Further Reading . . . . .	747
9.6 Direct Mapping . . . . .	747
9.7 Querying the Info Table Map . . . . .	749
<b>10 What to do when something goes wrong</b>	<b>751</b>
10.1 When the compiler “does the wrong thing” . . . . .	751
10.2 When your program “does the wrong thing” . . . . .	752
<b>11 Hints</b>	<b>753</b>
11.1 Sooner: producing a program more quickly . . . . .	753
11.2 Faster: producing a program that runs quicker . . . . .	754
11.3 Smaller: producing a program that is smaller . . . . .	757
11.4 Thriftier: producing a program that gobbles less heap space . . . . .	757
11.5 Controlling inlining via optimisation flags. . . . .	758
11.5.1 Unfolding creation . . . . .	758
11.5.2 Inlining decisions . . . . .	758
11.5.3 Inlining generics . . . . .	759
11.6 Understanding how OS memory usage corresponds to live data . . . . .	759
<b>12 Other Haskell utility programs</b>	<b>761</b>
12.1 “Yacc for Haskell”: happy . . . . .	761
12.2 Writing Haskell interfaces to C code: hsc2hs . . . . .	761
12.2.1 command line syntax . . . . .	762
12.2.2 Input syntax . . . . .	763
12.2.3 Custom constructs . . . . .	764
12.2.4 Cross-compilation . . . . .	764
<b>13 Running GHC on Win32 systems</b>	<b>767</b>
13.1 Starting GHC on Windows platforms . . . . .	767
13.2 Running GHCi on Windows . . . . .	767
13.3 Interacting with the terminal . . . . .	768
13.4 Differences in library behaviour . . . . .	768
13.5 File paths under Windows . . . . .	768
13.6 Using GHC (and other GHC-compiled executables) with Cygwin . . . . .	769
13.6.1 Background . . . . .	769
13.6.2 The problem . . . . .	769
13.6.3 Things to do . . . . .	769
13.7 Building and using Win32 DLLs . . . . .	770
13.7.1 Creating a DLL . . . . .	770
13.7.2 Making DLLs to be called from other languages . . . . .	771
13.7.2.1 Using from VBA . . . . .	772
13.7.2.2 Using from C++ . . . . .	773
<b>14 FFI and the JavaScript Backend</b>	<b>775</b>
14.1 JavaScript FFI Types . . . . .	775



14.1.1 JSVal	776
14.1.2 JavaScript Callbacks	776
14.1.3 Callbacks as Foreign Exports	777
14.2 Writing Replacement Implementations for Libraries with C FFI Functions	778
14.2.1 Direct Implementation of C FFI Imports in JavaScript as jsbits	778
14.2.2 Writing JavaScript Functions to be NodeJS and Browser Aware	780
14.2.3 Replacing C FFI Imports with Pure Haskell and JavaScript	781
14.3 Linking with C sources	782
14.3.1 EMCC pragmas	782
14.3.2 Wrappers	782
14.3.3 Callbacks	783
<b>15 Using the GHC WebAssembly backend</b>	<b>785</b>
15.1 What does the WebAssembly “backend” mean	785
15.2 Setting up the GHC wasm backend	785
15.3 Using the GHC wasm backend to compile & link code	785
15.4 Running the GHC wasm backend’s output	786
15.5 JavaScript FFI in the wasm backend	786
15.5.1 Marshalable types and JSVal	787
15.5.2 Foreign imports	788
15.5.3 Foreign exports	790
15.5.4 Detect whether JSFFI is being used	791
15.5.5 Interaction with async exception	791
15.5.6 Interaction with C FFI	791
15.5.7 The JavaScript API	792
<b>16 Known bugs and infelicities</b>	<b>795</b>
16.1 Haskell standards vs. Glasgow Haskell: language non-compliance	795
16.1.1 Divergence from Haskell 98 and Haskell 2010	795
16.1.1.1 Lexical syntax	795
16.1.1.2 Context-free syntax	797
16.1.1.3 Expressions and patterns	797
16.1.1.4 Failable patterns	798
16.1.1.5 Typechecking of recursive binding groups	798
16.1.1.6 Default Module headers with -main-is	799
16.1.1.7 Module system and interface files	800
16.1.1.8 Numbers, basic types, and built-in classes	800
16.1.1.9 In Prelude support	801
16.1.1.10 The Foreign Function Interface	802
16.1.2 GHC’s interpretation of undefined behaviour in Haskell 98 and Haskell 2010	802
16.2 Known bugs or infelicities	803
16.2.1 Bugs in GHC	803
16.2.2 Bugs in GHCi (the interactive GHC)	805
<b>17 Eventlog encodings</b>	<b>807</b>
17.1 Event log format	807
17.2 Runtime system diagnostics	808
17.2.1 Capability sets	808
17.2.2 Environment information	808
17.2.3 Thread and scheduling events	810
17.2.4 Garbage collector events	812
17.2.5 Heap events and statistics	815
17.2.6 Spark events	816

17.2.7 Capability events . . . . .	818
17.2.8 Task events . . . . .	819
17.2.9 Tracing events . . . . .	820
17.3 Heap profiler event log output . . . . .	821
17.3.1 Metadata event types . . . . .	821
17.3.1.1 Beginning of sample stream . . . . .	821
17.3.1.2 Cost centre definitions . . . . .	822
17.3.1.3 Info Table Provenance definitions . . . . .	822
17.3.1.4 Sample event types . . . . .	823
17.3.1.5 Cost-centre break-down . . . . .	824
17.3.1.6 String break-down . . . . .	824
17.4 Time profiler event log output . . . . .	825
17.4.1 Profile begin event . . . . .	825
17.4.2 Profile sample event . . . . .	825
17.5 Biographical profile sample event . . . . .	826
17.6 Non-moving GC event output . . . . .	826
17.6.1 Non-moving heap census . . . . .	828
17.6.2 Ticky counters . . . . .	829
<b>18 Glossary</b>	<b>831</b>
<b>19 Care and feeding of your GHC User’s Guide</b>	<b>833</b>
19.1 Basics . . . . .	833
19.1.1 Headings . . . . .	834
19.1.2 Formatting code . . . . .	835
19.1.2.1 Haskell . . . . .	835
19.1.2.2 Other languages . . . . .	835
19.1.3 Links . . . . .	835
19.1.3.1 Within the User’s Guide . . . . .	835
19.1.3.2 To GHC resources . . . . .	836
19.1.3.3 To external resources . . . . .	836
19.1.3.4 To core library Haddock documentation . . . . .	836
19.1.3.5 Math . . . . .	837
19.1.4 Index entries . . . . .	837
19.2 Citations . . . . .	837
19.3 Admonitions . . . . .	837
19.4 Documenting command-line options and GHCi commands . . . . .	838
19.4.1 Command-line options . . . . .	838
19.4.2 GHCi commands . . . . .	839
19.5 Style Conventions . . . . .	839
19.6 reST reference materials . . . . .	839
<b>20 Indices and tables</b>	<b>841</b>
<b>Bibliography</b>	<b>843</b>
<b>Index</b>	<b>845</b>

Contents:



## INTRODUCTION

This is a guide to using the Glasgow Haskell Compiler (GHC): an interactive and batch compilation system for the [Haskell 2010](#) language.

GHC has two main components: an interactive Haskell interpreter (also known as GHCi), described in [Using GHCi](#) (page 23), and a batch compiler, described throughout [Using GHC](#) (page 75). In fact, GHC consists of a single program which is just run with different options to provide either the interactive or the batch system.

The batch compiler can be used alongside GHCi: compiled modules can be loaded into an interactive session and used in the same way as interpreted code, and in fact when using GHCi most of the library code will be pre-compiled. This means you get the best of both worlds: fast pre-compiled library code, and fast compile turnaround for the parts of your program being actively developed.

GHC supports numerous language extensions, including concurrency, a foreign function interface, exceptions, type system extensions such as multi-parameter type classes, local universal and existential quantification, functional dependencies, scoped type variables and explicit unboxed types. These are all described in [Language extensions](#) (page 313).

GHC has a comprehensive optimiser, so when you want to Really Go For It (and you've got time to spare) GHC can produce pretty fast code. Alternatively, the default option is to compile as fast as possible while not making too much effort to optimise the generated code (although GHC probably isn't what you'd describe as a fast compiler :-).

GHC's profiling system supports "cost centre stacks": a way of seeing the profile of a Haskell program in a call-graph like structure. See [Profiling](#) (page 709) for more details.

GHC comes with a number of libraries. These are described in separate documentation.

### 1.1 Obtaining GHC

Go to the [GHC home page](#) and follow the "download" link to download GHC for your platform.

Alternatively, if you want to build GHC yourself, head on over to the [GHC Building Guide](#) to find out how to get the sources, and build it on your system. Note that GHC itself is written in Haskell, so you will still need to install GHC in order to build it.

## 1.2 Meta-information: Web sites, mailing lists, etc.

On the World-Wide Web, there are several URLs of likely interest:

- [GHC home page](#)
- [GHC Developers Home](#) (developer documentation, wiki, and bug tracker)

We run the following mailing lists about GHC. We encourage you to join, as you feel is appropriate.

### **glasgow-haskell-users**

This list is for GHC users to chat among themselves. If you have a specific question about GHC, please check the [FAQ](#) first.

Subscribers can post to the list by sending their message to [glasgow-haskell-users@haskell.org](mailto:glasgow-haskell-users@haskell.org). Further information can be found on the [Mailman page](#).

### **ghc-devs**

The GHC developers hang out here. If you are working with the GHC API or have a question about GHC's implementation, feel free to chime in.

Subscribers can post to the list by sending their message to [ghc-devs@haskell.org](mailto:ghc-devs@haskell.org). Further information can be found on the [Mailman page](#).

There are several other Haskell and GHC-related mailing lists served by [www.haskell.org](http://www.haskell.org). Go to <https://www.haskell.org/mailman/listinfo/> for the full list.

## 1.3 Reporting bugs in GHC

Glasgow Haskell is a changing system so there are sure to be bugs in it. If you find one, please see [this wiki page](#) for information on how to report it.

## 1.4 GHC version numbering policy

As of GHC version 6.8, we have adopted the following policy for numbering GHC versions:

Stable branches are numbered  $x.y$ , where  $\langle y \rangle$  is *even*. Releases on the stable branch  $x.y$  are numbered  $x.y.z$ , where  $\langle z \rangle$  ( $\geq 1$ ) is the patchlevel number. Patchlevels are bug-fix releases only, and never change the programmer interface to any system-supplied code. However, if you install a new patchlevel over an old one you will need to recompile any code that was compiled against the old libraries.

The value of `__GLASGOW_HASKELL__` (see *Options affecting the C pre-processor* (page 282)) for a major release  $x.y.z$  is the integer  $\langle xyy \rangle$  (if  $\langle y \rangle$  is a single digit, then a leading zero is added, so for example in version 6.8.2 of GHC we would have `__GLASGOW_HASKELL__==608`).

We may make snapshot releases of the current stable branch [available for download](#), and the latest sources are available from [the git repositories](#).

Stable snapshot releases are named  $x.y.z.YYYYMMDD$ , where  $YYYYMMDD$  is the date of the sources from which the snapshot was built, and  $x.y.z+1$  is the next release to be made on that branch. For example, 6.8.1.20040225 would be a snapshot of the 6.8 branch during the development of 6.8.2.

Unstable snapshot releases are named `x.y.YYYYMMDD`, where `YYYYMMDD` is the date of the sources from which the snapshot was built. For example, `6.7.20040225` would be a snapshot of the `HEAD` before the creation of the `6.8` branch.

The value of `__GLASGOW_HASKELL__` for a snapshot release is the integer `<xyy>`. You should never write any conditional code which tests for this value, however: since interfaces change on a day-to-day basis, and we don't have finer granularity in the values of `__GLASGOW_HASKELL__`, you should only conditionally compile using predicates which test whether `__GLASGOW_HASKELL__` is equal to, later than, or earlier than a given major release.

The version number of your copy of GHC can be found by invoking `ghc` with the `--version` flag (see [Verbosity options](#) (page 86)).

The compiler version can be tested within compiled code with the `MIN_VERSION_GLASGOW_HASKELL` CPP macro (defined only when [CPP](#) (page 282) is used). See [Standard CPP macros](#) (page 283) for details.

## 1.5 The Glasgow Haskell Compiler License

Copyright 2002 - 2007, The University Court of the University of Glasgow. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE UNIVERSITY COURT OF THE UNIVERSITY OF GLASGOW AND THE CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE UNIVERSITY COURT OF THE UNIVERSITY OF GLASGOW OR THE CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.





## RELEASE NOTES

### 2.1 Version 9.10.1

The significant changes to the various parts of the compiler are listed in the following sections. See the [migration guide](#) on the GHC Wiki for specific guidance on migrating programs to this release.

#### 2.1.1 Language

- The [GHC2024](#) (page 314) language edition is now supported. It builds on top of [GHC2021](#) (page 314), adding the following extensions:
  - [DataKinds](#) (page 404)
  - [DerivingStrategies](#) (page 507)
  - [DisambiguateRecordFields](#) (page 473)
  - [ExplicitNamespaces](#) (page 364)
  - [GADTs](#) (page 380)
  - [MonoLocalBinds](#) (page 580)
  - [LambdaCase](#) (page 343)
  - [RoleAnnotations](#) (page 469)

At the moment, [GHC2021](#) (page 314) remains the default language edition that is used when no other language edition is explicitly loaded (e.g. when running `ghc` directly). Because language editions are not necessarily backwards compatible, and future releases of GHC may change the default, it is highly recommended to specify the language edition explicitly.

- GHC Proposal [#575](#) has been implemented, allowing `DEPRECATED` and `WARNING` pragmas to be applied to class instance declarations. Doing so will cause warnings to be emitted whenever such instances are used to solve a constraint. For details, see [WARNING and DEPRECATED pragmas](#) (page 663).
- GHC Proposal [#281](#) “Visible forall in types of terms” has been partially implemented. The following code is now accepted by GHC:

```
{-# LANGUAGE RequiredTypeArguments #-}  
vshow :: forall a -> Show a => a -> String
```

(continues on next page)

(continued from previous page)

```
vshow t x = show (x :: t)

s1 = vshow Int    42      -- "42"
s2 = vshow Double 42      -- "42.0"
```

The use of forall a -> instead of forall a. indicates a *required* type argument. A required type argument is visually indistinguishable from a value argument but does not exist at runtime.

This feature is guarded behind [RequiredTypeArguments](#) (page 444).

- The [ExplicitNamespaces](#) (page 364) extension can now be used in conjunction with [RequiredTypeArguments](#) (page 444) to select the type namespace in a required type argument:

```
data T = T          -- the name `T` is ambiguous
f :: forall a -> ... -- `f` expects a required type argument

x1 = f T            -- refers to the /data/ constructor `T`
x2 = f (type T)     -- refers to the /type/ constructor `T`
```

- With [LinearTypes](#) (page 458), let and where bindings can now be linear. So the following now typechecks:

```
f :: A %1 -> B
g :: B %1 -> C

h :: A %1 -> C
h x = g y
  where
    y = f x
```

- Due to an oversight, previous GHC releases (starting from 9.4) allowed the use of promoted data types in kinds, even when [DataKinds](#) (page 404) was not enabled. That is, GHC would erroneously accept the following code:

```
{-# LANGUAGE NoDataKinds #-}

import Data.Kind (Type)
import GHC.TypeNats (Nat)

-- Nat shouldn't be allowed here without DataKinds
data Vec :: Nat -> Type -> Type
```

This oversight has now been fixed. If you wrote code that took advantage of this oversight, you may need to enable [DataKinds](#) (page 404) in your code to allow it to compile with GHC 9.10.

For more information on what types are allowed in kinds, see the [Datatype promotion](#) (page 404) section.

- Using forall as an identifier is now a parse error, as forewarned by [-Wforall-identifier](#) (page 122):

```
forall :: (Variable a, MonadQSAT s m) => m a
-- parse error on input 'forall'
```

Library authors are advised to use a different name for their functions, such as `forAll`, `for_all`, or `forall_`.

- GHC Proposal #65 “Require namespacing fixity declarations for type names and WARNING/DEPRECATED pragmas” has been partially implemented. Now, with [ExplicitNamespaces](#) (page 364) enabled, you can specify the namespace of a name in fixity signatures, DEPRECATED and WARNING pragmas:

```
type f $ a = f a
f $ a = f a

infixl 9 type $ -- type-level $ is left-associative with priority 9
infixr 0 data $ -- term-level $ is right-associative with priority 0

{-# DEPRECATED type D "Use `()` instead" #-} -- this will deprecate type_
↳D, but will not touch pattern synonym
data D = MkD

{-# DEPRECATED data D "Use `MkD` instead" #-} -- this will deprecate_
↳pattern synonym only
pattern D = MkD

pattern Head x <- (head -> x)
{-# WARNING in "x-partial" data Head [ "This is a partial synonym,"
                                       , "it throws an error on empty lists."
↳"] #-}
```

- GHC Proposal #475 “Non-punning list and tuple syntax” has been partially implemented. When the newly introduced extension [ListTuplePuns](#) (page 409) is disabled, bracket syntax for lists, tuples and sums only denotes their data constructors, while their type constructors have been changed to use regular prefix syntax:

```
data List a = [] | a : List a
data Tuple2 a b = (a, b)
```

The extension is enabled by default, establishing the usual behavior.

- In accordance with GHC Proposal #448, the [TypeAbstractions](#) (page 439) extension has been extended to support @-binders in lambdas and function equations:

```
id :: forall a. a -> a
id @t x = x :: t
-- ^^ @-binder in a function equation

e = higherRank (\ @t -> ... )
--                ^^ @-binder in a lambda
```

This feature is an experimental alternative to [ScopedTypeVariables](#) (page 565), see the [Type Abstractions in Functions](#) (page 440) section.

- In accordance with GHC Proposal #425, arity inference for type families and type synonyms was removed. Previously GHC performed attempts to figure out how many trailing invisible `forall`’s should be implicitly bound on the LHS. Consider this example:

```
type P :: forall k. k -> Proxy k
type P = Proxy
```

Before this change, GHC used to add an invisible binder for the kind, like this:

```
type P @k = Proxy @k
```

This meant that such `P` did not work in higher-ranked contexts, as type synonyms must always appear fully saturated.

After this change, GHC no longer tries to guess the arity. Instead, the arity is directly specified via the [TypeAbstractions](#) (page 439) extension.

- It is now possible to use untyped quotes in typed splices and vice versa:

```
$$ (const [|| 'x' ||] ([| 'y' |] :: IO Exp))
```

This is useful, e.g. for quoting patterns in typed splices.

### 2.1.2 Compiler

- GHC Proposal [#516](#) has been implemented. It introduces a warning `-Wincomplete-record-selectors` (page 108) which warns about when an invocation of a record selector may fail due to being applied to a constructor for which it is not defined.

For example

```
data T = T1 | T2 { x :: Int }
f :: T -> Int
f a = x a + 1 -- emit a warning here, since `f T1` will fail
```

Unlike `-Wpartial-fields` (page 120) this produces a warning about incomplete selectors at use sites instead of definition sites, so it is useful in cases when the library does intend for incomplete record selectors to be used but only in specific circumstances (e.g. when other cases are handled by previous pattern matches).

- The `-finfo-table-map-with-stack` (page ??) and `-finfo-table-map-with-fallback` (page ??) flags have been introduced. These flags include STACK info tables and info tables with default source location information in the info table map, respectively. They are implied by the `-finfo-table-map` (page 747) flag. The corresponding negative flags (`-fno-info-table-map-with-stack` (page 748), `-fno-info-table-map-with-fallback` (page 748)) are useful for omitting these info tables from the info table map and reducing the size of executables containing info table profiling information. In a test on the [Agda codebase](#), the size of the build results was reduced by about 10% when these info tables were omitted.
- Fixed a bug where compiling with both `-ddump-timings` (page 299) and `-ddump-to-file` (page 298) did not suppress printing timings to the console. See [#20316](#).
- Defaulting plugins can now propose solutions to entangled sets of type variables. This allows defaulting of multi-parameter type classes. See [#23832](#).
- The flag `-funbox-small-strict-fields` will now properly recognize unboxed tuples containing multiple elements as large. Constructors like `Foo (# Int64, Int64# )` will no longer be considered small and therefore not unboxed by default under `-O` even when used as strict field. [#22309](#).

- The flag `-funbox-small-strict-fields` will now always unpack things as if compiling for a 64bit platform. Even when generating code for a 32bit platform. This makes core optimizations more consistent between 32bit and 64bit platforms at the cost of slightly worse 32bit performance in edge cases.
- Type abstractions in constructor patterns that were previously admitted without enabling the `TypeAbstractions` (page 439) extension now trigger a warning, `-Wdeprecated-type-abstractions` (page 125). This new warning is part of the `-Wcompat` (page 97) warning group and will become an error in a future GHC release.
- The `-Wforall-identifier` (page 122) flag is now deprecated and removed from `-Wdefault` (page 96), as `forall` is no longer parsed as an identifier.
- Late plugins have been added. These are plugins which can access and/or modify the core of a module after optimization and after interface creation. See [#24254](#).
- If you use `-fllvm` (page 286) we now use an assembler from the LLVM toolchain rather than the preconfigured assembler. This is typically `clang`. The `LLVMAS` environment variable can be specified at configure time to instruct GHC which `clang` to use. This means that if you are using `-fllvm` you now need `lld`, `opt` and `clang` available.
- The `-fprof-late-overloaded` (page 717) flag has been introduced. It causes cost centres to be added to *overloaded* top level bindings, unlike `-fprof-late` (page 716) which adds cost centres to all top level bindings.
- The `-fprof-late-overloaded-calls` (page 717) flag has been introduced. It causes cost centres to be inserted at call sites including instance dictionary arguments. This may be preferred over `-fprof-late-overloaded` (page 717) since it may reveal whether imported functions are called overloaded.
- The `-fkeep-auto-rules` (page 135) flag was introduced, forcing GHC to keep auto generated specialization rules.

### 2.1.3 JavaScript backend

- The JavaScript backend now supports linking with C sources. It uses Emscripten to compile them to WebAssembly. The resulting JS file embeds and loads these WebAssembly files. Important note: JavaScript wrappers are required to call into C functions and pragmas have been added to indicate which C functions are exported (see the users guide).

### 2.1.4 WebAssembly backend

- The `wasm` backend now implements JavaScript FFI, allowing JavaScript to be called from Haskell and vice versa when targetting JavaScript environments like browsers and `node.js`. See *JavaScript FFI in the `wasm` backend* (page 786) for details.

### 2.1.5 GHCi

- GHCi now differentiates between adding, unadding, loading, unloading and reloading in its responses to using the respective commands. The output with *-fshow-loaded-modules* is not changed to keep backwards compatibility for tooling.

### 2.1.6 Runtime system

- Internal fragmentation incurred by the non-moving GC's allocator has been reduced for small objects. In one real-world application, this has reduced resident set size by about 20% and modestly improved run-time. See [#23340](#). *--nonmoving-dense-allocator-count={count}* (page 222) has been added to fine-tune this behaviour.
- Add support for heap profiling with the non-moving GC. See [#22221](#).
- Add a *--no-automatic-time-samples* (page 726) flag which stops time profiling samples being automatically started on startup. Time profiling can be controlled manually using functions in `GHC.Profiling`.
- Add a *-xr {size}* (page 221) which controls the size of virtual memory address space reserved by the two step allocator on a 64-bit platform. The default size is now 1T on aarch64 as well. See [#24498](#).

### 2.1.7 Packaging & Build System

- Escape multiple arguments in the settings file ([#24265](#))  
GHC now escapes configuration options that end up in the settings file. This prevents errors when those options included spaces or similar special characters.

### 2.1.8 base library

- Updated to [Unicode 15.1.0](#).
- The functions `GHC.Exts.dataToTag#` and `GHC.Base.getTag` have had their types changed to the following:

```
dataToTag#, getTag
  :: forall {lev :: Levity} (a :: TYPE (BoxedRep lev))
  . DataToTag a => a -> Int#
```

In particular, they are now applicable only at some (not all) lifted types. However, if `t` is an algebraic data type (i.e. `t` matches a `data` or `data instance` declaration) with all of its constructors in scope and the levity of `t` is statically known, then the constraint `DataToTag t` can always be solved.

- Exceptions can now carry arbitrary user-defined annotations via the new `GHC.Exception.Type.ExceptionContext` implicit parameter of `SomeException`. These annotations are intended to be used to carry context describing the provenance of an exception.
- GHC now collects backtraces for synchronous exceptions. These are carried by the exception via the `ExceptionContext` mechanism described above. GHC supports several

mechanisms by which backtraces can be collected which can be individually enabled and disabled via `GHC.Exception.Backtrace.setEnabledBacktraceMechanisms`.

- Deprecation of `GHC.Pack` has reached Phase 2. A warning is now thrown when importing the module. See [ghc/ghc#21461](#).
- [CLC proposal #258](#): `Data.List.NonEmpty.unzip` raises a specific warning about its future monomorphisation. Do consider switching to `Data.Functor.unzip` if you need to keep it polymorphic.

### 2.1.9 ghc-prim library

- `dataToTag#` has been moved from `GHC.Prim`. It remains exported by `GHC.Exts`, but with a different type, as described in the notes for `base` above.
- New primops for unaligned `Addr#` access. These primops will be emulated on platforms that don't support unaligned access. These primops take the form

```
indexWord80ffAddrAs<ty> :: Addr# -> Int# -> <ty>#  
readWord80ffAddrAs<ty> :: Addr# -> Int# -> State# s -> (# State# s, <ty>  
-># #)  
writeWord80ffAddrAs<ty> :: Addr# -> Int# -> <ty># -> State# s -> State# s
```

where `<ty>` is one of:

- `Word`
- `Word{16,32,64}`
- `Int`
- `Int{16,32,64,}`
- `Char`
- `WideChar`
- `Addr`
- `Float`
- `Double`
- `StablePtr`

### 2.1.10 ghc library

### 2.1.11 ghc-heap library

### 2.1.12 ghc-experimental library

- `ghc-experimental` is a new library for functions and data types with weaker stability guarantees. Introduced per the [HF Technical Proposal #51](#).

### 2.1.13 `template-haskell` library

- Extend Pat with TypeP and Exp with TypeE, introduce functions typeP and typeE (Template Haskell support for GHC Proposal [#281](#)).

### 2.1.14 Included libraries

The package database provided with this distribution also contains a number of packages other than GHC itself. See the changelogs provided with these packages for further change information.

Package	Version	Reason for inclusion
ghc	9.10.2.20250725	The compiler itself
Cabal-syntax	3.12.1.0	Dependency of ghc-pkg utility
Cabal	3.12.1.0	Dependency of ghc-pkg utility
Win32	2.14.1.0	Dependency of ghc library
array	0.5.8.0	Dependency of ghc library
base	4.20.2.0	Core library
binary	0.8.9.3	Dependency of ghc library
bytestring	0.12.2.0	Dependency of ghc library
containers	0.7	Dependency of ghc library
deepseq	1.5.2.0	Dependency of ghc library
directory	1.3.8.5	Dependency of ghc library
exceptions	0.10.9	Dependency of ghc and haskeline library

continues on next page



Table 1 – continued from previous page

Package	Version	Reason for inclusion
filepath	1.5.4.0	Dependency of ghc library
ghc-boot-th	9.10.2.20250725	Internal compiler library
ghc-boot	9.10.2.20250725	Internal compiler library
ghc-compact	0.1.0.0	Core library
ghc-heap	9.10.2.20250725	GHC heap-walking library
ghc-prim	0.12.0	Core library
ghci	9.10.2.20250725	The REPL interface
haskeline	0.8.2.1	Dependency of ghci executable
hpc	0.7.0.2	Dependency of hpc executable
integer-gmp	1.1	Core library
mtl	2.3.1	Dependency of Cabal library
parsec	3.1.18.0	Dependency of Cabal library
pretty	1.1.3.6	Dependency of ghc library
process	1.6.26.1	Dependency of ghc library
stm	2.5.3.1	Dependency of haskeline library

continues on next page

Table 1 – continued from previous page

Package	Version	Reason for inclusion
template-haskell	2.22.0.0	Core library
terminfo	0.4.1.7	Dependency of haskeline library
text	2.1.2	Dependency of Cabal library
time	1.12.2	Dependency of ghc library
transformers	0.6.1.1	Dependency of ghc library
unix	2.8.7.0	Dependency of ghc library
xhtml	3000.2.2.1	Dependency of haddock executable

## 2.2 Version 9.10.2

The significant changes to the various parts of the compiler are listed in the following sections. See the [migration guide](#) on the GHC Wiki for specific guidance on migrating programs to this release.

### 2.2.1 Compiler

- Optimized lowering of `BigNat#` literals. ([#23942](#))
- Look for Haskell symbols only in relevant libraries. ([#23415](#))

When dynamically loading a Haskell symbol (typical when running a splice or GHCi expression), before this change we would search for the symbol in all dynamic libraries that were loaded. However, this could be very inefficient when too many packages are loaded (which can happen if there are many package dependencies) because the time to lookup the would be linear in the number of packages loaded.

In one measurement this improved performance for executing a GHCi expression from ~38 seconds down to ~2s.

- Fixed a bug that could cause a linker error when `TypeData` and `StrictData` where used in combination. ([#24620](#))
- Fixed an issue where `-Wmissing-home-modules` (page 120) caused quadratic compile time increases. ([#24778](#))

- Better type inference in certain situations. ([#24810](#))
- Fixed a bug where the magic `GHC.Magic.inline` function sometimes failed to inline functions if there were coercions involved. ([#24808](#))
- Fixed a bug where the simplifier sometimes destroyed join points during float out. ([#24768](#))
- Fixed inability to re-export the `Data.Tuple.MkSolo` constructor ([#25182](#))
- Fixed `Language.Haskell.TH.mkName "FUN"` ([#25174](#))
- Fixed a bug that could cause segfaults in GHCi when `-fworker-wrapper-cbv` (page 149) was enabled. ([#24870](#))
- Fixed a bug where the use of `throw` caused a loss of strictness ([#25066](#)).
- Fixed incorrect behaviour that could occur when using `control0#/prompt#` ([#25439](#)) by making `prompt#` lazy.
- Fixed a bug where GHC panicked during type checking. ([#25325](#))
- Fix linearity for strict unit patterns in a local `let` bindings. ([#25428](#))
- Improve the performance of type family consistency checks. ([#25554](#))
- Fixed a bug where type checking failed to terminate. ([#25597](#))
- Added flags to control speculative evaluation: `-fspec-eval` (page 132) and `-fspec-eval-dictfun` (page 132). This allows users to work around cases where recent changes to speculative evaluation caused performance regressions. ([#25606](#))

### 2.2.2 Profiling

- The flag `-fprof-late` (page 716) when combined with `-prof` (page 715) will no longer prevent top level constructors from being statically allocated.

It used to be the case that we would add a cost centre for bindings like `foo = Just bar`. This turned the binding into a constant applicative form that would allocate the constructor on first evaluation.

However without the cost-centre `foo` can be allocated at compile time. This reduces code-bloat and reduces overhead for short-running applications.

The tradeoff is that calling `GHC.Stack.whoCreated` on top level value definitions like `foo` will be less informative.

- Fixed a crash when using `-prof` (page 715) with `-forig-thunk-info` (page 309). ([#24809](#))
- Optimize the representation of `info table provenance maps` (page 747), significantly reducing code size when this feature is in use. ([#24504](#))

### 2.2.3 Native code generator backend

- Fixed a bug where the jump shortcutting optimization could lead to unsoundness in pattern matching. ([#24507](#))
- PowerPC: Fix sign hints in C calls. This bug caused segfaults when using FFI under some circumstances. ([#23034](#))
- AArch64: Various code generation performance improvements
- AArch64: Fixed a bug that caused GHC to panic when using *-fregs-graph* (page 139) on certain programs. ([#24941](#))
- AArch64: Multiway branches are now lowered to jump tables for better performance. ([#19912](#))
- Fixed a correctness issues for Int64/Word64 on 32-bit backends ([#24893](#))

### 2.2.4 LLVM backend

- Fixes related to better use of SSE4: - Use *+sse4.2* rather than *+sse42*, fixing ([#25019](#)), - make SSE4.2 imply *+popcnt*, fixing ([#25353](#)).
- Fixed a bug where `__GLASGOW_HASKELL_LLVM__` was not defined even if *-fllvm* (page 286) was set. ([#25606](#))

### 2.2.5 JavaScript backend

- Changes for better support of the Google Closure Compiler ([#24602](#))
- Add support for rubbish static literals
- Fix `h$withCStringOnHeap` helper ([#25288](#))

### 2.2.6 WebAssembly backend

- Use `scheduler.postTask()` for context switch when available
- The in-tree gmp library now is configured to produce faster and smaller code given the current constraints of the wasm backend.

### 2.2.7 GHCi

- When using XDG directories `.ghci_history` now uses the `$XDG_DATA_HOME` variable as expected. ([#24266](#))
- Replaced some uses of lists with Arrays for better performance during bytecode compilation.
- GHCi: support cross-module inlining of breakpoints. Fixing ([#24712](#))
- Fix a bug where GHCi would not start alongside a local file called `Prelude.hs` or `Prelude.lhs` ([#10920](#)).
- Fixed a panic in the ghci debugger when using breakpoints around field selectors. ([#25109](#))

- Fixed a bug (#25150) where ghc would not consider `-working-dir` when looking for foreign files.

## 2.2.8 Runtime system

- Memory return logic now uses live bytes rather than live blocks to measure the size of the heap. This primarily affects the non-moving GC, which should now be more willing to return memory to the OS. Users who have fine-tuned the `-F {factor}` (page 225), `-Fd {factor}` (page 225), or `-O {size}` (page 224) flags, and use the non-moving GC, should see if adjustments are needed in light of this change.
- Reduce fragmentation incurred by the non-moving GC's segment allocator. In one application this reduced resident set size by 26%. See #24150.
- Emit warning when `-M {size}` (page 229) is less than `-H [{size}]` (page 227).
- Fix a bug ((#24672)) causing programs on FreeBSD to occasionally terminate with the error: `internal error: Ticker: read(timerfd) failed with Operation not supported and returned -1`
- Fixed a bug ((#25503)) that sometimes caused the runtime to terminate with `internal error: alloc_adjustor_chunk: failed to allocate on windows`. This primarily affect programs making use of the foreign import "wrapper" functionality.
- Fixed a bug in compacting gc that could result in program termination with `update_fwd_large: unknown/strange object 38` (#24791).
- Fixed a bug where calling `setNumCapabilities` with a argument larger than 256 caused crashes. (#25560)
- Various runtime system linker improvements: `-R_X86_64_PC64` relocation support on windows - Use m32 allocator for sections when `NEED_PLT` - works around ((#24432)) - AArch64 - Skip NONE relocations

## 2.2.9 Build system and packaging

- Escape argument strings when storing them in the settings file. Fixes (#24265)
- Updated autoconf scripts to commit 948ae97ca5703224bd3eada06b7a69f40dd15a02 (dated 2024-01-01). (From <https://git.savannah.gnu.org/cgit/config.git/>)
- GHC now distinguishes more between the Cmm and C preprocessor. The new flags `-pgmCmmP {cmd}` (page 280) and `-optCmmP {option}` (page 281) can be used to control the Cmm preprocessor. C preprocessor flags will still be passed to the Cmm preprocessor, expect for `-g` (page 741) flags which have special handling. Fixes (#24474)
- Bindists: Fixed a bug in the Makefile which caused windows installs to duplicate files. ((#24800))
- The packages `ghc-internal` and `ghc-experimental` are now versioned based on the GHC version they are shipped with.
- Fixed a bug where running Xelatex concurrently failed. (#25564)
- Fixed a bug where building ghc from source using GHC 9.8.4 failed with an error mentioning `ghc_unique_counter64` (#25576)

### 2.2.10 ghc library

- Added some utility functions to `GHC.Data.SmallArray`

### 2.2.11 ghc-heap library

- Fix typo in ghc-heap cbits that caused compilation errors when assertions were enabled.

### 2.2.12 ghc-experimental library

- Primops and other GHC extensions are now exported via `GHC.PrimOps`
- The library is now versioned according to the ghc version it shipped with.

### 2.2.13 Included libraries

The package database provided with this distribution also contains a number of packages other than GHC itself. See the changelogs provided with these packages for further change information.

Package	Version	Reason for inclusion
ghc	9.10.2.20250725	The compiler itself
Cabal-syntax	3.12.1.0	Dependency of ghc-pkg utility
Cabal	3.12.1.0	Dependency of ghc-pkg utility
Win32	2.14.1.0	Dependency of ghc library
array	0.5.8.0	Dependency of ghc library
base	4.20.2.0	Core library
binary	0.8.9.3	Dependency of ghc library
bytestring	0.12.2.0	Dependency of ghc library
containers	0.7	Dependency of ghc library

continues on next page

Table 2 – continued from previous page

Package	Version	Reason for inclusion
deepseq	1.5.2.0	Dependency of ghc library
directory	1.3.8.5	Dependency of ghc library
exceptions	0.10.9	Dependency of ghc and haskeline library
filepath	1.5.4.0	Dependency of ghc library
ghc-boot-th	9.10.2.20250725	Internal compiler library
ghc-boot	9.10.2.20250725	Internal compiler library
ghc-compact	0.1.0.0	Core library
ghc-heap	9.10.2.20250725	GHC heap-walking library
ghc-prim	0.12.0	Core library
ghci	9.10.2.20250725	The REPL interface
haskeline	0.8.2.1	Dependency of ghci executable
hpc	0.7.0.2	Dependency of hpc executable
integer-gmp	1.1	Core library
mtl	2.3.1	Dependency of Cabal library
parsec	3.1.18.0	Dependency of Cabal library

continues on next page

Table 2 – continued from previous page

Package	Version	Reason for inclusion
pretty	1.1.3.6	Dependency of ghc library
process	1.6.26.1	Dependency of ghc library
stm	2.5.3.1	Dependency of haskeline library
template-haskell	2.22.0.0	Core library
terminfo	0.4.1.7	Dependency of haskeline library
text	2.1.2	Dependency of Cabal library
time	1.12.2	Dependency of ghc library
transformers	0.6.1.1	Dependency of ghc library
unix	2.8.7.0	Dependency of ghc library
xhtml	3000.2.2.1	Dependency of haddock executable



## USING GHCi

GHCi<sup>1</sup> is GHC's interactive environment that includes an interactive debugger (see *The GHCi Debugger* (page 40)).

GHCi can

- interactively evaluate Haskell expressions
- interpret Haskell programs
- load GHC-compiled modules.

At the moment GHCi supports most of GHC's language extensions.

### 3.1 Introduction to GHCi

Let's start with an example GHCi session. You can fire up GHCi with the command `ghci`:

```
$ ghci
GHCi, version 8.y.z: https://www.haskell.org/ghc/  :? for help
ghci>
```

There may be a short pause while GHCi loads the prelude and standard libraries, after which the prompt is shown. As the banner says, you can type `:?` (page 57) to see the list of commands available, and a half line description of each of them. We'll explain most of these commands as we go along, and there is complete documentation for all the commands in *GHCi commands* (page 53).

Haskell expressions can be typed at the prompt:

```
ghci> 1+2
3
ghci> let x = 42 in x / 9
4.666666666666667
ghci>
```

GHCi interprets the whole line as an expression to evaluate. The expression may not span several lines - as soon as you press enter, GHCi will attempt to evaluate it.

In Haskell, a `let` expression is followed by `in`. However, in GHCi, since the expression can also be interpreted in the `IO` monad, a `let` binding with no accompanying `in` statement can be signalled by an empty line, as in the above example.

---

<sup>1</sup> The "i" stands for "Interactive"

Since GHC 8.0.1, you can bind values and functions to names without `let` statement:

```
ghci> x = 42
ghci> x
42
ghci>
```

## 3.2 Loading source files

Suppose we have the following Haskell source code, which we place in a file `Main.hs`:

```
main = print (fac 20)

fac 0 = 1
fac n = n * fac (n-1)
```

You can save `Main.hs` anywhere you like, but if you save it somewhere other than the current directory<sup>3</sup> then we will need to change to the right directory in GHCi:

```
ghci> :cd dir
```

where `(dir)` is the directory (or folder) in which you saved `Main.hs`.

To load a Haskell source file into GHCi, use the `:load` (page 59) command:

```
ghci> :load Main
Compiling Main          ( Main.hs, interpreted )
Ok, modules loaded: Main.
*ghci>
```

GHCi has loaded the `Main` module, and the prompt has changed to `*ghci>` to indicate that the current context for expressions typed at the prompt is the `Main` module we just loaded (we'll explain what the `*` means later in *What's really in scope at the prompt?* (page 33)). So we can now type expressions involving the functions from `Main.hs`:

```
*ghci> fac 17
355687428096000
```

Loading a multi-module program is just as straightforward; just give the name of the “topmost” module to the `:load` (page 59) command (hint: `:load` (page 59) can be abbreviated to `:l`). The topmost module will normally be `Main`, but it doesn't have to be. GHCi will discover which modules are required, directly or indirectly, by the topmost module, and load them all in dependency order.

### **-fshow-loaded-modules**

**Default**  
off

**Since**  
8.2.2

---

<sup>3</sup> If you started up GHCi from the command line then GHCi's current directory is the same as the current directory of the shell from which it was started. If you started GHCi from the “Start” menu in Windows, then the current directory is probably something like `C:\Documents and Settings\user name`.

Typically GHCi will show only the number of modules that it loaded after a `:load` (page 59) command. With this flag, GHC will also list the loaded modules' names. This was the default behavior prior to GHC 8.2.1 and can be useful for some tooling users.

### 3.2.1 Modules vs. filenames

Question: How does GHC find the filename which contains module {M}? Answer: it looks for the file `M.hs`, or `M.lhs`. This means that for most modules, the module name must match the filename. If it doesn't, GHCi won't be able to find it.

There is one exception to this general rule: when you load a program with `:load` (page 59), or specify it when you invoke `ghci`, you can give a filename rather than a module name. This filename is loaded if it exists, and it may contain any module you like. This is particularly convenient if you have several `Main` modules in the same directory and you can't call them all `Main.hs`.

The search path for finding source files is specified with the `-i` (page 241) option on the GHCi command line, like so:

```
ghci -idir1:...:dirn
```

or it can be set using the `:set` (page 61) command from within GHCi (see [Setting GHC command-line options in GHCi](#) (page 66))<sup>4</sup>

One consequence of the way that GHCi follows dependencies to find modules to load is that every module must have a source file. The only exception to the rule is modules that come from a package, including the `Prelude` and standard libraries such as `I0` and `Complex`. If you attempt to load a module for which GHCi can't find a source file, even if there are object and interface files for the module, you'll get an error message.

### 3.2.2 Making changes and recompilation

If you make some changes to the source code and want GHCi to recompile the program, give the `:reload` (page 61) command. The program will be recompiled as necessary, with GHCi doing its best to avoid actually recompiling modules if their external dependencies haven't changed. This is the same mechanism we use to avoid re-compiling modules in the batch compilation setting (see [The recompilation checker](#) (page 246)).

## 3.3 Loading compiled code


When you load a Haskell source module into GHCi, it is normally converted to byte-code and run using the interpreter. However, interpreted code can also run alongside compiled code in GHCi; indeed, normally when GHCi starts, it loads up a compiled copy of the base package, which contains the `Prelude`.

Why should we want to run compiled code? Well, compiled code is roughly 10x faster than interpreted code, but takes about 2x longer to produce (perhaps longer if optimisation is on). So it pays to compile the parts of a program that aren't changing very often, and use the interpreter for the code being actively developed.

---

<sup>4</sup> Note that in GHCi, and `--make` (page 78) mode, the `-i` (page 241) option is used to specify the search path for *source* files, whereas in standard batch-compilation mode the `-i` (page 241) option is used to specify the search path for interface files, see [The search path](#) (page 241).

When loading up source modules with `:load` (page 59), GHCi normally looks for any corresponding compiled object files, and will use one in preference to interpreting the source if possible. For example, suppose we have a 4-module program consisting of modules A, B, C, and D. Modules B and C both import D only, and A imports both B and C:



We can compile D, then load the whole program, like this:

```
ghci> :! ghc -c -dynamic D.hs
ghci> :load A
Compiling B          ( B.hs, interpreted )
Compiling C          ( C.hs, interpreted )
Compiling A          ( A.hs, interpreted )
Ok, modules loaded: A, B, C, D (D.o).
*ghci>
```

In the messages from the compiler, we see that there is no line for D. This is because it isn't necessary to compile D, because the source and everything it depends on is unchanged since the last compilation.

Note the `-dynamic` (page 289) flag to GHC: GHCi uses dynamically-linked object code (if you are on a platform that supports it), and so in order to use compiled code with GHCi it must be compiled for dynamic linking.

At any time you can use the command `:show modules` (page 63) to get a list of the modules currently loaded into GHCi:

```
*ghci> :show modules
D          ( D.hs, D.o )
C          ( C.hs, interpreted )
B          ( B.hs, interpreted )
A          ( A.hs, interpreted )
*ghci>
```

If we now modify the source of D (or pretend to: using the Unix command `touch` on the source file is handy for this), the compiler will no longer be able to use the object file, because it might be out of date:

```
*ghci> :! touch D.hs
*ghci> :reload
Compiling D          ( D.hs, interpreted )
Ok, modules loaded: A, B, C, D.
*ghci>
```

Note that module D was compiled, but in this instance because its source hadn't really changed, its interface remained the same, and the recompilation checker determined that A, B and C didn't need to be recompiled.

So let's try compiling one of the other modules:

```
*ghci> :! ghc -c C.hs
*ghci> :load A
Compiling D          ( D.hs, interpreted )
Compiling B          ( B.hs, interpreted )
Compiling C          ( C.hs, interpreted )
Compiling A          ( A.hs, interpreted )
Ok, modules loaded: A, B, C, D.
```

We didn't get the compiled version of C! What happened? Well, in GHCi a compiled module may only depend on other compiled modules, and in this case C depends on D, which doesn't have an object file, so GHCi also rejected C's object file. Ok, so let's also compile D:

```
*ghci> :! ghc -c D.hs
*ghci> :reload
Ok, modules loaded: A, B, C, D.
```

Nothing happened! Here's another lesson: newly compiled modules aren't picked up by `:reload` (page 61), only `:load` (page 59):

```
*ghci> :load A
Compiling B          ( B.hs, interpreted )
Compiling A          ( A.hs, interpreted )
Ok, modules loaded: A, B, C (C.o), D (D.o).
```

The automatic loading of object files can sometimes lead to confusion, because non-exported top-level definitions of a module are only available for use in expressions at the prompt when the module is interpreted (see *What's really in scope at the prompt?* (page 33)). For this reason, you might sometimes want to force GHCi to load a module using the interpreter. This can be done by prefixing a `*` to the module name or filename when using `:load` (page 59), for example

```
ghci> :load *A
Compiling A          ( A.hs, interpreted )
*ghci>
```

When the `*` is used, GHCi ignores any pre-compiled object code and interprets the module. If you have already loaded a number of modules as object code and decide that you wanted to interpret one of them, instead of re-loading the whole set you can use `:add *M` to specify that you want `M` to be interpreted (note that this might cause other modules to be interpreted too, because compiled modules cannot depend on interpreted ones).

To always compile everything to object code and never use the interpreter, use the `-fobject-code` (page 286) option (see *Compiling to object code inside GHCi* (page 69)).

---

**Hint:** Since GHCi will only use a compiled object file if it can be sure that the compiled version is up-to-date, a good technique when working on a large program is to occasionally run `ghc --make` to compile the whole project (say before you go for lunch :-), then continue working in the interpreter. As you modify code, the changed modules will be interpreted, but the rest of the project will remain compiled.

---

## 3.4 Interactive evaluation at the prompt

When you type an expression at the prompt, GHCi immediately evaluates and prints the result:

```
ghci> reverse "hello"
"olleh"
ghci> 5+5
10
```

### 3.4.1 I/O actions at the prompt

GHCi does more than simple expression evaluation at the prompt. If you enter an expression of type `IO a` for some `a`, then GHCi *executes* it as an IO-computation.

```
ghci> "hello"
"hello"
ghci> putStrLn "hello"
hello
```

This works even if the type of the expression is more general, provided it can be *instantiated* to `IO a`. For example

```
ghci> return True
True
```

Furthermore, GHCi will print the result of the I/O action if (and only if):

- The result type is an instance of `Show`.
- The result type is not `()`.

For example, remembering that `putStrLn :: String -> IO ()`:

```
ghci> putStrLn "hello"
hello
ghci> do { putStrLn "hello"; return "yes" }
hello
"yes"
```

### 3.4.2 Using `do` notation at the prompt

GHCi actually accepts statements rather than just expressions at the prompt. This means you can bind values and functions to names, and use them in future expressions or statements.

The syntax of a statement accepted at the GHCi prompt is exactly the same as the syntax of a statement in a Haskell `do` expression. However, there's no monad overloading here: statements typed at the prompt must be in the `IO` monad.

```
ghci> x <- return 42
ghci> print x
42
ghci>
```

The statement `x <- return 42` means “execute `return 42` in the `IO` monad, and bind the result to `x`”. We can then use `x` in future statements, for example to print it as we did above.

### **-fprint-bind-result**

If `-fprint-bind-result` (page 29) is set then GHCi will print the result of a statement if and only if:

- The statement is not a binding, or it is a monadic binding (`p <- e`) that binds exactly one variable.
- The variable's type is not polymorphic, is not `()`, and is an instance of `Show`.

Of course, you can also bind normal non-IO expressions using the `let`-statement:

```
ghci> let x = 42
ghci> x
42
ghci>
```

Another important difference between the two types of binding is that the monadic bind (`p <- e`) is *strict* (it evaluates `e`), whereas with the `let` form, the expression isn't evaluated immediately:

```
ghci> let x = error "help!"
ghci> print x
*** Exception: help!
ghci>
```

Note that `let` bindings do not automatically print the value bound, unlike monadic bindings. You can also define functions at the prompt:

```
ghci> add a b = a + b
ghci> add 1 2
3
ghci>
```

However, this quickly gets tedious when defining functions with multiple clauses, or groups of mutually recursive functions, because the complete definition has to be given on a single line, using explicit semicolons instead of layout:

```
ghci> f op n [] = n ; f op n (h:t) = h `op` f op n t
ghci> f (+) 0 [1..3]
6
ghci>
```

```
:{
:}
```

Begin or end a multi-line GHCi command block.

To alleviate this issue, GHCi commands can be split over multiple lines, by wrapping them in `:{` and `:{` (each on a single line of its own):

```
ghci> :{
ghci| g op n [] = n
ghci| g op n (h:t) = h `op` g op n t
```

(continues on next page)

(continued from previous page)

```
ghci| :}  
ghci> g (*) 1 [1..3]  
6
```

Such multiline commands can be used with any GHCi command, and note that the layout rule is in effect. The main purpose of multiline commands is not to replace module loading but to make definitions in `.ghci`-files (see *The `.ghci` and `.haskeline` files* (page 68)) more readable and maintainable.

Any exceptions raised during the evaluation or execution of the statement are caught and printed by the GHCi command line interface (for more information on exceptions, see the module `Control.Exception` in the libraries documentation.)

Every new binding shadows any existing bindings of the same name, including entities that are in scope in the current module context.

**Warning:** Temporary bindings introduced at the prompt only last until the next `:load` (page 59), `:reload` (page 61), `:add` (page 53) or `:unadd` (page 65) command, at which time they will be simply lost. However, they do survive a change of context with `:module` (page 60): the temporary bindings just move to the new location.

---

**Hint:** To get a list of the bindings currently in scope, use the `:show bindings` (page 63) command:

```
ghci> :show bindings  
x :: Int  
ghci>
```

---

**Hint:** If you turn on the `+t` option, GHCi will show the type of each variable bound by a statement. For example:

```
ghci> :set +t  
ghci> let (x:xs) = [1..]  
x :: Integer  
xs :: [Integer]
```

---

### 3.4.3 Multiline input

Apart from the `{ ... }` syntax for multi-line input mentioned above, GHCi also has a multiline mode, enabled by `:set +m`, `:set +m` in which GHCi detects automatically when the current statement is unfinished and allows further lines to be added. A multi-line input is terminated with an empty line. For example:

```
ghci> :set +m  
ghci> let x = 42  
ghci|
```



Further bindings can be added to this `let` statement, so GHCi indicates that the next line continues the previous one by changing the prompt. Note that layout is in effect, so to add more bindings to this `let` we have to line them up:

```
ghci> :set +m
ghci> let x = 42
ghci|     y = 3
ghci|
ghci>
```

Explicit braces and semicolons can be used instead of layout:

```
ghci> do {
ghci| putStrLn "hello"
ghci| ;putStrLn "world"
ghci| }
hello
world
ghci>
```

Note that after the closing brace, GHCi knows that the current statement is finished, so no empty line is required.

Multiline mode is useful when entering monadic `do` statements:

```
ghci> flip evalStateT 0 $ do
ghci| i <- get
ghci| lift $ do
ghci|   putStrLn "Hello World!"
ghci|   print i
ghci|
"Hello World!"
0
ghci>
```

During a multiline interaction, the user can interrupt and return to the top-level prompt.

```
ghci> do
ghci| putStrLn "Hello, World!"
ghci| ^C
ghci>
```

### 3.4.4 Type, class and other declarations

At the GHCi prompt you can also enter any top-level Haskell declaration, including data, type, newtype, class, instance, deriving, and foreign declarations. For example:

```
ghci> data T = A | B | C deriving (Eq, Ord, Show, Enum)
ghci> [A ..]
[A,B,C]
ghci> :i T
data T = A | B | C          -- Defined at <interactive>:2:6
instance Enum T -- Defined at <interactive>:2:45
```

(continues on next page)

(continued from previous page)

```
instance Eq T -- Defined at <interactive>:2:30
instance Ord T -- Defined at <interactive>:2:34
instance Show T -- Defined at <interactive>:2:39
```

As with ordinary variable bindings, later definitions shadow earlier ones, so you can re-enter a declaration to fix a problem with it or extend it. But there's a gotcha: when a new type declaration shadows an older one, there might be other declarations that refer to the old type. The thing to remember is that the old type still exists, and these other declarations still refer to the old type. However, while the old and the new type have the same name, GHCi will treat them as distinct. For example:

```
ghci> data T = A | B
ghci> let f A = True; f B = False
ghci> data T = A | B | C
ghci> f A

<interactive>:2:3:
  Couldn't match expected type `main::Interactive.T'
    with actual type `T'
  In the first argument of `f', namely `A'
  In the expression: f A
  In an equation for `it': it = f A
ghci>
```

The old, shadowed, version of `T` is displayed as `main::Interactive.T` by GHCi in an attempt to distinguish it from the new `T`, which is displayed as simply `T`.

Class and type-family instance declarations are simply added to the list of available instances, with one exception. Since you might want to re-define one, a class instance *replaces* any earlier instance with an identical head. You aren't allowed to re-define a type family instance, since it might not be type safe to do so. Instead, re-define the whole type-family. (See [Type families](#) (page 384).) For example:

```
ghci> type family T a b
ghci> type instance T a b = a
ghci> let uc :: a -> T a b; uc = id

ghci> type instance T a b = b

<interactive>:3:15: error:
  Conflicting family instance declarations:
    T a b = a -- Defined at <interactive>:3:15
    T a b = b -- Defined at <interactive>:5:15

-- Darn! We have to re-declare T.

ghci> type family T a b
-- This is a brand-new T, unrelated to the old one
ghci> type instance T a b = b
ghci> uc 'a' :: Int

<interactive>:8:1: error:
  • Couldn't match type `Char' with `Int'
```

(continues on next page)

(continued from previous page)

```
Expected type: Int
Actual type: GHCi1.T Char b0
• In the expression: uc 'a' :: Int
  In an equation for 'it': it = uc 'a' :: Int
```

### 3.4.5 What's really in scope at the prompt?

When you type an expression at the prompt, what identifiers and types are in scope? GHCi provides a flexible way to control exactly how the context for an expression is constructed:

- The `:load` (page 59), `:reload` (page 61), `:add` (page 53) and `:unadd` (page 65) commands (*The effect of :load on what is in scope* (page 33)).
- The import declaration (*Controlling what is in scope with import* (page 34)).
- The `:module` (page 60) command (*Controlling what is in scope with the :module command* (page 34)).

The command `:show imports` (page 63) will show a summary of which modules contribute to the top-level scope.

---

**Hint:** GHCi will tab-complete names that are in scope; for example, if you run GHCi and type `J<tab>` then GHCi will expand it to `Just`.

---

#### 3.4.5.1 The effect of `:load` on what is in scope

The `:load` (page 59), `:reload` (page 61), `:add` (page 53) and `:unadd` (page 65) commands (*Loading source files* (page 24) and *Loading compiled code* (page 25)) affect the top-level scope. Let's start with the simple cases; when you start GHCi the prompt looks like this:

```
ghci>
```

By default, this means that everything from the module `Prelude` is currently in scope. Should the prompt be set to `%s>` in the `.ghci` configuration file, we would be seeing `Prelude>` displayed. However, it is not the default mechanism due to the large space the prompt can take if more imports are done.

The syntax in the prompt `*module` indicates that it is the full top-level scope of `(module)` that is contributing to the scope for expressions typed at the prompt. Without the `*`, just the exports of the module are visible.

---

**Note:** For technical reasons, GHCi can only support the `*`-form for modules that are interpreted. Compiled modules and package modules can only contribute their exports to the current scope. To ensure that GHCi loads the interpreted version of a module, add the `*` when loading the module, e.g. `:load *M`.

---

In general, after a `:load` (page 59) command, an automatic import is added to the scope for the most recently loaded “target” module, in a `*`-form if possible. For example, if you say `:load foo.hs bar.hs` and `bar.hs` contains module `Bar`, then the scope will be set to `*Bar` if `Bar` is interpreted, or if `Bar` is compiled it will be set to `Prelude` and `Bar` (GHCi automatically

adds Prelude if it isn't present and there aren't any \*-form modules). These automatically-added imports can be seen with `:show imports` (page 63):

```
ghci> :load hello.hs
[1 of 1] Compiling Main           ( hello.hs, interpreted )
Ok, modules loaded: Main.
*ghci> :show imports
:module +*Main -- added automatically
*ghci>
```

and the automatically-added import is replaced the next time you use `:load` (page 59), `:reload` (page 61), `:add` (page 53) or `:unadd` (page 65). It can also be removed by `:module` (page 60) as with normal imports.

### 3.4.5.2 Controlling what is in scope with import

We are not limited to a single module: GHCi can combine scopes from multiple modules, in any mixture of \* and non-\* forms. GHCi combines the scopes from all of these modules to form the scope that is in effect at the prompt.

To add modules to the scope, use ordinary Haskell import syntax:

```
ghci> import System.IO
ghci> hPutStrLn stdout "hello\n"
hello
```

The full Haskell import syntax is supported, including hiding and as clauses. The prompt shows the modules that are currently imported, but it omits details about hiding, as, and so on. To see the full story, use `:show imports` (page 63):

```
ghci> import System.IO
ghci> import Data.Map as Map
ghci Map> :show imports
import Prelude -- implicit
import System.IO
import Data.Map as Map
```

Note that the Prelude import is marked as implicit. It can be overridden with an explicit Prelude import, just like in a Haskell module.

With multiple modules in scope, especially multiple \*-form modules, it is likely that name clashes will occur. Haskell specifies that name clashes are only reported when an ambiguous identifier is used, and GHCi behaves in the same way for expressions typed at the prompt.

### 3.4.5.3 Controlling what is in scope with the :module command

Another way to manipulate the scope is to use the `:module` (page 60) command, whose syntax is this:

```
:module +|- *mod1 ... *modn
```

Using the + form of the module commands adds modules to the current scope, and - removes them. Without either + or -, the current scope is replaced by the set of modules specified.

Note that if you use this form and leave out `Prelude`, an implicit `Prelude` import will be added automatically.

The `:module` (page 60) command provides a way to do two things that cannot be done with ordinary import declarations:

- `:module` (page 60) supports the `*` modifier on modules, which opens the full top-level scope of a module, rather than just its exports.
- Imports can be *removed* from the context, using the syntax `:module -M`. The import syntax is cumulative (as in a Haskell module), so this is the only way to subtract from the scope.

#### 3.4.5.4 Qualified names

##### `-fimplicit-import-qualified`

**Default**  
on

To make life slightly easier, the GHCi prompt also behaves as if there is an implicit import qualified declaration for every module in every package, and every module currently loaded into GHCi. This behaviour can be disabled with the `-fno-implicit-import-qualified` flag.

#### 3.4.5.5 `:module` and `:load`

It might seem that `:module` (page 60)/`import` and `:load` (page 59)/`:add` (page 53)/`:reload` (page 61) do similar things: you can use both to bring a module into scope. However, there is a very important difference. GHCi is concerned with two sets of modules:

- The set of modules that are currently *loaded*. This set is modified by `:load` (page 59), `:reload` (page 61), `:add` (page 53) and `:unadd` (page 65), and can be shown with `:show modules` (page 63).
- The set of modules that are currently *in scope* at the prompt. This set is modified by `import` and `:module` (page 60), and it is also modified automatically after `:load` (page 59), `:reload` (page 61), `:add` (page 53) and `:unadd` (page 65), as described above. The set of modules in scope can be shown with `:show imports` (page 63).

You can add a module to the scope (via `:module` (page 60) or `import`) only if either (a) it is loaded, or (b) it is a module from a package that GHCi knows about. Using `:module` (page 60) or `import` to try bring into scope a non-loaded module may result in the message `module M is not loaded`.

#### 3.4.5.6 Shadowing and the `Ghci1` module name

Bindings on the prompt can shadow earlier bindings:

```
ghci> let foo = True
ghci> let foo = False
ghci> :show bindings
foo :: Bool = False
```

But the shadowed thing still exists, and may show up again later, for example in a type signature:

```
ghci> data T = A | B deriving Eq
ghci> let a = A
ghci> data T = ANewType
ghci> :t a
a :: Ghci1.T
```

Now the type of `a` is printed using the fully qualified name of `T`, using the module name `Ghci1` (and `Ghci2` for the next set of bindings, and so on). You can use these qualified names as well:

```
ghci> a == Ghci1.A
True
ghci> let a = False -- shadowing a
ghci> Ghci2.a == Ghci1.A
True
```

The command `:show bindings` only shows bindings that are not shadowed. Bindings that define multiple names, such as a type constructor and its data constructors, are shown if *any* defined name is still available without the need for qualification.

### 3.4.6 The `it` variable

Whenever an expression (or a non-binding statement, to be precise) is typed at the prompt, GHCi implicitly binds its value to the variable `it`. For example:

```
ghci> 1+2
3
ghci> it * 2
6
```

What actually happens is that GHCi typechecks the expression, and if it doesn't have an `IO` type, then it transforms it as follows: an expression `e` turns into

```
let it = e;
print it
```

which is then run as an `IO`-action.

Hence, the original expression must have a type which is an instance of the `Show` class, or GHCi will complain:

```
ghci> id
<interactive>:1:0:
  No instance for (Show (a -> a))
    arising from use of `print' at <interactive>:1:0-1
  Possible fix: add an instance declaration for (Show (a -> a))
  In the expression: print it
  In a 'do' expression: print it
```

The error message contains some clues as to the transformation happening internally.

If the expression was instead of type `IO a` for some `a`, then it will be bound to the result of the `IO` computation, which is of type `a`. eg.:

```
ghci> Data.Time.getZonedTime
2017-04-10 12:34:56.93213581 UTC
ghci> print it
2017-04-10 12:34:56.93213581 UTC
```

The corresponding translation for an IO-typed `e` is

```
it <- e
```

Note that `it` is shadowed by the new value each time you evaluate a new expression, and the old value of `it` is lost.

In order to stop the value `it` being bound on each command, the flag `-fno-it` (page 37) can be set. The `it` variable can be the source of space leaks due to how shadowed declarations are handled by GHCi (see *Type, class and other declarations* (page 31)).

#### **-fno-it**

When this flag is set, the variable `it` will no longer be set to the result of the previously evaluated expression.

### 3.4.7 Type defaulting in GHCi

#### **ExtendedDefaultRules**

**Since**  
6.8.1

Allow defaulting to take place for more than just numeric classes.

Consider this GHCi session:

```
ghci> reverse []
```

What should GHCi do? Strictly speaking, the program is ambiguous. `show (reverse [])` (which is what GHCi computes here) has type `Show a => String` and how that displays depends on the type `a`. For example:

```
ghci> reverse ([] :: String)
""
ghci> reverse ([] :: [Int])
[]
```

However, it is tiresome for the user to have to specify the type, so GHCi extends Haskell's type-defaulting rules (Section 4.3.4 of the Haskell 2010 Report) as follows. The standard rules take each group of constraints ( $C_1\ a$ ,  $C_2\ a$ , ...,  $C_n\ a$ ) for each type variable `a`, and defaults the type variable if

1. The type variable `a` appears in no other constraints
2. All the classes  $C_i$  are standard.
3. At least one of the classes  $C_i$  is numeric.

At the GHCi prompt, or with GHC if the *ExtendedDefaultRules* (page 37) flag is given, the types are instead resolved with the following method:

Find all the unsolved constraints. Then:

- Find those that are of form `(C a)` where `a` is a type variable, and partition those constraints into groups that share a common type variable `a`.
- Keep only the groups in which at least one of the classes is an **interactive class** (defined below).
- Now, for each remaining group `G`, try each type `ty` from the default-type list in turn; if setting `a = ty` would allow the constraints in `G` to be completely solved. If so, default `a` to `ty`.
- The unit type `()` and the list type `[]` are added to the start of the standard list of types which are tried when doing type defaulting.

Note that any multi-parameter constraints `(D a b)` or `(D [a] Int)` do not participate in the process (either to help or to hinder); but they must of course be soluble once the defaulting process is complete.

The last point means that, for example, this program:

```
main :: IO ()
main = print def

instance Num ()

def :: (Num a, Enum a) => a
def = toEnum 0
```

prints `()` rather than `0` as the type is defaulted to `()` rather than `Integer`.

The motivation for the change is that it means `IO a` actions default to `IO ()`, which in turn means that `ghci` won't try to print a result when running them. This is particularly important for `printf`, which has an instance that returns `IO a`. However, it is only able to return undefined (the reason for the instance having this type is so that `printf` doesn't require extensions to the class system), so if the type defaults to `Integer` then `ghci` gives an error when running a `printf`.

See also *I/O actions at the prompt* (page 28) for how the monad of a computational expression defaults to `IO` if possible.

### 3.4.7.1 Interactive classes

The interactive classes (only relevant when *ExtendedDefaultRules* (page 37) is in effect) are: any numeric class, `Show`, `Eq`, `Ord`, `Foldable` or `Traversable`.

As long as a type variable is constrained by one of these classes, defaulting will occur, as outlined above.

### 3.4.7.2 Extended rules around default declarations

Since the rules for defaulting are relaxed under *ExtendedDefaultRules* (page 37), the rules for default declarations are also relaxed. According to Section 4.3.4 of the Haskell 2010 Report, a default declaration looks like `default (t1, ..., tn)` where, for each `ti`, `Num ti` must hold. This is relaxed to say that for each `ti`, there must exist an interactive class `C` such that `C ti` holds. This means that type *constructors* can be allowed in these lists. For example, the following works if you wish your `Foldable` constraints to default to `Maybe` but your `Num` constraints to still default to `Integer` or `Double`:



`default` (`Maybe`, `Integer`, `Double`)

### 3.4.8 Using a custom interactive printing function

Since GHC 7.6.1, GHCi prints the result of expressions typed at the prompt using the function `System.IO.print`. Its type signature is `Show a => a -> IO ()`, and it works by converting the value to `String` using `show`.

This is not ideal in certain cases, like when the output is long, or contains strings with non-ascii characters.

The `-interactive-print <name>` (page 39) flag allows to specify any function of type `C a => a -> IO ()`, for some constraint `C`, as the function for printing evaluated expressions. The function can reside in any loaded module or any registered package, but only when it resides in a registered package will it survive a `:cd` (page 54), `:add` (page 53), `:unadd` (page 65), `:load` (page 59), `:reload` (page 61) or `:set` (page 61).

**-interactive-print <name>**

Set the function used by GHCi to print evaluation results. Given name must be of type `C a => a -> IO ()`.

As an example, suppose we have following special printing module:

```
module SpecPrinter where
import System.IO

sprint a = putStrLn $ show a ++ "!"
```

The `sprint` function adds an exclamation mark at the end of any printed value. Running GHCi with the command:

```
ghci -interactive-print=SpecPrinter.sprint SpecPrinter
```

will start an interactive session where values will be printed using `sprint`:

```
*SpecPrinter> [1,2,3]
[1,2,3]!
*SpecPrinter> 42
42!
```

A custom pretty printing function can be used, for example, to format tree-like and nested structures in a more readable way.

The `-interactive-print <name>` (page 39) flag can also be used when running GHC in `-e` mode:

```
% ghc -e "[1,2,3]" -interactive-print=SpecPrinter.sprint SpecPrinter
[1,2,3]!
```

### 3.4.9 Stack Traces in GHCi

[ This is an experimental feature enabled by the new `-fexternal-interpreter` flag that was introduced in GHC 8.0.1. It is currently not supported on Windows.]

GHCi can use the profiling system to collect stack trace information when running interpreted code. To gain access to stack traces, start GHCi like this:

```
ghci -fexternal-interpreter -prof
```

This runs the interpreted code in a separate process (see [Running the interpreter in a separate process](#) (page 70)) and runs it in profiling mode to collect call stack information. Note that because we're running the interpreted code in profiling mode, all packages that you use must be compiled for profiling. The `-prof` flag to GHCi only works in conjunction with `-fexternal-interpreter`.

There are three ways to get access to the current call stack.

- `error` and `undefined` automatically attach the current stack to the error message. This often complements the `HasCallStack` stack (see [HasCallStack](#) (page 659)), so both call stacks are shown.
- `Debug.Trace.traceStack` is a version of `Debug.Trace.trace` that also prints the current call stack.
- Functions in the module `GHC.Stack` can be used to get the current stack and render it.

You don't need to use `-fprof-auto` for interpreted modules, annotations are automatically added at a granularity fine enough to distinguish individual call sites. However, you won't see any call stack information for compiled code unless it was compiled with `-fprof-auto` or has explicit SCC annotations (see [Inserting cost centres by hand](#) (page 712)).

## 3.5 The GHCi Debugger

GHCi contains a simple imperative-style debugger in which you can stop a running computation in order to examine the values of variables. The debugger is integrated into GHCi, and is turned on by default: no flags are required to enable the debugging facilities. There is one major restriction: breakpoints and single-stepping are only available in interpreted modules; compiled code is invisible to the debugger<sup>5</sup>.

The debugger provides the following:

- The ability to set a breakpoint on a function definition or expression in the program. When the function is called, or the expression evaluated, GHCi suspends execution and returns to the prompt, where you can inspect the values of local variables before continuing with the execution.
- Execution can be single-stepped: the evaluator will suspend execution approximately after every reduction, allowing local variables to be inspected. This is equivalent to setting a breakpoint at every point in the program.
- Execution can take place in tracing mode, in which the evaluator remembers each evaluation step as it happens, but doesn't suspend execution until an actual breakpoint is reached. When this happens, the history of evaluation steps can be inspected.

---

<sup>5</sup> Note that packages only contain compiled code, so debugging a package requires finding its source and loading that directly.

- Exceptions (e.g. pattern matching failure and error) can be treated as breakpoints, to help locate the source of an exception in the program.

There is currently no support for obtaining a “stack trace”, but the tracing and history features provide a useful second-best, which will often be enough to establish the context of an error. For instance, it is possible to break automatically when an exception is thrown, even if it is thrown from within compiled code (see [Debugging exceptions](#) (page 49)).

## -fbreak-points

### Default

enabled for GHCi

This flag's purpose is to allow disabling breakpoint insertion with the reverse form.

## 3.5.1 Breakpoints and inspecting variables

Let's use quicksort as a running example. Here's the code:

```
qsort [] = []
qsort (a:as) = qsort left ++ [a] ++ qsort right
  where (left,right) = (filter (<=a) as, filter (>a) as)

main = print (qsort [8, 4, 0, 3, 1, 23, 11, 18])
```

First, load the module into GHCi:

```
ghci> :l qsort.hs
[1 of 1] Compiling Main                ( qsort.hs, interpreted )
Ok, modules loaded: Main.
*ghci>
```

Now, let's set a breakpoint on the right-hand-side of the second equation of qsort:

```
*ghci> :break 2
Breakpoint 0 activated at qsort.hs:2:15-46
*ghci>
```

The command `:break 2` sets a breakpoint on line 2 of the most recently-loaded module, in this case `qsort.hs`. Specifically, it picks the leftmost complete subexpression on that line on which to set the breakpoint, which in this case is the expression `(qsort left ++ [a] ++ qsort right)`.

Now, we run the program:

```
*ghci> main
Stopped at qsort.hs:2:15-46
_result :: [a]
a :: a
left :: [a]
right :: [a]
[qsort.hs:2:15-46] *ghci>
```

Execution has stopped at the breakpoint. The prompt has changed to indicate that we are currently stopped at a breakpoint, and the location: `[qsort.hs:2:15-46]`. To further clarify the location, we can use the `:list` (page 59) command:

```
[qsort.hs:2:15-46] *ghci> :list
1  qsort [] = []
2  qsort (a:as) = qsort left ++ [a] ++ qsort right
3    where (left,right) = (filter (<=a) as, filter (>a) as)
```

The `:list` (page 59) command lists the source code around the current breakpoint. If your output device supports it, then GHCi will highlight the active subexpression in bold.

GHCi has provided bindings for the free variables<sup>6</sup> of the expression on which the breakpoint was placed (`a`, `left`, `right`), and additionally a binding for the result of the expression (`_result`). These variables are just like other variables that you might define in GHCi; you can use them in expressions that you type at the prompt, you can ask for their types with `:type` (page 64), and so on. There is one important difference though: these variables may only have partial types. For example, if we try to display the value of `left`:

```
[qsort.hs:2:15-46] *ghci> left
<interactive>:1:0:
  Ambiguous type variable `a' in the constraint:
    `Show a' arising from a use of `print' at <interactive>:1:0-3
  Cannot resolve unknown runtime types: a
  Use :print or :force to determine these types
```

This is because `qsort` is a polymorphic function, and because GHCi does not carry type information at runtime, it cannot determine the runtime types of free variables that involve type variables. Hence, when you ask to display `left` at the prompt, GHCi can't figure out which instance of `Show` to use, so it emits the type error above.

Fortunately, the debugger includes a generic printing command, `:print` (page 60), which can inspect the actual runtime value of a variable and attempt to reconstruct its type. If we try it on `left`:

```
[qsort.hs:2:15-46] *ghci> :set -fprint-evld-with-show
[qsort.hs:2:15-46] *ghci> :print left
left = (_t1::[a])
```

This isn't particularly enlightening. What happened is that `left` is bound to an unevaluated computation (a suspension, or thunk), and `:print` (page 60) does not force any evaluation. The idea is that `:print` (page 60) can be used to inspect values at a breakpoint without any unfortunate side effects. It won't force any evaluation, which could cause the program to give a different answer than it would normally, and hence it won't cause any exceptions to be raised, infinite loops, or further breakpoints to be triggered (see *Nested breakpoints* (page 46)). Rather than forcing thunks, `:print` (page 60) binds each thunk to a fresh variable beginning with an underscore, in this case `_t1`.

### **-fprint-evld-with-show**

The flag `-fprint-evld-with-show` (page 42) instructs `:print` (page 60) to reuse available `Show` instances when possible. This happens only when the contents of the variable being inspected are completely evaluated.

If we aren't concerned about preserving the evaluatedness of a variable, we can use `:force` (page 57) instead of `:print` (page 60). The `:force` (page 57) command behaves exactly like `:print` (page 60), except that it forces the evaluation of any thunks it encounters:

---

<sup>6</sup> We originally provided bindings for all variables in scope, rather than just the free variables of the expression, but found that this affected performance considerably, hence the current restriction to just the free variables.

```
[qsort.hs:2:15-46] *ghci> :force left
left = [4,0,3,1]
```

Now, since `:force` (page 57) has inspected the runtime value of `left`, it has reconstructed its type. We can see the results of this type reconstruction:

```
[qsort.hs:2:15-46] *ghci> :show bindings
_result :: [Integer]
a :: Integer
left :: [Integer]
right :: [Integer]
_t1 :: [Integer]
```

Not only do we now know the type of `left`, but all the other partial types have also been resolved. So we can ask for the value of `a`, for example:

```
[qsort.hs:2:15-46] *ghci> a
8
```

You might find it useful to use Haskell's `seq` function to evaluate individual thunks rather than evaluating the whole expression with `:force` (page 57). For example:

```
[qsort.hs:2:15-46] *ghci> :print right
right = (_t1::[Integer])
[qsort.hs:2:15-46] *ghci> seq _t1 ()
()
[qsort.hs:2:15-46] *ghci> :print right
right = 23 : (_t2::[Integer])
```

We evaluated only the `_t1` thunk, revealing the head of the list, and the tail is another thunk now bound to `_t2`. The `seq` function is a little inconvenient to use here, so you might want to use `:def` (page 55) to make a nicer interface (left as an exercise for the reader!).

Finally, we can continue the current execution:

```
[qsort.hs:2:15-46] *ghci> :continue
Stopped at qsort.hs:2:15-46
_result :: [a]
a :: a
left :: [a]
right :: [a]
[qsort.hs:2:15-46] *ghci>
```

The execution continued at the point it previously stopped, and has now stopped at the breakpoint for a second time.

### 3.5.1.1 Setting breakpoints

Breakpoints can be set in various ways. Perhaps the easiest way to set a breakpoint is to name a top-level function:

```
:break identifier
```

Where `(identifier)` names any top-level function in an interpreted module currently loaded into GHCi (qualified names may be used). The breakpoint will be set on the body of the function, when it is fully applied. If the function has several patterns, then a breakpoint will be set on each of them.

By using qualified names, one can set breakpoints on all functions (top-level and nested) in every loaded and interpreted module:

```
:break [ModQual.]topLevelIdent[.nestedIdent]...[.nestedIdent]
```

`(ModQual)` is optional and is either the effective name of a module or the local alias of a qualified import statement.

`(topLevelIdent)` is the name of a top level function in the module referenced by `(ModQual)`.

`(nestedIdent)` is optional and the name of a function nested in a `let` or `where` clause inside the previously mentioned function `(nestedIdent)` or `(topLevelIdent)`.

If `(ModQual)` is a module name, then `(topLevelIdent)` can be any top level identifier in this module. If `(ModQual)` is missing or a local alias of a qualified import, then `(topLevelIdent)` must be in scope.

Breakpoints can be set on arbitrarily deeply nested functions, but the whole chain of nested function names must be specified.

Consider the function `foo` in a module `Main`:

```
foo s = 'a' : add s
  where add = (++"z")
```

The breakpoint on the function `add` can be set with one of the following commands:

```
:break Main.foo.add
:break foo.add
```

Breakpoints can also be set by line (and optionally column) number:

```
:break line
:break line column
:break module line
:break module line column
```

When a breakpoint is set on a particular line, GHCi sets the breakpoint on the leftmost subexpression that begins and ends on that line. If two complete subexpressions start at the same column, the longest one is picked. If there is no complete subexpression on the line, then the leftmost expression starting on the line is picked, and failing that the rightmost expression that partially or completely covers the line.

When a breakpoint is set on a particular line and column, GHCi picks the smallest subexpression that encloses that location on which to set the breakpoint. Note: GHC considers the TAB character to have a width of 1, wherever it occurs; in other words it counts characters, rather

than columns. This matches what some editors do, and doesn't match others. The best advice is to avoid tab characters in your source code altogether (see *-Wtabs* (page 114) in *Warnings and sanity-checking* (page 96)).

If the module is omitted, then the most recently-loaded module is used.

Not all subexpressions are potential breakpoint locations. Single variables are typically not considered to be breakpoint locations (unless the variable is the right-hand-side of a function definition, lambda, or case alternative). The rule of thumb is that all redexes are breakpoint locations, together with the bodies of functions, lambdas, case alternatives and binding statements. There is normally no breakpoint on a `let` expression, but there will always be a breakpoint on its body, because we are usually interested in inspecting the values of the variables bound by the `let`.

### 3.5.1.2 Managing breakpoints

The list of breakpoints currently defined can be displayed using `:show breaks` (page 63):

```
*ghci> :show breaks
[0] Main qsort.hs:1:11-12 enabled
[1] Main qsort.hs:2:15-46 enabled
```

To disable one or several defined breakpoint, use the `:disable` (page 56) command with one or several blank separated numbers given in the output from `:show breaks` (page 63):. To disable all breakpoints at once, use `:disable *`.

```
*ghci> :disable 0
*ghci> :show breaks
[0] Main qsort.hs:1:11-12 disabled
[1] Main qsort.hs:2:15-46 enabled
```

Disabled breakpoints can be (re-)enabled with the `:enable` (page 57) command. The parameters of the `:disable` (page 56) and `:enable` (page 57) commands are identical.

To delete a breakpoint, use the `:delete` (page 56) command with the number given in the output from `:show breaks` (page 63):

```
*ghci> :delete 0
*ghci> :show breaks
[1] Main qsort.hs:2:15-46 disabled
```

To delete all breakpoints at once, use `:delete *`.

## 3.5.2 Single-stepping

Single-stepping is a great way to visualise the execution of your program, and it is also a useful tool for identifying the source of a bug. GHCi offers two variants of stepping. Use `:step` (page 63) to enable all the breakpoints in the program, and execute until the next breakpoint is reached. Use `:steplocal` (page 64) to limit the set of enabled breakpoints to those in the current top level function. Similarly, use `:stepmodule` (page 64) to single step only on breakpoints contained in the current module. For example:

```
*ghci> :step main
Stopped at qsort.hs:5:7-47
_result :: IO ()
```

The command `:step expr` (page 63) begins the evaluation of `(expr)` in single-stepping mode. If `(expr)` is omitted, then it single-steps from the current breakpoint. `:steplocal` (page 64) and `:stepmodule` (page 64) commands work similarly.

The `:list` (page 59) command is particularly useful when single-stepping, to see where you currently are:

```
[qsort.hs:5:7-47] *ghci> :list
4
5  main = print (qsort [8, 4, 0, 3, 1, 23, 11, 18])
6
[qsort.hs:5:7-47] *ghci>
```

In fact, GHCi provides a way to run a command when a breakpoint is hit, so we can make it automatically do `:list` (page 59):

```
[qsort.hs:5:7-47] *ghci> :set stop :list
[qsort.hs:5:7-47] *ghci> :step
Stopped at qsort.hs:5:14-46
_result :: [Integer]
4
5  main = print (qsort [8, 4, 0, 3, 1, 23, 11, 18])
6
[qsort.hs:5:14-46] *ghci>
```

### 3.5.3 Nested breakpoints

When GHCi is stopped at a breakpoint, and an expression entered at the prompt triggers a second breakpoint, the new breakpoint becomes the “current” one, and the old one is saved on a stack. An arbitrary number of breakpoint contexts can be built up in this way. For example:

```
[qsort.hs:2:15-46] *ghci> :st qsort [1,3]
Stopped at qsort.hs:(1,0)-(3,55)
_result :: [a]
... [qsort.hs:(1,0)-(3,55)] *ghci>
```

While stopped at the breakpoint on line 2 that we set earlier, we started a new evaluation with `:step qsort [1,3]`. This new evaluation stopped after one step (at the definition of `qsort`). The prompt has changed, now prefixed with `...`, to indicate that there are saved breakpoints beyond the current one. To see the stack of contexts, use `:show context` (page 63):

```
... [qsort.hs:(1,0)-(3,55)] *ghci> :show context
--> main
   Stopped at qsort.hs:2:15-46
--> qsort [1,3]
   Stopped at qsort.hs:(1,0)-(3,55)
... [qsort.hs:(1,0)-(3,55)] *ghci>
```



To abandon the current evaluation, use `:abandon` (page 53):

```
... [qsort.hs:(1,0)-(3,55)] *ghci> :abandon
[qsort.hs:2:15-46] *ghci> :abandon
*ghci>
```

### 3.5.4 The `_result` variable

When stopped at a breakpoint or single-step, GHCi binds the variable `_result` to the value of the currently active expression. The value of `_result` is presumably not available yet, because we stopped its evaluation, but it can be forced: if the type is known and showable, then just entering `_result` at the prompt will show it. However, there's one caveat to doing this: evaluating `_result` will be likely to trigger further breakpoints, starting with the breakpoint we are currently stopped at (if we stopped at a real breakpoint, rather than due to `:step` (page 63)). So it will probably be necessary to issue a `:continue` (page 55) immediately when evaluating `_result`. Alternatively, you can use `:force` (page 57) which ignores breakpoints.

### 3.5.5 Tracing and history

A question that we often want to ask when debugging a program is “how did I get here?”. Traditional imperative debuggers usually provide some kind of stack-tracing feature that lets you see the stack of active function calls (sometimes called the “lexical call stack”), describing a path through the code to the current location. Unfortunately this is hard to provide in Haskell, because execution proceeds on a demand-driven basis, rather than a depth-first basis as in strict languages. The “stack” in GHC's execution engine bears little resemblance to the lexical call stack. Ideally GHCi would maintain a separate lexical call stack in addition to the dynamic call stack, and in fact this is exactly what our profiling system does (*Profiling* (page 709)), and what some other Haskell debuggers do. For the time being, however, GHCi doesn't maintain a lexical call stack (there are some technical challenges to be overcome). Instead, we provide a way to backtrack from a breakpoint to previous evaluation steps: essentially this is like single-stepping backwards, and should in many cases provide enough information to answer the “how did I get here?” question.

To use tracing, evaluate an expression with the `:trace` (page 64) command. For example, if we set a breakpoint on the base case of `qsort`:

```
*ghci> :list qsort
1  qsort [] = []
2  qsort (a:as) = qsort left ++ [a] ++ qsort right
3    where (left,right) = (filter (<=a) as, filter (>a) as)
4
*ghci> :b 1
Breakpoint 1 activated at qsort.hs:1:11-12
*ghci>
```

and then run a small `qsort` with tracing:

```
*ghci> :trace qsort [3,2,1]
Stopped at qsort.hs:1:11-12
_result :: [a]
[qsort.hs:1:11-12] *ghci>
```

We can now inspect the history of evaluation steps:

```
[qsort.hs:1:11-12] *ghci> :hist
-1  : qsort.hs:3:24-38
-2  : qsort.hs:3:23-55
-3  : qsort.hs:(1,0)-(3,55)
-4  : qsort.hs:2:15-24
-5  : qsort.hs:2:15-46
-6  : qsort.hs:3:24-38
-7  : qsort.hs:3:23-55
-8  : qsort.hs:(1,0)-(3,55)
-9  : qsort.hs:2:15-24
-10 : qsort.hs:2:15-46
-11 : qsort.hs:3:24-38
-12 : qsort.hs:3:23-55
-13 : qsort.hs:(1,0)-(3,55)
-14 : qsort.hs:2:15-24
-15 : qsort.hs:2:15-46
-16 : qsort.hs:(1,0)-(3,55)
<end of history>
```

To examine one of the steps in the history, use `:back` (page 53):

```
[qsort.hs:1:11-12] *ghci> :back
Logged breakpoint at qsort.hs:3:24-38
_result :: [a]
as :: [a]
a :: a
[-1: qsort.hs:3:24-38] *ghci>
```

Note that the local variables at each step in the history have been preserved, and can be examined as usual. Also note that the prompt has changed to indicate that we're currently examining the first step in the history: `-1`. The command `:forward` (page 57) can be used to traverse forward in the history.

The `:trace` (page 64) command can be used with or without an expression. When used without an expression, tracing begins from the current breakpoint, just like `:step` (page 63).

The history is only available when using `:trace` (page 64); the reason for this is we found that logging each breakpoint in the history cuts performance by a factor of 2 or more.

**-fghci-hist-size=(n)**

**Default**

50

Modify the depth of the evaluation history tracked by GHCi.

### 3.5.6 Debugging exceptions

Another common question that comes up when debugging is “where did this exception come from?”. Exceptions such as those raised by `error` or `head []` have no context information attached to them. Finding which particular call to `head` in your program resulted in the error can be a painstaking process, usually involving `Debug.Trace.trace`, or compiling with profiling and using `Debug.Trace.traceStack` or `+RTS -xc` (see `-xc` (page 238)).

The GHCi debugger offers a way to hopefully shed some light on these errors quickly and without modifying or recompiling the source code. One way would be to set a breakpoint on the location in the source code that throws the exception, and then use `:trace` (page 64) and `:history` (page 57) to establish the context. However, `head` is in a library and we can't set a breakpoint on it directly. For this reason, GHCi provides the flags `-fbreak-on-exception` (page 49) which causes the evaluator to stop when an exception is thrown, and `-fbreak-on-error` (page 49), which works similarly but stops only on uncaught exceptions. When stopping at an exception, GHCi will act just as it does when a breakpoint is hit, with the deviation that it will not show you any source code location. Due to this, these commands are only really useful in conjunction with `:trace` (page 64), in order to log the steps leading up to the exception. For example:

```
*ghci> :set -fbreak-on-exception
*ghci> :trace qsort ("abc" ++ undefined)
"Stopped at <exception thrown>
_exception :: e
[<exception thrown>] *ghci> :hist
-1 : qsort.hs:3:24-38
-2 : qsort.hs:3:23-55
-3 : qsort.hs:(1,0)-(3,55)
-4 : qsort.hs:2:15-24
-5 : qsort.hs:2:15-46
-6 : qsort.hs:(1,0)-(3,55)
<end of history>
[<exception thrown>] *ghci> :back
Logged breakpoint at qsort.hs:3:24-38
_result :: [a]
as :: [a]
a :: a
[-1: qsort.hs:3:24-38] *ghci> :force as
*** Exception: Prelude.undefined
[-1: qsort.hs:3:24-38] *ghci> :print as
as = 'b' : 'c' : (_t1::[Char])
```

The exception itself is bound to a new variable, `_exception`.

Breaking on exceptions is particularly useful for finding out what your program was doing when it was in an infinite loop. Just hit Control-C, and examine the history to find out what was going on.

#### **-fbreak-on-exception**

Causes GHCi to halt evaluation and return to the interactive prompt in the event of an exception. `-fbreak-on-exception` (page 49) breaks on all exceptions.

#### **-fbreak-on-error**

Causes GHCi to halt evaluation and return to the interactive prompt in the event of an exception. `-fbreak-on-error` (page 49) breaks on only those exceptions which would otherwise be uncaught.

### 3.5.7 Example: inspecting functions

It is possible to use the debugger to examine function values. When we are at a breakpoint and a function is in scope, the debugger cannot show you the source code for it; however, it is possible to get some information by applying it to some arguments and observing the result.

The process is slightly complicated when the binding is polymorphic. We show the process by means of an example. To keep things simple, we will use the well known map function:

```
import Prelude hiding (map)

map :: (a->b) -> [a] -> [b]
map f [] = []
map f (x:xs) = f x : map f xs
```

We set a breakpoint on map, and call it.

```
*ghci> :break 5
Breakpoint 0 activated at map.hs:5:15-28
*ghci> map Just [1..5]
Stopped at map.hs:(4,0)-(5,12)
_resultt :: [b]
x :: a
f :: a -> b
xs :: [a]
```

GHCi tells us that, among other bindings, f is in scope. However, its type is not fully known yet, and thus it is not possible to apply it to any arguments. Nevertheless, observe that the type of its first argument is the same as the type of x, and its result type is shared with \_resultt.

As we demonstrated earlier (*Breakpoints and inspecting variables* (page 41)), the debugger has some intelligence built-in to update the type of f whenever the types of x or \_resultt are discovered. So what we do in this scenario is force x a bit, in order to recover both its type and the argument part of f.

```
*ghci> seq x ()
*ghci> :print x
x = 1
```

We can check now that as expected, the type of x has been reconstructed, and with it the type of f has been too:

```
*ghci> :t x
x :: Integer
*ghci> :t f
f :: Integer -> b
```

From here, we can apply f to any argument of type Integer and observe the results.

```
*ghci> let b = f 10
*ghci> :t b
b :: b
*ghci> b
<interactive>:1:0:
```

(continues on next page)

(continued from previous page)

```

    Ambiguous type variable `b' in the constraint:
      `Show b' arising from a use of `print' at <interactive>:1:0
*ghci> :p b
b = (_t2::a)
*ghci> seq b ()
()
*ghci> :t b
b :: a
*ghci> :p b
b = Just 10
*ghci> :t b
b :: Maybe Integer
*ghci> :t f
f :: Integer -> Maybe Integer
*ghci> f 20
Just 20
*ghci> map f [1..5]
[Just 1, Just 2, Just 3, Just 4, Just 5]

```

In the first application of `f`, we had to do some more type reconstruction in order to recover the result type of `f`. But after that, we are free to use `f` normally.

### 3.5.8 Limitations

- When stopped at a breakpoint, if you try to evaluate a variable that is already under evaluation, the second evaluation will hang. The reason is that GHC knows the variable is under evaluation, so the new evaluation just waits for the result before continuing, but of course this isn't going to happen because the first evaluation is stopped at a breakpoint. Control-C can interrupt the hung evaluation and return to the prompt.

The most common way this can happen is when you're evaluating a CAF (e.g. `main`), stop at a breakpoint, and ask for the value of the CAF at the prompt again.

- Implicit parameters (see [Implicit parameters](#) (page 570)) are only available at the scope of a breakpoint if there is an explicit type signature.

## 3.6 Invoking GHCi

GHCi is invoked with the command `ghci` or `ghc --interactive`. One or more modules or filenames can also be specified on the command line; this instructs GHCi to load the specified modules or filenames (and all the modules they depend on), just as if you had said `:load` modules at the GHCi prompt (see [GHCi commands](#) (page 53)). For example, to start GHCi and load the program whose topmost module is in the file `Main.hs`, we could say:

```
$ ghci Main.hs
```

Most of the command-line options accepted by GHC (see [Using GHC](#) (page 75)) also make sense in interactive mode. The ones that don't make sense are mostly obvious.

### -flocal-ghci-history

By default, GHCi keeps global history in `$XDG_DATA_HOME/ghc/ghci_history` or `%APPDATA%/<app>/ghci_history`, but you can use current directory, e.g.:

```
$ ghci -flocal-ghci-history
```

It will create `.ghci-history` in current folder where GHCi is launched.

### **-fghci-leak-check**

(Debugging only) When loading new modules with `:load`, check that any previously loaded modules have been correctly garbage collected. Emits messages if a leak is detected.

## **3.6.1 Packages**

Most packages (see *Using Packages* (page 260)) are available without needing to specify any extra flags at all: they will be automatically loaded the first time they are needed.

For hidden packages, however, you need to request the package be loaded by using the `-package {pkg}` (page 261) flag:

```
$ ghci -package readline
GHCi, version 8.y.z: https://www.haskell.org/ghc/  :? for help
Loading package base ... linking ... done.
Loading package readline-1.0 ... linking ... done.
ghci>
```

The following command works to load new packages into a running GHCi:

```
ghci> :set -package name
```

But note that doing this will cause all currently loaded modules to be unloaded, and you'll be dumped back into the Prelude.

## **3.6.2 Extra libraries**

Extra libraries may be specified on the command line using the normal `-llib` option. (The term *library* here refers to libraries of foreign object code; for using libraries of Haskell source code, see *Modules vs. filenames* (page 25).) For example, to load the “m” library:

```
$ ghci -lm
```

On systems with `.so`-style shared libraries, the actual library loaded will be `liblib.so`. GHCi searches the following places for libraries, in this order:

- Paths specified using the `-L {dir}` (page 288) command-line option,
- The standard library search path for your system loader, which on some systems may be overridden by setting the `LD_LIBRARY_PATH` environment variable.
- The linker standard library search can also be overridden on some systems using the `LIBRARY_PATH` environment variable. Because of some implementation detail on Windows, setting `LIBRARY_PATH` will also extend the system loader path for any library it finds. So often setting `LIBRARY_PATH` is enough.

On systems with `.dll`-style shared libraries, the actual library loaded will be `lib.dll`, `liblib.dll`. GHCi also has full support for import libraries, either Microsoft style `.lib`, or GNU GCC style `.a` and `.dll.a` libraries. If you have an import library it is advisable to always specify

the import library instead of the .dll. e.g. use `-lgcc`` instead of ``-llibgcc_s_seh-1`. Again, GHCi will signal an error if it can't find the library.

GHCi can also load plain object files (`.o` or `.obj` depending on your platform) or static archives (`.a`) from the command-line. Just add the name the object file or library to the command line. On Windows GHCi also supports the `big-obj` format.

Ordering of `-l` options matters: a library should be mentioned *before* the libraries it depends on (see [Options affecting linking](#) (page 288)).

## 3.7 GHCi commands

GHCi commands all begin with `:"` and consist of a single command name followed by zero or more parameters. The command name may be abbreviated, with ambiguities being resolved in favour of the more commonly used commands.

### **:abandon**

Abandons the current evaluation (only available when stopped at a breakpoint).

### **:add** [`*`](`module`)

Add (`module`)(s) to the current target set, and perform a reload. Normally pre-compiled code for the module will be loaded if available, or otherwise the module will be compiled to byte-code. Using the `*` prefix forces the module to be loaded as byte-code.

(`module`) may be a file path. A `~` symbol at the beginning of (`module`) will be replaced by the contents of the environment variable `HOME`.

### **:all-types**

List all types collected for expressions and (local) bindings currently loaded (while `:set +c` (page 66) was active) with their respective source-code span, e.g.

```
GhciTypes> :all-types
GhciTypes.hs:(38,13)-(38,24): Maybe Id
GhciTypes.hs:(45,10)-(45,29): Outputable SpanInfo
GhciTypes.hs:(45,10)-(45,29): (Rational -> SpanInfo -> SDoc) ->
↳Outputable SpanInfo
```

### **:back** (`n`)

Travel back (`n`) steps in the history. (`n`) is one if omitted. See [Tracing and history](#) (page 47) for more about GHCi's debugging facilities. See also: `:trace` (page 64), `:history` (page 57), `:forward` (page 57).

### **:break** [(`identifier`) | [(`module`)] (`line`) [(`column`)]]

Set a breakpoint on the specified function or line and column. See [Setting breakpoints](#) (page 44).

### **:browse**[!] [(`*`)] (`module`)

Displays the identifiers exported by the module (`module`), which must be either loaded into GHCi or be a member of a package. If (`module`) is omitted, the most recently-loaded module is used.

Like all other GHCi commands, the output is always displayed in the current GHCi scope ([What's really in scope at the prompt?](#) (page 33)).

There are two variants of the browse command:

- If the `*` symbol is placed before the module name, then *all* the identifiers in scope in `(module)` (rather than just its exports) are shown.

The `*`-form is only available for modules which are interpreted; for compiled modules (including modules from packages) only the non-`*` form of `:browse` (page 53) is available.

- Data constructors and class methods are usually displayed in the context of their data type or class declaration. However, if the `!` symbol is appended to the command, thus `:browse!`, they are listed individually. The `!`-form also annotates the listing with comments giving possible imports for each group of entries. Here is an example:

```
ghci> :browse! Data.Maybe
-- not currently imported
Data.Maybe.catMaybes :: [Maybe a] -> [a]
Data.Maybe.fromJust :: Maybe a -> a
Data.Maybe.fromMaybe :: a -> Maybe a -> a
Data.Maybe.isJust :: Maybe a -> Bool
Data.Maybe.isNothing :: Maybe a -> Bool
Data.Maybe.listToMaybe :: [a] -> Maybe a
Data.Maybe.mapMaybe :: (a -> Maybe b) -> [a] -> [b]
Data.Maybe.maybeToList :: Maybe a -> [a]
-- imported via Prelude
Just :: a -> Maybe a
data Maybe a = Nothing | Just a
Nothing :: Maybe a
maybe :: b -> (a -> b) -> Maybe a -> b
```

This output shows that, in the context of the current session (ie in the scope of Prelude), the first group of items from `Data.Maybe` are not in scope (although they are available in fully qualified form in the GHCi session - see [What's really in scope at the prompt?](#) (page 33)), whereas the second group of items are in scope (via Prelude) and are therefore available either unqualified, or with a `Prelude.` qualifier.

#### `:cd (dir)`

Changes the current working directory to `(dir)`. A `~` symbol at the beginning of `(dir)` will be replaced by the contents of the environment variable `HOME`. See also the `:show paths` (page 63) command for showing the current working directory.

Note: changing directories causes all currently loaded modules to be unloaded. This is because the search path is usually expressed using relative directories, and changing the search path in the middle of a session is not supported.

#### `:cmd (expr)`

Executes `(expr)` as a computation of type `I0 String`, and then executes the resulting string as a list of GHCi commands. Multiple commands are separated by newlines. The `:cmd` (page 54) command is useful with `:def` (page 55) and `:set stop` (page 62).

#### `:complete (type) [(n)-][(m)] (string-literal)`

This command allows to request command completions from GHCi even when interacting over a pipe instead of a proper terminal and is designed for integrating GHCi's completion with text editors and IDEs.

When called, `:complete` (page 54) prints the  $(n)^{\text{th}}$  to  $(m)^{\text{th}}$  completion candidates for the partial input `(string-literal)` for the completion domain denoted by `(type)`. Currently, only the `repl` domain is supported which denotes the kind of completion that would be provided interactively by GHCi at the input prompt.



If omitted,  $\langle n \rangle$  and  $\langle m \rangle$  default to the first or last available completion candidate respectively. If there are less candidates than requested via the range argument,  $\langle n \rangle$  and  $\langle m \rangle$  are implicitly capped to the number of available completion candidates.

The output of `:complete` (page 54) begins with a header line containing three space-delimited fields:

- An integer denoting the number  $l$  of printed completions,
- an integer denoting the total number of completions available, and finally
- a string literal denoting a common prefix to be added to the returned completion candidates.

The header line is followed by  $\langle l \rangle$  lines each containing one completion candidate encoded as (quoted) string literal. Here are some example invocations showing the various cases:

```
ghci> :complete repl 0 ""
0 470 ""
ghci> :complete repl 5 "import For"
5 21 "import "
"Foreign"
"Foreign.C"
"Foreign.C.Error"
"Foreign.C.String"
"Foreign.C.Types"
ghci> :complete repl 5-10 "import For"
6 21 "import "
"Foreign.C.Types"
"Foreign.Concurrent"
"Foreign.ForeignPtr"
"Foreign.ForeignPtr.Safe"
"Foreign.ForeignPtr.Unsafe"
"Foreign.Marshal"
ghci> :complete repl 20- "import For"
2 21 "import "
"Foreign.StablePtr"
"Foreign.Storable"
ghci> :complete repl "map"
3 3 ""
"map"
"mapM"
"mapM_"
ghci> :complete repl 5-10 "map"
0 3 ""
```

**`:continue`** [ $\langle \text{ignoreCount} \rangle$ ]

Continue the current evaluation, when stopped at a breakpoint.

If an  $\langle \text{ignoreCount} \rangle$  is specified, the program will ignore the current breakpoint for the next  $\langle \text{ignoreCount} \rangle$  iterations. See command `:ignore` (page 58).

**`:def`**[!]  $\langle \text{name} \rangle$   $\langle \text{expr} \rangle$

`:def` (page 55) is used to define new commands, or macros, in GHCi. The command `:def`  $\langle \text{name} \rangle$   $\langle \text{expr} \rangle$  defines a new GHCi command `:name`, implemented by the Haskell expression  $\langle \text{expr} \rangle$ , which must have type `String -> IO String`. When `:name args` is typed at the prompt, GHCi will run the expression  $\langle \text{name} \text{ args} \rangle$ , take the resulting `String`, and

feed it back into GHCi as a new sequence of commands. Separate commands in the result must be separated by “\n”.

That’s all a little confusing, so here’s a few examples. To start with, here’s a new GHCi command which doesn’t take any arguments or produce any results, it just outputs the current date and time:

```
ghci> let date _ = Data.Time.getZonedTime >=> print >> return ""
ghci> :def date date
ghci> :date
2017-04-10 12:34:56.93213581 UTC
```

Here’s an example of a command that takes an argument. It’s a re-implementation of `:cd` (page 54):

```
ghci> let mycd d = System.Directory.setCurrentDirectory d >> return ""
ghci> :def mycd mycd
ghci> :mycd ..
```

Or I could define a simple way to invoke “`ghc --make Main`” in the current directory:

```
ghci> :def make (\_ -> return "!! ghc --make Main")
```

We can define a command that reads GHCi input from a file. This might be useful for creating a set of bindings that we want to repeatedly load into the GHCi session:

```
ghci> :def . readFile
ghci> . cmds.ghci
```

Notice that we named the command `:.` , by analogy with the “`.”` Unix shell command that does the same thing.

Typing `:def` on its own lists the currently-defined macros. Attempting to redefine an existing command name results in an error unless the `:def!` form is used, in which case the old command with that name is silently overwritten. However for builtin commands the old command can still be used by preceding the command name with a double colon (eg `::load`). It’s not possible to redefine the commands `{, :}` and `!!`.

**`:delete`** \* | (num) ...

Delete one or more breakpoints by number (use `:show breaks` (page 63) to see the number of each breakpoint). The `*` form deletes all the breakpoints.

**`:disable`** \* | (num) ...

Disable one or more breakpoints by number (use `:show breaks` (page 63) to see the number and state of each breakpoint). The `*` form disables all the breakpoints.

**`:doc`** (name)

(Experimental: This command will likely change significantly in GHC 8.8.)

Displays the documentation for the given name. Currently the command is restricted to displaying the documentation directly on the declaration in question, ignoring documentation for arguments, constructors etc.

**`:edit`** (file)

Opens an editor to edit the file (file), or the most recently loaded module if (file) is omitted. If there were errors during the last loading, the cursor will be positioned at the line of the first error. The editor to invoke is taken from the [VISUAL](#) (page 57) or `EDITOR`

environment variables, or a default editor on your system if neither is not set. You can change the editor using `:set editor` (page 61).

## VISUAL

### Hidden

**:enable** \* | (num) ...

Enable one or more disabled breakpoints by number (use `:show breaks` (page 63) to see the number and state of each breakpoint). The \* form enables all the disabled breakpoints. Enabling a break point will reset its ignore count to 0. (See `:ignore` (page 58))

**:force** (identifier) ...

Prints the value of (identifier) in the same way as `:print` (page 60). Unlike `:print` (page 60), `:force` (page 57) evaluates each thunk that it encounters while traversing the value. This may cause exceptions or infinite loops, or further breakpoints (which are ignored, but displayed).

**:forward** (n)

Move forward (n) steps in the history. (n) is one if omitted. See *Tracing and history* (page 47) for more about GHCi's debugging facilities. See also: `:trace` (page 64), `:history` (page 57), `:back` (page 53).

**:help**

**:?**

Displays a list of the available commands.

**:**

Repeat the previous command.

**:history** [num]

Display the history of evaluation steps. With a number, displays that many steps (default: 20). For use with `:trace` (page 64); see *Tracing and history* (page 47). To set the number of history entries stored by GHCi, use the `-fghci-hist-size={n}` (page 48) flag.

**:info[!]** (name)

Displays information about the given name(s). For example, if (name) is a class, then the class methods and their types will be printed; if (name) is a type constructor, then its definition will be printed; if (name) is a function, then its type will be printed. If (name) has been loaded from a source file, then GHCi will also display the location of its definition in the source.

For types and classes, GHCi also summarises instances that mention them. To avoid showing irrelevant information, an instance is shown only if (a) its head mentions (name), and (b) all the other things mentioned in the instance are in scope (either qualified or otherwise) as a result of a `:load` (page 59) or `:module` (page 60) commands.

The command `:info!` works in a similar fashion but it removes restriction (b), showing all instances that are in scope and mention (name) in their head.

**:instances** (type)

Displays all the class instances available to the argument (type). The command will match (type) with the first parameter of every instance and then check that all constraints are satisfiable.

When combined with *PartialTypeSignatures* (page 574), a user can insert wildcards into a query and learn the constraints required of each wildcard for (type) match with an instance.

The output is a listing of all matching instances, simplified and instantiated as much as possible.

For example:

```
> :instances Maybe (Maybe Int)
instance Eq (Maybe (Maybe Int)) -- Defined in 'GHC.Maybe'
instance Ord (Maybe (Maybe Int)) -- Defined in 'GHC.Maybe'
instance Show (Maybe (Maybe Int)) -- Defined in 'GHC.Show'
instance Read (Maybe (Maybe Int)) -- Defined in 'GHC.Read'

> :set -XPartialTypeSignatures -fno-warn-partial-type-signatures

> :instances Maybe _
instance Eq _ => Eq (Maybe _) -- Defined in 'GHC.Maybe'
instance Semigroup _ => Monoid (Maybe _) -- Defined in 'GHC.Base'
instance Ord _ => Ord (Maybe _) -- Defined in 'GHC.Maybe'
instance Semigroup _ => Semigroup (Maybe _) -- Defined in 'GHC.Base'
instance Show _ => Show (Maybe _) -- Defined in 'GHC.Show'
instance Read _ => Read (Maybe _) -- Defined in 'GHC.Read'
```

Only instances which could potentially be used will be displayed in the results. Instances which require unsatisfiable constraints such as `TypeError` will not be included. In the following example, the instance for `A` is not shown because it cannot be used.

```
ghci>:set -XDataKinds -XUndecidableInstances
ghci>import GHC.TypeLits
ghci>class A a
ghci>instance (TypeError (Text "Not possible")) => A Bool
ghci>:instances Bool
instance Eq Bool -- Defined in 'GHC.Classes'
instance Ord Bool -- Defined in 'GHC.Classes'
instance Enum Bool -- Defined in 'GHC.Enum'
instance Show Bool -- Defined in 'GHC.Show'
instance Read Bool -- Defined in 'GHC.Read'
instance Bounded Bool -- Defined in 'GHC.Enum'
```

### **:issafe** [`<module>`]

Displays Safe Haskell information about the given module (or the current module if omitted). This includes the trust type of the module and its containing package.

### **:ignore** `<break>` `<ignoreCount>`

Set the ignore count of the breakpoint with number `<break>` to `<ignoreCount>`.

The next `<ignoreCount>` times the program hits the breakpoint `<break>`, this breakpoint is ignored and the program doesn't stop. Every time the breakpoint is ignored, the ignore count is decremented by 1. When the ignore count is zero, the program again stops at the breakpoint.

You can also specify an `<ignoreCount>` on a `:continue` (page 55) command when you resume execution of your program.

### **:kind**[!] `<type>`

Infers and prints the kind of `<type>`. The latter can be an arbitrary type expression, including a partial application of a type constructor, such as `Either Int`. In fact, `:kind`

(page 58) even allows you to write a partial application of a type synonym (usually disallowed), so that this works:

```
ghci> type T a b = (a,b,a)
ghci> :k T Int Bool
T Int Bool :: *
ghci> :k T
T :: * -> * -> *
ghci> :k T Int
T Int :: * -> *
```

Free type variables are also implicitly quantified, same as if you wrote `:k forall a. [a]` so this also works:

```
ghci> :k [a]
[a] :: *
```

If you specify the optional `!`, GHC will in addition normalise the type by expanding out type synonyms and evaluating type-function applications, and display the normalised result.

#### **:list** {identifier}

Lists the source code around the definition of {identifier} or the current breakpoint if not given. This requires that the identifier be defined in an interpreted module. If your output device supports it, then GHCi will highlight the active subexpression in bold.

#### **:list** [{module}] {line}

Lists the source code around the given line number of {module}. This requires that the module be interpreted. If your output device supports it, then GHCi will highlight the active subexpression in bold.

#### **:load** [!] [\*] {module}

Recursively loads the specified {module}s, and all the modules they depend on. Here, each {module} must be a module name or filename, but may not be the name of a module in a package.

All previously loaded modules, except package modules, are forgotten. The new set of modules is known as the target set. Note that [:load](#) (page 59) can be used without any arguments to unload all the currently loaded modules and bindings.

Normally pre-compiled code for a module will be loaded if available, or otherwise the module will be compiled to byte-code. Using the `*` prefix forces a module to be loaded as byte-code.

Adding the optional `!` turns type errors into warnings while loading. This allows to use the portions of the module that are correct, even if there are type errors in some definitions. Effectively, the `-fdefer-type-errors` (page 464) flag is set before loading and unset after loading if the flag has not already been set before. See [Deferring type errors to runtime](#) (page 464) for further motivation and details.

After a [:load](#) (page 59) command, the current context is set to:

- {module}, if it was loaded successfully, or
- the most recently successfully loaded module, if any other modules were loaded as a result of the current [:load](#) (page 59), or
- Prelude otherwise.

**:loc-at** {module} {line} {col} {end-line} {end-col} [{name}]

Tries to find the definition site of the name at the given source-code span, e.g.:

```
X> :loc-at X.hs 6 14 6 16 mu
X.hs:(8,7)-(8,9)
```

This command is useful when integrating GHCi with text editors and IDEs for providing a goto-definition facility.

The `:loc-at` command requires `:set +c` (page 66) to be set.

**:main** {arg1} ... {argn}

When a program is compiled and executed, it can use the `getArgs` IO action to access the command-line arguments. However, we cannot simply pass the arguments to `main` while we are testing in `ghci`, as `main` doesn't take its arguments directly.

Instead, we can use the `:main` (page 60) command. This runs whatever `main` is in scope, with any arguments being treated the same as command-line arguments, e.g.:

```
ghci> main = System.Environment.getArgs >>= print
ghci> :main foo bar
["foo","bar"]
```

We can also quote arguments which contains characters like spaces, and they are treated like Haskell strings, or we can just use Haskell list syntax:

```
ghci> :main foo "bar baz"
["foo","bar baz"]
ghci> :main ["foo", "bar baz"]
["foo","bar baz"]
```

Finally, other IO actions can be called, either with the `-main-is` flag or the `:run` (page 61) command:

```
ghci> foo = putStrLn "foo" >> System.Environment.getArgs >>= print
ghci> bar = putStrLn "bar" >> System.Environment.getArgs >>= print
ghci> :set -main-is foo
ghci> :main foo "bar baz"
foo
["foo","bar baz"]
ghci> :run bar ["foo", "bar baz"]
bar
["foo","bar baz"]
```

**:module** +|- [\*]{mod1} ...

**import** {mod}

Sets or modifies the current context for statements typed at the prompt. The form `import mod` is equivalent to `:module +mod`. See *What's really in scope at the prompt?* (page 33) for more details.

**:print** {names}

Prints a value without forcing its evaluation. `:print` (page 60) may be used on values whose types are unknown or partially known, which might be the case for local variables with polymorphic types at a breakpoint. While inspecting the runtime value, `:print` (page 60) attempts to reconstruct the type of the value, and will elaborate the type in

GHCi's environment if possible. If any unevaluated components (thunks) are encountered, then `:print` (page 60) binds a fresh variable with a name beginning with `_t` to each thunk. See *Breakpoints and inspecting variables* (page 41) for more information. See also the `:sprint` (page 63) command, which works like `:print` (page 60) but does not bind new variables.

**:quit**

Quits GHCi. You can also quit by typing `Control-D` at the prompt.

**:reload[!]**

Attempts to reload the current target set (see `:load` (page 59)) if any of the modules in the set, or any dependent module, has changed. Note that this may entail loading new modules, or dropping modules which are no longer indirectly required by the target.

Adding the optional `!` turns type errors into warnings while loading. This allows to use the portions of the module that are correct, even if there are type errors in some definitions. Effectively, the `-fdefer-type-errors` (page 464) flag is set before loading and unset after loading if the flag has not already been set before. See *Deferring type errors to runtime* (page 464) for further motivation and details.

**:run**

See `:main` (page 60).

**:script** [(*n*)] (*filename*)

Executes the lines of a file as a series of GHCi commands. The syntax for file-name arguments respects shell quoting rules, i.e., file names containing spaces can be enclosed in double quotes or with spaces escaped with a backslash. This command is compatible with multiline statements as set by `:set +m` (page 66)

**:set** [(*option*) ...]

Sets various options. See *The :set and :seti commands* (page 65) for a list of available options and *Interactive-mode options* (page 164) for a list of GHCi-specific flags. The `:set` (page 61) command by itself shows which options are currently set. It also lists the current dynamic flag settings, with GHCi-specific flags listed separately.

**:set args** (*arg*)

Sets the list of arguments which are returned when the program calls `System.Environment.getArgs`.

**:set editor** (*cmd*)

Sets the command used by `:edit` (page 56) to (*cmd*).

**:set local-config** (*source|ignore*)

If *ignore*, `./.`ghci files will be ignored (sourcing untrusted local scripts is a security risk). The default is *source*. Set this directive in your user `.ghci` script, i.e. before the local script would be sourced.

Even when set to *ignore*, a local script will still be processed if given by `-ghci-script` (page 69) on the command line, or sourced via `:script` (page 61).

**:set prog** (*prog*)

Sets the string to be returned when the program calls `System.Environment.getProgName`.

**:set prompt** (*prompt*)

Sets the string to be used as the prompt in GHCi. Inside (*prompt*), the next sequences are replaced:

- %s by the names of the modules currently in scope.
- %l by the line number (as referenced in compiler messages) of the current prompt.
- %d by the date in “Weekday Month Date” format (e.g., “Tue May 26”) .
- %t by the current time in 24-hour HH:MM:SS format.
- %T by the current time in 12-hour HH:MM:SS format.
- %@ by the current time in 12-hour am/pm format.
- %A by the current time in 24-hour HH:MM format.
- %u by the username of the current user.
- %w by the current working directory.
- %o by the operating system.
- %a by the machine architecture.
- %N by the compiler name.
- %V by the compiler version.
- %call(cmd [args]) by the result of calling cmd args.
- %% by %.

If (prompt) starts with " then it is parsed as a Haskell String; otherwise it is treated as a literal string.

**:set prompt-cont** (prompt)

Sets the string to be used as the continuation prompt (used when using the `:{` (page 29) command) in GHCi.

**:set prompt-function** (prompt-function)

Sets the function to be used for the prompt displaying in GHCi. The function should be of the type `[String] -> Int -> IO String`. This function is called each time the prompt is being made. The first argument stands for the names of the modules currently in scope (the name of the “topmost” module will begin with a \*; see *What’s really in scope at the prompt?* (page 33) for more information). The second arguments is the line number (as referenced in compiler messages) of the current prompt.

**:set prompt-cont-function** (prompt-function)

Sets the function to be used for the continuation prompt (used when using the `:{` (page 29) command) displaying in GHCi.

**:set stop** (num) (cmd)

Set a command to be executed when a breakpoint is hit, or a new item in the history is selected. The most common use of `:set stop` (page 62) is to display the source code at the current location, e.g. `:set stop :list`.

If a number is given before the command, then the commands are run when the specified breakpoint (only) is hit. This can be quite useful: for example, `:set stop 1 :continue` effectively disables breakpoint 1, by running `:continue` (page 55) whenever it is hit. In this case GHCi will still emit a message to say the breakpoint was hit. If you don’t want such a message, you can use the `:disable` (page 56) command. What’s more, with cunning use of `:def` (page 55) and `:cmd` (page 54) you can use `:set stop` (page 62) to implement conditional breakpoints:



```
*ghci> :def cond \expr -> return ("cmd if ( " ++ expr ++ " ) then return \
→ "\" else return \":continue\"" )
*ghci> :set stop 0 :cond (x < 3)
```

To ignore breakpoints for a specified number of iterations use the `:ignore` (page 58) or the `(ignoreCount)` parameter of the `:continue` (page 55) command.

### **:seti** [{option} ...]

Like `:set` (page 61), but options set with `:seti` (page 63) affect only expressions and commands typed at the prompt, and not modules loaded with `:load` (page 59) (in contrast, options set with `:set` (page 61) apply everywhere). See *Setting options for interactive evaluation only* (page 67).

Without any arguments, displays the current set of options that are applied to expressions and commands typed at the prompt.

### **:show bindings**

Show the bindings made at the prompt and their types.

### **:show breaks**

List the active breakpoints.

### **:show context**

List the active evaluations that are stopped at breakpoints.

### **:show imports**

Show the imports that are currently in force, as created by `import` and `:module` (page 60) commands.

### **:show modules**

Show the list of modules currently loaded.

### **:show packages**

Show the currently active package flags, as well as the list of packages currently loaded.

### **:show paths**

Show the current working directory (as set via `:cd` (page 54) command), as well as the list of directories searched for source files (as set by the `-i` option).

### **:show language**

Show the currently active language flags for source files.

### **:showi language**

Show the currently active language flags for expressions typed at the prompt (see also `:seti` (page 63)).

### **:show targets**

Show list of currently loaded modules. This set of loaded modules can be modified by `:load` (page 59), `:reload` (page 61), `:add` (page 53) and `:unadd` (page 65).

### **:show** [args|prog|prompt|editor|stop]

Displays the specified setting (see `:set` (page 61)).

### **:sprint** (expr)

Prints a value without forcing its evaluation. `:sprint` (page 63) is similar to `:print` (page 60), with the difference that unevaluated subterms are not bound to new variables, they are simply denoted by `_`.

**:step** [(*expr*)]

Enable all breakpoints and begin evaluating an expression in single-stepping mode. In this mode evaluation will be stopped after every reduction, allowing local variables to be inspected. If (*expr*) is not given, evaluation will resume at the last breakpoint. See [Single-stepping](#) (page 45).

**:steplocal**

Enable only breakpoints in the current top-level binding and resume evaluation at the last breakpoint. Continuation with [:steplocal](#) (page 64) is not possible if this last breakpoint was hit by an error ([-fbreak-on-error](#) (page 49)) or an exception ([-fbreak-on-exception](#) (page 49)).

**:stepmodule**

Enable only breakpoints in the current module and resume evaluation at the last breakpoint.

**:trace** (*expr*)

Evaluates the given expression (or from the last breakpoint if no expression is given), and additionally logs the evaluation steps for later inspection using [:history](#) (page 57). See [Tracing and history](#) (page 47).

**:type** (*expression*)

Infers and prints the type of (*expression*), solving constraints and reducing type families as much as possible. For polymorphic types, it does not instantiate any forall quantified variables.

```
*X> :type length
length :: Foldable t => t a -> Int
```

Type family reduction is skipped if the function is not fully instantiated, as this has been observed to give more intuitive results. You may want to use [:info](#) (page 57) if you are not applying any arguments, as that will return the original type of the function.

**:type +d** (*expression*)

Infers and prints the type of (*expression*), instantiating *all* the forall quantifiers, solving constraints, defaulting, and generalising. In this mode, if the inferred type is constrained by any interactive class (Num, Show, Eq, Ord, Foldable, or Traversable), the constrained type variable(s) are defaulted according to the rules described under [ExtendedDefaultRules](#) (page 37). This mode is quite useful when the inferred type is quite general (such as for `foldr`) and it may be helpful to see a more concrete instantiation.

```
*X> :type +d length
length :: [a] -> Int
```

**:type-at** (*path*) (*line*) (*col*) (*end-line*) (*end-col*) [(*name*)]

Reports the inferred type at the given span/position in the module, e.g.:

```
*X> :type-at X.hs 6 6 6 7 f
Int -> Int
```

This command is useful when integrating GHCi with text editors and IDEs for providing a show-type-under-point facility.

The first parameter (*path*) must be a file path and not a module name. The type of this path is dependent on how the module was loaded into GHCi: If the module was loaded

by name, then the path name calculated by GHCi as described in *Modules vs. filenames* (page 25) must be used. If the module was loaded with an absolute or a relative path, then the same path must be specified.

The last string parameter is useful for when the span is out of date, i.e. the file changed and the code has moved. In which case `:type-at` (page 64) falls back to a general `:type` (page 64) like lookup.

The `:type-at` (page 64) command requires `:set +c` (page 66) to be set.

**:unadd** {module}

Removes {module}(s) from the current target set, and perform a reload (see `:add` (page 53) above).

**:undef** {name}

Undefines the user-defined command {name} (see `:def` (page 55) above).

**:unset** {option}

Unsets certain options. See *The :set and :seti commands* (page 65) for a list of available options.

**:uses** {module} {line} {col} {end-line} {end-col} [{name}]

Reports all module-local uses of the thing at the given position in the module, e.g.:

```
:uses GhciFind.hs 53 66 53 70 name
GhciFind.hs:(46,25)-(46,29)
GhciFind.hs:(47,37)-(47,41)
GhciFind.hs:(53,66)-(53,70)
GhciFind.hs:(57,62)-(57,66)
```

This command is useful for highlighting and navigating all uses of an identifier in editors and IDEs.

The `:uses` (page 65) command requires `:set +c` (page 66) to be set.

**::** {builtin-command}

Executes the GHCi built-in command (e.g. `::type 3`). That is, look up on the list of builtin commands, excluding defined macros. See also: `:def` (page 55).

**:!** {command}

Executes the shell command {command}.

## 3.8 The :set and :seti commands

The `:set` (page 61) command sets two types of options: GHCi options, which begin with “+”, and “command-line” options, which begin with “-”.

---

**Note:** At the moment, the `:set` (page 61) command doesn't support any kind of quoting in its arguments: quotes will not be removed and cannot be used to group words together. For example, `:set -DF00='BAR BAZ'` will not do what you expect.

---

### 3.8.1 GHCi options

GHCi options may be set using `:set` (page 61) and unset using `:unset` (page 65).

The available GHCi options are:

**:set +c**

Collect type and location information after loading modules. The commands `:all-types` (page 53), `:loc-at` (page 59), `:type-at` (page 64), and `:uses` (page 65) require +c to be active.

**:set +m**

Enable parsing of multiline commands. A multiline command is prompted for when the current input line contains open layout contexts (see *Multiline input* (page 30)).

**:set +r**

Normally, any evaluation of top-level expressions (otherwise known as CAFs or Constant Applicative Forms) in loaded modules is retained between evaluations. Turning on +r causes all evaluation of top-level expressions to be discarded after each evaluation (they are still retained *during* a single evaluation).

This option may help if the evaluated top-level expressions are consuming large amounts of space, or if you need repeatable performance measurements.

**:set +s**

Display some stats after evaluating each expression, including the elapsed time and number of bytes allocated. NOTE: the allocation figure is only accurate to the size of the storage manager's allocation area, because it is calculated at every GC. Hence, you might see values of zero if no GC has occurred.

**:set +t**

Display the type of each variable bound after a statement is entered at the prompt. If the statement is a single expression, then the only variable binding will be for the variable it.

### 3.8.2 Setting GHC command-line options in GHCi

Normal GHC command-line options may also be set using `:set` (page 61). For example, to turn on `-Wmissing-signatures` (page 110), you would say:

```
ghci> :set -Wmissing-signatures
```

GHCi will also accept any file-header pragmas it finds, such as `{-# OPTIONS_GHC ... #-}` and `{-# LANGUAGE ... #-}` (see *Pragmas* (page 661)). For example, instead of using `:set` (page 61) to enable `-Wmissing-signatures` (page 110), you could instead write:

```
ghci> {-# OPTIONS_GHC -Wmissing-signatures #-}
```

Any GHC command-line option that is designated as dynamic (see the table in *Flag reference* (page 153)), may be set using `:set` (page 61). To unset an option, you can set the reverse option:

```
ghci> :set -Wno-incomplete-patterns -XNoMultiParamTypeClasses
```

*Flag reference* (page 153) lists the reverse for each option where applicable.

Certain static options (`-package <pkg>` (page 261), `-I<dir>` (page 282), `-i<dir>[:<dir>]*` (page 241), and `-l <lib>` (page 288) in particular) will also work, but some may not take effect until the next reload.

### 3.8.3 Setting options for interactive evaluation only

GHCi actually maintains *two* sets of options:

- The *loading options* apply when loading modules
- The *interactive options* apply when evaluating expressions and commands typed at the GHCi prompt.

The `:set` (page 61) command modifies both, but there is also a `:seti` (page 63) command (for “set interactive”) that affects only the interactive options set.

It is often useful to change the interactive options, without having that option apply to loaded modules too. For example

```
:seti -XMonoLocalBinds
```

It would be undesirable if `MonoLocalBinds` (page 580) were to apply to loaded modules too: that might cause a compilation error, but more commonly it will cause extra recompilation, because GHC will think that it needs to recompile the module because the flags have changed.

If you are setting language options in your `.ghci` file, it is good practice to use `:seti` (page 63) rather than `:set` (page 61), unless you really do want them to apply to all modules you load in GHCi.

The two sets of options can be inspected using the `:set` (page 61) and `:seti` (page 63) commands respectively, with no arguments. For example, in a clean GHCi session we might see something like this:

```
ghci> :seti
base language is: GHC2021
with the following modifiers:
  -XExtendedDefaultRules
  -XNoMonomorphismRestriction
GHCi-specific dynamic flag settings:
other dynamic, non-language, flag settings:
  -fexternal-dynamic-refs
  -fignore-optim-changes
  -fignore-hpc-changes
  -fimplicit-import-qualified
warning settings:
```

The two sets of options are initialised as follows. First, both sets of options are initialised as described in *The .ghci and .haskeline files* (page 68). Then the interactive options are modified as follows:

- The option `-XExtendedDefaultRules` is enabled, in order to apply special defaulting rules to expressions typed at the prompt (see *Type defaulting in GHCi* (page 37)).

- The Monomorphism Restriction is disabled (see [Switching off the Monomorphism Restriction](#) (page 579)).

## 3.9 The .ghci and .haskeline files

### 3.9.1 The .ghci files

When it starts, unless the `-ignore-dot-ghci` (page 68) flag is given, GHCi reads and executes commands from the following files, in this order, if they exist:

1. `ghcappdata/ghci.conf`, where `<ghcappdata>` depends on your system, but is usually something like `$HOME/.ghc` or `$XDG_CONFIG_HOME/ghc` on Unix or `C:\Users{username}\AppData\Roaming\ghc` on Windows.
2. `./ghci`

The `ghci.conf` file is most useful for turning on favourite options (e.g. `:set +s`), and defining useful macros.

---

**Note:** When setting language options in this file it is usually desirable to use `:seti` (page 63) rather than `:set` (page 61) (see [Setting options for interactive evaluation only](#) (page 67)).

---

Placing a `.ghci` file in a directory with a Haskell project is a useful way to set certain project-wide options so you don't have to type them every time you start GHCi: eg. if your project uses multi-parameter type classes, scoped type variables, and CPP, and has source files in three subdirectories A, B and C, you might put the following lines in `.ghci`:

```
:set -XMultiParamTypeClasses -XScopedTypeVariables -cpp
:set -iA:B:C
```

(Note that strictly speaking the `-i` (page 241) flag is a static one, but in fact it works to set it using `:set` (page 61) like this. The changes won't take effect until the next `:load` (page 59), though.)

**Warning:** Sourcing untrusted `./ghci` files is a security risk. They can contain arbitrary commands that will be executed as the user. Use `:set local-config` (page 61) to inhibit the processing of `./ghci` files.

Once you have a library of GHCi macros, you may want to source them from separate files, or you may want to source your `.ghci` file into your running GHCi session while debugging it

```
:def source readFile
```

With this macro defined in your `.ghci` file, you can use `:source file` to read GHCi commands from file. You can find (and contribute!-) other suggestions for `.ghci` files on this Haskell wiki page: [GHC/GHCi](#)

Additionally, any files specified with `-ghci-script` (page 69) flags will be read after the standard files, allowing the use of custom `.ghci` files.

Two command-line options control whether the startup files are read:

**-ignore-dot-ghci**

Don't read either `./ghci` or the other startup files when starting up.

**-ghci-script**

Read a specific file after the usual startup files. May be specified repeatedly for multiple inputs. `-ignore-dot-ghci` (page 68) does not apply to these files.

When defining GHCi macros, there is some important behavior you should be aware of when names may conflict with built-in commands, especially regarding tab completion.

For example, consider if you had a macro named `:time` and in the shell, typed `:t 3` — what should happen? The current algorithm we use for completing commands is:

1. First, look up an exact match on the name from the defined macros.
2. Look for the exact match on the name in the built-in command list.
3. Do a prefix lookup on the list of built-in commands - if a built-in command matches, but a macro is defined with the same name as the built-in defined, pick the macro.
4. Do a prefix lookup on the list of built-in commands.
5. Do a prefix lookup on the list of defined macros.

Here are some examples:

1. You have a macro `:time` and enter `:t 3`  
You get `:type 3`
2. You have a macro `:type` and enter `:t 3`  
You get `:type 3` with your defined macro, not the builtin.
3. You have a macro `:time` and a macro `:type`, and enter `:t 3`  
You get `:type 3` with your defined macro.

When giving priority to built-in commands, you can use `:: <builtin-command>` (page 65), like `::type 3`.

### 3.9.2 The `.haskeline` file

GHCi uses [Haskeline](#) under the hood. You can configure it to, among other things, prune duplicates from GHCi history. See: [Haskeline user preferences](#).

## 3.10 Compiling to object code inside GHCi

By default, GHCi compiles Haskell source code into byte-code that is interpreted by the run-time system. GHCi can also compile Haskell code to object code: to turn on this feature, use the `-fobject-code` (page 286) flag either on the command line or with `:set` (page 61) (the option `-fbyte-code` (page 286) restores byte-code compilation again). Compiling to object code takes longer, but typically the code will execute 10-20 times faster than byte-code.

Compiling to object code inside GHCi is particularly useful if you are developing a compiled application, because the `:reload` (page 61) command typically runs much faster than restarting GHC with `--make` (page 78) from the command-line, because all the interface files are already cached in memory.



There are disadvantages to compiling to object-code: you can't set breakpoints in object-code modules, for example. Only the exports of an object-code module will be visible in GHCi, rather than all top-level bindings as in interpreted modules.

## 3.11 Running the interpreter in a separate process

Normally GHCi runs the interpreted code in the same process as GHC itself, on top of the same RTS and sharing the same heap. However, if the flag `-fexternal-interpreter` (page 70) is given, then GHC will spawn a separate process for running interpreted code, and communicate with it using messages over a pipe.

### `-fexternal-interpreter`

Since  
8.0.1

Run interpreted code (for GHCi, Template Haskell, Quasi-quoting, or Annotations) in a separate process. The interpreter will run in profiling mode if `-prof` (page 715) is in effect, and in dynamically-linked mode if `-dynamic` (page 289) is in effect.

There are a couple of caveats that will hopefully be removed in the future: this option is currently not implemented on Windows (it is a no-op), and the external interpreter does not support the GHCi debugger, so breakpoints and single-stepping don't work with `-fexternal-interpreter` (page 70).

See also the `-pgmi {cmd}` (page 280) (*Replacing the program for one or more phases* (page 279)) and `-opti {option}` (page 282) (*Forcing options to a particular phase* (page 281)) flags.

Why might we want to do this? The main reason is that the RTS running the interpreted code can be a different flavour (profiling or dynamically-linked) from GHC itself. So for example:

- We can use the profiler to collect stack traces when using GHCi (see *Stack Traces in GHCi* (page 40)).
- When compiling Template Haskell code with `-prof` (page 715) we don't need to compile the modules without `-prof` (page 715) first (see *Using Template Haskell with Profiling* (page 591)) because we can run the profiled object code in the interpreter.

This feature is experimental in GHC 8.0.x, but it may become the default in future releases.

## 3.12 Running the interpreter on a different host

When using the flag `-fexternal-interpreter` (page 70) GHC will spawn and communicate with the separate process using pipes. There are scenarios (e.g. when cross compiling) where it is favourable to have the communication happen over the network. GHC provides two utilities for this, which can be found in the `utils` directory.

- `remote-iserv` needs to be built with the cross compiler to be executed on the remote host. Or in the case of using it on the same host the stage2 compiler will do as well.
- `iserv-proxy` needs to be built on the build machine by the build compiler.

After starting `remote-iserv {tmp_dir} {port}` on the target and providing it with a temporary folder (where it will copy the necessary libraries to load to) and port it will listen for the proxy to connect.



Providing `-pgmi (/path/to/iserv-proxy)` (page 280) and `-opti {slave-ip} -opti {slave-port} [-opti -v]` (page 282) in addition to `-fexternal-interpreter` (page 70) will then make ghc go through the proxy instead.

There are some limitations when using this. File and process IO will be executed on the target. As such packages like `git-embed`, `file-embed` and others might not behave as expected if the target and host do not share the same filesystem.

### 3.13 Building GHCi libraries

When invoked in the static way, GHCi will use the GHC RTS's static runtime linker to load object files for imported modules when available. However, when these modules are built with `-split-sections` (page 289) this linking can be quite expensive. To reduce this cost, package managers and build systems may opt to produce a pre-linked *GHCi object* using the `--merge-objs` (page 79) mode. This merges the per-module objects into a single object, collapsing function sections into a single text section which can be efficiently loaded by the runtime linker.

### 3.14 FAQ and Things To Watch Out For

#### The interpreter can't load modules with foreign export declarations!

Unfortunately not. We haven't implemented it yet. Please compile any offending modules by hand before loading them into GHCi.

`-O` (page 127) is ineffective in GHCi!

Before GHC 9.8, optimizations were considered too unstable to be used with the bytecode interpreter. This restriction has been lifted, but is still regarded as experimental and guarded by `-funoptimized-core-for-interpreter` (page 310), which is enabled by default. In order to use optimizations, run:

```
ghci -fno-unoptimized-core-for-interpreter -O
```

#### Concurrent threads don't carry on running when GHCi is waiting for input.

This should work, as long as your GHCi was built with the `-threaded` (page ??) switch, which is the default. Consult whoever supplied your GHCi installation.

#### After using `getContents`, I can't use `stdin`, until I do `:load` or `:reload`

This is the defined behaviour of `getContents`: it puts the `stdin` Handle in a state known as semi-closed, wherein any further I/O operations on it are forbidden. Because I/O state is retained between computations, the semi-closed state persists until the next `:load` (page 59) or `:reload` (page 61) command.

You can make `stdin` reset itself after every evaluation by giving GHCi the command `:set +r`. This works because `stdin` is just a top-level expression that can be reverted to its unevaluated state in the same way as any other top-level expression (CAF).

#### I can't use `Control-C` to interrupt computations in GHCi on Windows.

See *Running GHCi on Windows* (page 767).

#### The default buffering mode is different in GHCi to GHC.

In GHC, the `stdout` handle is line-buffered by default. However, in GHCi we turn off the buffering on `stdout`, because this is normally what you want in an interpreter: output appears as it is generated.

If you want line-buffered behaviour, as in GHC, you can start your program thus:

```
main = do { hSetBuffering stdout LineBuffering; ... }
```

## USING RUNGHC

`runghc/runhaskell` allows you to run Haskell programs using the interpreter, instead of having to compile them first.

### 4.1 Usage

The `runghc` command-line looks like:

```
runghc [runghc flags] [GHC flags] module [program args]
```

Any flags not recognized by `runghc` are automatically passed to GHC. If a flag is recognized by both `runghc` and GHC but you want to pass it to GHC then you can place it after a `--` separator. Flags after the separator are treated as GHC only flags. Alternatively you can use the `runghc` option `--ghc-arg=<arg>` to pass any flag or argument directly to GHC.

`module` could be a Haskell source filename with or without the extension. If for some reason the filename starts with a `-` you can use a second `--` to indicate the end of flags. Anything following a second `--` will be considered a program file or module name followed by its arguments. For example:

- `runghc -- -- -hello.hs`

### 4.2 `runghc` flags

`runghc` accepts the following flags:

- `-f /path/to/ghc`: tell `runghc` the path of GHC executable to use to run the program. By default `runghc` will search for GHC in the directories in the system search path.
- `--ghc-arg=<arg>`: Pass an option or argument to GHC
- `--help`: print usage information.
- `--version`: print version information.

## 4.3 GHC Flags

As discussed earlier, use `--` or `--ghc-arg=<arg>` to disambiguate GHC flags when needed. For example, `-f` is recognized by `runghc`, therefore to pass `-fliberate-case` to GHC use any of the following:

- `runghc -- -fliberate-case`
- `runghc --ghc-arg=-fliberate-case`

Note that any non-flag arguments are never passed to GHC. An unused non-flag argument will be considered as the name of the program to run. If a GHC flag takes an argument use `--ghc-arg=<arg>` to pass the argument to GHC. For example, if you want to pass `-package foo` to GHC use any of the following:

- `runghc -package --ghc-arg=foo Main.hs`
- `runghc --ghc-arg=-package --ghc-arg=foo Main.hs`

## USING GHC

### 5.1 Using GHC

#### 5.1.1 Getting started: compiling programs

In this chapter you'll find a complete reference to the GHC command-line syntax, including all 400+ flags. It's a large and complex system, and there are lots of details, so it can be quite hard to figure out how to get started. With that in mind, this introductory section provides a quick introduction to the basic usage of GHC for compiling a Haskell program, before the following sections dive into the full syntax.

Let's create a Hello World program, and compile and run it. First, create a file `hello.hs` containing the Haskell code:

```
main = putStrLn "Hello, World!"
```

To compile the program, use GHC like this:

```
$ ghc hello.hs
```

(where `$` represents the prompt: don't type it). GHC will compile the source file `hello.hs`, producing an object file `hello.o` and an interface file `hello.hi`, and then it will link the object file to the libraries that come with GHC to produce an executable called `hello` on Unix/Linux/Mac, or `hello.exe` on Windows.

By default GHC will be very quiet about what it is doing, only printing error messages. If you want to see in more detail what's going on behind the scenes, add `-v` (page 86) to the command line.

Then we can run the program like this:

```
$ ./hello
Hello World!
```

If your program contains multiple modules, then you only need to tell GHC the name of the source file containing the `Main` module, and GHC will examine the `import` declarations to find the other modules that make up the program and find their source files. This means that, with the exception of the `Main` module, every source file should be named after the module name that it contains (with dots replaced by directory separators). For example, the module `Data.Person` would be in the file `Data/Person.hs` on Unix/Linux/Mac, or `Data\Person.hs` on Windows.

### 5.1.2 Options overview

GHC's behaviour is controlled by options, which for historical reasons are also sometimes referred to as command-line flags or arguments. Options can be specified in three ways:

#### 5.1.2.1 Command-line arguments

An invocation of GHC takes the following form:

```
ghc [argument...]
```

Command-line arguments are either options or file names.

Command-line options begin with `-`. They may *not* be grouped: `-v0` is different from `-v -0`. Options need not precede filenames: e.g., `ghc *.o -o foo`. All options are processed and then applied to all files; you cannot, for example, invoke `ghc -c -O1 Foo.hs -O2 Bar.hs` to apply different optimisation levels to the files `Foo.hs` and `Bar.hs`.

In addition to passing arguments via the command-line, arguments can be passed via GNU-style response files. For instance,

```
$ cat response-file
-O1
Hello.hs
-o Hello
$ ghc @response-file
```

---

**Note:** Note that command-line options are *order-dependent*, with arguments being evaluated from left-to-right. This can have seemingly strange effects in the presence of flag implication. For instance, consider `-fno-specialise` (page 141) and `-O1` (page 127) (which implies `-fspecialise` (page 141)). These two command lines mean very different things:

```
-fno-specialise -O1
    -fspecialise will be enabled as the -fno-specialise is overridden by the -O1.
-O1 -fno-specialise
    -fspecialise will not be enabled, since the -fno-specialise overrides the
    -fspecialise implied by -O1.
```

---

#### 5.1.2.2 Command line options in source files

Sometimes it is useful to make the connection between a source file and the command-line options it requires quite tight. For instance, if a Haskell source file deliberately uses name shadowing, it should be compiled with the `-Wno-name-shadowing` option. Rather than maintaining the list of per-file options in a Makefile, it is possible to do this directly in the source file using the `OPTIONS_GHC` *pragma* (page 662)

```
{-# OPTIONS_GHC -Wno-name-shadowing #-}
module X where
...
```

OPTIONS\_GHC is a *file-header pragma* (see [OPTIONS\\_GHC pragma](#) (page 662)).

Only *dynamic* flags can be used in an OPTIONS\_GHC pragma (see [Dynamic and Mode options](#) (page 77)).

Note that your command shell does not get to the source file options, they are just included literally in the array of command-line arguments the compiler maintains internally, so you'll be desperately disappointed if you try to glob etc. inside OPTIONS\_GHC.

---

**Note:** The contents of OPTIONS\_GHC are appended to the command-line options, so options given in the source file override those given on the command-line.

---

It is not recommended to move all the contents of your Makefiles into your source files, but in some circumstances, the OPTIONS\_GHC pragma is the Right Thing. (If you use [-keep-hc-file](#) (page 244) and have OPTION flags in your module, the OPTIONS\_GHC will get put into the generated .hc file).

### 5.1.2.3 Setting options in GHCi

Options may also be modified from within GHCi, using the [:set](#) (page 61) command.

## 5.1.3 Dynamic and Mode options

Each of GHC's command line options is classified as dynamic or mode:

**Mode:** A mode may be used on the command line only. You can pass only one mode flag. For example, [--make](#) (page 78) or [-E](#) (page 78). The available modes are listed in [Modes of operation](#) (page 78).

**Dynamic:** A dynamic flag may be used on the command line, in a OPTIONS\_GHC pragma in a source file, or set using [:set](#) (page 61) in GHCi.

The flag reference tables ([Flag reference](#) (page 153)) lists the status of each flag.

### 5.1.4 Meaningful file suffixes

File names with “meaningful” suffixes (e.g., .lhs or .o) cause the “right thing” to happen to those files.

**.hs**

A Haskell module.

**.lhs**

A “literate Haskell” module.

**.hspp**

A file created by the preprocessor.

**.hi**

A Haskell interface file, probably compiler-generated.

**.hie**

An extended Haskell interface file, produced by the Haskell compiler.

**.hc**

Intermediate C file produced by the Haskell compiler.

- .c**  
A C file not produced by the Haskell compiler.
- .ll**  
An llvm-intermediate-language source file, usually produced by the compiler.
- .bc**  
An llvm-intermediate-language bitcode file, usually produced by the compiler.
- .s**  
An assembly-language source file, usually produced by the compiler.
- .o**  
An object file, produced by an assembler.

Files with other suffixes (or without suffixes) are passed straight to the linker.

### 5.1.5 Modes of operation

GHC's behaviour is firstly controlled by a mode flag. Only one of these flags may be given, but it does not necessarily need to be the first option on the command-line. For instance,

```
$ ghc Main.hs --make -o my-application
```

If no mode flag is present, then GHC will enter `--make` (page 78) mode (*Using ghc --make* (page 82)) if there are any Haskell source files given on the command line, or else it will link the objects named on the command line to produce an executable.

The available mode flags are:

#### **--interactive**

Interactive mode, which is also available as **ghci**. Interactive mode is described in more detail in *Using GHCi* (page 23).

#### **--run {file}**

Run a script's main entry-point. Similar to `runghc/runhaskell` this will by default use the bytecode interpreter. If the command-line contains a `--` argument then all arguments that follow will be passed to the script. All arguments that precede `--` are interpreted as GHC arguments.

#### **--make**

In this mode, GHC will build a multi-module Haskell program automatically, figuring out dependencies for itself. If you have a straightforward Haskell program, this is likely to be much easier, and faster, than using **make**. Make mode is described in *Using ghc --make* (page 82).

This mode is the default if there are any Haskell source files mentioned on the command line, and in this case the `--make` (page 78) option can be omitted.

#### **-e {expr}**

Expression-evaluation mode. This is very similar to interactive mode, except that there is a single expression to evaluate (`{expr}`) which is given on the command line. This flag may be given multiple times, in which case each expression is evaluated sequentially. See *Expression evaluation mode* (page 85) for more details.

#### **-E**

Stop after preprocessing (`.hspp` file)



**-C**

Stop after generating C (.hc file)

**-S**

Stop after generating assembly (.s file)

**-c**

Stop after generating object (.o) file

This is the traditional batch-compiler mode, in which GHC can compile source files one at a time, or link objects together into an executable. See *Batch compiler mode* (page 85).

**--merge-objs**

Merge a set of static object files into a library optimised for loading in GHCi. See *Building GHCi libraries* (page 71).

**-M**

Dependency-generation mode. In this mode, GHC can be used to generate dependency information suitable for use in a Makefile. See *Dependency generation* (page 256).

**--frontend** {module}

Run GHC using the given frontend plugin. See *Frontend plugins* (page 703) for details.

**-shared**

Create a shared object (or, on Windows, DLL). See *Creating a DLL* (page 770).

**--help**

**-?**

Cause GHC to spew a long usage message to standard output and then exit.

**--show-iface** {file}

Read the interface in {file} and dump it as text to stdout. For example `ghc --show-iface M.hi`.

**--supported-extensions**

**--supported-languages**

Print the supported language extensions.

**--show-options**

Print the supported command line options. This flag can be used for autocompletion in a shell.

**--info**

Print information about the compiler.

**--version**

**-V**

Print a one-line string including GHC's version number.

**--numeric-version**

Print GHC's numeric version number only.

**--print-booter-version**

Print the numeric version of the GHC binary used to bootstrap the build of this compiler.

**--print-build-platform**

Print the target string of the build platform, on which GHC was built, as generated by GNU Autotools. The format is `cpu-manufacturer-operating_system-(kernel)`, e.g., `x86_64-unknown-linux`.

**--print-c-compiler-flags**

List the flags passed to the C compiler during GHC build.

**--print-c-compiler-link-flags**

List the flags passed to the C compiler for the linking step during GHC build.

**--print-debug-on**

Print True if GHC was built with `-DDebug` flag. This enables assertions and extra debug code. The flag can be set in `GhcStage1HcOpts` and/or `GhcStage2HcOpts` and is automatically set for `devel1` and `devel2` build flavors.

**--print-global-package-db**

Print the path to GHC's global package database directory. A package database stores details about installed packages as a directory containing a file for each package. This flag prints the path to the global database shipped with GHC, and looks something like `/usr/lib/ghc/package.conf.d` on Unix. There may be other package databases, e.g., the user package database. For more details see [Package Databases](#) (page 264).

**--print-have-interpreter**

Print YES if GHC was compiled to include the interpreter, NO otherwise. If this GHC does not have the interpreter included, running it in interactive mode (see [--interactive](#) (page 78)) will throw an error. This only pertains the use of GHC interactively, not any separate GHCi binaries (see [Using GHCi](#) (page 23)).

**--print-have-native-code-generator**

Print YES if native code generator supports the target platform, NO otherwise. (See [Native Code Generator \(-fasm\)](#) (page 278))

**--print-host-platform**

Print the target string of the host platform, i.e., the one on which GHC is supposed to run, as generated by GNU Autotools. The format is `cpu-manufacturer-operating_system-(kernel)`, e.g., `x86_64-unknown-linux`.

**--print-leading-underscore**

Print YES if GHC was compiled to use symbols with leading underscores in object files, NO otherwise. This is usually atarget platform dependent.

**--print-libdir**

Print the path to GHC's library directory. This is the top of the directory tree containing GHC's libraries, interfaces, and include files (usually something like `/usr/local/lib/ghc-5.04` on Unix). This is the value of `$libdir` in the package configuration file (see [Packages](#) (page 259)).

**--print-ld-flags**

Print linker flags used to compile GHC.

**--print-object-splitting-supported**

Prints NO as object splitting is no longer supported. See [-split-sections](#) (page 289) for a more portable and reliable alternative.

**--print-project-git-commit-id**

Print the Git commit id from which this GHC was built. This can be used to trace the current binary back to a specific revision, which is especially useful during development on GHC itself. It is set by the configure script.

**--print-project-version**

Print the version set in the configure script during build. This is simply the GHC version.

**--print-rtts-ways**

Packages, like the Runtime System, can be built in a number of ways: - profiling - with profiling support - dynamic - with dynamic linking - logging - RTS event logging - threaded - multithreaded RTS - debug - RTS with debug information

Various combinations of these flavours are possible.

**--print-stage**

GHC is built using GHC itself and this build happens in stages, which are numbered.

- Stage 0 is the GHC you have installed. The “GHC you have installed” is also called “the bootstrap compiler”.
- Stage 1 is the first GHC we build, using stage 0. Stage 1 is then used to build the packages.
- Stage 2 is the second GHC we build, using stage 1. This is the one we normally install when you say `make install`.
- Stage 3 is optional, but is sometimes built to test stage 2.

Stage 1 does not support interactive execution (GHCi) and Template Haskell.

**--print-support-smp**

Print YES if GHC was built with multiprocessor support, NO otherwise.

**--print-tables-next-to-code**

Print YES if GHC was built with the flag `--enable-tables-next-to-code`, NO otherwise. This option is on by default, as it generates a more efficient code layout.

**--print-target-platform**

Print the target string of the target platform, i.e., the one on which generated binaries will run, as generated by GNU Autotools. The format is `cpu-manufacturer-operating_system-(kernel)`, e.g., `x86_64-unknown-linux`.

**--print-unregisterised**

Print YES if this GHC was built in unregisterised mode, NO otherwise. “Unregisterised” means that GHC will disable most platform-specific tricks and optimisations. Only the LLVM and C code generators will be available. See [Unregisterised compilation](#) (page 279) for more details.

### 5.1.5.1 Using `ghc --make`

In this mode, GHC will build a multi-module Haskell program by following dependencies from one or more root modules (usually just `Main`). For example, if your `Main` module is in a file called `Main.hs`, you could compile and link the program like this:

```
ghc --make Main.hs
```

In fact, GHC enters make mode automatically if there are any Haskell source files on the command line and no other mode is specified, so in this case we could just type

```
ghc Main.hs
```

Any number of source file names or module names may be specified; GHC will figure out all the modules in the program by following the imports from these initial modules. It will then attempt to compile each module which is out of date, and finally, if there is a `Main` module, the program will also be linked into an executable.

The main advantages to using `ghc --make` over traditional Makefiles are:

- GHC doesn't have to be restarted for each compilation, which means it can cache information between compilations. Compiling a multi-module program with `ghc --make` can be up to twice as fast as running `ghc` individually on each source file.
- You don't have to write a Makefile.
- GHC re-calculates the dependencies each time it is invoked, so the dependencies never get out of sync with the source.
- Using the `-j[<n>]` (page 82) flag, you can compile modules in parallel. Specify `-j <n>` to compile `<n>` jobs in parallel. If `<n>` is omitted, then it defaults to the number of processors.

Any of the command-line options described in the rest of this chapter can be used with `--make`, but note that any options you give on the command line will apply to all the source files compiled, so if you want any options to apply to a single source file only, you'll need to use an `OPTIONS_GHC` pragma (see *Command line options in source files* (page 76)).

If the program needs to be linked with additional objects (say, some auxiliary C code), then the object files can be given on the command line and GHC will include them when linking the executable.

For backward compatibility with existing make scripts, when used in combination with `-c` (page 79), the linking phase is omitted (same as `--make -no-link`).

Note that GHC can only follow dependencies if it has the source file available, so if your program includes a module for which there is no source file, even if you have an object and an interface file for the module, then GHC will complain. The exception to this rule is for package modules, which may or may not have source files.

The source files for the program don't all need to be in the same directory; the `-i` (page 241) option can be used to add directories to the search path (see *The search path* (page 241)).

#### `-j[<n>]`

Perform compilation in parallel when possible. GHC will use up to `<N>` threads during compilation. If `N` is omitted, then it defaults to the number of processors. Note that compilation of a module may not begin until its dependencies have been built.

### 5.1.5.2 GHC Jobserver Protocol

The GHC Jobserver Protocol was specified in [GHC proposal #540](#).

This protocol allows a server to dynamically invoke many instances of a client process, while restricting all of those instances to use no more than  $<n>$  capabilities. This is achieved by coordination over a system semaphore (either a POSIX semaphore in the case of Linux and Darwin, or a Win32 semaphore in the case of Windows platforms).

There are two kinds of participants in the GHC Jobserver protocol:

- The *jobserver* creates a system semaphore with a certain number of available tokens.

Each time the jobserver wants to spawn a new jobclient subprocess, it **must** first acquire a single token from the semaphore, before spawning the subprocess. This token **must** be released once the subprocess terminates.

Once work is finished, the jobserver **must** destroy the semaphore it created.

- A *jobclient* is a subprocess spawned by the jobserver or another jobclient.

Each jobclient starts with one available token (its *implicit token*, which was acquired by the parent which spawned it), and can request more tokens through the Jobserver Protocol by waiting on the semaphore.

Each time a jobclient wants to spawn a new jobclient subprocess, it **must** pass on a single token to the child jobclient. This token can either be the jobclient's implicit token, or another token which the jobclient acquired from the semaphore.

Each jobclient **must** release exactly as many tokens as it has acquired from the semaphore (this does not include the implicit tokens).

GHC itself acts as a jobclient which can be enabled by using the flag `-jsem`.

#### **-jsem**

Perform compilation in parallel when possible, coordinating with other processes through the semaphore `(sem)` (specified as a string). Error if the semaphore doesn't exist.

Use of `-jsem` will override use of `:ghc-flag:-j[{n}]`, and vice-versa.

### 5.1.5.3 Multiple Home Units

The compiler also has support for building multiple units in a single compiler invocation. In modern projects it is common to work on multiple interdependent packages at once, using the support for multiple home units you can load all these local packages into one ghc session and quickly get feedback about how changes affect other dependent packages.

In order to specify multiple units, the `-unit @(<filename>)` (page 84) is given multiple times with a response file containing the arguments for each unit. The response file contains a newline separated list of arguments.

```
ghc -unit @unitA -unit @unitB
```

where the `unitA` response file contains the normal arguments that you would pass to `--make mode`.

```
-this-unit-id a-0.1.0.0
-i
-src
A1
A2
...
```

Then when the compiler starts in `--make` mode it will compile both units `a` and `b`.

There is also very basic support for multiple home units in GHCi, at the moment you can start a GHCi session with multiple units but only the `:reload` (page 61) is supported.

**-unit** @(filename)

This option is passed multiple times to inform the compiler about all the home units which it will compile. The options for each unit are supplied in a response file which contains a newline separated list of normal arguments.

There are a few extra flags which have been introduced to make working with multiple units easier.

**-working-dir** (dir)

It is common to assume that a package is compiled in the directory where its cabal file resides. Thus, all paths used in the compiler are assumed to be relative to this directory. When there are multiple home units the compiler is often not operating in the standard directory and instead where the cabal.project file is located. In this case the `-working-dir` option can be passed which specifies the path from the current directory to the directory the unit assumes to be its root, normally the directory which contains the cabal file.

When the flag is passed, any relative paths used by the compiler are offset by the working directory. Notably this includes `-i` (page 241) and `-I(dir)` (page 282) flags.

This option can also be queried by the `getPackageRoot` Template Haskell function. It is intended to be used with helper functions such as `makeRelativeToProject` which make relative filepaths relative to the compilation directory rather than the directory which contains the `.cabal` file.

**-this-package-name** (unit-id)

This flag papers over the awkward interaction of the `PackageImports` (page 363) and multiple home units. When using `PackageImports` you can specify the name of the package in an import to disambiguate between modules which appear in multiple packages with the same name.

This flag allows a home unit to be given a package name so that you can also disambiguate between multiple home units which provide modules with the same name.

**-hidden-module** (module name)

This flag can be supplied multiple times in order to specify which modules in a home unit should not be visible outside of the unit it belongs to.

The main use of this flag is to be able to recreate the difference between an exposed and hidden module for installed packages.

**-reexported-module** (module name)

This flag can be supplied multiple times in order to specify which modules are not defined in a unit but should be reexported. The effect is that other units will see this module as if it was defined in this unit.

The use of this flag is to be able to replicate the reexported modules feature of packages with multiple home units.

### The home unit closure requirement

There is one very important closure property which you must ensure when using multiple home units.

Any external unit must not depend on any home unit.

This closure property is checked by the compiler but it's up to the tool invoking GHC to ensure that the supplied list of home units obeys this invariant.

For example, if we have three units, *p*, *q* and *r*, where *p* depends on *q* and *q* depends on *r*, then the closure property states that if we load *p* and *r* as home units then we must also load *q*, because *q* depends on the home unit *r* and we need *q* because *p* depends on it.

#### 5.1.5.4 Expression evaluation mode

This mode is very similar to interactive mode, except that there is a single expression to evaluate which is specified on the command line as an argument to the `-e` option:

```
ghc -e expr
```

Haskell source files may be named on the command line, and they will be loaded exactly as in interactive mode. The expression is evaluated in the context of the loaded modules.

For example, to load and run a Haskell program containing a module `Main`, we might say:

```
ghc -e Main.main Main.hs
```

or we can just use this mode to evaluate expressions in the context of the `Prelude`:

```
$ ghc -e "interact (unlines.map reverse.lines)"
hello
olleh
```

#### 5.1.5.5 Batch compiler mode

In *batch mode*, GHC will compile one or more source files given on the command line.

The first phase to run is determined by each input-file suffix, and the last phase is determined by a flag. If no relevant flag is present, then go all the way through to linking. This table summarises:

Phase of the compilation system	Suffix saying "start here"	Flag saying "stop after"	(suffix of) output file
literate pre-processor	.lhs		.hs
C pre-processor (opt.)	.hs (with -cpp)	-E	.hspp
Haskell compiler	.hs	-C, -S	.hc, .s
C compiler (opt.)	.hc or .c	-S	.s
assembler	.s	-c	.o
linker	{other}		a.out

Thus, a common invocation would be:

```
ghc -c Foo.hs
```

to compile the Haskell source file `Foo.hs` to an object file `Foo.o`.

---

**Note:** What the Haskell compiler proper produces depends on what backend code generator is used. See [GHC Backends](#) (page 278) for more details.

---

---

**Note:** Pre-processing is optional, the `-cpp` (page 282) flag turns it on. See [Options affecting the C pre-processor](#) (page 282) for more details.

---

---

**Note:** The option `-E` (page 78) runs just the pre-processing passes of the compiler, dumping the result in a file.

---

---

**Note:** The option `-C` (page 78) is only available when GHC is built in unregistered mode. See [Unregistered compilation](#) (page 279) for more details.

---

## Overriding the default behaviour for a file

As described above, the way in which a file is processed by GHC depends on its suffix. This behaviour can be overridden using the `-x {suffix}` (page 86) option:

### **-x {suffix}**

Causes all files following this option on the command line to be processed as if they had the suffix `{suffix}`. For example, to compile a Haskell module in the file `M.my-hs`, use `ghc -c -x hs M.my-hs`.

## 5.1.6 Verbosity options

See also the `--help`, `--version`, `--numeric-version`, and `--print-libdir` modes in [Modes of operation](#) (page 78).

### **-v**

The `-v` (page 86) option makes GHC *verbose*: it reports its version number and shows (on stderr) exactly how it invokes each phase of the compilation system. Moreover, it passes the `-v` flag to most phases; each reports its version number (and possibly some other information).

Please, oh please, use the `-v` option when reporting bugs! Knowing that you ran the right bits in the right order is always the first thing we want to verify.

### **-v(n)**

To provide more control over the compiler's verbosity, the `-v` flag takes an optional numeric argument. Specifying `-v` on its own is equivalent to `-v3`, and the other levels have the following meanings:



**-v0**

Disable all non-essential messages (this is the default).

**-v1**

Minimal verbosity: print one line per compilation (this is the default when `--make` (page 78) or `--interactive` (page 78) is on).

**-v2**

Print the name of each compilation phase as it is executed. (equivalent to `-dshow-passes` (page 298)).

**-v3**

The same as -v2, except that in addition the full command line (if appropriate) for each compilation phase is also printed.

**-v4**

The same as -v3 except that the intermediate program representation after each compilation phase is also printed (excluding preprocessed and C/assembly files).

**-fprint-potential-instances**

When GHC can't find an instance for a class, it displays a short list of some of the instances it knows about. With this flag it prints *all* the instances it knows about.

**-fhide-source-paths**

Starting with minimal verbosity (-v1, see `-v` (page 86)), GHC displays the name, the source path and the target path of each compiled module. This flag can be used to reduce GHC's output by hiding source paths and target paths.

The following flags control the way in which GHC displays types in error messages and in GHCi:

**-fprint-unicode-syntax**

When enabled GHC prints type signatures using the unicode symbols from the *UnicodeSyntax* (page 320) extension. For instance,

```
ghci> :set -fprint-unicode-syntax
ghci> :t +v (>>)
(>>) :: Monad m => ∀ a b. m a → m b → m b
```

**-fprint-explicit-foralls**

Using `-fprint-explicit-foralls` (page 87) makes GHC print explicit forall quantification at the top level of a type; normally this is suppressed. For example, in GHCi:

```
ghci> let f x = x
ghci> :t f
f :: a -> a
ghci> :set -fprint-explicit-foralls
ghci> :t f
f :: forall a. a -> a
```

However, regardless of the flag setting, the quantifiers are printed under these circumstances:

- For nested foralls, e.g.

```
ghci> :t GHC.ST.runST
GHC.ST.runST :: (forall s. GHC.ST.ST s a) -> a
```

- If any of the quantified type variables has a kind that mentions a kind variable, e.g.

```
ghci> :i Data.Type.Equality.sym
Data.Type.Equality.sym ::
  forall k (a :: k) (b :: k).
  (a Data.Type.Equality.~: b) -> b Data.Type.Equality.~: a
  -- Defined in Data.Type.Equality
```

### -fprint-explicit-kinds

Using `-fprint-explicit-kinds` (page 88) makes GHC print kind arguments in types, which are normally suppressed. This can be important when you are using kind polymorphism. For example:

```
ghci> :set -XPolyKinds
ghci> data T a (b :: l) = MkT
ghci> :t MkT
MkT :: forall k l (a :: k) (b :: l). T a b
ghci> :set -fprint-explicit-kinds
ghci> :t MkT
MkT :: forall k l (a :: k) (b :: l). T @{k} @l a b
ghci> :set -XNoPolyKinds
ghci> :t MkT
MkT :: T @{} @* a b
```

In the output above, observe that `T` has two kind variables (`k` and `l`) and two type variables (`a` and `b`). Note that `k` is an *inferred* variable and `l` is a *specified* variable (see [Inferred vs. specified type variables](#) (page 435)), so as a result, they are displayed using slightly different syntax in the type `T @{k} @l a b`. The application of `l` (with `@l`) is the standard syntax for visible type application (see [Visible type application](#) (page 435)). The application of `k` (with `@{k}`), however, uses a hypothetical syntax for visible type application of inferred type variables. This syntax is not currently exposed to the programmer, but it is nevertheless displayed when `-fprint-explicit-kinds` (page 88) is enabled.

### -fprint-explicit-coercions

Using `-fprint-explicit-coercions` (page 88) makes GHC print coercions in types. When trying to prove the equality between types of different kinds, GHC uses type-level coercions. Users will rarely need to see these, as they are meant to be internal.

### -fprint-axiom-incomps

Using `-fprint-axiom-incomps` (page 88) tells GHC to display incompatibilities between closed type families' equations, whenever they are printed by `:info` (page 57) or `--show-iface {file}` (page 79).

```
ghci> :i Data.Type.Equality.==
type family (==) (a :: k) (b :: k) :: Bool
  where
    (==) (f a) (g b) = (f == g) && (a == b)
    (==) a a = 'True
    (==) _1 _2 = 'False
ghci> :set -fprint-axiom-incomps
ghci> :i Data.Type.Equality.==
type family (==) (a :: k) (b :: k) :: Bool
  where
    {- #0 -} (==) (f a) (g b) = (f == g) && (a == b)
```

(continues on next page)

(continued from previous page)

```
{- #1 -} (==) a a = 'True
      -- incompatible with: #0
{- #2 -} (==) _1 _2 = 'False
      -- incompatible with: #1, #0
```

The equations are numbered starting from 0, and the comment after each equation refers to all preceding equations it is incompatible with.

### **-fprint-equality-relations**

Using *-fprint-equality-relations* (page 89) tells GHC to distinguish between its equality relations when printing. For example, `~` is homogeneous lifted equality (the kinds of its arguments are the same) while `~~` is heterogeneous lifted equality (the kinds of its arguments might be different) and `~#` is heterogeneous unlifted equality, the internal equality relation used in GHC's solver. Generally, users should not need to worry about the subtleties here; `~` is probably what you want. Without *-fprint-equality-relations* (page 89), GHC prints all of these as `~`. See also *Equality constraints* (page 552).

### **-fprint-expanded-synonyms**

When enabled, GHC also prints type-synonym-expanded types in type errors. For example, with this type synonyms:

```
type Foo = Int
type Bar = Bool
type MyBarST s = ST s Bar
```

This error message:

```
Couldn't match type 'Int' with 'Bool'
Expected type: ST s Foo
Actual type: MyBarST s
```

Becomes this:

```
Couldn't match type 'Int' with 'Bool'
Expected type: ST s Foo
Actual type: MyBarST s
Type synonyms expanded:
Expected type: ST s Int
Actual type: ST s Bool
```

### **-fprint-redundant-promotion-ticks**

The *DataKinds* (page 404) extension allows us to use data constructors at the type level:

```
type B = True      -- refers to the data constructor True (of type Bool)
```

When there is a type constructor of the same name, it takes precedence during name resolution:

```
data True = MkT
type B = True      -- now refers to the type constructor (of kind Type)
```

We can tell GHC to prefer the data constructor over the type constructor using special namespace disambiguation syntax that we call a *promotion tick*:

```
data True = MkT
type B = 'True
    -- refers to the data constructor True (of type Bool)
    -- even in the presence of a type constructor of the same name
```

Note that the promotion tick is not a promotion operator. Its only purpose is to instruct GHC to prefer the promoted data constructor over a type constructor in case of a name conflict. Therefore, GHC will not print the tick when the name conflict is absent:

```
ghci> type B = False
ghci> :kind! B
B :: Bool
= False          -- no promotion tick here

ghci> data False -- introduce a name conflict

ghci> :kind! B
B :: Bool
= 'False         -- promotion tick resolves the name conflict
```

The `-fprint-redundant-promotion-ticks` (page 89) instructs GHC to print the promotion tick unconditionally.

### **-fprint-typechecker-elaboration**

When enabled, GHC also prints extra information from the typechecker in warnings. For example:

```
main :: IO ()
main = do
    return $ let a = "hello" in a
    return ()
```

This warning message:

```
A do-notation statement discarded a result of type '[Char]'
```

Suppress this warning by saying

```
'_ <- ($) return let a = "hello" in a'
```

or by using the flag `-fno-warn-unused-do-bind`

Becomes this:

```
A do-notation statement discarded a result of type '[Char]'
```

Suppress this warning by saying

```
'_ <- ($)
    return
    let
        AbsBinds [] []
        {Exports: [a <= a
                    <>]
         Exported types: a :: [Char]
                        [LclId, Str=DmdType]
         Binds: a = "hello"]}
    in a'
```

or by using the flag `-fno-warn-unused-do-bind`

**-fdefer-diagnostics**

Causes GHC to group diagnostic messages by severity and output them after other messages when building a multi-module Haskell program. This flag can make diagnostic messages more visible when used in conjunction with `--make` (page 78) and `-j[⟨n⟩]` (page 82). Otherwise, it can be hard to find the relevant errors or likely to ignore the warnings when they are mixed with many other messages.

**-fdiagnostics-as-json**

Causes GHC to emit diagnostic messages in a standardized JSON format, and output them directly to `stderr`. The format follows the [JSON Lines](#) convention, where each diagnostic is its own JSON object separated by a new line.

The structure of the output is described by a [JSON Schema](#). The schema can be downloaded [here](#).

**-fdiagnostics-color=(always|auto|never)**

Causes GHC to display error messages with colors. To do this, the terminal must have support for ANSI color codes, or else garbled text will appear. The default value is `auto`, which means GHC will make an attempt to detect whether terminal supports colors and choose accordingly.

The precise color scheme is controlled by the environment variable `GHC_COLORS` (or `GHC_COLOURS`). This can be set to colon-separated list of `key=value` pairs. These are the default settings:

```
header=:message=1:warning=1;35:error=1;31:fatal=1;31:margin=1;34
```

Each value is expected to be a [Select Graphic Rendition \(SGR\) substring](#). The formatting of each element can inherit from parent elements. For example, if `header` is left empty, it will inherit the formatting of `message`. Alternatively if `header` is set to `1` (bold), it will be bolded but still inherits the color of `message`.

Currently, in the primary message, the following inheritance tree is in place:

- message
  - header
    - \* warning
    - \* error
    - \* fatal

In the caret diagnostics, there is currently no inheritance at all between `margin`, `warning`, `error`, and `fatal`.

The environment variable can also be set to the magical values `never` or `always`, which is equivalent to setting the corresponding `-fdiagnostics-color` flag but with lower precedence.

**-fdiagnostics-show-caret**

**Default**  
on

Controls whether GHC displays a line of the original source code where the error was detected. This also affects the associated caret symbol that points at the region of code at fault.

**-fshow-error-context****Default**

on

Controls whether GHC displays information about the context in which an error occurred. This controls whether the part of the error message which says “In the equation..”, “In the pattern..” etc is displayed or not.

**-fprint-error-index-links={always|auto|never}****Default**

auto

Controls whether GHC will emit error indices as ANSI hyperlinks to the [Haskell Error Index](#). When set to auto, this flag will render hyperlinks if the terminal is capable; when set to always, this flag will render the hyperlinks regardless of the capabilities of the terminal.

**-ferror-spans**

Causes GHC to emit the full source span of the syntactic entity relating to an error message. Normally, GHC emits the source location of the start of the syntactic entity only.

For example:

```
test.hs:3:6: parse error on input `where'
```

becomes:

```
test296.hs:3:6-10: parse error on input `where'
```

And multi-line spans are possible too:

```
test.hs:(5,4)-(6,7):  
  Conflicting definitions for `a'  
  Bound at: test.hs:5:4  
           test.hs:6:7  
  In the binding group for: a, b, a
```

Note that line numbers start counting at one, but column numbers start at zero. This choice was made to follow existing convention (i.e. this is how Emacs does it).

**-fkeep-going****Since**

8.10.1

Causes GHC to continue the compilation if a module has an error. Any reverse dependencies are pruned immediately and the whole compilation is still flagged as an error. This option has no effect if parallel compilation (`-j[<n>]` (page 82)) is in use.

**-freverse-errors**

Causes GHC to output errors in reverse line-number order, so that the errors and warnings that originate later in the file are displayed first.

**-Rghc-timing**

Prints a one-line summary of timing statistics for the GHC run. This option is equivalent to `+RTS -tstderr`, see [RTS options to control the garbage collector](#) (page 222).

### 5.1.7 Platform-specific Flags

Some flags only make sense for particular target platforms.

#### **-mavx**

(x86 only) These SIMD instructions are currently not supported by the *native code generator* (page 278). Enabling this flag has no effect and is only present for future extensions.

The *LLVM backend* (page 278) may use AVX if your processor supports it, but detects this automatically, so no flag is required.

#### **-mavx2**

(x86 only) These SIMD instructions are currently not supported by the *native code generator* (page 278). Enabling this flag has no effect and is only present for future extensions.

The *LLVM backend* (page 278) may use AVX2 if your processor supports it, but detects this automatically, so no flag is required.

#### **-mavx512cd**

(x86 only) These SIMD instructions are currently not supported by the *native code generator* (page 278). Enabling this flag has no effect and is only present for future extensions.

The *LLVM backend* (page 278) may use AVX512 if your processor supports it, but detects this automatically, so no flag is required.

#### **-mavx512er**

(x86 only) These SIMD instructions are currently not supported by the *native code generator* (page 278). Enabling this flag has no effect and is only present for future extensions.

The *LLVM backend* (page 278) may use AVX512 if your processor supports it, but detects this automatically, so no flag is required.

#### **-mavx512f**

(x86 only) These SIMD instructions are currently not supported by the *native code generator* (page 278). Enabling this flag has no effect and is only present for future extensions.

The *LLVM backend* (page 278) may use AVX512 if your processor supports it, but detects this automatically, so no flag is required.

#### **-mavx512pf**

(x86 only) These SIMD instructions are currently not supported by the *native code generator* (page 278). Enabling this flag has no effect and is only present for future extensions.

The *LLVM backend* (page 278) may use AVX512 if your processor supports it, but detects this automatically, so no flag is required.

#### **-msse**

(x86 only) Use the SSE registers and instruction set to implement floating point operations when using the *native code generator* (page 278). This gives a substantial performance improvement for floating point, but the resulting compiled code will only run on processors that support SSE (Intel Pentium 3 and later, or AMD Athlon XP and later). The *LLVM backend* (page 278) will also use SSE if your processor supports it but detects this automatically so no flag is required.

Since GHC 8.10, SSE2 is assumed to be present on both x86 and x86-64 platforms and will be used by default. Even when setting this flag, SSE2 will be used instead.

**-msse2**

(x86 only, added in GHC 7.0.1) Use the SSE2 registers and instruction set to implement floating point operations when using the *native code generator* (page 278). This gives a substantial performance improvement for floating point, but the resulting compiled code will only run on processors that support SSE2 (Intel Pentium 4 and later, or AMD Athlon 64 and later). The *LLVM backend* (page 278) will also use SSE2 if your processor supports it but detects this automatically so no flag is required.

Since GHC 8.10, SSE2 is assumed to be present on both x86 and x86-64 platforms and will be used by default.

**-msse3**

(x86 only) Use the SSE3 instruction set to implement some floating point and bit operations when using the *native code generator* (page 278).

Note that the current version does not use SSE3 specific instructions and only requires SSE2 processor support.

The *LLVM backend* (page 278) will also use SSE3 if your processor supports it but detects this automatically so no flag is required.

**-msse4**

(x86 only) Use the SSE4 instruction set to implement some floating point and bit operations when using the *native code generator* (page 278).

Note that the current version does not use SSE4 specific instructions and only requires SSE2 processor support.

The *LLVM backend* (page 278) will also use SSE4 if your processor supports it but detects this automatically so no flag is required.

**-msse4.2**

(x86 only, added in GHC 7.4.1) Use the SSE4.2 instruction set to implement some floating point and bit operations when using the *native code generator* (page 278). The resulting compiled code will only run on processors that support SSE4.2 (Intel Core i7 and later). The *LLVM backend* (page 278) will also use SSE4.2 if your processor supports it but detects this automatically so no flag is required.

**-mbmi**

(x86 only) Use the BMI1 instruction set to implement some bit operations when using the *native code generator* (page 278).

Note that the current version does not use BMI specific instructions, so using this flag has no effect.

**-mbmi2**

(x86 only, added in GHC 7.4.1) Use the BMI2 instruction set to implement some bit operations when using the *native code generator* (page 278). The resulting compiled code will only run on processors that support BMI2 (Intel Haswell and newer, AMD Excavator, Zen and newer).

**-mfma****Default**

off by default, except for Aarch64 where it's on by default.

**Since**

9.8.1



Use native FMA instructions to implement the fused multiply-add floating-point operations of the form  $x * y + z$ . This allows computing a multiplication and addition in a single instruction, without an intermediate rounding step. Supported architectures: X86 with the FMA3 instruction set (this includes most consumer processors since 2013), PowerPC and AArch64.

When this flag is disabled, GHC falls back to the C implementation of fused multiply-add, which might perform non-IEEE-compliant software emulation on some platforms (depending on the implementation of the C standard library).

### 5.1.8 Haddock

#### **-haddock**

By default, GHC ignores Haddock comments (`-- | ...` and `-- ^ ...`) and does not check that they're associated with a valid term, such as a top-level type-signature. With this flag GHC will parse Haddock comments and include them in the interface file it produces.

Consider using [\*-Winvalid-haddock\*](#) (page 121) to be informed about discarded documentation comments.

### 5.1.9 Miscellaneous flags

Some flags only make sense for a particular use case.

#### **-ghcversion-file** (path to ghcversion.h)

When GHC is used to compile C files, GHC adds package include paths and includes `ghcversion.h` directly. The compiler will lookup the path for the `ghcversion.h` file from the `rts` package in the package database. In some cases, the compiler's package database does not contain the `rts` package, or one wants to specify a specific `ghcversions.h` to be included. This option can be used to specify the path to the `ghcversions.h` file to be included. This is primarily intended to be used by GHC's build system.

#### **-H** (size)

Set the minimum size of the heap to (size). This option is equivalent to `+RTS -Hsize`, see [\*RTS options to control the garbage collector\*](#) (page 222).

#### 5.1.9.1 Other environment variables

GHC can also be configured using various environment variables.

##### **GHC\_NO\_UNICODE**

When non-empty, disables Unicode diagnostics output regardless of locale settings. GHC can usually determine that locale is not Unicode-capable and fallback to ASCII automatically, but in some corner cases (e. g., when GHC output is redirected) you might hit invalid argument (cannot encode character '\8216'), in which case do set `GHC_NO_UNICODE`.

##### **GHC\_CHARENC**

When set to UTF-8 the compiler will always print UTF-8-encoded output, regardless of the current locale.

## 5.2 Warnings and sanity-checking

GHC has a number of options that select which types of non-fatal error messages, otherwise known as warnings, can be generated during compilation. Some options control individual warnings and others control collections of warnings. Use `-W(wflag)` to turn on an individual warning or a collection, or use `-Wno-(wflag)` to turn it off. Use `-Werror` to make all warnings into fatal errors, or `-Werror=(wflag)` to make a specific warning into an error. Reverse this with `-Wwarn` to make all warnings non-fatal, or `-Wwarn=(wflag)` to make a specific warning non-fatal.

---

**Note:** In GHC < 8 the syntax for `-W(wflag)` was `-fwarn-(wflag)` (e.g. `-fwarn-incomplete-patterns`). This spelling is deprecated, but still accepted for backwards compatibility. Likewise, `-Wno-(wflag)` used to be `fno-warn-(wflag)` (e.g. `-fno-warn-incomplete-patterns`).

---

### 5.2.1 Warning groups

The following flags are simple ways to select standard “packages” of warnings. They can be reversed using `-Wno-(group)`, which has the same effect as `-Wno-...` for every individual warning in the group.

#### **-Wdefault**

Since  
8.0

By default, you get a standard set of warnings which are generally likely to indicate bugs in your program. These are:

- `-Woverlapping-patterns` (page 112)
- `-Wwarnings-deprecations` (page 102)
- `-Wdeprecations` (page 102)
- `-Wdeprecated-flags` (page 103)
- `-Wunrecognised-pragmas` (page 100)
- `-Wduplicate-exports` (page 105)
- `-Wderiving-defaults` (page 104)
- `-Woverflowed-literals` (page 104)
- `-Wempty-enumerations` (page 104)
- `-Wmissing-fields` (page 109)
- `-Wmissing-methods` (page 109)
- `-Wwrong-do-bind` (page 119)
- `-Wuninlinable-class-constants` (page 114)
- `-Wtyped-holes` (page 99)
- `-Wdeferred-type-errors` (page 100)
- `-Wpartial-type-signatures` (page 100)
- `-Wunsupported-calling-conventions` (page 103)
- `-Wdodgy-foreign-imports` (page 103)
- `-Winline-rule-shadowing` (page 119)
- `-Wunsupported-llvm-version` (page 115)
- `-Wunsafe-extra-shared-lib` (page 115)
- `-Wtabs` (page 114)
- `-Wunrecognised-warning-flags` (page 99)
- `-Winaccessible-code` (page 113)
- `-Wstar-binder` (page 113)
- `-Wstar-is-type` (page 113)
- `-Woperator-whitespace-ext-conflict` (page 121)
- `-Wambiguous-fields`

- (page 122)
- `-Wtype-equality-requires-format-characters` (page 126)
- `-Wunicode-bidirectional` (page 123)
- `-Wtype-equality-out-of-scope` (page 102)
- `-Wforall-identifier` (page 123)
- `-Wnoncanonical-monoid-instances` (page 102)
- `-Wbadly-staged-types` (page 102)
- `-Wnoncanonical-monad-instances` (page 102)
- `-Wgadt-mono-local-binds` (page 126)
- `-Wdata-kinds-tc` (page 126)
- `-Winconsistent-flags`

## **-W**

Provides the standard warnings plus

- `-Wunused-binds` (page 115)
- `-Wunused-imports` (page 104)
- `-Wunused-matches` (page 117)
- `-Wdodgy-imports` (page 104)
- `-Wunused-foralls` (page 118)
- `-Wincomplete-patterns` (page 107)
- `-Wunbanged-strict-patterns` (page 120)
- `-Wdodgy-exports`

## **-Wextra**

Alias for `-W` (page 97)

## **-Wall**

Turns on all warning options that indicate potentially suspicious code. They include all warnings in `-Wextra` (page 97), plus:

- `-Whi-shadowing` (page 110)
- `-Wmissing-signatures` (page 643)
- `-Wincomplete-record-updates` (page 110)
- `-Wtype-defaults` (page 114)
- `-Wname-shadowing` (page 117)
- `-Wincomplete-record-selectors` (page 112)
- `-Wunused-do-bind` (page 117)
- `-Wredundant-record-wildcards` (page 118)
- `-Wincomplete-uni-patterns` (page 119)
- `-Wincomplete-export-warnings` (page 125)
- `-Wstar-is-type` (page 113)
- `-Wmissing-pattern-synonyms`
- `-Wunsafe-signatures`
- `-Wunsafe-safe`

## **-Weverything**

Since  
8.0

Turns on every single warning supported by the compiler.

## **-Wcompat**

Since  
8.0

Turns on warnings that will be enabled by default in the future, but remain off in normal compilations for the time being. This allows library authors eager to make their code future compatible to adapt to new features before they even generate warnings.

This currently enables

- `-Wcompat-unqualified-imports` (page 99)
- `-Wimplicit-rhs-quantification` (page 124)
- `-Wdeprecated-type-abstractions` (page 125)

#### **-w**

Turns off all warnings, including the standard ones and those that `-Wall` (page 97) doesn't enable.

#### **-Wnot**

Deprecated alias for `-w` (page 98)

When a warning is emitted, the specific warning flag which controls it is shown, but the group can optionally be shown as well:

#### **-fshow-warning-groups**

##### **Default**

off

When showing which flag controls a warning, also show the respective warning group flag(s) that warning is contained in.

## 5.2.2 Treating warnings as fatal errors

These options control which warnings are considered fatal and cause compilation to abort.

#### **-Werror**

##### **Since**

6.8 (`-Wwarn`)

Makes any warning into a fatal error. Useful so that you don't miss warnings when doing batch compilation. To reverse `-Werror` and stop treating any warnings as errors use `-Wwarn`, or use `-Wwarn={wflag}` to stop treating specific warnings as errors.

#### **-Werror={wflag}**

##### **Implies**

`-W{wflag}`

Makes a specific warning into a fatal error. The warning will be enabled if it hasn't been enabled yet. Can be reversed with `-Wwarn={wflag}`.

`-Werror={group}` has the same effect as `-Werror=...` for each warning flag in the group (for example, `-Werror=compat` will turn every warning in the `-Wcompat` (page 97) group into a fatal error).

#### **-Wwarn**

Warnings are treated only as warnings, not as errors. This is the default, but can be useful to negate a `-Werror` (page ??) flag.

**-Wwarn=(wflag)**

Causes a specific warning to be treated as normal warning, not fatal error.

Note that it doesn't fully negate the effects of `-Werror=(wflag)` - the warning will still be enabled.

`-Wwarn=(group)` has the same effect as `-Wwarn=...` for each warning flag in the group (for example, `-Wwarn=compat` will mark every warning in the [-Wcompat](#) (page 97) group as non-fatal).

**-Wno-error=(wflag)**

Alternative spelling for `-Wwarn=(wflag)`.

### 5.2.3 Individual warning options

The full set of warning options is described below. To turn off any warning, simply give the corresponding `-Wno-...` option on the command line. For backwards compatibility with GHC versions prior to 8.0, all these warnings can still be controlled with `-f(no-)warn-*` instead of `-W(no-)*`.

**-Wunrecognised-warning-flags****Since**

8.0

**Default**

on

Enables warnings when the compiler encounters a `-W...` flag that is not recognised.

**-Wcompat-unqualified-imports****Since**

8.10

Warns on unqualified imports of core library modules which are subject to change in future GHC releases. Currently the following modules are covered by this warning:

- `Data.List` due to the future addition of `Data.List.singleton` and specialisation of exports to the `[]` type. See the [mailing list](#) for details.

This warning can be addressed by either adding an explicit import list or using a qualified import.

**-Wprepositive-qualified-module****Since**

8.10

Normally, imports are qualified prepositively: `import qualified M`. By using [ImportQualifiedPost](#) (page 366), the qualified keyword can be used after the module name. Like so: `import M qualified`. This will warn when the first, prepositive syntax is used.

**-Wtyped-holes****Since**

7.8

**Default**

on

Determines whether the compiler reports typed holes warnings. Has no effect unless typed holes errors are deferred until runtime. See [Typed Holes](#) (page 347) and [Deferring type errors to runtime](#) (page 464).

**-Wdeferred-type-errors****Since**

8.0

**Default**

on

Causes a warning to be reported when a type error is deferred until runtime. See [Deferring type errors to runtime](#) (page 464).

**-Wdeferred-out-of-scope-variables****Since**

8.0

Warn when a deferred out-of-scope variable is encountered. See [Deferring type errors to runtime](#) (page 464).

**-Wpartial-type-signatures****Since**

7.10

**Default**

on

Determines whether the compiler reports holes in partial type signatures as warnings. Has no effect unless [PartialTypeSignatures](#) (page 574) is enabled, which controls whether errors should be generated for holes in types or not. See [Partial Type Signatures](#) (page 574).

**-fhelptful-errors****Since**

7.4

**Default**

on

When a name or package is not found in scope, make suggestions for the name or package you might have meant instead.

**-Wunrecognised-pragmas****Since**

6.10

**Default**

on

Causes a warning to be emitted when a pragma that GHC doesn't recognise is used. As well as pragmas that GHC itself uses, GHC also recognises pragmas known to be used by other tools, e.g. `OPTIONS_HUGS` and `DERIVE`.

**-Wmisplaced-pragmas****Since**

9.4

**Default**

on

Warn when a pragma that should only appear in the header of a module, such as a *LANGUAGE* or *OPTIONS\_GHC* pragma, appears in the body of the module instead.

**-Wmissed-specialisations****Since**

8.0

**Default**

off

Emits a warning if GHC cannot specialise an overloaded function, usually because the function needs an *INLINEABLE* pragma. Reports when the situation arises during specialisation of an imported function.

This form is intended to catch cases where an imported function that is marked as *INLINEABLE* (presumably to enable specialisation) cannot be specialised as it calls other functions that are themselves not specialised.

Note that this warning will not throw errors if used with *-Werror* (page ??).

**-Wmissed-specializations**

Alias for *-Wmissed-specialisations* (page 101)

**-Wall-missed-specialisations****Since**

8.0

**Default**

off

Emits a warning if GHC cannot specialise an overloaded function, usually because the function needs an *INLINEABLE* pragma. Reports all such situations.

Note that this warning will not throw errors if used with *-Werror* (page ??).

**-Wall-missed-specializations**

Alias for *-Wall-missed-specialisations* (page 101)

**-Wextended-warnings****Since**

9.8.1

**Default**

on

Causes a warning to be emitted when a module, function or type with a *WARNING* or *DEPRECATED* pragma is used, regardless of the category which may be associated with the pragma. See *WARNING and DEPRECATED pragmas* (page 663) for more details on the pragmas. This implies *-Wdeprecations* (page 102) and all *-Wx-⟨category⟩* flags.

**-Wx-⟨category⟩****Since**

9.8.1

**Default**

on

Causes a warning to be emitted when a module, function or type with a `WARNING` in `"x- {category}"` pragma is used. See [WARNING and DEPRECATED pragmas](#) (page 663) for more details on the pragmas.

#### **-Wdeprecations**

##### **Default**

on

Causes a warning to be emitted when a module, function or type with `DEPRECATED` pragma, or a `WARNING` pragma with the deprecated category, is used. See [WARNING and DEPRECATED pragmas](#) (page 663) for more details on the pragmas.

#### **-Wwarnings-deprecations**

##### **Since**

6.10

##### **Default**

on

Causes a warning to be emitted when a module, function or type with `DEPRECATED` pragma, or a `WARNING` pragma with the deprecated category, is used. See [WARNING and DEPRECATED pragmas](#) (page 663) for more details on the pragmas. An alias for [-Wdeprecations](#) (page 102).

#### **-Wnoncanonical-monad-instances**

##### **Since**

8.0

##### **Default**

on

Warn if noncanonical `Applicative` or `Monad` instances declarations are detected.

When this warning is enabled, the following conditions are verified:

In `Monad` instances declarations warn if any of the following conditions does not hold:

- If `return` is defined it must be canonical (i.e. `return = pure`).
- If `(>>)` is defined it must be canonical (i.e. `(>>) = (*>)`).

Moreover, in `Applicative` instance declarations:

- Warn if `pure` is defined backwards (i.e. `pure = return`).
- Warn if `(*>)` is defined backwards (i.e. `(*>) = (>>)`).

#### **-Wnoncanonical-monadfail-instances**

##### **Since**

8.0

This warning is deprecated. It no longer has any effect since GHC 8.8. It was used during the transition period of the `MonadFail` proposal, to detect when an instance of the `Monad` class was not defined via `MonadFail`, or when a `MonadFail` instance was defined backwards, using the method in `Monad`.

#### **-Wnoncanonical-monoid-instances**

##### **Since**

8.0



**Default**

on

Warn if noncanonical Semigroup or Monoid instances declarations are detected.

When this warning is enabled, the following conditions are verified:

In Monoid instances declarations warn if any of the following conditions does not hold:

- If mappend is defined it must be canonical (i.e. `mappend = (Data.Semigroup.< >)`).

Moreover, in Semigroup instance declarations:

- Warn if `(< >)` is defined backwards (i.e. `(< >) = mappend`).

**-Wmissing-monadfail-instances****Since**

8.0

This warning is deprecated. It no longer has any effect since GHC 8.8. It was used during the transition period of the MonadFail proposal, to warn when a failable pattern is used in a do-block that does not have a MonadFail instance.

**-Wsemigroup****Since**

8.0

This warning is deprecated. It no longer has any effect since GHC 9.8. It was used during the transition period of the semigroup proposal, to warn when an instance of Monoid was not an instance of Semigroup, or when a custom local operator `(< >)` could clash with `(< >)`, now exported from Prelude.

**-Wdeprecated-flags****Since**

6.10

**Default**

on

Causes a warning to be emitted when a deprecated command-line flag is used.

**-Wunsupported-calling-conventions****Since**

7.6

Causes a warning to be emitted for foreign declarations that use unsupported calling conventions. In particular, if the `stdcall` calling convention is used on an architecture other than i386 then it will be treated as `ccall`.

**-Wdodgy-foreign-imports****Since**

6.10

Causes a warning to be emitted for foreign imports of the following form:

```
foreign import "f" f :: FunPtr t
```

on the grounds that it probably should be

```
foreign import "&f" f :: FunPtr t
```

The first form declares that `f` is a (pure) C function that takes no arguments and returns a pointer to a C function with type `t`, whereas the second form declares that `f` itself is a C function with type `t`. The first declaration is usually a mistake, and one that is hard to debug because it results in a crash, hence this warning.

#### **-Wdodgy-exports**

##### **Since**

6.12

Causes a warning to be emitted when a datatype `T` is exported with all constructors, i.e. `T(..)`, but is it just a type synonym.

Also causes a warning to be emitted when a module is re-exported, but that module exports nothing.

#### **-Wdodgy-imports**

##### **Since**

6.8

Causes a warning to be emitted in the following cases:

- When a datatype `T` is imported with all constructors, i.e. `T(..)`, but has been exported abstractly, i.e. `T`.
- When an import statement hides an entity that is not exported.

#### **-Woverflowed-literals**

##### **Since**

7.8

Causes a warning to be emitted if a literal will overflow, e.g. `300 :: Word8`.

#### **-Wempty-enumerations**

##### **Since**

7.8

Causes a warning to be emitted if an enumeration is empty, e.g. `[5 .. 3]`.

#### **-Wderiving-defaults**

##### **Since**

8.10

Causes a warning when both [DeriveAnyClass](#) (page 504) and [GeneralizedNewtypeDeriving](#) (page 499) are enabled and no explicit deriving strategy is in use. For example, this would result a warning:

```
class C a
newtype T a = MkT a deriving C
```

#### **-Wduplicate-constraints**

##### **Since**

7.8

Have the compiler warn about duplicate constraints in a type signature. For example

```
f :: (Eq a, Show a, Eq a) => a -> a
```

The warning will indicate the duplicated `Eq a` constraint.

This option is now deprecated in favour of [-Wredundant-constraints](#) (page 105).

### -Wredundant-constraints

**Since**  
8.0

Have the compiler warn about redundant constraints in a type signature. In particular:

- A redundant constraint within the type signature itself:

```
f :: (Eq a, Ord a) => a -> a
```

The warning will indicate the redundant `Eq a` constraint: it is subsumed by the `Ord a` constraint.

- A constraint in the type signature is not used in the code it covers:

```
f :: Eq a => a -> a -> Bool
f x y = True
```

The warning will indicate the redundant `Eq a` constraint: `:` it is not used by the definition of `f`.)

Similar warnings are given for a redundant constraint in an instance declaration.

When turning on, you can suppress it on a per-module basis with [-Wno-redundant-constraints](#) (page 105). Occasionally you may specifically want a function to have a more constrained signature than necessary, perhaps to leave yourself wiggle-room for changing the implementation without changing the API. In that case, you can suppress the warning on a per-function basis, using a call in a dead binding. For example:

```
f :: Eq a => a -> a -> Bool
f x y = True
where
  _ = x == x -- Suppress the redundant-constraint warning for (Eq a)
```

Here the call to `(==)` makes GHC think that the `(Eq a)` constraint is needed, so no warning is issued.

### -Wduplicate-exports

**Since**  
at least 5.04

**Default**  
on

Have the compiler warn about duplicate entries in export lists. This is useful information if you maintain large export lists, and want to avoid the continued export of a definition after you've deleted (one) mention of it in the export list.

### -Whi-shadowing

**Since**

at least 5.04, deprecated

Causes the compiler to emit a warning when a module or interface file in the current directory is shadowing one with the same module name in a library or other directory.

This flag was not implemented correctly and is now deprecated. It will be removed in a later version of GHC.

**-Widentities****Since**

7.2

Causes the compiler to emit a warning when a Prelude numeric conversion converts a type `T` to the same type `T`; such calls are probably no-ops and can be omitted. The functions checked for are: `toInteger`, `toRational`, `fromIntegral`, and `realToFrac`.

**-Wimplicit-kind-vars****Since**

8.6

This warning is deprecated. It no longer has any effect since GHC 8.10. It was used to detect if a kind variable is not explicitly quantified over. For instance, the following would produce a warning:

```
f :: forall (a :: k). Proxy a
```

This is now an error and can be fixed by explicitly quantifying over `k`:

```
f :: forall k (a :: k). Proxy a
```

or

```
f :: forall {k} (a :: k). Proxy a
```

**-Wimplicit-lift****Since**

9.2

Template Haskell quotes referring to local variables bound outside of the quote are implicitly converted to use `lift`. For example, `f x = [| reverse x |]` becomes `f x = [| reverse $(lift x) |]`. This flag issues a warning for every such implicit addition of `lift`. This can be useful when debugging more complex staged programs, where an implicit `lift` can accidentally conceal a variable used at a wrong stage.

**-Wimplicit-prelude****Since**

6.8

**Default**

off

Have the compiler warn if the Prelude is implicitly imported. This happens unless either the Prelude module is explicitly imported with an `import ... Prelude ...` line, or this implicit import is disabled (either by `NoImplicitPrelude` (page 339) or a `LANGUAGE NoImplicitPrelude` pragma).

Note that no warning is given for syntax that implicitly refers to the Prelude, even if [NoImplicitPrelude](#) (page 339) would change whether it refers to the Prelude. For example, no warning is given when `368` means `Prelude.fromInteger` (`368::Prelude.Integer`) (where `Prelude` refers to the actual Prelude module, regardless of the imports of the module being compiled).

### **-Wincomplete-patterns**

**Since**

5.04

The option [-Wincomplete-patterns](#) (page 107) warns about places where a pattern-match might fail at runtime. The function `g` below will fail when applied to non-empty lists, so the compiler will emit a warning about this when [-Wincomplete-patterns](#) (page 107) is enabled.

```
g [] = 2
```

This option isn't enabled by default because it can be a bit noisy, and it doesn't always indicate a bug in the program. However, it's generally considered good practice to cover all the cases in your functions, and it is switched on by [-W](#) (page 97).

### **-Wincomplete-uni-patterns**

**Since**

7.2

The flag [-Wincomplete-uni-patterns](#) (page 107) is similar to [-Wincomplete-patterns](#) (page 107), except that it applies only to lambda-expressions and pattern bindings, constructs that only allow a single pattern:

```
h = \[] -> 2
Just k = f y
```

Furthermore, this flag also applies to lazy patterns, since they are syntactic sugar for pattern bindings. For example, `f ~(Just x) = (x,x)` is equivalent to `f y = let Just x = y in (x,x)`.

### **-fmax-pmcheck-models=(n)**

**Since**

8.10

**Default**

30

The pattern match checker works by assigning symbolic values to each pattern. We call each such assignment a 'model'. Now, each pattern match clause leads to potentially multiple splits of that model, encoding different ways for the pattern match to fail. For example, when matching `x` against `Just 4`, we split each incoming matching model into two uncovered sub-models: One where `x` is `Nothing` and one where `x` is `Just y` but `y` is not `4`.

This can be exponential in the arity of the pattern and in the number of guards in some cases. The [-fmax-pmcheck-models=\(n\)](#) (page 107) limit makes sure we scale polynomially in the number of patterns, by forgetting refined information gained from a partially successful match. For the above example, if we had a limit of 1, we would continue checking the next clause with the original, unrefined model.

**-Wincomplete-record-updates****Since**

6.4

The function `f` below will fail when applied to `Bar`, so the compiler will emit a warning about this when *-Wincomplete-record-updates* (page 107) is enabled.

```
data Foo = Foo { x :: Int }
           | Bar

f :: Foo -> Foo
f foo = foo { x = 6 }
```

This option isn't enabled by default because it can be very noisy, and it often doesn't indicate a bug in the program.

**-Wincomplete-record-selectors****Since**

9.10

When a record selector is applied to a constructor that does not contain that field, it will produce an error. For example

```
data T = T1 | T2 { x :: Int }

f :: T -> Int
f a = x a -- `f T1` will fail

g1 :: HasField "x" t Int => t -> Int
g1 a = 1 + getField @"x" a

g2 :: T -> Int
g2 a = g1 a + 2 -- `g2 T1` will fail as well
```

The warning warns about cases like that. It also takes into account previously pattern-matched cases, for example

```
d :: T -> Int
d T1 = 0
d a = x a -- would not warn
```

**-Wmissing-deriving-strategies****Since**

8.8.1

**Default**

off

The datatype below derives the `Eq` typeclass, but doesn't specify a strategy. When *-Wmissing-deriving-strategies* (page 108) is enabled, the compiler will emit a warning about this.

```
data Foo a = Foo a
  deriving (Eq)
```

The compiler will warn here that the deriving clause doesn't specify a strategy. If the warning is enabled, but *DerivingStrategies* (page 507) is not enabled, the compiler will suggest turning on the *DerivingStrategies* (page 507) extension.

### **-Wmissing-fields**

#### **Since**

at least 5.04

This option is on by default, and warns you whenever the construction of a labelled field constructor isn't complete, missing initialisers for one or more fields. While not an error (the missing fields are initialised with bottoms), it is often an indication of a programmer error.

### **-Wmissing-export-lists**

#### **Since**

8.4

This flag warns if you declare a module without declaring an explicit export list. For example

```
module M where

p x = x
```

The *-Wmissing-export-lists* (page 109) flag will warn that M does not declare an export list. Declaring an explicit export list for M enables GHC dead code analysis, prevents accidental export of names and can ease optimizations like inlining.

### **-Wmissing-import-lists**

#### **Since**

7.0

This flag warns if you use an unqualified import declaration that does not explicitly list the entities brought into scope. For example

```
module M where
import X( f )
import Y
import qualified Z
p x = f x x
```

The *-Wmissing-import-lists* (page 109) flag will warn about the import of Y but not X. If module Y is later changed to export (say) f, then the reference to f in M will become ambiguous. No warning is produced for the import of Z because extending Z's exports would be unlikely to produce ambiguity in M.

### **-Wmissing-methods**

#### **Since**

at least 5.04

#### **Default**

on

This option warns you whenever an instance declaration is missing one or more methods, and the corresponding class declaration has no default declaration for them.

The `MINIMAL` pragma can be used to change which combination of methods will be required for instances of a particular class. See [MINIMAL pragma](#) (page 666).

**-Wmissing-signatures****Since**

at least 5.04

**Default**

off

If you would like GHC to check that every top-level function/value has a type signature, use the `-Wmissing-signatures` (page 110) option. As part of the warning GHC also reports the inferred type.

**-Wmissing-exported-sigs****Since**

7.10

This option is now deprecated in favour of `-Wmissing-exported-signatures` (page 110).

**-Wmissing-exported-signatures****Since**

8.0

**Default**

off

If you would like GHC to check that every exported top-level function/value has a type signature, but not check unexported values, use the `-Wmissing-exported-signatures` (page 110) option. If this option is used in conjunction with `-Wmissing-signatures` (page 110) then every top-level function/value must have a type signature. As part of the warning GHC also reports the inferred type.

**-Wmissing-local-sigs****Since**

7.0

This option is now deprecated in favour of `-Wmissing-local-signatures` (page 110).

**-Wmissing-local-signatures****Since**

8.0

If you use the `-Wmissing-local-signatures` (page 110) flag GHC will warn you about any polymorphic local bindings. As part of the warning GHC also reports the inferred type. The option is off by default.

**-Wmissing-pattern-synonym-signatures****Since**

8.0

**Default**

off

If you would like GHC to check that every pattern synonym has a type signature, use the `-Wmissing-pattern-synonym-signatures` (page 110) option. If this option is used in



conjunction with `-Wmissing-exported-signatures` (page 110) then only exported pattern synonyms must have a type signature. GHC also reports the inferred type.

### **-Wmissing-kind-signatures**

**Since**  
9.2

**Default**  
off

If you would like GHC to check that every data, type family, type-class definition has a *standalone kind signature* (page 417) or a *CUSK* (page 415), use the `-Wmissing-kind-signatures` (page 111) option. You can specify the kind via *StandaloneKindSignatures* (page 417) or *CUSKs* (page 415).

Note that `-Wmissing-kind-signatures` (page 111) does not warn about associated type families, as GHC considers an associated type family declaration to have a CUSK if its enclosing class has a CUSK. (See *Complete user-supplied kind signatures and polymorphic recursion* (page 415) for more on this point.) Therefore, giving the parent class a standalone kind signature or CUSK is sufficient to fix the warning for the class's associated type families as well.

### **-Wmissing-poly-kind-signatures**

**Since**  
9.8

**Default**  
off

This is a restricted version of `-Wmissing-kind-signatures` (page 111).

It warns when a declaration defines a type constructor that lacks a *standalone kind signature* (page 417) and whose inferred kind is polymorphic (which happens with `-PolyKinds`). For example

```
data T a = MkT (a -> Int)    -- T :: Type -> Type
                             -- Not polymorphic, hence no warning
data W f a = MkW (f a)      -- W :: forall k. (k->Type) -> k -> Type
                             -- Polymorphic, hence warning!
```

It is useful to catch accidentally polykinded types, or to make that polymorphism explicit, without requiring a kind signature for every type.

### **-Wmissing-exported-pattern-synonym-signatures**

**Default**  
off

If you would like GHC to check that every exported pattern synonym has a type signature, but not check unexported pattern synonyms, use the `-Wmissing-exported-pattern-synonym-signatures` (page 111) option. If this option is used in conjunction with `-Wmissing-pattern-synonym-signatures` (page 110) then every pattern synonym must have a type signature. As part of the warning GHC also reports the inferred type.

### **-Wname-shadowing**

**Since**  
at least 5.04

This option causes a warning to be emitted whenever an inner-scope value has the same name as an outer-scope value, i.e. the inner value shadows the outer one. This can catch typographical errors that turn into hard-to-find bugs, e.g., in the inadvertent capture of what would be a recursive call in `f = ... let f = id in ... f ...`.

The warning is suppressed for names beginning with an underscore. For example

```
f x = do { _ignore <- this; _ignore <- that; return (the other) }
```

## -Worphans

Since  
6.4

These flags cause a warning to be emitted whenever the module contains an “orphan” instance declaration or rewrite rule. An instance declaration is an orphan if it appears in a module in which neither the class nor the type being instanced are declared in the same module. A rule is an orphan if it is a rule for a function declared in another module. A module containing any orphans is called an orphan module.

The trouble with orphans is that GHC must pro-actively read the interface files for all orphan modules, just in case their instances or rules play a role, whether or not the module’s interface would otherwise be of any use. See [Orphan modules and instance declarations](#) (page 258) for details.

The flag `-Worphans` (page 112) warns about user-written orphan rules or instances.

## -Woverlapping-patterns

Since  
at least 5.04

By default, the compiler will warn you if a set of patterns are overlapping, e.g.,

```
f :: String -> Int
f []      = 0
f (_:xs)  = 1
f "2"     = 2
```

where the last pattern match in `f` won’t ever be reached, as the second pattern overlaps it. More often than not, redundant patterns is a programmer mistake/error, so this option is enabled by default.

If the programmer is dead set on keeping a redundant clause, for example to prevent bitrot, they can make use of a guard scrutinising `GHC.Exts.considerAccessible` to prevent the checker from flagging the parent clause as redundant:

```
g :: String -> Int
g []              = 0
g (_:xs)          = 1
g "2" | considerAccessible = 2 -- No warning!
```

Note that `considerAccessible` should come as the last statement of the guard in order not to impact the results of the checker. E.g., if you write

```
h :: Bool -> Int
h x = case (x, x) of
  (True, True) -> 1
```

(continues on next page)

(continued from previous page)

```
(False, False) -> 2
(True, False) | considerAccessible, False <- x -> 3
```

The pattern-match checker takes you by your word, will conclude that `False <- x` might fail and warn that the pattern-match is inexhaustive. Put `considerAccessible` last to avoid such confusions.

Note that due to technical limitations, `considerAccessible` will not suppress *-Winaccessible-code* (page 113) warnings.

### **-Winaccessible-code**

Since  
8.6

By default, the compiler will warn you if types make a branch inaccessible. This generally requires GADTs or similar extensions.

Take, for example, the following program

```
{-# LANGUAGE GADTs #-}

data Foo a where
  Foo1 :: Foo Char
  Foo2 :: Foo Int

data TyEquality a b where
  Refl :: TyEquality a a

checkTEQ :: Foo t -> Foo u -> Maybe (TyEquality t u)
checkTEQ x y = error "unimportant"

step2 :: Bool
step2 = case checkTEQ Foo1 Foo2 of
  Just Refl -> True -- Inaccessible code
  Nothing -> False
```

The `Just Refl` case in `step2` is inaccessible, because in order for `checkTEQ` to be able to produce a `Just`, `t ~ u` must hold, but since we're passing `Foo1` and `Foo2` here, it follows that `t ~ Char`, and `u ~ Int`, and thus `t ~ u` cannot hold.

### **-Wstar-is-type**

Since  
8.6

The use of `*` to denote the kind of inhabited types relies on the *StarIsType* (page 426) extension, which in a future release will be turned off by default and then possibly removed. The reasons for this and the deprecation schedule are described in [GHC proposal #143](#).

This warning allows to detect such uses of `*` before the actual breaking change takes place. The recommended fix is to replace `*` with `Type` imported from `Data.Kind`.

### **-Wstar-binder**

Since  
8.6

Under *StarIsType* (page 426), a `*` in types is not an operator nor even a name, it is special syntax that stands for `Data.Kind.Type`. This means that an expression like `Either * Char` is parsed as `Either (*) Char` and not `(*) Either Char`.

In binding positions, we have similar parsing rules. Consider the following example

```
{-# LANGUAGE TypeOperators, TypeFamilies, StarIsType #-}  
  
type family a + b  
type family a * b
```

While `a + b` is parsed as `(+) a b` and becomes a binding position for the `(+)` type operator, `a * b` is parsed as `a (*) b` and is rejected.

As a workaround, we allow to bind `(*)` in prefix form:

```
type family (*) a b
```

This is a rather fragile arrangement, as generally a programmer expects `(*) a b` to be equivalent to `a * b`. With *-Wstar-binder* (page 113) we warn when this special treatment of `(*)` takes place.

### **-Wsimpifiable-class-constraints**

**Since**  
8.2

**Default**  
on

Warn about class constraints in a type signature that can be simplified using a top-level instance declaration. For example:

```
f :: Eq [a] => a -> a
```

Here the `Eq [a]` in the signature overlaps with the top-level instance for `Eq [a]`. GHC goes to some efforts to use the former, but if it should use the latter, it would then have an insoluble `Eq a` constraint. Best avoided by instead writing:

```
f :: Eq a => a -> a
```

### **-Wtabs**

**Since**  
6.8

Have the compiler warn if there are tabs in your source file.

### **-Wtype-defaults**

**Since**  
at least 5.04

**Default**  
off

Have the compiler warn/inform you where in your source the Haskell defaulting mechanism for numeric types kicks in. This is useful information when converting code from a context that assumed one default into one with another, e.g., the ‘default default’ for Haskell 1.4 caused the otherwise unconstrained value `1` to be given the type `Int`, whereas

Haskell 98 and later defaults it to Integer. This may lead to differences in performance and behaviour, hence the usefulness of being non-silent about this.

#### **-Wmonomorphism-restriction**

**Since**  
6.8

**Default**  
off

Have the compiler warn/inform you where in your source the Haskell Monomorphism Restriction is applied. If applied silently the MR can give rise to unexpected behaviour, so it can be helpful to have an explicit warning that it is being applied.

#### **-Wunsupported-llvm-version**

**Since**  
7.8

Warn when using `-fllvm` (page 286) with an unsupported version of LLVM.

#### **-Wmissed-extra-shared-lib**

**Since**  
8.8

Warn when GHCi can't load a shared lib it deduced it should load when loading a package and analyzing the extra-libraries stanza of the target package description.

#### **-Wunticked-promoted-constructors**

**Since**  
7.10

Warn if a promoted data constructor is used without a tick preceding its name.

For example:

```
data Nat = Succ Nat | Zero

data Vec n s where
  Nil  :: Vec Zero a
  Cons :: a -> Vec n a -> Vec (Succ n) a
```

Will raise two warnings because Zero and Succ are not written as 'Zero and 'Succ.

This also applies to list literals since 9.4. For example:

```
type L = [Int, Char, Bool]
```

will raise a warning, because `[Int, Char, Bool]` is a promoted list which lacks a tick.

#### **-Wunused-binds**

**Since**  
at least 5.04

Report any function definitions (and local bindings) which are unused. An alias for

- `-Wunused-top-binds` (page 116)
- `-Wunused-local-binds` (page 116)

- `-Wunused-pattern-binds` (page 116)

### **-Wunused-top-binds**

**Since**  
8.0

Report any function definitions which are unused.

More precisely, warn if a binding brings into scope a variable that is not used, except if the variable's name starts with an underscore. The “starts-with-underscore” condition provides a way to selectively disable the warning.

A variable is regarded as “used” if

- It is exported, or
- It appears in the right hand side of a binding that binds at least one used variable that is used

For example:

```
module A (f) where
f = let (p,q) = rhs1 in t p  -- No warning: q is unused, but is locally
    ↳ bound
t = rhs3                    -- No warning: f is used, and hence so is t
g = h x                     -- Warning: g unused
h = rhs2                    -- Warning: h is only used in the
                             -- right-hand side of another unused binding
_w = True                   -- No warning: _w starts with an underscore
```

### **-Wunused-local-binds**

**Since**  
8.0

Report any local definitions which are unused. For example:

```
module A (f) where
f = let (p,q) = rhs1 in t p  -- Warning: q is unused
g = h x                     -- No warning: g is unused, but is a top-
    ↳ level binding
```

### **-Wunused-pattern-binds**

**Since**  
8.0

Warn if a pattern binding binds no variables at all, unless it is a lone wild-card pattern, or a banged pattern. For example:

```
Just _ = rhs3               -- Warning: unused pattern binding
(_, _) = rhs4               -- Warning: unused pattern binding
_ = rhs3                    -- No warning: lone wild-card pattern
!() = rhs4                  -- No warning: banged pattern; behaves like seq
```

In general a lazy pattern binding `p = e` is a no-op if `p` does not bind any variables. The motivation for allowing lone wild-card patterns is they are not very different from `_v = rhs3`, which elicits no warning; and they can be useful to add a type constraint, e.g. `_`

= `x :: Int`. A banged pattern (see [Bang patterns and Strict Haskell](#) (page 594)) is *not* a no-op, because it forces evaluation, and is useful as an alternative to `seq`.

#### -Wunused-imports

##### Since

at least 5.04

Report any modules that are explicitly imported but never used. However, the form `import M()` is never reported as an unused import, because it is a useful idiom for importing instance declarations, which are anonymous in Haskell.

#### -Wunused-matches

##### Since

at least 5.04

Report all unused variables which arise from term-level pattern matches, including patterns consisting of a single variable. For instance `f x y = []` would report `x` and `y` as unused. The warning is suppressed if the variable name begins with an underscore, thus:

```
f _x = True
```

Note that [-Wunused-matches](#) (page 117) does not warn about variables which arise from type-level patterns, as found in type family and data family instances. This must be enabled separately through the [-Wunused-type-patterns](#) (page 117) flag.

#### -Wunused-do-bind

##### Since

6.12

Report expressions occurring in `do` and `mdo` blocks that appear to silently throw information away. For instance `do { mapM popInt xs ; return 10 }` would report the first statement in the `do` block as suspicious, as it has the type `StackM [Int]` and not `StackM ()`, but that `[Int]` value is not bound to anything. The warning is suppressed by explicitly mentioning in the source code that your program is throwing something away:

```
do { _ <- mapM popInt xs ; return 10 }
```

Of course, in this particular situation you can do even better:

```
do { mapM_ popInt xs ; return 10 }
```

#### -Wunused-type-patterns

##### Since

8.0

Report all unused implicitly bound type variables which arise from patterns in type family and data family instances. For instance:

```
type instance F x y = []
```

would report `x` and `y` as unused on the right hand side. The warning is suppressed if the type variable name begins with an underscore, like so:

```
type instance F _x _y = []
```

When *ExplicitForAll* (page 560) is enabled, explicitly quantified type variables may also be identified as unused. For instance:

```
type instance forall x y. F x y = []
```

would still report *x* and *y* as unused on the right hand side

Unlike *-Wunused-matches* (page 117), *-Wunused-type-patterns* (page 117) is not implied by *-Wall* (page 97). The rationale for this decision is that unlike term-level pattern names, type names are often chosen expressly for documentation purposes, so using underscores in type names can make the documentation harder to read.

### **-Wunused-foralls**

#### **Since**

8.0

Report all unused type variables which arise from explicit, user-written forall statements. For instance:

```
g :: forall a b c. (b -> b)
```

would report *a* and *c* as unused.

### **-Wunused-record-wildcards**

#### **Since**

8.10

Report all record wildcards where none of the variables bound implicitly are used. For instance:

```
data P = P { x :: Int, y :: Int }  
  
f1 :: P -> Int  
f1 P{..} = 1 + 3
```

would report that the *P{..}* match is unused.

### **-Wredundant-bang-patterns**

#### **Since**

9.2

Report dead bang patterns, where dead bangs are bang patterns that under no circumstances can force a thunk that wasn't already forced. Dead bangs are a form of redundant bangs. The new check is performed in pattern-match coverage checker along with other checks (namely, redundant and inaccessible RHSs). Given

```
f :: Bool -> Int  
f True = 1  
f !x   = 2
```

The bang pattern on *!x* is dead. By the time the *x* in the second equation is reached, *x* will already have been forced due to the first equation (*f True = 1*). Moreover, there is no way to reach the second equation without going through the first one.

Note that *-Wredundant-bang-patterns* will not warn about dead bangs that appear on a redundant clause. That is because in that case, it is recommended to delete the clause wholly, including its leading pattern match.



Dead bang patterns are redundant. But there are bang patterns which are redundant that aren't dead, for example:

```
f !() = 0
```

the bang still forces the argument, before we attempt to match on (). But it is redundant with the forcing done by the () match. Currently such redundant bangs are not considered dead, and -Wredundant-bang-patterns will not warn about them.

#### -Wredundant-record-wildcards

Since

8.10

Report all record wildcards where the wild card match binds no patterns. For instance:

```
data P = P { x :: Int, y :: Int }

f1 :: P -> Int
f1 P{x,y,...} = x + y
```

would report that the P{x, y, ...} match has a redundant use of ...

#### -Wredundant-strictness-flags

Since

9.4

Report strictness flags applied to unlifted types. An unlifted type is always strict, and applying a strictness flag has no effect.

For example:

```
data T = T !Int#
```

#### -Wwrong-do-bind

Since

6.12

Report expressions occurring in do and mdo blocks that appear to lack a binding. For instance do { return (popInt 10) ; return 10 } would report the first statement in the do block as suspicious, as it has the type StackM (StackM Int) (which consists of two nested applications of the same monad constructor), but which is not then “unpacked” by binding the result. The warning is suppressed by explicitly mentioning in the source code that your program is throwing something away:

```
do { _ <- return (popInt 10) ; return 10 }
```

For almost all sensible programs this will indicate a bug, and you probably intended to write:

```
do { popInt 10 ; return 10 }
```

#### -Winline-rule-shadowing

Since

7.8

Warn if a rewrite RULE might fail to fire because the function might be inlined before the rule has a chance to fire. See [How rules interact with INLINE/NOINLINE pragmas](#) (page 649).

#### **-Wcpp-undef**

**Since**  
8.2

This flag passes `-Wundef` to the C pre-processor (if its being used) which causes the pre-processor to warn on uses of the `#if` directive on undefined identifiers.

#### **-Wunbanged-strict-patterns**

**Since**  
8.2

This flag warns whenever you write a pattern that binds a variable whose type is unlifted, and yet the pattern is not a bang pattern nor a bare variable. See [Unboxed types](#) (page 609) for information about unlifted types.

#### **-Wmissing-home-modules**

**Since**  
8.2

When a module provided by the package currently being compiled (i.e. the “home” package) is imported, but not explicitly listed in command line as a target. Useful for Cabal to ensure GHC won't pick up modules, not listed neither in `exposed-modules`, nor in `other-modules`.

#### **-Wpartial-fields**

**Since**  
8.4

The option `-Wpartial-fields` (page 120) warns about a record field `f` that is defined in some, but not all, of the constructors of a data type, as such selector functions are partial. For example, when `-Wpartial-fields` (page 120) is enabled the compiler will emit a warning at the definition of `Foo` below:

```
data Foo = Foo { f :: Int } | Bar
```

The warning is suppressed if the field name begins with an underscore.

```
data Foo = Foo { _f :: Int } | Bar
```

Another related warning is `-Wincomplete-record-selectors` (page 108), which warns at use sites rather than definition sites.

#### **-Wunused-packages**

**Since**  
8.10

The option `-Wunused-packages` (page 120) warns about packages, specified on command line via `-package <pkg>` (page 261) or `-package-id <unit-id>` (page 262), but were not needed during compilation. If the warning fires it means the specified package wasn't needed for compilation.

This warning interacts poorly with GHCi because most invocations will pass a large number of `-package` arguments on the initial load. Therefore if you modify the targets using `:load` or `:cd` then the warning will be silently disabled if it's enabled (see [#21110](#)).

### **-Winvalid-haddock**

**Since**  
9.0

When the `-haddock` option is enabled, GHC collects documentation comments and associates them with declarations, function arguments, data constructors, and other syntactic elements. Documentation comments in invalid positions are discarded:

```
myValue =
  -- | Invalid (discarded) comment in an expression
  2 + 2
```

This warning informs you about discarded documentation comments. It has no effect when `-haddock` (page 95) is disabled.

### **-Woperator-whitespace-ext-conflict**

**Since**  
9.2

When [TemplateHaskell](#) (page 582) is enabled, `f $x` is parsed as `f` applied to an untyped splice. But when the extension is disabled, the expression is parsed as a use of the `$` infix operator.

To make it easy to read `f $x` without checking the enabled extensions, one could rewrite it as `f $ x`, which is what this warning suggests.

Currently, it detects the following cases:

- `$x` could mean an untyped splice under [TemplateHaskell](#) (page 582)
- `$$x` could mean a typed splice under [TemplateHaskell](#) (page 582)
- `%m` could mean a multiplicity annotation under [LinearTypes](#) (page 458)

It only covers extensions that currently exist. If you want to enforce a stricter policy and always require whitespace around all infix operators, use `-Woperator-whitespace` (page 121).

### **-Woperator-whitespace**

**Since**  
9.2

There are four types of infix operator occurrences, as defined by [GHC Proposal #229](#):

```
a ! b    -- a loose infix occurrence
a!b      -- a tight infix occurrence
a !b     -- a prefix occurrence
a! b     -- a suffix occurrence
```

A loose infix occurrence of any operator is always parsed as an infix operator, but other occurrence types may be assigned a special meaning. For example, a prefix `!` denotes a bang pattern, and a prefix `$` denotes a [TemplateHaskell](#) (page 582) splice.

This warning encourages the use of loose infix occurrences of all infix operators, to prevent possible conflicts with future language extensions.

**-Wauto-orphans****Since**

7.4

Does nothing.

**-Wmissing-space-after-bang****Since**

8.8

Does nothing.

**-Wderiving-typeable****Since**

7.10

This flag warns when `Typeable` is listed in a deriving clause or derived with [StandaloneDeriving](#) (page 487).

Since GHC 7.10, `Typeable` is automatically derived for all types. Thus, deriving `Typeable` yourself is redundant.

**-Wambiguous-fields****Since**

9.2

When [DuplicateRecordFields](#) (page 475) is enabled, the option *-Wambiguous-fields* (page 122) warns about occurrences of fields in selectors or updates that depend on the deprecated mechanism for type-directed disambiguation. This mechanism will be removed in a future GHC release, at which point these occurrences will be rejected as ambiguous. See the proposal [DuplicateRecordFields without ambiguous field access](#) and the documentation on [DuplicateRecordFields](#) (page 475) for further details.

This warning has no effect when [DuplicateRecordFields](#) (page 475) is disabled.

**-Wforall-identifier****Since**

9.4

This warning is deprecated. It no longer has any effect since GHC 9.10.

In the past, GHC used to accept `forall` as a term-level identifier:

```
-- from constraints-0.13
forall :: forall p. (forall a. Dict (p a)) -> Dict (Forall p)
forall d = ...
```

In accordance with [GHC Proposal #281](#), this is no longer possible, as `forall` has become a proper keyword. *-Wforall-identifier* (page 122) was used in the migration period before the breaking change took place.

**-Wunicode-bidirectional-format-characters****Since**

9.0.2

Explicit unicode bidirectional formatting characters can cause source code to be rendered misleadingly in many viewers. We warn if any such character is present in the source.

Specifically, the characters disallowed by this warning are those which are a part of the ‘Explicit Formatting’ category of the [Unicode Bidirectional Character Type Listing](#)

#### **-Wgadt-mono-local-binds**

##### **Since**

9.4.1

This warning is triggered on pattern matching involving GADTs, if [MonoLocalBinds](#) (page 580) is disabled. Type inference can be fragile in this case.

See the [OutsideIn\(X\)](#) paper (section 4.2) and [Let-generalisation](#) (page 580) for more details.

To resolve this warning, you can enable [MonoLocalBinds](#) (page 580) or an extension implying it ([GADTs](#) (page 380) or [TypeFamilies](#) (page 384)).

The warning is also triggered when matching on GADT-like pattern synonyms (i.e. pattern synonyms containing equalities in provided constraints).

In previous versions of GHC (9.2 and below), it was an error to pattern match on a GADT if neither [GADTs](#) (page 380) nor [TypeFamilies](#) (page 384) were enabled.

#### **-Wtype-equality-out-of-scope**

##### **Since**

9.4.1

##### **Default**

on

In accordance with [GHC Proposal #371](#), the type equality syntax `a ~ b` is no longer built-in. Instead, `~` is a regular type operator that can be imported from `Data.Type.Equality` or `Prelude`.

To minimize breakage, a compatibility fallback is provided: whenever `~` is used but is not in scope, the compiler assumes that it stands for a type equality constraint. The warning is triggered by any code that relies on this fallback. It can be addressed by bringing `~` into scope explicitly.

The likely culprit is that you use [NoImplicitPrelude](#) (page 339) and a custom `Prelude`. In this case, consider updating your custom `Prelude` to re-export `~` from `Data.Type.Equality`.

#### **-Wtype-equality-requires-operators**

##### **Since**

9.4.1

In accordance with [GHC Proposal #371](#), the type equality syntax `a ~ b` is no longer built-in. Instead, `~` is a regular type operator that requires the [TypeOperators](#) (page 368) extension.

To minimize breakage, `~` specifically (unlike other type operators) can be used even when [TypeOperators](#) (page 368) is disabled. The warning is triggered whenever this happens, and can be addressed by enabling the extension.

**-Wloopy-superclass-solve****Since**

9.6.1

This warning is deprecated. It no longer has any effect since GHC 9.10. In the past, [UndecidableInstances](#) (page 537) allowed potentially non-terminating evidence for certain superclass constraints. This is no longer allowed, as explained in [Undecidable instances and loopy superclasses](#) (page 537). This warning was used during the transition period.

**-Wterm-variable-capture****Since**

9.8.1

Under [RequiredTypeArguments](#) (page 444), implicit quantification of type variables does not take place if there is a term variable of the same name in scope.

For example:

```
a = 15
f :: a -> a    -- NoRequiredTypeArguments: The 'a' is implicitly
↳quantified    -- RequiredTypeArguments: The 'a' refers to the term-
↳level binding
```

When [-Wterm-variable-capture](#) (page 124) is enabled, GHC warns against implicit quantification that would stop working under [RequiredTypeArguments](#) (page 444).

**-Wmissing-role-annotations****Since**

9.8.1

**Default**

off

If you would like GHC to check that every data type definition has a [role annotation](#) (page 469), use the [-Wmissing-role-annotations](#) (page 124) option. You can specify the role via [RoleAnnotations](#) (page 469).

GHC will not warn about type class definitions with missing role annotations, as their default roles are the strictest: all nominal. In other words the type-class role cannot be accidentally left representational or phantom, which could affected the code correctness.

**-Wimplicit-rhs-quantification****Since**

9.8.1

**Default**

off

In accordance with [GHC Proposal #425](#), GHC will stop implicitly quantifying over type variables that occur free on the right-hand side of a type synonym but are not mentioned on the left-hand side. Type synonym declarations that rely on this form of quantification should be rewritten with invisible binders.

For example:

```

type T1 :: forall a . Maybe a
type T1  = 'Nothing :: Maybe a      -- old
type T1 @a = 'Nothing :: Maybe a    -- new

```

This warning detects code that will be affected by this breaking change.

### -Wdeprecated-type-abstractions

**Since**  
9.10.1

**Default**  
off

Type abstractions in constructor patterns allow binding existential type variables:

```

import Type.Reflection (Typeable, typeRep)
data Ex = forall e. (Typeable e, Show e) => MkEx e
showEx (MkEx @e a) = show a ++ " :: " ++ show (typeRep @e)

```

Note the pattern `MkEx @e a`, and specifically the `@e` binder.

Support for this feature was added to GHC in version 9.2, but instead of getting its own language extension the feature was enabled by a combination of [TypeApplications](#) (page 435) and [ScopedTypeVariables](#) (page 565). As per [GHC Proposal #448](#) and its amendment [#604](#) we are now transitioning towards guarding this feature behind [TypeAbstractions](#) (page 439) instead.

As a compatibility measure, GHC continues to support old programs that use type abstractions in constructor patterns without enabling the appropriate extension [TypeAbstractions](#) (page 439), but it will stop doing so in a future release.

This warning detects code that will be affected by this breaking change.

### -Wincomplete-export-warnings

**Since**  
9.8.1

In accordance with [GHC Proposal #134](#), it is now possible to deprecate certain exports of a name without deprecating the name itself.

As explained in [WARNING and DEPRECATED pragmas](#) (page 663), when a name is exported in several ways in the same module, but only some of those ways have a warning, it will not end up deprecated when imported in another module.

For example:

```

module A (x) where

x :: Int
x = 2

module M (
  {-# WARNING x "deprecated" #-} x
  module A
)
import A

```

(continues on next page)

(continued from previous page)

```
When :ghc-flag:`-Wincomplete-export-warnings` is enabled, GHC warns␣  
→about exports  
that are not deprecating a name that is deprecated with another export␣  
→in that module.
```

### **-Wbadly-staged-types**

#### **Since**

9.10.1

Consider an example:

```
tardy :: forall a. Proxy a -> IO Type  
tardy _ = [t | a |]
```

The type binding `a` is bound at stage 1 but used on stage 2.

This is badly staged program, and the `tardy (Proxy @Int)` won't produce a type representation of `Int`, but rather a local name `a`.

### **-Winconsistent-flags**

#### **Since**

9.8.1

#### **Default**

on

Warn when command line options are inconsistent in some way.

For example, when using GHCi, optimisation flags are ignored and a warning is issued. Another example is `-dynamic` (page 289) is ignored when `-dynamic-too` (page 287) is passed.

### **-Wdata-kinds-tc**

#### **Since**

9.10.1

Introduced in GHC 9.10.1, this warns when an illegal use of a type or kind (without having enabled the `DataKinds` (page 404) extension) is caught in the typechecker (hence the `-tc` suffix). These warnings complement the existing `DataKinds` (page 404) checks (that have existed since `DataKinds` (page 404) was first introduced), which result in errors instead of warnings.

This warning is scheduled to be changed to an error in a future GHC version, at which point the `-Wdata-kinds-tc` (page 126) flag will be removed. Users can enable the `DataKinds` (page 404) extension to avoid issues (thus silencing the warning).

### **-Wdefaulted-exception-context**

#### **Since**

9.10.1

Introduced in GHC 9.10.1 with the introduction of an implicit `Control.Exception.Context.ExceptionContext` context to `Control.Exception.SomeException`. To preserve compatibility with earlier compilers, this constraints is implicitly defaulted



to `Control.Exception.Context.emptyExceptionContext` when no other evidence is available. As this behavior may result in dropped exception context this warning is provided to give notice when defaulting occurs.

If you're feeling really paranoid, the `-dcore-lint` (page 309) option is a good choice. It turns on heavyweight intra-pass sanity-checking within GHC. (It checks GHC's sanity, not yours.)

## 5.3 Optimisation (code improvement)

The `-O*` options specify convenient “packages” of optimisation flags; the `-f*` options described later on specify *individual* optimisations to be turned on/off; the `-m*` options specify *machine-specific* optimisations to be turned on/off.

Most of these options are boolean and have options to turn them both “on” and “off” (beginning with the prefix `no-`). For instance, while `-fspecialise` enables specialisation, `-fno-specialise` disables it. When multiple flags for the same option appear in the command-line they are evaluated from left to right. For instance, `-fno-specialise -fspecialise` will enable specialisation.

It is important to note that the `-O*` flags are roughly equivalent to combinations of `-f*` flags. For this reason, the effect of the `-O*` and `-f*` flags is dependent upon the order in which they occur on the command line.

For instance, take the example of `-fno-specialise -O1`. Despite the `-fno-specialise` appearing in the command line, specialisation will still be enabled. This is the case as `-O1` implies `-fspecialise`, overriding the previous flag. By contrast, `-O1 -fno-specialise` will compile without specialisation, as one would expect.

### 5.3.1 `-O*`: convenient “packages” of optimisation flags.

There are *many* options that affect the quality of code produced by GHC. Most people only have a general goal, something like “Compile quickly” or “Make my program run like greased lightning.” The following “packages” of optimisations (or lack thereof) should suffice.

Note that higher optimisation levels cause more cross-module optimisation to be performed, which can have an impact on how much of your program needs to be recompiled when you change something. This is one reason to stick to no-optimisation when developing code.

**No ```-O*```-type option specified:** This is taken to mean “Please compile quickly; I’m not over-bothered about compiled-code quality.” So, for example, `ghc -c Foo.hs`

#### **`-O0`**

Means “turn off all optimisation”, reverting to the same settings as if no `-O` options had been specified. Saying `-O0` can be useful if e.g. `make` has inserted a `-O` on the command line already.

#### **`-O`**

#### **`-O1`**

Means: “Generate good-quality code without taking too long about it.” Thus, for example: `ghc -c -O Main.lhs`

#### **`-O2`**

Means: “Apply every non-dangerous optimisation, even if it means significantly longer compile times.”

The avoided “dangerous” optimisations are those that can make runtime or space *worse* if you’re unlucky. They are normally turned on or off individually.

### **-O(n)**

Any -On where  $n > 2$  is the same as -O2.

We don’t use a -O\* flag for day-to-day work. We use -O to get respectable speed; e.g., when we want to measure something. When we want to go for broke, we tend to use -O2 (and we go for lots of coffee breaks).

The easiest way to see what -O (etc.) “really mean” is to run with -v (page 86), then stand back in amazement.

## **5.3.2 -f\*: platform-independent flags**

These flags turn on and off individual optimisations. Flags marked as *on* by default are enabled at all optimisation levels by default, and as such you shouldn’t need to set any of them explicitly. A flag -fwombat can be negated by saying -fno-wombat.

### **-fcore-constant-folding**

#### **Default**

off but enabled by -O (page 127).

Enables Core-level constant folding, i.e. propagation of values that can be computed at compile time.

### **-fcase-merge**

#### **Default**

off but enabled by -O (page 127).

Merge immediately-nested case expressions that scrutinise the same variable. For example,

```
case x of
  Red -> e1
  _    -> case x of
            Blue -> e2
            Green -> e3
```

Is transformed to,

```
case x of
  Red -> e1
  Blue -> e2
  Green -> e2
```

### **-fcase-folding**

#### **Default**

off but enabled by -O (page 127).

Allow constant folding in case expressions that scrutinise some primops: For example,

```
case x `minusWord#` 10## of
  10## -> e1
```

(continues on next page)

(continued from previous page)

```
20## -> e2
v     -> e3
```

Is transformed to,

```
case x of
  20## -> e1
  30## -> e2
  _     -> let v = x `minusWord#` 10## in e3
```

### **-fcall-arity**

#### **Default**

off but enabled by `-O` (page 127).

Enable call-arity analysis.

### **-fexitification**

#### **Default**

off but enabled by `-O` (page 127).

Enables the floating of exit paths out of recursive functions.

### **-fcmm-elim-common-blocks**

#### **Default**

off but enabled by `-O` (page 127).

Enables the common block elimination optimisation in the code generator. This optimisation attempts to find identical Cmm blocks and eliminate the duplicates.

### **-fcmm-sink**

#### **Default**

off but enabled by `-O` (page 127).

Enables the sinking pass in the code generator. This optimisation attempts to find identical Cmm blocks and eliminate the duplicates attempts to move variable bindings closer to their usage sites. It also inlines simple expressions like literals or registers.

### **-fcmm-static-pred**

#### **Default**

off but enabled by `-O` (page 127).

This enables static control flow prediction on the final Cmm code. If enabled GHC will apply certain heuristics to identify loops and hot code paths. This information is then used by the register allocation and code layout passes.

### **-fcmm-control-flow**

#### **Default**

off but enabled by `-O` (page 127).

Enables some control flow optimisations in the Cmm code generator, merging basic blocks and avoiding jumps right after jumps.

**-fasm-shortcutting****Default**

off but enabled by [-O2](#) (page 127).

This enables shortcutting at the assembly stage of the code generator. In simpler terms shortcutting means if a block of instructions A only consists of a unconditionally jump, we replace all jumps to A by jumps to the successor of A.

This is mostly done during Cmm passes. However this can miss corner cases. So at [-O2](#) this flag runs the pass again at the assembly stage to catch these. Note that due to platform limitations ([#21972](#)) this flag does nothing on macOS.

**-fblock-layout-cfg****Default**

off but enabled by [-O](#) (page 127).

The new algorithm considers all outgoing edges of a basic blocks for code layout instead of only the last jump instruction. It also builds a control flow graph for functions, tries to find hot code paths and place them sequentially leading to better cache utilization and performance.

This is expected to improve performance on average, but actual performance difference can vary.

If you find cases of significant performance regressions, which can be traced back to obviously bad code layout please open a ticket.

**-fblock-layout-weights**

This flag is hacker territory. The main purpose of this flag is to make it easy to debug and tune the new code layout algorithm. There is no guarantee that values giving better results now won't be worse with the next release.

If you feel your code warrants modifying these settings please consult the source code for default values and documentation. But I strongly advise against this.

**-fblock-layout-weightless****Default**

off

When not using the cfg based blocklayout layout is determined either by the last jump in a basic block or the heaviest outgoing edge of the block in the cfg.

With this flag enabled we use the last jump instruction in blocks. Without this flags the old algorithm also uses the heaviest outgoing edge.

When this flag is enabled and [-fblock-layout-cfg](#) (page 130) is disabled block layout behaves the same as in 8.6 and earlier.

**-fcpr-anal****Default**

off but enabled by [-O](#) (page 127).

Turn on CPR analysis, which enables the worker/wrapper transformation (cf. [-fworker-wrapper](#) (page 149)) to unbox the result of a function, such as

```
sum :: [Int] -> Int
sum []      = 0
sum (x:xs)  = x + sum xs
```

CPR analysis will see that each code path produces a *constructed product* such as `I# 0#` in the first branch (where `GHC.Exts.I#` is the data constructor of `Int`, boxing up the primitive integer literal `0#` of type `Int#`) and optimise to

```
sum xs = I# ($wsum xs)
$wsum []      = 0#
$wsum (I# x:xs) = x# +# $wsum xs
```

and then `sum` can inline to potentially cancel away the `I#` box.

Here's an example of the function that *does not* return a constructed product:

```
f :: [Int] -> (Int -> Int) -> Int
f []      g = g 0
f (x:xs) g = x + f xs g
```

The expression `g 0` is not a constructed product, because we don't know anything about `g`.

CPR analysis also works *nestedly*, for example

```
sumIO :: [Int] -> IO Int
sumIO []      = return 0
sumIO (x:xs) = do
  r <- sumIO xs
  return $! x + r
```

Note the use of `$!`: Without it, GHC would be unable to see that evaluation of `r` and `x` terminates (and rapidly, at that). An alternative would be to evaluate both with a bang pattern or a `seq`, but the `return $! <res>` idiom should work more reliably and needs less thinking. The above example will be optimised to

```
sumIO :: [Int] -> IO Int
sumIO xs = IO $ \s -> case $wsum xs s of
  (# s', r #) -> (# s', I# r #)
$wsumIO :: [Int] -> (# State# RealWorld, Int# #)
$wsumIO []      s = (# s, 0# #)
$wsumIO (I# x:xs) s = case $wsumIO xs of
  (# s', r #) -> (# s', x +# r#)
```

And the latter can inline `sumIO` and cancel away the `I#` constructor. Unboxing the result of a `State` action should work similarly.

## -fcse

### Default

off but enabled by `-O` (page 127).

Enables the common-sub-expression elimination optimisation. Switching this off can be useful if you have some `unsafePerformIO` expressions that you don't want commoned-up.

## -fstg-cse

### Default

off but enabled by `-O` (page 127).

Enables the common-sub-expression elimination optimisation on the STG intermediate language, where it is able to common up some subexpressions that differ in their types, but not their representation.

### **-fspec-eval**

**Default**

on

**Since**

9.14.1

Enables speculative evaluation which usually results in fewer allocations. Enabling speculative evaluation should not cause performance regressions. If you encounter any, please open a ticket.

Note that disabling this flag will switch off speculative evaluation completely, causing *-fspec-eval-dictfun* (page 132) to have no effect.

### **-fspec-eval-dictfun**

**Default**

on

**Since**

9.14.1

Enables speculative (strict) evaluation of dictionary functions.

This is best explained with an example

```
instance C a => D a where ...

g :: D a => a -> Int
g x = ...

f :: C a => a -> Int
f x = g x
```

Function *f* has to pass a *D a* dictionary to *g*, and uses a dictionary function *C a => D a* to compute it. If speculative evaluation for dictionary functions is enabled, this dictionary is computed strictly.

Speculative evaluation of dictionary functions can lead to slightly better performance, because a thunk is avoided. However, it results in unnecessary computation and allocation if the dictionary goes unused. This causes a significant increase in allocation if the dictionary is large. See ([#25284](#)).

### **-fdicts-cheap**

**Default**

off

A very experimental flag that makes dictionary-valued expressions seem cheap to the optimiser.

### **-fdicts-strict**

**Default**

off but enabled by *-O2* (page 127).

Make dictionaries strict.

This enables WW to fire on dictionary constraints which usually results in better runtime. In niche cases it can lead to significant compile time regressions because of changed inlining behaviour. Rarely this can also affect runtime negatively.

If enabling this flag leads to regressions try increasing the unfolding threshold using `-funfolding-use-threshold={n}` (page 147) by a modest amount ( $\sim 30$ ) as this is likely a result of a known limitation described in [#18421](#).

#### **-fdmd-tx-dict-sel**

##### **Default**

on

Use a special demand transformer for dictionary selectors. Behaviour is unconditionally enabled starting with 9.2

#### **-fdo-eta-reduction**

##### **Default**

on

Eta-reduce lambda expressions, if doing so gets rid of a whole group of lambdas.

#### **-fdo-lambda-eta-expansion**

##### **Default**

on

Eta-expand let-bindings to increase their arity.

#### **-fdo-clever-arg-eta-expansion**

##### **Default**

off

##### **Since**

9.10.1

Eta-expand arguments to increase their arity to avoid allocating unnecessary thunks for them.

For example in code like `foo = f (g x)` this flag will determine which analysis is used to decide the arity of `g x`, with the goal of avoiding a thunk for `g x` in cases where `g` is a function with an arity higher than one.

Enabling the flag enables a more sophisticated analysis, resulting in better runtime but longer compile time.

#### **-feager-blackholing**

##### **Default**

off

Usually GHC black-holes a thunk only when it switches threads. This flag makes it do so as soon as the thunk is entered. See [Haskell on a shared-memory multiprocessor](#).

See [Compile-time options for SMP parallelism](#) (page 151) for a discussion on its use.

#### **-fexcess-precision**

##### **Default**

off

When this option is given, intermediate floating point values can have a *greater* precision/range than the final type. Generally this is a good thing, but some programs may rely on the exact precision/range of Float/Double values and should not use this option for their compilation.

Note that the 32-bit x86 native code generator only supports excess-precision mode, so neither `-fexcess-precision` nor `-fno-excess-precision` has any effect. This is a known bug, see [Bugs in GHC](#) (page 803).

### **-fexpose-all-unfoldings**

#### **Default**

off

An experimental flag to expose all unfoldings, even for very large or recursive functions. This allows for all functions to be inlined while usually GHC would avoid inlining larger functions.

### **-ffloat-in**

#### **Default**

off but enabled by `-O` (page 127).

Float let-bindings inwards, nearer their binding site. See [Let-floating: moving bindings to give faster programs \(ICFP'96\)](#).

This optimisation moves let bindings closer to their use site. The benefit here is that this may avoid unnecessary allocation if the branch the let is now on is never executed. It also enables other optimisation passes to work more effectively as they have more information locally.

This optimisation isn't always beneficial though (so GHC applies some heuristics to decide when to apply it). The details get complicated but a simple example is that it is often beneficial to move let bindings outwards so that multiple let bindings can be grouped into a larger single let binding, effectively batching their allocation and helping the garbage collector and allocator.

### **-ffull-laziness**

#### **Default**

off but enabled by `-O` (page 127).

Run the full laziness optimisation (also known as let-floating), which floats let-bindings outside enclosing lambdas, in the hope they will be thereby be computed less often. See [Let-floating: moving bindings to give faster programs \(ICFP'96\)](#). Full laziness increases sharing, which can lead to increased memory residency.

---

**Note:** GHC doesn't implement complete full laziness. Although GHC's full-laziness optimisation does enable some transformations which would be performed by a fully lazy implementation (such as extracting repeated computations from loops), these transformations are not applied consistently, so don't rely on them.

---

### **-ffun-to-thunk**

#### **Default**

off



Worker/wrapper removes unused arguments, but usually we do not remove them all, lest it turn a function closure into a thunk, thereby perhaps creating a space leak and/or disrupting inlining. This flag allows worker/wrapper to remove *all* value lambdas.

This flag was ineffective in the presence of `-ffull-laziness` (page 134), which would flout a thunk out of a constant worker function *even though* `-ffun-to-thunk` (page 134) was off.

Hence use of this flag is deprecated since GHC 9.4.1 and we rather suggest to pass `-fno-full-laziness` instead. That implies there's no way for worker/wrapper to turn a function into a thunk in the presence of `-fno-full-laziness`. If that is inconvenient for you, please leave a comment [on the issue tracker](#) (#21204).

### **-finter-module-far-jumps**

#### **Default**

Off

This flag forces GHC to use far jumps instead of near jumps for all jumps which cross module boundaries. This removes the need for jump islands/linker jump fixups which some linkers struggle to deal with. (#24648)

This comes at a very modest code size (~2%) and runtime (~0.6%) overhead.

Note that this flag currently only affects the NCG AArch64 backend.

### **-fignore-asserts**

#### **Default**

off but enabled by `-O` (page 127).

Causes GHC to ignore uses of the function `Exception.assert` in source code (in other words, rewriting `Exception.assert p e to e` (see [Assertions](#) (page 658))).

### **-fignore-interface-pragmas**

#### **Default**

Implied by `-O0` (page ??), otherwise off.

Tells GHC to ignore all inessential information when reading interface files. That is, even if `M.hi` contains unfolding or strictness information for a function, GHC will ignore that information.

### **-fkeep-auto-rules**

#### **Default**

off

#### **Since**

9.10.1

The type-class specialiser and call-pattern specialisation both generate so-called “auto” RULES. These rules are usually exposed to importing modules in the interface file. But when an auto rule is the sole reason for keeping a function alive, both the rule and the function are discarded, by default. That reduces code bloat, but risks the same function being specialised again in an importing module.

You can change this behaviour with `-fkeep-auto-rules` (page 135). Switching it on keeps all auto-generated rules.

**-flate-dmd-anal****Default**

off

Run demand analysis again, at the end of the simplification pipeline. We found some opportunities for discovering strictness that were not visible earlier; and optimisations like *-fspec-constr* (page 140) can create functions with unused arguments which are eliminated by late demand analysis. Improvements are modest, but so is the cost. See notes on the [wiki page](#).

**-fliberate-case****Default**off but enabled by *-O2* (page 127).

Turn on the liberate-case transformation. This unrolls recursive function once in its own RHS, to avoid repeated case analysis of free variables. It's a bit like the call-pattern specialiser (*-fspec-constr* (page 140)) but for free variables rather than arguments.

**-fliberate-case-threshold=<n>****Default**

2000

Set the size threshold for the liberate-case transformation.

**-floopification****Default**off but enabled by *-O* (page 127).

When this optimisation is enabled the code generator will turn all self-recursive saturated tail calls into local jumps rather than function calls.

**-fllvm-pass-vectors-in-regs****Default**

on

This flag has no effect since GHC 8.8 - its behavior is always on. It used to instruct GHC to use the platform's native vector registers to pass vector arguments during function calls.

**-fmax-inline-alloc-size=<n>****Default**

128

Set the maximum size of inline array allocations to *n* bytes. GHC will allocate non-pinned arrays of statically known size in the current nursery block if they're no bigger than *n* bytes, ignoring GC overhead. This value should be quite a bit smaller than the block size (typically: 4096).

**-fmax-inline-memcpy-insns=<n>****Default**

32

Inline memcpy calls if they would generate no more than *<n>* pseudo-instructions.

**-fmax-inline-memset-insns**=(n)

**Default**

32

Inline `memset` calls if they would generate no more than `n` pseudo instructions.

**-fmax-relevant-binds**=(n)

**Default**

6

The type checker sometimes displays a fragment of the type environment in error messages, but only up to some maximum number, set by this flag. Turning it off with `-fno-max-relevant-binds` gives an unlimited number. Syntactically top-level bindings are also usually excluded (since they may be numerous), but `-fno-max-relevant-binds` includes them too.

**-fmax-uncovered-patterns**=(n)

**Default**

4

Maximum number of unmatched patterns to be shown in warnings generated by `-Wincomplete-patterns` (page 107) and `-Wincomplete-uni-patterns` (page 107).

**-fmax-simplifier-iterations**=(n)

**Default**

4

Sets the maximal number of iterations for the simplifier.

**-flocal-float-out**

**Default**

on

Enable local floating of bindings from the RHS of a `let(rec)` in the simplifier. For example

```
let x = let y = rhs_y in rhs_x in blah
==>
let y = rhs_y in let x = rhs_x in blah
```

See the paper “Let-floating: moving bindings to give faster programs”, Partain, Santos, and Peyton Jones; ICFP 1996. <https://www.microsoft.com/en-us/research/publication/let-floating-moving-bindings-to-give-faster-programs/>

---

**Note:** This is distinct from the global floating pass which can be disabled with `-fno-full-laziness` (page ??).

---

**-flocal-float-out-top-level**

**Default**

on

Enable local floating of top-level bindings from the RHS of a `let(rec)` in the simplifier. For example

`x = let y = e in (a,b) ==> y = e; x = (a,b)`

See the paper “Let-floating: moving bindings to give faster programs”, Partain, Santos, and Peyton Jones; ICFP 1996. <https://www.microsoft.com/en-us/research/publication/let-floating-moving-bindings-to-give-faster-programs/>

Note that if `-fno-local-float-out` (page ??) is set, that will take precedence.

---

**Note:** This is distinct from the global floating pass which can be disabled with `-fno-full-laziness` (page ??).

---

**-fmax-worker-args=(n)**

**Default**

10

A function will not be split into worker and wrapper if the number of value arguments of the resulting worker exceeds both that of the original function and this setting.

**-fmax-forced-spec-args=(n)**

**Default**

512

When using SPEC from `GHC.Types` to force `SpecConstr` to fire on a function sometimes this can result in functions taking a ridiculously large number of arguments resulting a very large compile time hits for minor performance benefits.

Since this is usually unintended we prevent `SpecConstr` from firing and generate a warning if the number of arguments in the resulting function would exceed the value given by `-fmax-forced-spec-args`.

**-fno-opt-coercion**

**Default**

coercion optimisation enabled.

Turn off the coercion optimiser.

**-fno-pre-inlining**

**Default**

pre-inlining enabled

Turn off pre-inlining.

**-fno-state-hack**

**Default**

state hack is enabled

Turn off the “state hack” whereby any lambda with a `State#` token as argument is considered to be single-entry, hence it is considered okay to inline things inside it. This can improve performance of IO and ST monad code, but it runs the risk of reducing sharing.

**-fomit-interface-pragmas**

**Default**

Implied by `-O0` (page ??), otherwise off.

Tells GHC to omit all inessential information from the interface file generated for the module being compiled (say `M`). This means that a module importing `M` will see only the *types* of the functions that `M` exports, but not their unfoldings, strictness info, etc.

Hence, for example, no function exported by *M* will be inlined into an importing module. The benefit is that modules that import *M* will need to be recompiled less often (only when *M*'s exports change their type, not when they change their implementation).

#### **-fomit-yields**

##### **Default**

on (yields are *not* inserted)

Tells GHC to omit heap checks when no allocation is being performed. While this improves binary sizes by about 5%, it also means that threads run in tight non-allocating loops will not get preempted in a timely fashion. If it is important to always be able to interrupt such threads, you should turn this optimization off. Consider also recompiling all libraries with this optimization turned off, if you need to guarantee interruptibility.

#### **-fpedantic-bottoms**

##### **Default**

off

Make GHC be more precise about its treatment of bottom (but see also *-fno-state-hack* (page 138)). In particular, stop GHC eta-expanding through a case expression, which is good for performance, but bad if you are using *seq* on partial applications.

#### **-fregs-graph**

##### **Default**

off due to a performance regression bug ([#7679](#))

*Only applies in combination with the native code generator.* Use the graph colouring register allocator for register allocation in the native code generator. By default, GHC uses a simpler, faster linear register allocator. The downside being that the linear register allocator usually generates worse code.

#### **-fregs-iterative**

##### **Default**

off

*Only applies in combination with the native code generator.* Use the iterative coalescing graph colouring register allocator for register allocation in the native code generator. This is the same register allocator as the *-fregs-graph* (page 139) one but also enables iterative coalescing during register allocation.

#### **-fsimplifier-phases=(n)**

##### **Default**

2

Set the number of phases for the simplifier. Ignored with *-O0*.

#### **-fsimpl-tick-factor=(n)**

##### **Default**

100

GHC's optimiser can diverge if you write rewrite rules (*Rewrite rules* (page 645)) that don't terminate, or (less satisfactorily) if you code up recursion through data types (*Bugs in GHC* (page 803)). To avoid making the compiler fall into an infinite loop, the optimiser carries a "tick count" and stops inlining and applying rewrite rules when this count is exceeded. The limit is set as a multiple of the program size, so bigger programs get more

ticks. The `-fsimpl-tick-factor` flag lets you change the multiplier. The default is 100; numbers larger than 100 give more ticks, and numbers smaller than 100 give fewer.

If the tick-count expires, GHC summarises what simplifier steps it has done; you can use `-fddump-simpl-stats` to generate a much more detailed list. Usually that identifies the loop quite accurately, because some numbers are very large.

**-fdmd-unbox-width=(n)**

#### Default

3

Boxity analysis optimistically pretends that a function returning a record with at most `-fdmd-unbox-width` fields has only call sites that don't need the box of the returned record. That may in turn allow more argument unboxing to happen. Set to 0 to be completely conservative (which guarantees that no reboxing will happen due to this mechanism).

**-fspec-constr**

#### Default

off but enabled by `-O2` (page 127).

Turn on call-pattern specialisation; see [Call-pattern specialisation for Haskell programs](#).

This optimisation specializes recursive functions according to their argument “shapes”. This is best explained by example so consider:

```
last :: [a] -> a
last [] = error "last"
last (x : []) = x
last (x : xs) = last xs
```

In this code, once we pass the initial check for an empty list we know that in the recursive case this pattern match is redundant. As such `-fspec-constr` will transform the above code to:

```
last :: [a] -> a
last []      = error "last"
last (x : xs) = last' x xs
  where
    last' x []      = x
    last' x (y : ys) = last' y ys
```

As well avoid unnecessary pattern matching it also helps avoid unnecessary allocation. This applies when an argument is strict in the recursive call to itself but not on the initial entry. A strict recursive branch of the function is created similar to the above example.

It is also possible for library writers to instruct GHC to perform call-pattern specialisation extremely aggressively. This is necessary for some highly optimized libraries, where we may want to specialize regardless of the number of specialisations, or the size of the code. As an example, consider a simplified use-case from the vector library:

```
import GHC.Types (SPEC(..))

foldl :: (a -> b -> a) -> a -> Stream b -> a
{-# INLINE foldl #-}
foldl f z (Stream step s _) = foldl_loop SPEC z s
```

(continues on next page)

(continued from previous page)

```

where
  foldl_loop !sPEC z s = case step s of
    Yield x s' -> foldl_loop sPEC (f z x) s'
    Skip      -> foldl_loop sPEC z s'
    Done      -> z

```

Here, after GHC inlines the body of `foldl` to a call site, it will perform call-pattern specialisation very aggressively on `foldl_loop` due to the use of `SPEC` in the argument of the loop body. `SPEC` from `GHC.Types` is specifically recognised by the compiler.

(NB: it is extremely important you use `seq` or a bang pattern on the `SPEC` argument!)

In particular, after inlining this will expose `f` to the loop body directly, allowing heavy specialisation over the recursive cases.

### **-fspec-constr-keen**

#### **Default**

off

If this flag is on, call-pattern specialisation will specialise a call `(f (Just x))` with an explicit constructor argument, even if the argument is not scrutinised in the body of the function. This is sometimes beneficial; e.g. the argument might be given to some other function that can itself be specialised.

### **-fspec-constr-count=(n)**

#### **Default**

3

Set the maximum number of specialisations that will be created for any one function by the `SpecConstr` transformation.

### **-fspec-constr-threshold=(n)**

#### **Default**

2000

Set the size threshold for the `SpecConstr` transformation.

### **-fspecialise**

#### **Default**

off but enabled by `-O` (page 127).

Specialise each type-class-overloaded function defined in this module for the types at which it is called in this module. If `-fcross-module-specialise` (page 141) is set imported functions that have an `INLINABLE` pragma (*INLINABLE pragma* (page 669)) will be specialised as well.

### **-fspecialise-aggressively**

#### **Default**

off

By default only type class methods and methods marked `INLINABLE` or `INLINE` are specialised. This flag will specialise any overloaded function regardless of size if its unfolding is available. This flag is not included in any optimisation level as it can massively increase code size. It can be used in conjunction with `-fexpose-all-unfoldings` (page 134) if you want to ensure all calls are specialised.

**-fcross-module-specialise****Default**

off but enabled by `-O` (page 127).

Specialise INLINABLE (*INLINABLE pragma* (page 669)) type-class-overloaded functions imported from other modules for the types at which they are called in this module. Note that specialisation must be enabled (by `-fspecialise`) for this to have any effect.

**-fpolynomial-specialisation****Default**

off

Warning, this feature is highly experimental and may lead to incorrect runtime results. Use at your own risk (#23469, #23109, #21229, #23445).

Enable specialisation of function calls to known dictionaries with free type variables. The created specialisation will abstract over the type variables free in the dictionary.

**-flate-specialise****Default**

off

Runs another specialisation pass towards the end of the optimisation pipeline. This can catch specialisation opportunities which arose from the previous specialisation pass or other inlining.

You might want to use this if you are you have a type class method which returns a constrained type. For example, a type class where one of the methods implements a traversal.

**-fspecialise-incoherents****Default**

on

Enable specialisation of overloaded functions in cases when the selected instance is incoherent. This makes the choice of instance non-deterministic, so it is only safe to do if there is no observable runtime behaviour difference between potentially unifying instances. Turning this flag off ensures the incoherent instance selection adheres to the algorithm described in *IncoherentInstances* (page 538) at the cost of optimisation opportunities arising from specialisation.

**-finline-generics****Default**

off but enabled by `-O` (page 127).

**Since**

9.2.1

Annotate methods of derived Generic and Generic1 instances with `INLINE[1]` pragmas based on heuristics dependent on the size of the data type in question. Improves performance of generics-based algorithms as GHC is able to optimize away intermediate representation more often.

**-finline-generics-aggressively****Default**

off



**Since**

9.2.1

Annotate methods of all derived `Generic` and `Generic1` instances with `INLINE[1]` pragmas.

This flag should only be used in modules deriving `Generic` instances that weren't considered appropriate for `INLINE[1]` annotations by heuristics of *-finline-generics* (page 142), yet you know that doing so would be beneficial.

When enabled globally it will most likely lead to worse compile times and code size blowup without runtime performance gains.

**-fsolve-constant-dicts****Default**off but enabled by *-O* (page 127).

When solving constraints, try to eagerly solve super classes using available dictionaries.

For example:

```
class M a b where m :: a -> b

type C a b = (Num a, M a b)

f :: C Int b => b -> Int -> Int
f _ x = x + 1
```

The body of *f* requires a *Num Int* instance. We could solve this constraint from the context because we have *C Int b* and that provides us a solution for *Num Int*. However, we can often produce much better code by directly solving for an available *Num Int* dictionary we might have at hand. This removes potentially many layers of indirection and crucially allows other optimisations to fire as the dictionary will be statically known and selector functions can be inlined.

The optimisation also works for GADTs which bind dictionaries. If we statically know which class dictionary we need then we will solve it directly rather than indirectly using the one passed in at run time.

**-fstatic-argument-transformation****Default**

off

Turn on the static argument transformation, which turns a recursive function into a non-recursive one with a local recursive loop. See Chapter 7 of [Andre Santos's PhD thesis](#).

**-fstg-lift-lams****Default**off but enabled by *-O2* (page 127).

Enables the late lambda lifting optimisation on the STG intermediate language. This selectively lifts local functions to top-level by converting free variables into function parameters.

**-fstg-lift-lams-known****Default**

off

Allow turning known into unknown calls while performing late lambda lifting. This is deemed non-beneficial, so it's off by default.

#### **-fstg-lift-lams-non-rec-args**

##### **Default**

5

Create top-level non-recursive functions with at most `<n>` parameters while performing late lambda lifting. The default is 5, the number of available parameter registers on x86\_64.

#### **-fstg-lift-lams-rec-args**

##### **Default**

5

Create top-level recursive functions with at most `<n>` parameters while performing late lambda lifting. The default is 5, the number of available parameter registers on x86\_64.

#### **-fststrictness**

##### **Default**

off but enabled by `-O` (page 127).

Turn on demand analysis.

A *Demand* describes an evaluation context of an expression. *Demand analysis* tries to find out what demands a function puts on its arguments when called: If an argument is scrutinised on every code path, the function is strict in that argument and GHC is free to use the more efficient call-by-value calling convention, as well as pass parameters unboxed.

Apart from *strictness analysis*, demand analysis also performs *usage analysis*: Where *strict* translates to “evaluated at least once”, usage analysis asks whether arguments and bindings are “evaluated at most once” or not at all (“evaluated at most zero times”), e.g. *absent*. For the former, GHC may use call-by-name instead of call-by-need, effectively turning thunks into non-memoised functions. For the latter, no code needs to be generated at all: An absent argument can simply be replaced by a dummy value at the call site or omitted altogether.

The worker/wrapper transformation (`-fworker-wrapper` (page 149)) is responsible for exploiting unboxing opportunities and replacing absent arguments by dummies. For arguments that can't be unboxed, opportunities for call-by-value and call-by-name are exploited in CorePrep when translating to STG.

It's not only interesting to look at how often a binding is *evaluated*, but also how often a function is *called*. If a function is called at most once, we may freely eta-expand it, even if doing so destroys shared work if the function was called multiple times. This information translates into `OneShotInfo` annotations that the Simplifier acts on.

#### **Notation**

So demand analysis is about conservatively inferring lower and upper bounds about how many times something is evaluated/called. We call the “how many times” part a *cardinality*. In the compiler and debug output we differentiate the following cardinality intervals as approximations to cardinality:

Interval	Set of denoted cardinalities	Syntax	Explanation tying syntax to semantics
[1,0]	{}	B	Bottom element
[0,0]	{0}	A	Absent
[0,1]	{0,1}	M	Used at most once ("Maybe")
[0,ω]	{0,1,ω}	L	Lazy. Top element, no information, used at least 0, at most many times
[1,1]	{1}	1	Strict, used exactly once
[1,ω]	{1,ω}	S	Strict, used possibly many times

Note that it's never interesting to differentiate between a cardinality of 2 and 3, or even 4232123. We just approximate the  $>1$  case with  $\omega$ , standing for "many times".

Apart from the cardinality describing *how often* an argument is evaluated, a demand also carries a *sub-demand*, describing *how deep* something is evaluated beyond a simple seq-like evaluation.

This is the full syntax for cardinalities, demands and sub-demands in BNF:

<code>card ::= B   A   M   L   1   S</code>	semantics as in the table above
<code>d ::= card sd</code> <code>       card</code>	card = how often, sd = how deep abbreviation: Same as "card card"
<code>sd ::= card</code> <code>    → level</code> <code>       P(d,d,...)</code> <code>       C(card,sd)</code>	polymorphic sub-demand, card at every <span style="color:red">└</span> product sub-demand call sub-demand

For example, `fst` is strict in its argument, and also in the first component of the argument. It will not evaluate the argument's second component. That is expressed by the demand `1P(1L,A)`. The `P` is for "product sub-demand", which has a *demand* for each product field. The notation `1L` just says "evaluated strictly (1), with everything nested inside evaluated according to `L`" - e.g., no information, because that would depend on the evaluation context of the call site of `fst`. The role of `L` in `1L` is that of a *polymorphic* sub-demand, being semantically equivalent to the sub-demand `P(LP(. .))`, which we simply abbreviate by the (consequently overloaded) cardinality notation `L`.

For another example, the expression `x + 1` evaluates `x` according to demand `1P(L)`. We have seen single letters stand for cardinalities and polymorphic sub-demands, but what does the single letter `L` mean for a *demand*? Such a single letter demand simply expands to a cardinality and a polymorphic sub-demand of the same letter: E.g. `L` is equivalent to `LL` by expansion of the single letter demand, which is equivalent to `LP(LP(. .))`, so `L`s all the way down. It is always clear from context whether we talk about about a cardinality, sub-demand or demand.


### Demand signatures

We summarise a function's demand properties in its *demand signature*. This is the general syntax:

```
{x->dx,y->dy,z->dz...}<d1><d2><d3>...<dn>div
      ^           ^   ^   ^           ^   ^
      |           |   |   |           |   |
```

(continues on next page)

(continued from previous page)

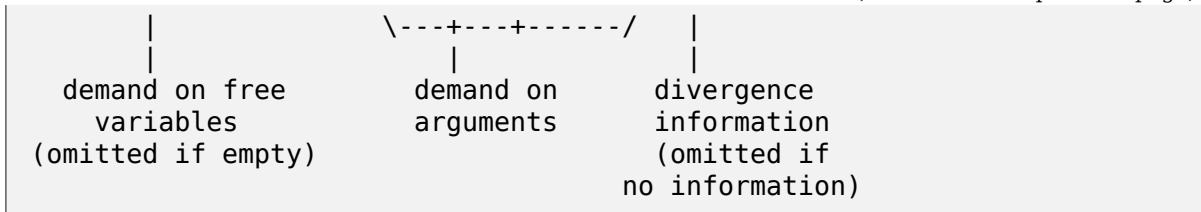

We summarise `fst`'s demand properties in its *demand signature*  $\langle 1P(1L, A) \rangle$ , which just says "If `fst` is applied to one argument, that argument is evaluated according to  $1P(1L, A)$ ". For another example, the demand signature of `seq` would be  $\langle 1A \rangle \langle 1L \rangle$  and that of `+` would be  $\langle 1P(L) \rangle \langle 1P(L) \rangle$ .

If not omitted, the divergence information can be `b` (surely diverges) or `x` (surely diverges or throws a precise exception). For example, `error` has demand signature  $\langle S \rangle b$  and `throwIO` (which is the only way to throw precise exceptions) has demand signature  $\langle \_ \rangle \langle L \rangle \langle L \rangle x$  (leaving out the complicated demand on the Exception dictionary).

### Call sub-demands

Consider maybe:

```
maybe :: b -> (a -> b) -> Maybe a -> b
maybe n _ Nothing = n
maybe _ s (Just a) = s a
```

We give it demand signature  $\langle L \rangle \langle MC(M, L) \rangle \langle 1L \rangle$ . The  $C(M, L)$  is a *call sub-demand* that says "Called at most once, where the result is used according to  $L$ ". The expression `f `seq` f 1` puts `f` under demand  $SC(1, L)$  and serves as an example where the upper bound on evaluation cardinality doesn't coincide with that of the call cardinality.

Cardinality is always relative to the enclosing call cardinality, so `g 1 2 + g 3 4` puts `g` under demand  $SC(S, C(1, L))$ , which says "called multiple times ( $S$ ), but every time it is called with one argument, it is applied exactly once to another argument ( $1$ )".

### **-fststrictness-before**=(*n*)

Run an additional demand analysis before simplifier phase (*n*).

### **-funbox-small-strict-fields**

#### Default

off but enabled by `-O` (page 127).

This option causes all constructor fields which are marked strict (i.e. `!`) and which representation is smaller or equal to the size of a pointer to be unpacked, if possible. It is equivalent to adding an `UNPACK pragma` (see [UNPACK pragma](#) (page 675)) to every strict constructor field that fulfils the size restriction.

For example, the constructor fields in the following data types

```
data A = A !Int
data B = B !A
newtype C = C B
data D = D !C
```

would all be represented by a single `Int#` (see [Unboxed types and primitive operations](#) (page 609)) value with `-funbox-small-strict-fields` enabled.

This option is less of a sledgehammer than `-funbox-strict-fields`: it should rarely make things worse. If you use `-funbox-small-strict-fields` to turn on unboxing by default you can disable it for certain constructor fields using the `NOUNPACK` pragma (see [NOUNPACK pragma](#) (page 676)).

Note that for consistency constructor fields are unpacked on 32-bit platforms as if it we were compiling for a 64-bit target even if fields are larger than a pointer on those platforms.

#### **-funbox-strict-fields**

##### **Default**

off

This option causes all constructor fields which are marked strict (i.e. `!`) to be unpacked if possible. It is equivalent to adding an `UNPACK` pragma to every strict constructor field (see [UNPACK pragma](#) (page 675)).

This option is a bit of a sledgehammer: it might sometimes make things worse. Selectively unboxing fields by using `UNPACK` pragmas might be better. An alternative is to use `-funbox-strict-fields` to turn on unboxing by default but disable it for certain constructor fields using the `NOUNPACK` pragma (see [NOUNPACK pragma](#) (page 676)).

Alternatively you can use `-funbox-small-strict-fields` (page 146) to only unbox strict fields which are “small”.

#### **-funfolding-creation-threshold={n}**

##### **Default**

750

Governs the maximum size that GHC will allow a function unfolding to be. (An unfolding has a “size” that reflects the cost in terms of “code bloat” of expanding (aka inlining) that unfolding at a call site. A bigger function would be assigned a bigger cost.)

Consequences:

- nothing larger than this will be inlined (unless it has an `INLINE` pragma)
- nothing larger than this will be spewed into an interface file.

Increasing this figure is more likely to result in longer compile times than faster code. The `-funfolding-use-threshold={n}` (page 147) is more useful.

#### **-funfolding-dict-discount={n}**

##### **Default**

30

How eager should the compiler be to inline dictionaries?

#### **-funfolding-fun-discount={n}**

##### **Default**

60

How eager should the compiler be to inline functions?

#### **-funfolding-keenness-factor={n}**

This factor was deprecated in GHC 9.0.1. See [#15304](#) for details. Users who need to control inlining should rather consider `-funfolding-use-threshold={n}` (page 147).

**-funfolding-use-threshold=<n>**

**Default**

80

This is the magic cut-off figure for unfolding (aka inlining): below this size, a function definition will be unfolded at the call-site, any bigger and it won't. The size computed for a function depends on two things: the actual size of the expression minus any discounts that apply depending on the context into which the expression is to be inlined.

The difference between this and `-funfolding-creation-threshold=<n>` (page 147) is that this one determines if a function definition will be inlined *at a call site*. The other option determines if a function definition will be kept around at all for potential inlining.

**-funfolding-case-threshold=<n>**

**Default**

2

GHC is in general quite eager to inline small functions. However sometimes these functions will be expanded by more inlining after inlining. Since they are now applied to “interesting” arguments. Even worse, their expanded form might reference again a small function, which will be inlined and expanded afterwards. This can repeat often and lead to explosive growth of programs.

As it happened in #18730.

Starting with GHC 9.0 we will be less eager to inline deep into nested cases. We achieve this by applying a inlining penalty that increases as the nesting gets deeper. However sometimes a specific (maybe quite high!) threshold of nesting is to be expected.

In such cases this flag can be used to ignore the first <n> levels of nesting when computing the penalty.

This flag in combination with `-funfolding-case-scaling=<n>` (page 148) can be used to break inlining loops without disabling inlining completely. For this purpose a smaller value is more likely to break such loops although often adjusting the scaling is enough and preferably.

**-funfolding-case-scaling=<n>**

**Default**

30

GHC is in general quite eager to inline small functions. However sometimes these functions will be expanded by more inlining after inlining. Since they are now applied to “interesting” arguments. Even worse, their expanded form might reference again a small function, which will be inlined and expanded afterwards. This can repeat often and lead to explosive growth of programs.

As it happened in #18730.

Starting with GHC 9.0 we will be less eager to inline deep into nested cases. We achieve this by applying a inlining penalty that increases as the nesting gets deeper. However sometimes we are ok with inlining a lot in the name of performance.

In such cases this flag can be used to tune how hard we penalize inlining into deeply nested cases beyond the threshold set by `-funfolding-case-threshold=<n>` (page 148). Cases are only counted against the nesting level if they have more than one alternative.

We use 1/n to scale the penalty. That is a higher value gives a lower penalty.

This can be used to break inlining loops. For this purpose a lower value is recommended. Values in the range  $10 \leq n \leq 20$  allow some inlining to take place while still allowing GHC to compile modules containing such inlining loops.

#### **-fworker-wrapper**

##### **Default**

off but enabled by `-O` (page 127).

Enable the worker/wrapper transformation after a demand analysis pass.

Exploits strictness and absence information by unboxing strict arguments and replacing absent fields by dummy values in a wrapper function that will inline in all relevant scenarios and thus expose a specialised, unboxed calling convention of the worker function.

Implied by `-O` (page 127), and by `-fstrictness` (page 144). Disabled by `-fno-strictness` (page ??). Enabling `-fworker-wrapper` (page 149) while demand analysis is disabled (by `-fno-strictness` (page ??)) has no effect.

#### **-fworker-wrapper-cbv**

Disabling this flag prevents a W/W split if the only benefit would be call-by-value for some arguments.

Otherwise this exploits strictness information by passing strict value arguments call-by-value to the functions worker. Even for functions who would otherwise not get a worker.

This avoids (potentially repeated) checks for evaluatedness of arguments in the rhs of the worker by pushing this check to the call site. If the argument is statically visible to be a value at the call site the overhead for the check disappears completely.

This can cause slight codesize increases. It will also cause many more functions to get a worker/wrapper split which can play badly with rules (see #20364) which is why it's currently disabled by default. In particular if you depend on rules firing on functions marked as NOINLINE without marking use sites of these functions as INLINE or INLINEABLE then things will break unless this flag is disabled.

While WorkerWrapper is disabled this has no effect.

#### **-fbinary-blob-threshold={n}**

##### **Default**

500000

The native code-generator can either dump binary blobs (e.g. string literals) into the assembly file (by using `".asciz"` or `".string"` assembler directives) or it can dump them as binary data into a temporary file which is then included by the assembler (using the `".incbin"` assembler directive).

This flag sets the size (in bytes) threshold above which the second approach is used. You can disable the second approach entirely by setting the threshold to 0.

## 5.4 Using Concurrent Haskell

GHC supports Concurrent Haskell by default, without requiring a special option or libraries compiled in a certain way. To get access to the support libraries for Concurrent Haskell, just import `Control.Concurrent`. More information on Concurrent Haskell is provided in the documentation for that module.

Optionally, the program may be linked with the `-threaded` (page ??) option (see *Options affecting linking* (page 288)). This provides two benefits:

- It enables the `-N <x>` (page 151) to be used, which allows threads to run in parallel on a multi-processor or multi-core machine. See *Using SMP parallelism* (page 150).
- If a thread makes a foreign call (and the call is not marked `unsafe`), then other Haskell threads in the program will continue to run while the foreign call is in progress. Additionally, foreign exported Haskell functions may be called from multiple OS threads simultaneously. See *Multi-threading and the FFI* (page 629).

The following RTS option(s) affect the behaviour of Concurrent Haskell programs:

**-C** (s)

### Default

20 milliseconds

Sets the context switch interval to (s) seconds. A context switch will occur at the next heap block allocation after the timer expires (a heap block allocation occurs every 4k of allocation). With `-C0` or `-C`, context switches will occur as often as possible (at every heap block allocation).

## 5.5 Using SMP parallelism

GHC supports running Haskell programs in parallel on an SMP (symmetric multiprocessor).

There's a fine distinction between *concurrency* and *parallelism*: parallelism is all about making your program run *faster* by making use of multiple processors simultaneously. Concurrency, on the other hand, is a means of abstraction: it is a convenient way to structure a program that must respond to multiple asynchronous events.

However, the two terms are certainly related. By making use of multiple CPUs it is possible to run concurrent threads in parallel, and this is exactly what GHC's SMP parallelism support does. But it is also possible to obtain performance improvements with parallelism on programs that do not use concurrency. This section describes how to use GHC to compile and run parallel programs, in *Parallel and Concurrent* (page 604) we describe the language features that affect parallelism.



### 5.5.1 Compile-time options for SMP parallelism

In order to make use of multiple CPUs, your program must be linked with the `-threaded` (page ??) option (see *Options affecting linking* (page 288)). Additionally, the following compiler options affect parallelism:

#### **-feager-blackholing**

Blackholing is the act of marking a thunk (lazy computation) as being under evaluation. It is useful for three reasons: firstly it lets us detect certain kinds of infinite loop (the `NonTermination` exception), secondly it avoids certain kinds of space leak, and thirdly it avoids repeating a computation in a parallel program, because we can tell when a computation is already in progress.

The option `-feager-blackholing` (page 133) causes each thunk to be blackholed as soon as evaluation begins. The default is “lazy blackholing”, whereby thunks are only marked as being under evaluation when a thread is paused for some reason. Lazy blackholing is typically more efficient (by 1-2% or so), because most thunks don’t need to be blackholed. However, eager blackholing can avoid more repeated computation in a parallel program, and this often turns out to be important for parallelism.

We recommend compiling any code that is intended to be run in parallel with the `-feager-blackholing` (page 133) flag.

### 5.5.2 RTS options for SMP parallelism

There are two ways to run a program on multiple processors: call `Control.Concurrent.setNumCapabilities` from your program, or use the RTS `-N <x>` (page 151) options.

**-N <x>**

**-N**

**-maxN <x>**

Use `<x>` simultaneous threads when running the program.

The runtime manages a set of virtual processors, which we call *capabilities*, the number of which is determined by the `-N` option. Each capability can run one Haskell thread at a time, so the number of capabilities is equal to the number of Haskell threads that can run physically in parallel. A capability is animated by one or more OS threads; the runtime manages a pool of OS threads for each capability, so that if a Haskell thread makes a foreign call (see *Multi-threading and the FFI* (page 629)) another OS thread can take over that capability.

Normally `<x>` should be chosen to match the number of CPU cores on the machine<sup>1</sup>. For example, on a dual-core machine we would probably use `+RTS -N2 -RTS`.

Omitting `<x>`, i.e. `+RTS -N -RTS`, lets the runtime choose the value of `<x>` itself based on how many processors are in your machine.

Omitting `-N<x>` entirely means `-N1`.

With `-maxN<x>`, i.e. `+RTS -maxN3 -RTS`, the runtime will choose at most `<x>`, also limited by the number of processors on the system. Omitting `<x>` is an error, if you need a default use option `-N`.

<sup>1</sup> Whether hyperthreading cores should be counted or not is an open question; please feel free to experiment and let us know what results you find.

Be careful when using all the processors in your machine: if some of your processors are in use by other programs, this can actually harm performance rather than improve it. Asking GHC to create more capabilities than you have physical threads is almost always a bad idea.

Setting `-N` also has the effect of enabling the parallel garbage collector (see [RTS options to control the garbage collector](#) (page 222)).

The current value of the `-N` option is available to the Haskell program via `Control.Concurrent.getNumCapabilities`, and it may be changed while the program is running by calling `Control.Concurrent.setNumCapabilities`.

---

**Note:** The maximum number of capabilities supported by the GHC runtime system is determined when at RTS startup to be either 256, the value given by `-N <x>` (page 151), or the number of logical CPU cores, whichever is greater.

---

The following options affect the way the runtime schedules threads on CPUs:

**-qa**

Use the OS's affinity facilities to try to pin OS threads to CPU cores.

When this option is enabled, the OS threads for a capability *i* are bound to the CPU core *i* using the API provided by the OS for setting thread affinity. e.g. on Linux GHC uses `sched_setaffinity()`.

Depending on your workload and the other activity on the machine, this may or may not result in a performance improvement. We recommend trying it out and measuring the difference.

**-qm**

Disable automatic migration for load balancing. Normally the runtime will automatically try to schedule threads across the available CPUs to make use of idle CPUs; this option disables that behaviour. Note that migration only applies to threads; sparks created by `par` are load-balanced separately by work-stealing.

This option is probably only of use for concurrent programs that explicitly schedule threads onto CPUs with `Control.Concurrent.forkOn`.

### 5.5.3 Hints for using SMP parallelism

Add the `-s [file]` (page 231) RTS option when running the program to see timing stats, which will help to tell you whether your program got faster by using more CPUs or not. If the user time is greater than the elapsed time, then the program used more than one CPU. You should also run the program without `-N <x>` (page 151) for comparison.

The output of `+RTS -s` tells you how many “sparks” were created and executed during the run of the program (see [RTS options to control the garbage collector](#) (page 222)), which will give you an idea how well your `par` annotations are working.

GHC's parallelism support has improved in 6.12.1 as a result of much experimentation and tuning in the runtime system. We'd still be interested to hear how well it works for you, and we're also interested in collecting parallel programs to add to our benchmarking suite.

## 5.6 Flag reference

This section is a quick-reference for GHC's command-line flags. For each flag, we also list its mode/dynamic status (see *Dynamic and Mode options* (page 77)), and the flag's opposite (if available).

### 5.6.1 Verbosity options

More details in *Verbosity options* (page 86)

Flag	Description	Type	Reverse
<code>-fabstrict-refinement-hole</code> (page 354)	<i>default: off.</i> Toggles whether refinements where one or more of the holes are abstract are reported.	dynamic	<code>-fno-abstract-refinement-hole</code> (page ??)
<code>-fdefer-diagnostics</code> (page 90)	Defer and group diagnostic messages by severity	dynamic	
<code>-fdiagnostics-as-json</code> (page 91)	Output diagnostics in Json format specified by JSON schema	dynamic	
<code>-fdiagnostics-color={always,never,auto}</code> (page 91)	Use colors in error messages	dynamic	
<code>-fdiagnostics-show-caret</code> (page 91)	Whether to show snippets of original source code	dynamic	<code>-fno-diagnostics-show-caret</code> (page ??)
<code>-ferror-spans</code> (page 92)	Output full span in error messages	dynamic	
<code>-fhide-source-paths</code> (page 87)	hide module source and object paths	dynamic	
<code>-fkeep-going</code> (page 92)	Continue compilation as far as possible on errors	dynamic	
<code>-fmax-refinement-hole-fits</code> (page 354)	<i>default: 6.</i> Set the maximum number of refinement hole fits for typed holes to display in type error messages.	dynamic	<code>-fno-max-refinement-hole-fits</code> (page ??)

continues on next page

Table 1 – continued from previous page

Flag	Description	Type	Reverse
<code>-fmax-relevant-binds={n}</code> (page 137)	<i>default: 6.</i> Set the maximum number of bindings to display in type error messages.	dynamic	<code>-fno-max-relevant-binds</code> (page ??)
<code>-fmax-valid-hole-fits={n}</code> (page 352)	<i>default: 6.</i> Set the maximum number of valid hole fits for typed holes to display in type error messages.	dynamic	<code>-fno-max-valid-hole-fits</code> (page ??)
<code>-fno-show-valid-hole-fits</code> (page 352)	Disables showing a list of valid hole fits for typed holes in type error messages.	dynamic	
<code>-fno-sort-valid-hole-fits</code> (page 355)	Disables the sorting of the list of valid hole fits for typed holes in type error messages.	dynamic	<code>-fsort-valid-hole-fits</code> (page ??)
<code>-fprint-axiom-incomps</code> (page 88)	Display equation incompatibilities in closed type families	dynamic	<code>-fno-print-axiom-incomps</code> (page ??)
<code>-fprint-equality-relations</code> (page 89)	Distinguish between equality relations when printing	dynamic	<code>-fno-print-equality-relations</code> (page ??)
<code>-fprint-error-index-links</code> (page 92)	Whether to emit diagnostic codes as ANSI hyperlinks to the Haskell Error Index.	dynamic	
<code>-fprint-expanded-synonyms</code> (page 89)	In type errors, also print type-synonym-expanded types.	dynamic	<code>-fno-print-expanded-synonyms</code> (page ??)
<code>-fprint-explicit-coercions</code> (page 88)	Print coercions in types	dynamic	<code>-fno-print-explicit-coercions</code> (page ??)
<code>-fprint-explicit-foralls</code> (page 87)	Print explicit forall quantification in types. See also <a href="#">ExplicitForAll</a> (page 560)	dynamic	<code>-fno-print-explicit-foralls</code> (page ??)
<code>-fprint-explicit-kinds</code> (page 88)	Print explicit kind foralls and kind arguments in types. See also <a href="#">KindSignatures</a> (page 564)	dynamic	<code>-fno-print-explicit-kinds</code> (page ??)

continues on next page

Table 1 – continued from previous page

Flag	Description	Type	Reverse
<code>-fprint-explicit-runtime</code> (page 432)	Print <code>RuntimeRep</code> and <code>Levity</code> variables in types which are runtime-representation polymorphic.	dynamic	<code>-fno-print-explicit-runtime-rep</code> (page ??)
<code>-fprint-potential-instances</code> (page 87)	display all available instances in type error messages	dynamic	<code>-fno-print-potential-instances</code> (page ??)
<code>-fprint-redundant-promotion</code> (page 89)	Print redundant <code>DataKinds</code> (page 404) promotion ticks	dynamic	<code>-fno-print-redundant-promotion</code> (page ??)
<code>-fprint-typechecker-elaborate</code> (page 90)	Print extra information from typechecker.	dynamic	<code>-fno-print-typechecker-elaborate</code> (page ??)
<code>-fprint-unicode-syntax</code> (page 87)	Use unicode syntax when printing expressions, types and kinds. See also <code>UnicodeSyntax</code> (page 320)	dynamic	<code>-fno-print-unicode-syntax</code> (page ??)
<code>-frefinement-level-hole-fits</code> (page 354)	<i>default: off.</i> Sets the level of refinement of the refinement hole fits, where level <code>n</code> means that hole fits of up to <code>n</code> holes will be considered.	dynamic	<code>-fno-refinement-level-hole-fits</code> (page ??)
<code>-freverse-errors</code> (page 92)	Output errors in reverse order	dynamic	<code>-fno-reverse-errors</code> (page ??)
<code>-fshow-docs-of-hole-fits</code> (page 352)	Toggles whether to show the documentation of the valid hole fits in the output.	dynamic	<code>-fno-show-docs-of-hole-fits</code> (page ??)
<code>-fshow-error-context</code> (page 91)	Whether to show textual information about error context	dynamic	<code>-fno-show-error-context</code> (page ??)
<code>-fshow-hole-constraints</code> (page 351)	Show constraints when reporting typed holes.	dynamic	
<code>-fshow-hole-matches-of-hole-fits</code> (page 355)	Toggles whether to show the type of the additional holes in refinement hole fits.	dynamic	<code>-fno-show-hole-matches-of-hole-fits</code> (page ??)

continues on next page

Table 1 – continued from previous page

Flag	Description	Type	Reverse
<i>-fshow-provenance-of-hole</i> (page 352)	Toggles whether to show the provenance of the valid hole fits in the output.	dynamic	<i>-fno-show-provenance-of-hole-fits</i> (page ??)
<i>-fshow-type-app-of-hole-fits</i> (page 352)	Toggles whether to show the type application of the valid hole fits in the output.	dynamic	<i>-fno-show-type-app-of-hole-fits</i> (page ??)
<i>-fshow-type-app-vars-of-hole-fits</i> (page 352)	Toggles whether to show what type each quantified variable takes in a valid hole fit.	dynamic	<i>-fno-show-type-app-vars-of-hole-fits</i> (page ??)
<i>-fshow-type-of-hole-fits</i> (page 352)	Toggles whether to show the type of the valid hole fits in the output.	dynamic	<i>-fno-show-type-of-hole-fits</i> (page ??)
<i>-fsort-by-size-hole-fits</i> (page 355)	Sort valid hole fits by size.	dynamic	<i>-fno-sort-by-size-hole-fits</i> (page ??)
<i>-fsort-by-subsumption-hole-fits</i> (page 355)	Sort valid hole fits by subsumption.	dynamic	<i>-fno-sort-by-subsumption-hole-fits</i> (page ??)
<i>-funclutter-valid-hole-fits</i> (page 353)	Unclutter the list of valid hole fits by not showing provenance nor type applications of suggestions.	dynamic	
<i>-Rghc-timing</i> (page 92)	Summarise timing stats for GHC (same as +RTS -tstderr).	dynamic	
<i>-v</i> (page 86)	verbose mode (equivalent to -v3)	dynamic	
<i>-v{n}</i> (page 86)	set verbosity level	dynamic	

## 5.6.2 Alternative modes of operation

More details in *Modes of operation* (page 78)

Flag	Description	Type	Reverse
<code>--frontend (module)</code> (page 79)	run GHC with the given frontend plugin; see <i>Frontend plugins</i> (page 703) for details.	mode	
<code>--help</code> (page 79), <code>-?</code> (page 79)	Display help	mode	
<code>--info</code> (page 79)	display information about the compiler	mode	
<code>--interactive</code> (page 78)	Interactive mode - normally used by just running <code>ghci</code> ; see <i>Using GHCi</i> (page 23) for details.	mode	
<code>--make</code> (page 78)	Build a multi-module Haskell program, automatically figuring out dependencies. Likely to be much easier, and faster, than using <code>make</code> ; see <i>Using ghc --make</i> (page 82) for details.	mode	
<code>--numeric-version</code> (page 79)	display GHC version (numeric only)	mode	
<code>--print-booter-version</code> (page 79)	display bootstrap compiler version	mode	
<code>--print-build-platform</code> (page 79)	display platform on which GHC was built	mode	
<code>--print-c-compiler-flags</code> (page 80)	C compiler flags used to build GHC	mode	
<code>--print-c-compiler-linker-flags</code> (page 80)	C linker flags used to build GHC	mode	
<code>--print-debug-on</code> (page 80)	print whether GHC was built with <code>-DDEBUG</code>	mode	
<code>--print-global-package-db</code> (page 80)	display GHC's global package database directory	mode	
<code>--print-have-interactive-support</code> (page 80)	display whether GHC was built with interactive support	mode	

continues on next page

Table 2 – continued from previous page

Flag	Description	Type	Reverse
<code>--print-have-native-code</code> (page 80)	display whether target platform has NCG support	mode	
<code>--print-host-platform</code> (page 80)	display host platform of GHC	mode	
<code>--print-ld-flags</code> (page 80)	display linker flags used to compile GHC	mode	
<code>--print-leading-underscores</code> (page 80)	display use of leading underscores on symbol names	mode	
<code>--print-libdir</code> (page 80)	display GHC library directory	mode	
<code>--print-object-splitting</code> (page 80)	display whether GHC supports object splitting	mode	
<code>--print-project-git-commit</code> (page 80)	display Git commit id GHC is built from	mode	
<code>--print-project-version</code> (page 81)	display GHC version	mode	
<code>--print-rts-ways</code> (page 81)	display which way RTS was built	mode	
<code>--print-stage</code> (page 81)	display stage number of GHC	mode	
<code>--print-support-smp</code> (page 81)	display whether GHC was compiled with SMP support	mode	
<code>--print-tables-next-to-ld</code> (page 81)	display whether GHC was compiled with <code>--enable-tables-next-to-ld</code>	mode	
<code>--print-target-platform</code> (page 81)	display target platform of GHC	mode	
<code>--print-unregisterised</code> (page 81)	display whether this GHC was built in unregisterised mode	mode	
<code>--run {file}</code> (page 78)	Run a Haskell program.	mode	
<code>--show-iface {file}</code> (page 79)	display the contents of an interface file.	mode	

continues on next page



Table 2 – continued from previous page

Flag	Description	Type	Reverse
<code>--show-options</code> (page 79)	display the supported command line options	mode	
<code>--supported-extensions</code> (page 79), <code>--supported-languages</code> (page 79)	display the supported language extensions	mode	
<code>--version</code> (page 79), <code>-V</code> (page 79)	display GHC version	mode	
<code>-e {expr}</code> (page 78)	Evaluate <code>expr</code> ; see <i>Expression evaluation mode</i> (page 85) for details.	mode	
<code>-M</code> (page 79)	generate dependency information suitable for use in a Makefile; see <i>Dependency generation</i> (page 256) for details.	mode	
<code>-shared</code> (page 79)	Create a shared object.	mode	

### 5.6.3 Which phases to run

More details in *Batch compiler mode* (page 85)

Flag	Description	Type	Reverse
<code>--merge-objs</code> (page 79)	Merge a set of objects into a GHCi library.	mode	
<code>-C</code> (page 78)	Stop after generating C (.hc file)	mode	
<code>-c</code> (page 79)	Stop after generating object (.o) file	mode	
<code>-E</code> (page 78)	Stop after preprocessing (.hspp file)	mode	
<code>-F</code> (page 285)	Enable the use of a <i>pre-processor</i> (page 285) (set with <code>-pgmF {cmd}</code> (page 280))	dynamic	
<code>-S</code> (page 79)	Stop after generating assembly (.s file)	mode	

continues on next page

Table 3 – continued from previous page

Flag	Description	Type	Reverse
<code>-x {suffix}</code> (page 86)	Override default behaviour for source files	dynamic	

### 5.6.4 Redirecting output

More details in *Redirecting the compilation output(s)* (page 242)

Flag	Description	Type	Reverse
<code>-dep-makefile {file}</code> (page 257)	Use {file} as the makefile	dynamic	
<code>-dep-suffix {suffix}</code> (page 257)	Make dependencies that declare that files with suffix <code>.(suf)(osuf)</code> depend on interface files with suffix <code>.(suf)hi</code>	dynamic	
<code>-dumpdir {dir}</code> (page 243)	redirect dump files	dynamic	
<code>-dynhisuf {suffix}</code> (page 244)	set the suffix to use for dynamic interface files	dynamic	
<code>-dyno {file}</code> (page 242)	set dynamic output filename	dynamic	
<code>-dynohi {file}</code> (page 243)	set the filename in which to put the dynamic interface	dynamic	
<code>-dynosuf {suffix}</code> (page 243)	set the dynamic output file suffix	dynamic	
<code>-hcsuf {suffix}</code> (page 244)	set the suffix to use for intermediate C files	dynamic	
<code>-hidir {dir}</code> (page 243)	set directory for interface files	dynamic	

continues on next page

Table 4 – continued from previous page

Flag	Description	Type	Reverse
<code>-hiedir {dir}</code> (page 243)	set directory for extended interface files	dynamic	
<code>-hiesuf {suffix}</code> (page 244)	set the suffix to use for extended interface files	dynamic	
<code>-hisuf {suffix}</code> (page 244)	set the suffix to use for interface files	dynamic	
<code>-o {file}</code> (page 242)	set output filename	dynamic	
<code>-odir {dir}</code> (page 242)	set directory for object files	dynamic	
<code>-ohi {file}</code> (page 243)	set the filename in which to put the interface	dynamic	
<code>-osuf {suffix}</code> (page 243)	set the output file suffix	dynamic	
<code>-outputdir {dir}</code> (page 243)	set output directory	dynamic	
<code>-stubdir {dir}</code> (page 243)	redirect FFI stub files	dynamic	

### 5.6.5 Keeping intermediate files

More details in *Keeping Intermediate Files* (page 244)

Flag	Description	Type	Reverse
<code>-keep-hc-file</code> (page 244), <code>-keep-hc-files</code> (page 244)	Retain intermediate .hc files.	dynamic	

continues on next page

Table 5 – continued from previous page

Flag	Description	Type	Reverse
<code>-keep-hi-files</code> (page 244)	Retain intermediate .hi files (the default).	dynamic	<code>-no-keep-hi-files</code> (page ??)
<code>-keep-hscpp-file</code> (page 244), <code>-keep-hscpp-files</code> (page 244)	Retain intermediate hscpp files.	dynamic	
<code>-keep-llvm-file</code> (page 244), <code>-keep-llvm-files</code> (page 244)	Retain intermediate LLVM .ll files. Implies <code>-fllvm</code> (page 286).	dynamic	
<code>-keep-o-files</code> (page 245)	Retain intermediate .o files (the default).	dynamic	<code>-no-keep-o-files</code> (page ??)
<code>-keep-s-file</code> (page 245), <code>-keep-s-files</code> (page 245)	Retain intermediate .s files.	dynamic	
<code>-keep-tmp-files</code> (page 245)	Retain all intermediate temporary files.	dynamic	

### 5.6.6 Temporary files

More details in *Redirecting temporary files* (page 245)

Flag	Description	Type	Reverse
<code>-tmpdir &lt;dir&gt;</code> (page 245)	set the directory for temporary files	dynamic	

### 5.6.7 Finding imports

More details in *The search path* (page 241)

Flag	Description	Type	Reverse
<code>-i</code> (page 241)	Empty the import directory list	dynamic	

continues on next page

Table 7 – continued from previous page

Flag	Description	Type	Reverse
<code>-i{dir}[:{dir}]*</code> (page 241)	add {dir}, {dir2}, etc. to import path	dynamic	

### 5.6.8 Interface file options

More details in *Other options related to interface files* (page 245)

Flag	Description	Type	Reverse
<code>--show-iface {file}</code> (page 79)	See <i>Modes of operation</i> (page 78).	mode	
<code>-ddump-hi</code> (page 245)	Dump the new interface to stdout	dynamic	
<code>-ddump-hi-diffs</code> (page 245)	Show the differences vs. the old interface	dynamic	
<code>-ddump-minimal-imports</code> (page 245)	Dump a minimal set of imports	dynamic	

### 5.6.9 Extended interface file options

More details in *Options related to extended interface files* (page 246)

Flag	Description	Type	Reverse
<code>-fvalidate-ide-info</code> (page 246)	Perform some sanity checks on the extended interface files	dynamic	
<code>-fwrite-ide-info</code> (page 246)	Write out extended interface files	dynamic	

### 5.6.10 Recompilation checking

More details in *The recompilation checker* (page 246)

Flag	Description	Type	Reverse
<i>-exclude-module={file}</i> (page 258)	Regard {file} as "stable"; i.e., exclude it from having dependencies on it.	dynamic	
<i>-fforce-recomp</i> (page 246)	Turn off recompilation checking. This is implied by any <i>-ddump-X</i> option when compiling a single file (i.e. when using <i>-c</i> (page 79)).	dynamic	<i>-fno-force-recomp</i> (page ??)
<i>-fignore-hpc-changes</i> (page 246)	Do not recompile modules just to match changes to HPC flags. This is especially useful for avoiding recompilation when using GHCi, and is enabled by default for GHCi.	dynamic	<i>-fno-ignore-hpc-changes</i> (page ??)
<i>-fignore-optim-changes</i> (page 246)	Do not recompile modules just to match changes to optimisation flags. This is especially useful for avoiding recompilation when using GHCi, and is enabled by default for GHCi.	dynamic	<i>-fno-ignore-optim-changes</i> (page ??)
<i>-include-cpp-deps</i> (page 258)	Include preprocessor dependencies	dynamic	
<i>-include-pkg-deps</i> (page 258)	Regard modules imported from packages as unstable	dynamic	

### 5.6.11 Interactive-mode options

More details in *The .ghci and .haskeline files* (page 68)

Flag	Description	Type	Reverse
<i>-fbreak-on-error</i> (page 49)	<i>Break on uncaught exceptions and errors</i> (page 49)	dynamic	<i>-fno-break-on-error</i> (page ??)

continues on next page

Table 11 – continued from previous page

Flag	Description	Type	Reverse
<code>-fbreak-on-exception</code> (page 49)	<i>Break on any exception thrown</i> (page 49)	dynamic	<code>-fno-break-on-exception</code> (page ??)
<code>-fbreak-points</code> (page 41)	<i>Insert breakpoints in the GHCi debugger</i> (page 40)	dynamic	<code>-fno-break-points</code> (page ??)
<code>-fghci-hist-size={n}</code> (page 48)	Set the number of entries GHCi keeps for <code>:history</code> . See <i>The GHCi Debugger</i> (page 40).	dynamic	
<code>-fghci-leak-check</code> (page 52)	(Debugging only) check for space leaks when loading new modules in GHCi.	dynamic	<code>-fno-ghci-leak-check</code> (page ??)
<code>-fimplicit-import-qualified</code> (page 35)	Put in scope qualified identifiers for every loaded module	dynamic	<code>-fno-implicit-import-qualified</code> (page ??)
<code>-flocal-ghci-history</code> (page 51)	Use current directory for the GHCi command history file <code>.ghci-history</code> .	dynamic	<code>-fno-local-ghci-history</code> (page ??)
<code>-fno-it</code> (page 37)	No longer set the special variable <code>it</code> .	dynamic	<code>-fno-no-it</code> (page ??)
<code>-fprint-bind-result</code> (page 29)	<i>Turn on printing of binding results in GHCi</i> (page 28)	dynamic	<code>-fno-print-bind-result</code> (page ??)
<code>-fprint-evld-with-show</code> (page 42)	Instruct <code>:print</code> (page 60) to use <code>Show</code> instances where possible.	dynamic	
<code>-fshow-loaded-modules</code> (page 24)	Show the names of modules that GHCi loaded after a <code>:load</code> (page 59) command.	dynamic	
<code>-ghci-script</code> (page 69)	Read additional <code>.ghci</code> files	dynamic	
<code>-ignore-dot-ghci</code> (page 68)	Disable reading of <code>.ghci</code> files	dynamic	<code>-no-ignore-dot-ghci</code> (page ??)

continues on next page

Table 11 – continued from previous page

Flag	Description	Type	Reverse
<code>-interactive-print &lt;name&gt;</code> (page 39)	Select the function to use for printing evaluated expressions in <i>GHCi</i> (page 39)	dynamic	

### 5.6.12 Packages

More details in *Packages* (page 259)

Flag	Description	Type	Reverse
<code>-clear-package-db</code> (page 265)	Clear the package db stack.	dynamic	
<code>-distrust &lt;pkg&gt;</code> (page 641)	Expose package <i>&lt;pkg&gt;</i> and set it to be distrusted. See <i>Safe Haskell</i> (page 633).	dynamic	
<code>-distrust-all-packages</code> (page 642)	Distrust all packages by default. See <i>Safe Haskell</i> (page 633).	dynamic	
<code>-fpackage-trust</code> (page 643)	Enable <i>Safe Haskell</i> (page 633) trusted package requirement for trustworthy modules.	dynamic	
<code>-global-package-db</code> (page 265)	Add the global package db to the stack.	dynamic	
<code>-hide-all-packages</code> (page 262)	Hide all packages by default	dynamic	
<code>-hide-package &lt;pkg&gt;</code> (page 262)	Hide package <i>&lt;pkg&gt;</i>	dynamic	
<code>-ignore-package &lt;pkg&gt;</code> (page 262)	Ignore package <i>&lt;pkg&gt;</i>	dynamic	
<code>-no-auto-link-packages</code> (page 262)	Don't automatically link in the base and rts packages.	dynamic	

continues on next page



Table 12 – continued from previous page

Flag	Description	Type	Reverse
<code>-no-global-package-db</code> (page 265)	Remove the global package db from the stack.	dynamic	
<code>-no-user-package-db</code> (page 265)	Remove the user's package db from the stack.	dynamic	
<code>-package &lt;pkg&gt;</code> (page 261)	Expose package <pkg>	dynamic	
<code>-package-db &lt;file&gt;</code> (page 265)	Add <file> to the package db stack.	dynamic	
<code>-package-env &lt;file&gt; &lt;name&gt;</code> (page 267)	Use the specified package environment.	dynamic	
<code>-package-id &lt;unit-id&gt;</code> (page 262)	Expose package by id <unit-id>	dynamic	
<code>-this-unit-id &lt;unit-id&gt;</code> (page 262)	Compile to be part of unit (i.e. package) <unit-id>	dynamic	
<code>-trust &lt;pkg&gt;</code> (page 641)	Expose package <pkg> and set it to be trusted. See <i>Safe Haskell</i> (page 633).	dynamic	
<code>-user-package-db</code> (page 265)	Add the user's package db to the stack.	dynamic	

### 5.6.13 Language options

Language options can be enabled either by a command-line option `-Xblah`, or by a `{-# LANGUAGE blah #-}` pragma in the file itself. See *Controlling editions and extensions* (page 313).

## 5.6.14 Warnings

More details in *Warnings and sanity-checking* (page 96)

Flag	Description	Type	Reverse
<i>-fenable-th-splice-warnings</i> (page 588)	Generate warnings for Template Haskell splices	dynamic	<i>-fno-enable-th-splice-warnings</i> (page ??)
<i>-fhelpful-errors</i> (page 100)	Make suggestions for misspelled names.	dynamic	<i>-fno-helpful-errors</i> (page ??)
<i>-fmax-pmcheck-models=N</i> (page 107)	soft limit on the number of parallel models the pattern match checker should check a pattern match clause against	dynamic	
<i>-fshow-warning-groups</i> (page 98)	show which group an emitted warning belongs to.	dynamic	<i>-fno-show-warning-groups</i> (page ??)
<i>-fvia-C</i> (page 278)	use the C code generator	dynamic	
<i>-W</i> (page 97)	enable normal warnings	dynamic	<i>-Wno-extra</i> (page ??)
<i>-w</i> (page 98)	disable all warnings	dynamic	
<i>-Wall</i> (page 97)	enable almost all warnings (details in <i>Warnings and sanity-checking</i> (page 96))	dynamic	<i>-Wno-all</i> (page ??)
<i>-Wall-missed-specialisations</i> (page 101)	warn when specialisation of any overloaded function fails.	dynamic	<i>-Wno-all-missed-specialisations</i> (page ??)
<i>-Wall-missed-specializations</i> (page 101)	alias for <i>-Wall-missed-specialisations</i> (page 101)	dynamic	<i>-Wno-all-missed-specializations</i> (page ??)
<i>-Wambiguous-fields</i> (page 122)	warn about ambiguous field selectors or updates	dynamic	

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-Wauto-orphans</a> (page 122)	( <i>deprecated</i> ) Does nothing	dynamic	
<a href="#">-Wbadly-staged-types</a> (page 126)	warn when type binding is used at the wrong TH stage.	dynamic	<a href="#">-Wno-badly-staged-types</a> (page ??)
<a href="#">-Wcompat</a> (page 97)	enable future compatibility warnings (details in <a href="#">Warnings and sanity-checking</a> (page 96))	dynamic	<a href="#">-Wno-compat</a> (page ??)
<a href="#">-Wcompat-unqualified-imports</a> (page 99)	Report unqualified imports of core libraries which are expected to cause compatibility problems in future releases.	dynamic	<a href="#">-Wno-compat-unqualified-imports</a> (page ??)
<a href="#">-Wcpp-undef</a> (page 120)	warn on uses of the <code>#if</code> directive on undefined identifiers	dynamic	
<a href="#">-Wdata-kinds-tc</a> (page 126)	warn when an illegal use of a type or kind without <a href="#">DataKinds</a> (page 404) is caught by the typechecker	dynamic	<a href="#">-Wno-data-kinds-tc</a> (page ??)
<a href="#">-Wdefault</a> (page 96)	enable default flags	dynamic	<a href="#">-Wno-default</a> (page ??)
<a href="#">-Wdefaulted-exception-context</a> (page 126)	warn when an <code>Control.Exception.Context.ExceptionContext</code> implicit parameter is defaulted to <code>Control.Exception.Context.empty</code>	dynamic	<a href="#">-Wnop-defaulted-exception-context</a> (page ??)
<a href="#">-Wdeferred-out-of-scope-variables</a> (page 100)	Report warnings when variable out-of-scope errors are <i>deferred until runtime</i> (page 464). See <a href="#">-fdefer-out-of-scope-variables</a> (page 465).	dynamic	<a href="#">-Wno-deferred-out-of-scope-variables</a> (page ??)
<a href="#">-Wdeferred-type-errors</a> (page 100)	Report warnings when <i>deferred type errors</i> (page 464) are enabled. This option is enabled by default. See <a href="#">-fdefer-type-errors</a> (page 464).	dynamic	<a href="#">-Wno-deferred-type-errors</a> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<i>-Wdeprecated-flags</i> (page 103)	warn about uses of commandline flags that are deprecated	dynamic	<i>-Wno-deprecated-flags</i> (page ??)
<i>-Wdeprecated-type-abstractions</i> (page 125)	warn when type abstractions in constructor patterns are used without enabling <i>TypeApplications</i> (page 435)	dynamic	<i>-Wno-deprecated-type-abstractions</i> (page ??)
<i>-Wdeprecations</i> (page 102)	warn about uses of functions & types that have DEPRECATED pragmas, or WARNING pragmas with the deprecated category.	dynamic	<i>-Wno-deprecations</i> (page ??)
<i>-Wderiving-defaults</i> (page 104)	warn about default deriving when using both <i>DeriveAnyClass</i> (page 504) and <i>GeneralizedNewtypeDeriving</i> (page 499)	dynamic	<i>-Wno-deriving-defaults</i> (page ??)
<i>-Wderiving-typeable</i> (page 122)	warn when Typeable is derived	dynamic	<i>-Wno-deriving-typeable</i> (page ??)
<i>-Wdodgy-exports</i> (page 104)	warn about dodgy exports	dynamic	<i>-Wno-dodgy-exports</i> (page ??)
<i>-Wdodgy-foreign-imports</i> (page 103)	warn about dodgy foreign imports	dynamic	<i>-Wno-dodgy-foreign-imports</i> (page ??)
<i>-Wdodgy-imports</i> (page 104)	warn about dodgy imports	dynamic	<i>-Wno-dodgy-imports</i> (page ??)
<i>-Wduplicate-constraints</i> (page 104)	warn when a constraint appears duplicated in a type signature	dynamic	<i>-Wno-duplicate-constraints</i> (page ??)
<i>-Wduplicate-exports</i> (page 105)	warn when an entity is exported multiple times	dynamic	<i>-Wno-duplicate-exports</i> (page ??)
<i>-Wempty-enumerations</i> (page 104)	warn about enumerations that are empty	dynamic	<i>-Wno-empty-enumerations</i> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<code>-Werror</code> (page ??)	make warnings fatal	dynamic	<code>-Wwarn</code> (page 98)
<code>-Weverything</code> (page 97)	enable all warnings supported by GHC	dynamic	<code>-w</code> (page 98)
<code>-Wextended-warnings</code> (page 101)	warn about uses of functions & types that have WARNING or DEPRECATED pragmas, across all categories	dynamic	<code>-Wno-extended-warnings</code> (page ??)
<code>-Wextra</code> (page 97)	alias for <code>-W</code> (page 97)	dynamic	<code>-Wno-extra</code> (page ??)
<code>-Wforall-identifier</code> (page 122)	( <i>deprecated</i> ) Does nothing	dynamic	
<code>-Wgadt-mono-local-binds</code> (page 123)	warn when pattern matching on a GADT without MonoLocalBinds	dynamic	<code>-Wno-gadt-mono-local-binds</code> (page ??)
<code>-Whi-shadowing</code> (page 105)	( <i>deprecated</i> ) warn when a .hi file in the current directory shadows a library	dynamic	<code>-Wno-hi-shadowing</code> (page ??)
<code>-Widentities</code> (page 106)	warn about uses of Prelude numeric conversions that are probably the identity (and hence could be omitted)	dynamic	<code>-Wno-identities</code> (page ??)
<code>-Wimplicit-kind-vars</code> (page 106)	( <i>deprecated</i> ) warn when kind variables are implicitly quantified over.	dynamic	<code>-Wno-implicit-kind-vars</code> (page ??)
<code>-Wimplicit-lift</code> (page 106)	warn about implicit lift in Template Haskell quotes	dynamic	<code>-Wno-implicit-lift</code> (page ??)
<code>-Wimplicit-prelude</code> (page 106)	warn when the Prelude is implicitly imported	dynamic	<code>-Wno-implicit-prelude</code> (page ??)
<code>-Wimplicit-rhs-quantification</code> (page 124)	warn when type variables on the RHS of a type synonym are implicitly quantified	dynamic	<code>-Wno-implicit-rhs-quantification</code> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<code>-Winaccessible-code</code> (page 113)	warn about inaccessible code	dynamic	<code>-Wno-inaccessible-code</code> (page ??)
<code>-Wincomplete-export-warnings</code> (page 125)	warn when some but not all of exports for a name are warned about	dynamic	<code>-Wno-incomplete-export-warnings</code> (page ??)
<code>-Wincomplete-patterns</code> (page 107)	warn when a pattern match could fail	dynamic	<code>-Wno-incomplete-patterns</code> (page ??)
<code>-Wincomplete-record-selectors</code> (page 108)	warn when a record selector application could fail	dynamic	<code>-Wno-incomplete-record-selectors</code> (page ??)
<code>-Wincomplete-record-updates</code> (page 107)	warn when a record update could fail	dynamic	<code>-Wno-incomplete-record-updates</code> (page ??)
<code>-Wincomplete-uni-patterns</code> (page 107)	warn when a pattern match in a lambda expression, pattern binding or a lazy pattern could fail	dynamic	<code>-Wno-incomplete-uni-patterns</code> (page ??)
<code>-Winconsistent-flags</code> (page 126)	warn when command line options are inconsistent in some way.	dynamic	<code>-Wno-inconsistent-flags</code> (page ??)
<code>-Winferred-safe-imports</code> (page 644)	warn when an explicitly Safe Haskell module imports a Safe-Inferred one	dynamic	<code>-Wno-inferred-safe-imports</code> (page ??)
<code>-Winline-rule-shadowing</code> (page 119)	Warn if a rewrite RULE might fail to fire because the function might be inlined before the rule has a chance to fire. See <a href="#">How rules interact with INLINE/NOINLINE pragmas</a> (page 649).	dynamic	<code>-Wno-inline-rule-shadowing</code> (page ??)
<code>-Winvalid-haddock</code> (page 121)	warn when a Haddock comment occurs in an invalid position	dynamic	<code>-Wno-invalid-haddock</code> (page ??)
<code>-Wloopy-superclass-solve</code> (page 123)	(deprecated) warn when creating potentially-loopy superclass constraint evidence	dynamic	<code>-Wno-loopy-superclass-solve</code> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<code>-Wmisplaced-pragmas</code> (page 100)	warn about uses of file header pragmas in the module body	dynamic	<code>-Wno-misplaced-pragmas</code> (page ??)
<code>-Wmissed-extra-shared-lib</code> (page 115)	Warn when GHCi can't load a shared lib.	dynamic	<code>-Wno-missed-extra-shared-lib</code> (page ??)
<code>-Wmissed-specialisation</code> (page 101)	warn when specialisation of an imported, overloaded function fails.	dynamic	<code>-Wno-missed-specialisations</code> (page ??)
<code>-Wmissed-specialization</code> (page 101)	alias for <code>-Wmissed-specialisation</code> (page 101)	dynamic	<code>-Wno-missed-specializations</code> (page ??)
<code>-Wmissing-deriving-strategies</code> (page 108)	warn when a deriving clause is missing a deriving strategy	dynamic	<code>-Wno-missing-deriving-strategies</code> (page ??)
<code>-Wmissing-export-lists</code> (page 109)	warn when a module declaration does not explicitly list all exports	dynamic	<code>-Wno-missing-export-lists</code> (page ??)
<code>-Wmissing-exported-pattern-synonyms</code> (page 111)	warn about pattern synonyms without signatures, only if they are exported	dynamic	<code>-Wno-missing-exported-pattern-synonyms</code> (page ??)
<code>-Wmissing-exported-signatures</code> (page 110)	warn about top-level functions without signatures, only if they are exported	dynamic	<code>-Wno-missing-exported-signatures</code> (page ??)
<code>-Wmissing-exported-signatures-deprecated</code> (page 110)	(deprecated) warn about top-level functions without signatures, only if they are exported. takes precedence over <code>-Wmissing-signatures</code>	dynamic	<code>-Wno-missing-exported-sigs</code> (page ??)
<code>-Wmissing-fields</code> (page 109)	warn when fields of a record are uninitialised	dynamic	<code>-Wno-missing-fields</code> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<code>-Wmissing-home-modules</code> (page 120)	warn when encountering a home module imported, but not listed on the command line. Useful for cabal to ensure GHC won't pick up modules, not listed neither in <code>exposed-modules</code> , nor in <code>other-modules</code> .	dynamic	<code>-Wno-missing-home-modules</code> (page ??)
<code>-Wmissing-import-lists</code> (page 109)	warn when an import declaration does not explicitly list all the names brought into scope	dynamic	<code>-Wno-missing-import-lists</code> (page ??)
<code>-Wmissing-kind-signatures</code> (page 111)	warn when type declarations don't have kind signatures nor CUSKs	dynamic	<code>-Wno-missing-kind-signatures</code> (page ??)
<code>-Wmissing-local-signatures</code> (page 110)	warn about polymorphic local bindings without signatures	dynamic	<code>-Wno-missing-local-signatures</code> (page ??)
<code>-Wmissing-local-sigs</code> (page 110)	( <i>deprecated</i> ) warn about polymorphic local bindings without signatures	dynamic	<code>-Wno-missing-local-sigs</code> (page ??)
<code>-Wmissing-methods</code> (page 109)	warn when class methods are undefined	dynamic	<code>-Wno-missing-methods</code> (page ??)
<code>-Wmissing-monadfail-instances</code> (page 103)	( <i>deprecated</i> ) Warn when a failable pattern is used in a <code>do</code> -block that does not have a <code>MonadFail</code> instance.	dynamic	<code>-Wno-missing-monadfail-instances</code> (page ??)
<code>-Wmissing-pattern-synonyms</code> (page 110)	warn when pattern synonyms do not have type signatures	dynamic	<code>-Wno-missing-pattern-synonym-signatures</code> (page ??)
<code>-Wmissing-poly-kind-signatures</code> (page 111)	warn when inferred polykinded type or class declaration don't have kind signatures nor CUSKs	dynamic	<code>-Wno-missing-poly-kind-signatures</code> (page ??)
<code>-Wmissing-role-annotations</code> (page 124)	warn when type declarations don't have role annotations	dynamic	<code>-Wno-role-annotations-signatures</code> (page ??)

continues on next page



Table 13 – continued from previous page

Flag	Description	Type	Reverse
<code>-Wmissing-safe-haskell</code> (page 644)	warn when the Safe Haskell mode is not explicitly specified.	dynamic	<code>-Wno-missing-safe-haskell-mode</code> (page ??)
<code>-Wmissing-signatures</code> (page 110)	warn about top-level functions without signatures	dynamic	<code>-Wno-missing-signatures</code> (page ??)
<code>-Wmissing-space-after-lambda</code> (page 122)	<i>(deprecated)</i> Does nothing	dynamic	
<code>-Wmonomorphism-restriction</code> (page 115)	warn when the Monomorphism Restriction is applied	dynamic	<code>-Wno-monomorphism-restriction</code> (page ??)
<code>-Wname-shadowing</code> (page 111)	warn when names are shadowed	dynamic	<code>-Wno-name-shadowing</code> (page ??)
<code>-Wnoncanonical-monad-instances</code> (page 102)	warn when Applicative or Monad instances have noncanonical definitions of return, pure, ( <code>&gt;&gt;</code> ), or ( <code>*&gt;</code> ). See flag description in <i>Warnings and sanity-checking</i> (page 96) for more details.	dynamic	<code>-Wno-noncanonical-monad-instances</code> (page ??)
<code>-Wnoncanonical-monadfail-instances</code> (page 102)	<i>(deprecated)</i> warn when Monad or MonadFail instances have noncanonical definitions of fail.	dynamic	<code>-Wno-noncanonical-monadfail-instances</code> (page ??)
<code>-Wnoncanonical-monoid-instances</code> (page 102)	warn when Semigroup or Monoid instances have noncanonical definitions of ( <code>&lt;&gt;</code> ) or mappend. See flag description in <i>Warnings and sanity-checking</i> (page 96) for more details.	dynamic	<code>-Wno-noncanonical-monoid-instances</code> (page ??)
<code>-Wnot</code> (page 98)	<i>(deprecated)</i> Alias for <code>-w</code> (page 98)	dynamic	
<code>-Woperator-whitespace</code> (page 121)	warn on prefix, suffix, and tight infix uses of infix operators	dynamic	<code>-Wno-operator-whitespace</code> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-Woperator-whitespace-e</a> (page 121)	warn on uses of infix operators that would be parsed differently were a particular GHC extension enabled	dynamic	<a href="#">-Wno-operator-whitespace-ext-conf</a> (page ??)
<a href="#">-Worphans</a> (page 112)	warn when the module contains <a href="#">orphan instance declarations or rewrite rules</a> (page 258)	dynamic	<a href="#">-Wno-orphans</a> (page ??)
<a href="#">-Woverflowed-literals</a> (page 104)	warn about literals that will overflow their type	dynamic	<a href="#">-Wno-overflowed-literals</a> (page ??)
<a href="#">-Woverlapping-patterns</a> (page 112)	warn about overlapping patterns	dynamic	<a href="#">-Wno-overlapping-patterns</a> (page ??)
<a href="#">-Wpartial-fields</a> (page 120)	warn when defining a partial record field.	dynamic	<a href="#">-Wno-partial-fields</a> (page ??)
<a href="#">-Wpartial-type-signatures</a> (page 100)	warn about holes in partial type signatures when <a href="#">PartialTypeSignatures</a> (page 574) is enabled. Not applicable when <a href="#">PartialTypeSignatures</a> (page 574) is not enabled, in which case errors are generated for such holes.	dynamic	<a href="#">-Wno-partial-type-signatures</a> (page ??)
<a href="#">-Wprepositive-qualified</a> (page 99)	Report imports with a leading/prepositive “qualified”	dynamic	<a href="#">-Wno-prepositive-qualified-module</a> (page ??)
<a href="#">-Wredundant-bang-patterns</a> (page 118)	Warn about redundant bang patterns.	dynamic	<a href="#">-Wno-redundant-bang-patterns</a> (page ??)
<a href="#">-Wredundant-constraints</a> (page 105)	Have the compiler warn about redundant constraints in type signatures.	dynamic	<a href="#">-Wno-redundant-constraints</a> (page ??)
<a href="#">-Wredundant-record-wildcards</a> (page 119)	Warn about record wildcard matches when the wildcard binds no patterns.	dynamic	<a href="#">-Wno-redundant-record-wildcards</a> (page ??)
<a href="#">-Wredundant-strictness-flags</a> (page 119)	Warn about redundant strictness flags.	dynamic	<a href="#">-Wno-redundant-strictness-flags</a> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<code>-Wsafe</code> (page 643)	warn if the module being compiled is regarded to be safe.	dynamic	<code>-Wno-safe</code> (page ??)
<code>-Wsemigroup</code> (page 103)	<i>(deprecated)</i> Warn when a Monoid is not Semigroup, and on non-Semigroup definitions of ( <code>&lt;&gt;</code> )	dynamic	<code>-Wno-semigroup</code> (page ??)
<code>-Wsimplifiable-class-constraints</code> (page 114)	Warn about class constraints in a type signature that can be simplified using a top-level instance declaration.	dynamic	<code>-Wno-simplifiable-class-constraints</code> (page ??)
<code>-Wstar-binder</code> (page 113)	warn about binding the ( <code>*</code> ) type operator despite <code>StarIsType</code> (page 426)	dynamic	<code>-Wno-star-binder</code> (page ??)
<code>-Wstar-is-type</code> (page 113)	warn when <code>*</code> is used to mean <code>Data.Kind.Type</code>	dynamic	<code>-Wno-star-is-type</code> (page ??)
<code>-Wtabs</code> (page 114)	warn if there are tabs in the source file	dynamic	<code>-Wno-tabs</code> (page ??)
<code>-Wterm-variable-capture</code> (page 124)	warn when an implicitly quantified type variable captures a term's name	dynamic	
<code>-Wtrustworthy-safe</code> (page 643)	warn if the module being compiled is marked as <code>Trustworthy</code> (page 643) but it could instead be marked as <code>Safe</code> (page 642), a more informative bound.	dynamic	<code>-Wno-safe</code> (page ??)
<code>-Wtype-defaults</code> (page 114)	warn when defaulting happens	dynamic	<code>-Wno-type-defaults</code> (page ??)
<code>-Wtype-equality-out-of-scope</code> (page 123)	warn when type equality <code>a ~ b</code> is used despite being out of scope	dynamic	<code>-Wno-type-equality-out-of-scope</code> (page ??)
<code>-Wtype-equality-requires-operation</code> (page 123)	warn when type equality <code>a ~ b</code> is used despite being out of scope	dynamic	<code>-Wno-type-equality-requires-operation</code> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-Wtyped-holes</a> (page 99)	Report warnings when <a href="#">typed hole</a> (page 347) errors are <a href="#">deferred until runtime</a> (page 464). See <a href="#">-fdefer-typed-holes</a> (page 464).	dynamic	<a href="#">-Wno-typed-holes</a> (page ??)
<a href="#">-Wunbanged-strict-patterns</a> (page 120)	warn on pattern bind of unlifted variable that is neither bare nor banged	dynamic	<a href="#">-Wno-unbanged-strict-patterns</a> (page ??)
<a href="#">-Wunicode-bidirectional-layout-override-characters</a> (page 122)	warn about the usage of unicode bidirectional layout override characters	dynamic	
<a href="#">-Wunrecognised-pragmas</a> (page 100)	warn about uses of pragmas that GHC doesn't recognise	dynamic	<a href="#">-Wno-unrecognised-pragmas</a> (page ??)
<a href="#">-Wunrecognised-warning-flags</a> (page 99)	throw a warning when an unrecognised <code>-W...</code> flag is encountered on the command line.	dynamic	<a href="#">-Wno-unrecognised-warning-flags</a> (page ??)
<a href="#">-Wunsafe</a> (page 643)	warn if the module being compiled is regarded to be unsafe. See <a href="#">Safe Haskell</a> (page 633)	dynamic	<a href="#">-Wno-unsafe</a> (page ??)
<a href="#">-Wunsupported-calling-conventions</a> (page 103)	warn about use of an unsupported calling convention	dynamic	<a href="#">-Wno-unsupported-calling-conventions</a> (page ??)
<a href="#">-Wunsupported-llvm-version</a> (page 115)	Warn when using <a href="#">-fllvm</a> (page 286) with an unsupported version of LLVM.	dynamic	<a href="#">-Wno-unsupported-llvm-version</a> (page ??)
<a href="#">-Wunticked-promoted-constructors</a> (page 115)	warn if promoted constructors are not ticked	dynamic	<a href="#">-Wno-unticked-promoted-constructors</a> (page ??)
<a href="#">-Wunused-binds</a> (page 115)	warn about bindings that are unused. Alias for <a href="#">-Wunused-top-binds</a> (page 116), <a href="#">-Wunused-local-binds</a> (page 116) and <a href="#">-Wunused-pattern-binds</a> (page 116)	dynamic	<a href="#">-Wno-unused-binds</a> (page ??)
<a href="#">-Wunused-do-bind</a> (page 117)	warn about do bindings that appear to throw away values of types other than <code>()</code>	dynamic	<a href="#">-Wno-unused-do-bind</a> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<i>-Wunused-foralls</i> (page 118)	warn about type variables in user-written forall's that are unused	dynamic	<i>-Wno-unused-foralls</i> (page ??)
<i>-Wunused-imports</i> (page 117)	warn about unnecessary imports	dynamic	<i>-Wno-unused-imports</i> (page ??)
<i>-Wunused-local-binds</i> (page 116)	warn about local bindings that are unused	dynamic	<i>-Wno-unused-local-binds</i> (page ??)
<i>-Wunused-matches</i> (page 117)	warn about variables in patterns that aren't used	dynamic	<i>-Wno-unused-matches</i> (page ??)
<i>-Wunused-packages</i> (page 120)	warn when package is requested on command line, but not needed.	dynamic	<i>-Wno-unused-packages</i> (page ??)
<i>-Wunused-pattern-binds</i> (page 116)	warn about pattern match bindings that are unused	dynamic	<i>-Wno-unused-pattern-binds</i> (page ??)
<i>-Wunused-record-wildcards</i> (page 118)	Warn about record wildcard matches when none of the bound variables are used.	dynamic	<i>-Wno-unused-record-wildcards</i> (page ??)
<i>-Wunused-top-binds</i> (page 116)	warn about top-level bindings that are unused	dynamic	<i>-Wno-unused-top-binds</i> (page ??)
<i>-Wunused-type-patterns</i> (page 117)	warn about unused type variables which arise from patterns in in type family and data family instances	dynamic	<i>-Wno-unused-type-patterns</i> (page ??)
<i>-Wwarn</i> (page 98)	make warnings non-fatal	dynamic	<i>-Werror</i> (page ??)
<i>-Wwarnings-deprecations</i> (page 102)	warn about uses of functions & types that have DEPRECATED pragmas, or WARNING pragmas with the deprecated category. Alias for <i>-Wdeprecations</i> (page 102).	dynamic	<i>-Wno-warnings-deprecations</i> (page ??)

continues on next page

Table 13 – continued from previous page

Flag	Description	Type	Reverse
<i>-Wwrong-do-bind</i> (page 119)	warn about do bindings that appear to throw away monadic values that you should have bound instead	dynamic	<i>-Wno-wrong-do-bind</i> (page ??)
<i>-Wx-⟨category⟩</i> (page 101)	warn about uses of functions & types that have WARNING pragmas with the given category	dynamic	<i>-Wno-x-⟨category⟩</i> (page ??)

### 5.6.15 Optimisation levels

These options are described in more detail in *Optimisation (code improvement)* (page 127).

See *Individual optimisations* (page 180) for a list of optimisations enabled on level 1 and level 2.

Flag	Description	Type	Reverse
<i>-O</i> (page 127), <i>-O1</i> (page 127)	Enable level 1 optimisations	dynamic	<i>-O0</i> (page ??)
<i>-O0</i> (page ??)	Disable optimisations (default)	dynamic	
<i>-O2</i> (page 127)	Enable level 2 optimisations	dynamic	<i>-O0</i> (page ??)
<i>-O⟨n⟩</i> (page 128)	Any <i>-On</i> where $n > 2$ is the same as <i>-O2</i> .	dynamic	<i>-O0</i> (page ??)

### 5.6.16 Individual optimisations

These options are described in more detail in *-f\*: platform-independent flags* (page 128). If a flag is implied by *-O* then it is also implied by *-O2* (unless flag description explicitly says otherwise). If a flag is implied by *-O0* only then the flag is not implied by *-O* and *-O2*.

Flag	Description	Type	Reverse
<i>-fasm-shortcutting</i> (page 129)	Enable shortcutting on assembly. Implied by <i>-O2</i> (page 127).	dynamic	<i>-fno-asm-shortcutting</i> (page ??)

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<code>-fbinary-blob-threshold</code> (page 149)	default: 500K. Tweak assembly generator for binary blobs.	dynamic	
<code>-fblock-layout-cfg</code> (page 130)	Use the new cfg based block layout algorithm. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-block-layout-cfg</code> (page ??)
<code>-fblock-layout-weightless</code> (page 130)	Ignore cfg weights for code layout.	dynamic	<code>-fno-block-layout-weightless</code> (page ??)
<code>-fblock-layout-weights</code> (page 130)	Sets edge weights used by the new code layout algorithm.	dynamic	
<code>-fcall-arity</code> (page 129)	Enable call-arity optimisation. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-call-arity</code> (page ??)
<code>-fcase-folding</code> (page 128)	Enable constant folding in case expressions. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-case-folding</code> (page ??)
<code>-fcase-merge</code> (page 128)	Enable case-merging. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-case-merge</code> (page ??)
<code>-fcmm-control-flow</code> (page 129)	Enable control flow optimisation in the Cmm backend. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cmm-control-flow</code> (page ??)
<code>-fcmm-elim-common-blocks</code> (page 129)	Enable Cmm common block elimination. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cmm-elim-common-blocks</code> (page ??)
<code>-fcmm-sink</code> (page 129)	Enable Cmm sinking. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cmm-sink</code> (page ??)
<code>-fcmm-static-pred</code> (page 129)	Enable static control flow prediction. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cmm-static-pred</code> (page ??)
<code>-fcore-constant-folding</code> (page 128)	Enable constant folding in Core. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-core-constant-folding</code> (page ??)

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<code>-fcpr-anal</code> (page 130)	Turn on Constructed Product Result analysis. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cpr-anal</code> (page ??)
<code>-fcross-module-specialise</code> (page 141)	Turn on specialisation of overloaded functions imported from other modules. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cross-module-specialise</code> (page ??)
<code>-fcse</code> (page 131)	Enable common sub-expression elimination. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-cse</code> (page ??)
<code>-fdicts-cheap</code> (page 132)	Make dictionary-valued expressions seem cheap to the optimiser.	dynamic	<code>-fno-dicts-cheap</code> (page ??)
<code>-fdicts-strict</code> (page 132)	Make dictionaries strict. Implied by <code>-O2</code> (page 127).	dynamic	<code>-fno-dicts-strict</code> (page ??)
<code>-fdmd-tx-dict-sel</code> (page 133)	( <i>deprecated</i> ) Use a special demand transformer for dictionary selectors.	dynamic	<code>-fno-dmd-tx-dict-sel</code> (page ??)
<code>-fdmd-unbox-width={n}</code> (page 140)	<i>default: 3.</i> Boxity analysis pretends that returned records with this many fields can be unboxed.	dynamic	
<code>-fdo-clever-arg-eta-expansion</code> (page 133)	Enable sophisticated argument eta-expansion. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-do-clever-arg-eta-expansion</code> (page ??)
<code>-fdo-eta-reduction</code> (page 133)	Enable eta-reduction. Always enabled by default.	dynamic	<code>-fno-do-eta-reduction</code> (page ??)
<code>-fdo-lambda-eta-expansion</code> (page 133)	Enable lambda eta-expansion. Always enabled by default.	dynamic	<code>-fno-do-lambda-eta-expansion</code> (page ??)
<code>-feager-blackholing</code> (page 133)	Turn on <i>eager blackholing</i> (page 151)	dynamic	

continues on next page



Table 15 – continued from previous page

Flag	Description	Type	Reverse
<i>-fenable-rewrite-rules</i> (page 645)	Switch on all rewrite rules (including rules generated by automatic specialisation of overloaded functions). Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-enable-rewrite-rules</i> (page ??)
<i>-fexcess-precision</i> (page 133)	Enable excess intermediate precision	dynamic	<i>-fno-excess-precision</i> (page ??)
<i>-fexitification</i> (page 129)	Enables exitification optimisation. Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-exitification</i> (page ??)
<i>-fexpose-all-unfoldings</i> (page 134)	Expose all unfoldings, even for very large or recursive functions.	dynamic	<i>-fno-expose-all-unfoldings</i> (page ??)
<i>-ffloat-in</i> (page 134)	Turn on the float-in transformation. Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-float-in</i> (page ??)
<i>-ffull-laziness</i> (page 134)	Turn on full laziness (floating bindings outwards). Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-full-laziness</i> (page ??)
<i>-ffun-to-thunk</i> (page 134)	( <i>deprecated</i> ) superseded by <i>-ffull-laziness</i> .	dynamic	<i>-fno-fun-to-thunk</i> (page ??)
<i>-fignore-asserts</i> (page 135)	Ignore assertions in the source. Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-ignore-asserts</i> (page ??)
<i>-fignore-interface-pragmas</i> (page 135)	Ignore pragmas in interface files. Implied by <i>-O0</i> (page ??) only.	dynamic	<i>-fno-ignore-interface-pragmas</i> (page ??)
<i>-finline-generics</i> (page 142)	Annotate methods of derived Generic and Generic1 instances with <code>INLINE[1]</code> pragmas based on heuristics. Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-inline-generics</i> (page ??)
<i>-finline-generics-aggressive</i> (page 142)	Annotate methods of all derived Generic and Generic1 instances with <code>INLINE[1]</code> pragmas.	dynamic	<i>-fno-inline-generics-aggressively</i> (page ??)

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<i>-finter-module-far-jumps</i> (page 135)	Assume code sections can be very large.	dynamic	<i>-fno-inter-module-far-jumps</i> (page ??)
<i>-fkeep-auto-rules</i> (page 135)	Keep all "auto" rules, generated by specialisation	dynamic	<i>-fno-keep-auto-rules</i> (page ??)
<i>-flate-dmd-anal</i> (page 135)	Run demand analysis again, at the end of the simplification pipeline	dynamic	<i>-fno-late-dmd-anal</i> (page ??)
<i>-flate-specialise</i> (page 142)	Run a late specialisation pass	dynamic	<i>-fno-late-specialise</i> (page ??)
<i>-fliberate-case</i> (page 136)	Turn on the liberate-case transformation. Implied by <i>-O2</i> (page 127).	dynamic	<i>-fno-liberate-case</i> (page ??)
<i>-fliberate-case-threshold</i> (page 136)	<i>default: 2000</i> . Set the size threshold for the liberate-case transformation to <i>&lt;n&gt;</i>	dynamic	<i>-fno-liberate-case-threshold</i> (page ??)
<i>-fllvm-pass-vectors-in</i> (page 136)	<i>(deprecated)</i> Does nothing	dynamic	
<i>-flocal-float-out</i> (page 137)	Enable local floating definitions out of let-binds.	dynamic	<i>-fno-local-float-out</i> (page ??)
<i>-flocal-float-out-top-level</i> (page 137)	Enable local floating to float top-level bindings	dynamic	<i>-fno-local-float-out-top-level</i> (page ??)
<i>-floopification</i> (page 136)	Turn saturated self-recursive tail-calls into local jumps in the generated assembly. Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-loopification</i> (page ??)
<i>-fmax-forced-spec-args</i> (page 138)	<i>default: 333</i> . Maximum number of value arguments for forced Spec-Constr specializations.	dynamic	
<i>-fmax-inline-alloc-size</i> (page 136)	<i>default: 128</i> . Set the maximum size of inline array allocations to <i>&lt;n&gt;</i> bytes ( <i>default: 128</i> ).	dynamic	

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<code>-fmax-inline-memcpy-ins</code> (page 136)	<i>default: 32.</i> Inline memcpy calls if they would generate no more than $\langle n \rangle$ pseudo instructions.	dynamic	
<code>-fmax-inline-memset-ins</code> (page 136)	<i>default: 32.</i> Inline memset calls if they would generate no more than $\langle n \rangle$ pseudo instructions	dynamic	
<code>-fmax-simplifier-iterations</code> (page 137)	<i>default: 4.</i> Set the max iterations for the simplifier.	dynamic	
<code>-fmax-uncovered-patterns</code> (page 137)	<i>default: 4.</i> Set the maximum number of patterns to display in warnings about non-exhaustive ones.	dynamic	
<code>-fmax-worker-args=<math>\langle n \rangle</math></code> (page 138)	<i>default: 10.</i> Maximum number of value arguments for a worker.	dynamic	
<code>-fno-opt-coercion</code> (page 138)	Turn off the coercion optimiser	dynamic	
<code>-fno-pre-inlining</code> (page 138)	Turn off pre-inlining	dynamic	
<code>-fno-state-hack</code> (page 138)	Turn off the state hack where by any lambda with a real-world state token as argument is considered to be single-entry. Hence OK to inline things inside it.	dynamic	
<code>-fomit-interface-pragmas</code> (page 138)	Don't generate interface pragmas. Implied by <code>-O0</code> (page ??) only.	dynamic	<code>-fno-omit-interface-pragmas</code> (page ??)
<code>-fomit-yields</code> (page 139)	Omit heap checks when no allocation is being performed.	dynamic	<code>-fno-omit-yields</code> (page ??)
<code>-foptimal-applicative-do</code> (page 326)	Use a slower but better algorithm for ApplicativeDo	dynamic	<code>-fno-optimal-applicative-do</code> (page ??)

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<i>-fpedantic-bottoms</i> (page 139)	Make GHC be more precise about its treatment of bottom (but see also <i>-fno-state-hack</i> (page 138)). In particular, GHC will not eta-expand through a case expression.	dynamic	<i>-fno-pedantic-bottoms</i> (page ??)
<i>-fpolymorphic-specialisation</i> (page 142)	Allow specialisation to abstract over free type variables	dynamic	<i>-fno-polymorphic-specialisation</i> (page ??)
<i>-fregs-graph</i> (page 139)	Use the graph colouring register allocator for register allocation in the native code generator.	dynamic	<i>-fno-regs-graph</i> (page ??)
<i>-fregs-iterative</i> (page 139)	Use the iterative coalescing graph colouring register allocator in the native code generator.	dynamic	<i>-fno-regs-iterative</i> (page ??)
<i>-fsimpl-tick-factor={n}</i> (page 139)	<i>default: 100.</i> Set the percentage factor for simplifier ticks.	dynamic	
<i>-fsimplifier-phases={n}</i> (page 139)	<i>default: 2.</i> Set the number of phases for the simplifier. Ignored with <i>-O0</i> (page ??).	dynamic	
<i>-fsolve-constant-dicts</i> (page 143)	When solving constraints, try to eagerly solve superclasses using available dictionaries. Implied by <i>-O</i> (page 127).	dynamic	<i>-fno-solve-constant-dicts</i> (page ??)
<i>-fspec-constr</i> (page 140)	Turn on the SpecConstr transformation. Implied by <i>-O2</i> (page 127).	dynamic	<i>-fno-spec-constr</i> (page ??)
<i>-fspec-constr-count={n}</i> (page 141)	<i>default: 3.*</i> Set to {n} the maximum number of specialisations that will be created for any one function by the SpecConstr transformation.	dynamic	<i>-fno-spec-constr-count</i> (page ??)
<i>-fspec-constr-keen</i> (page 141)	Specialize a call with an explicit constructor argument, even if the argument is not scrutinised in the body of the function	dynamic	<i>-fno-spec-constr-keen</i> (page ??)

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<code>-fspec-constr-threshold</code> (page 141)	<i>default: 2000</i> . Set the size threshold for the Spec-Constr transformation to $\langle n \rangle$ .	dynamic	<code>-fno-spec-constr-threshold</code> (page ??)
<code>-fspec-eval</code> (page 132)	Enables speculative evaluation.	dynamic	<code>-fno-spec-eval</code> (page ??)
<code>-fspec-eval-dictfun</code> (page 132)	Enables speculative evaluation of dictionary functions.	dynamic	<code>-fno-spec-eval-dictfun</code> (page ??)
<code>-fspecialise</code> (page 141)	Turn on specialisation of overloaded functions. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-specialise</code> (page ??)
<code>-fspecialise-aggressive</code> (page 141)	Turn on specialisation of overloaded functions regardless of size, if unfolding is available	dynamic	<code>-fno-specialise-aggressively</code> (page ??)
<code>-fspecialise-incoherent</code> (page 142)	Enable specialisation on incoherent instances	dynamic	<code>-fno-specialise-incoherents</code> (page ??)
<code>-fstatic-argument-trans</code> (page 143)	Turn on the static argument transformation.	dynamic	<code>-fno-static-argument-transformati</code> (page ??)
<code>-fstg-cse</code> (page 131)	Enable common sub-expression elimination on the STG intermediate language. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-stg-cse</code> (page ??)
<code>-fstg-lift-lams</code> (page 143)	Enable late lambda lifting on the STG intermediate language. Implied by <code>-O2</code> (page 127).	dynamic	<code>-fno-stg-lift-lams</code> (page ??)
<code>-fstg-lift-lams-known</code> (page 143)	Allow turning known into unknown calls while performing late lambda lifting.	dynamic	<code>-fno-stg-lift-lams-known</code> (page ??)
<code>-fstg-lift-lams-non-rec</code> (page 144)	Create top-level non-recursive functions with at most $\langle n \rangle$ parameters while performing late lambda lifting.	dynamic	<code>-fstg-lift-lams-non-rec-args-any</code> (page ??)

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<code>-fstg-lift-lams-rec-args</code> (page 144)	Create top-level recursive functions with at most $<n>$ parameters while performing late lambda lifting.	dynamic	<code>-fstg-lift-lams-rec-args-any</code> (page ??)
<code>-fstrictness</code> (page 144)	Turn on demand analysis. Implied by <code>-O</code> (page 127). Implies <code>-fworker-wrapper</code> (page 149)	dynamic	<code>-fno-strictness</code> (page ??)
<code>-fstrictness-before=&lt;n&gt;</code> (page 146)	Run an additional demand analysis before simplifier phase $<n>$	dynamic	
<code>-funbox-small-strict-fields</code> (page 146)	Flatten strict constructor fields with a pointer-sized representation. Implied by <code>-O</code> (page 127).	dynamic	<code>-fno-unbox-small-strict-fields</code> (page ??)
<code>-funbox-strict-fields</code> (page 147)	Flatten strict constructor fields	dynamic	<code>-fno-unbox-strict-fields</code> (page ??)
<code>-funfolding-case-scaling</code> (page 148)	<i>default: 30.</i> Apply a penalty of $(\text{inlining\_cost} * 1/n)$ for each level of case nesting.	dynamic	
<code>-funfolding-case-threshold</code> (page 148)	<i>default: 2.</i> Reduce inlining for cases nested deeper than $n$ .	dynamic	
<code>-funfolding-creation-threshold</code> (page 147)	<i>default: 750.</i> Tweak unfolding settings.	dynamic	
<code>-funfolding-dict-discount</code> (page 147)	<i>default: 30.</i> Tweak unfolding settings.	dynamic	
<code>-funfolding-fun-discount</code> (page 147)	<i>default: 60.</i> Tweak unfolding settings.	dynamic	
<code>-funfolding-keenness-factor</code> (page 147)	This has been deprecated in GHC 9.0.1.	dynamic	
<code>-funfolding-use-threshold</code> (page 147)	<i>default: 80.</i> Tweak unfolding settings.	dynamic	

continues on next page

Table 15 – continued from previous page

Flag	Description	Type	Reverse
<i>-fworker-wrapper</i> (page 149)	Enable the worker/wrapper transformation. Implied by <i>-O</i> (page 127) and by <i>-fstrictness</i> (page 144).	dynamic	
<i>-fworker-wrapper-cbv</i> (page 149)	Enable w/w splits for wrappers whos sole purpose is evaluating arguments.	dynamic	

### 5.6.17 Profiling options

More details in *Profiling* (page 709)

Flag	Description	Type	Reverse
<i>-auto</i> (page 717)	<i>(deprecated)</i> Alias for <i>-fprof-auto-exported</i> (page 716)	dynamic	
<i>-auto-all</i> (page 717)	<i>(deprecated)</i> Alias for <i>-fprof-auto</i> (page 715)	dynamic	
<i>-caf-all</i> (page 717)	<i>(deprecated)</i> Alias for <i>-fprof-cafs</i> (page 717)	dynamic	
<i>-fno-prof-count-entries</i> (page 715)	Do not collect entry counts	dynamic	<i>-fprof-count-entries</i> (page ??)
<i>-fprof-auto</i> (page 715)	Auto-add SCC\ s to all bindings not marked INLINE	dynamic	<i>-fno-prof-auto</i> (page ??)
<i>-fprof-auto-calls</i> (page 716)	Auto-add SCC\ s to all call sites	dynamic	<i>-fno-prof-auto</i> (page ??)
<i>-fprof-auto-exported</i> (page 716)	Auto-add SCC\ s to all exported bindings not marked <i>INLINE</i> (page 666)	dynamic	<i>-fno-prof-auto</i> (page ??)
<i>-fprof-auto-top</i> (page 716)	Auto-add SCC\ s to all top-level bindings not marked INLINE	dynamic	<i>-fno-prof-auto</i> (page ??)

continues on next page

Table 16 – continued from previous page

Flag	Description	Type	Reverse
<code>-fprof-cafs</code> (page 717)	Auto-add SCC\ s to all CAFs	dynamic	<code>-fno-prof-cafs</code> (page ??)
<code>-fprof-callers={name}</code> (page 715)	Auto-add SCC\ s to all call-sites of the named function.	dynamic	
<code>-fprof-late</code> (page 716)	Auto-add SCC\ s to all top level bindings <i>after</i> the core pipeline has run.	dynamic	<code>-fno-prof-late</code> (page ??)
<code>-fprof-late-inline</code> (page 716)	Auto-add SCC\ s to all top level bindings <i>after</i> the optimizer has run and retain them when inlining.	dynamic	<code>-fno-prof-late-inline</code> (page ??)
<code>-fprof-late-overloaded</code> (page 717)	Auto-add SCC\ s to all top level overloaded bindings <i>after</i> the core pipeline has run.	dynamic	<code>-fno-prof-late-overloaded</code> (page ??)
<code>-fprof-late-overloaded-calls</code> (page 717)	Auto-add SCC\ s to all call sites that include dictionary arguments <i>after</i> the core pipeline has run.	dynamic	<code>-fno-prof-late-overloaded-calls</code> (page ??)
<code>-fprof-manual</code> (page 717)	Process manual SCC annotations.	dynamic	<code>-fno-prof-manual</code> (page ??)
<code>-no-auto</code> (page 717)	<i>(deprecated)</i> Alias for <code>-fno-prof-auto</code> (page ??)	dynamic	
<code>-no-auto-all</code> (page 717)	<i>(deprecated)</i> Alias for <code>-fno-prof-auto</code> (page ??)	dynamic	
<code>-no-caf-all</code> (page 717)	<i>(deprecated)</i> Alias for <code>-fno-prof-cafs</code> (page ??)	dynamic	
<code>-prof</code> (page 715)	Turn on profiling	dynamic	
<code>-ticky</code> (page 737)	Turn on <i>ticky-ticky profiling</i> (page 737)	dynamic	

continues on next page



Table 16 – continued from previous page

Flag	Description	Type	Reverse
<code>-ticky-allocd</code> (page 737)	Track the number of times each closure type is allocated.	dynamic	
<code>-ticky-ap-thunk</code> (page 738)	Don't use standard AP thunks on order to get more reliable entry counters.	dynamic	
<code>-ticky-dyn-thunk</code> (page 737)	Track allocations of dynamic thunks	dynamic	
<code>-ticky-LNE</code> (page 737)	Treat join point binders similar to thunks/functions.	dynamic	
<code>-ticky-tag-checks</code> (page 738)	Emit dummy ticky counters to record how many tag-inference checks tag inference avoided.	dynamic	

### 5.6.18 Program coverage options

More details in *Observing Code Coverage* (page 731)

Flag	Description	Type	Reverse
<code>-fhpc</code> (page 733)	Turn on Haskell program coverage instrumentation	dynamic	
<code>-hpcdir&lt;dir&gt;</code> (page 733)	Set the directory where GHC places .mix files.	dynamic	

### 5.6.19 C pre-processor options

More details in *Options affecting the C pre-processor* (page 282)

Flag	Description	Type	Reverse
<code>-cpp</code> (page 282)	Run the C pre-processor on Haskell source files	dynamic	

continues on next page

Table 18 – continued from previous page

Flag	Description	Type	Reverse
<code>-D⟨symbol⟩[=⟨value⟩]</code> (page 282)	Define a symbol in the C pre-processor	dynamic	<code>-U⟨symbol⟩</code> (page 282)
<code>-I⟨dir⟩</code> (page 282)	Add ⟨dir⟩ to the directory search list for <code>#include</code> files	dynamic	
<code>-U⟨symbol⟩</code> (page 282)	Undefine a symbol in the C pre-processor	dynamic	

### 5.6.20 Code generation options

More details in *Options affecting code generation* (page 286)

Flag	Description	Type	Reverse
<code>-dynamic-too</code> (page 287)	Build dynamic object files <i>as well as</i> static object files during compilation	dynamic	
<code>-fasm</code> (page ??)	Use the <i>native code generator</i> (page 278)	dynamic	<code>-fllvm</code> (page 286)
<code>-fbyte-code</code> (page 286)	Generate byte-code	dynamic	
<code>-fbyte-code-and-object</code> (page 286)	Generate object code and byte-code	dynamic	
<code>-fexpose-internal-symbols</code> (page 287)	Produce symbols for all functions, including internal functions.	dynamic	
<code>-fexternal-dynamic-refs</code> (page 287)	Generate code for linking against dynamic libraries	dynamic	
<code>-fllvm</code> (page 286)	Compile using the <i>LLVM code generator</i> (page 278)	dynamic	<code>-fasm</code> (page ??)

continues on next page

Table 19 – continued from previous page

Flag	Description	Type	Reverse
<code>-fno-code</code> (page 286)	Omit code generation	dynamic	
<code>-fobject-code</code> (page 286)	Generate object code	dynamic	
<code>-fPIC</code> (page 286)	Generate position-independent code (where available)	dynamic	
<code>-fPIE</code> (page 287)	Generate code for a position-independent executable (where available)	dynamic	
<code>-fprefer-byte-code</code> (page 287)	Use byte-code if it is available to evaluate TH splices	dynamic	
<code>-fwrite-if-simplified-c</code> (page 286)	Write an interface file containing the simplified core of the module.	dynamic	
<code>-fwrite-interface</code> (page 286)	Always write interface files	dynamic	

### 5.6.21 Linking options

More details in *Options affecting linking* (page 288)

Flag	Description	Type	Reverse
<code>-c</code> (page 79)	Stop after generating object (.o) file	mode	
<code>-debug</code> (page 290)	Use the debugging runtime	dynamic	

continues on next page

Table 20 – continued from previous page

Flag	Description	Type	Reverse
<code>-dylib-install-name &lt;path&gt;</code> (page 293)	Set the install name (via <code>-install_name</code> passed to Apple's linker), specifying the full install path of the library file. Any libraries or executables that link with it later will pick up that path as their runtime search location for it. (Darwin/OS X only)	dynamic	
<code>-dynamic</code> (page 289)	Build dynamically-linked object files and executables	dynamic	
<code>-dynload</code> (page 289)	Selects one of a number of modes for finding shared libraries at runtime.	dynamic	
<code>-eventlog</code> (page 291)	Enable runtime event tracing	dynamic	
<code>-fcompact-unwind</code> (page 294)	Instruct the linker to produce a <code>__compact_unwind</code> section.	dynamic	
<code>-fkeep-cafs</code> (page 294)	Do not garbage-collect CAFs (top-level expressions) at runtime	dynamic	
<code>-flink-rts</code> (page 289)	Link the runtime when generating a shared or static library	dynamic	
<code>-fno-embed-manifest</code> (page 292)	Do not embed the manifest in the executable (Windows only)	dynamic	
<code>-fno-gen-manifest</code> (page 292)	Do not generate a manifest file (Windows only)	dynamic	
<code>-fno-shared-implib</code> (page 293)	Don't generate an import library for a DLL (Windows only)	dynamic	
<code>-framework &lt;name&gt;</code> (page 288)	On Darwin/OS X/iOS only, link in the framework <code>&lt;name&gt;</code> . This option corresponds to the <code>-framework</code> option for Apple's Linker.	dynamic	

continues on next page

Table 20 – continued from previous page

Flag	Description	Type	Reverse
<code>-framework-path &lt;dir&gt;</code> (page 288)	On Darwin/OS X/iOS only, add <dir> to the list of directories searched for frameworks. This option corresponds to the -F option for Apple's Linker.	dynamic	
<code>-fsplit-sections</code> (page 289), <code>-split-sections</code> (page 289)	Split sections for link-time dead-code stripping	dynamic	<code>-fno-split-sections</code> (page ??)
<code>-fuse-rpaths</code> (page 288)	Set the rpath based on -L flags	dynamic	
<code>-fwhole-archive-hs-libs</code> (page 293)	When linking a binary executable, this inserts the flag <code>-Wl,--whole-archive</code> before any <code>-l</code> flags for Haskell libraries, and <code>-Wl,--no-whole-archive</code> afterwards	dynamic	
<code>-L &lt;dir&gt;</code> (page 288)	Add <dir> to the list of directories searched for libraries	dynamic	
<code>-l &lt;lib&gt;</code> (page 288)	Link in library <lib>	dynamic	
<code>-main-is &lt;thing&gt;</code> (page 289)	Set main module and function	dynamic	
<code>-no-hs-main</code> (page 290)	Don't assume this program contains main	dynamic	
<code>-no-pie</code> (page 293)	Don't instruct the linker to produce a position-independent executable.	dynamic	<code>-pie</code> (page ??)
<code>-no-rtsopts-suggestions</code> (page 292)	Don't print RTS suggestions about linking with <code>-rtsopts[=(none some all ignore ic</code> (page 291).	dynamic	
<code>-package &lt;name&gt;</code> (page 288)	Expose package <pkg>	dynamic	
<code>-pie</code> (page ??)	Instruct the linker to produce a position-independent executable.	dynamic	<code>-no-pie</code> (page 293)

continues on next page

Table 20 – continued from previous page

Flag	Description	Type	Reverse
<code>-rdynamic</code> (page 293)	This instructs the linker to add all symbols, not only used ones, to the dynamic symbol table. Currently Linux and Windows/MinGW32 only. This is equivalent to using <code>-optl -rdynamic</code> on Linux, and <code>-optl -export-all-symbols</code> on Windows.	dynamic	
<code>-rtsopts[={none some all ignore}]</code> (page 291)	Control whether the RTS behaviour can be tweaked via command-line flags and the GHCRTS environment variable. Using <code>none</code> means no RTS flags can be given; <code>some</code> means only a minimum of safe options can be given (the default); <code>all</code> (or no argument at all) means that all RTS flags are permitted; <code>ignore</code> means RTS flags can be given, but are treated as regular arguments and passed to the Haskell program as arguments; <code>ignoreAll</code> is the same as <code>ignore</code> , but GHCRTS is also ignored. <code>-rtsopts</code> does not affect <code>-with-rtspts</code> behavior; flags passed via <code>-with-rtspts</code> are used regardless of <code>-rtspts</code> .	dynamic	
<code>-shared</code> (page 79)	Generate a shared library (as opposed to an executable)	dynamic	
<code>-single-threaded</code> (page 291)	Use the single-threaded runtime	dynamic	<code>-threaded</code> (page ??)
<code>-static</code> (page 289)	Use static Haskell libraries	dynamic	
<code>-staticlib</code> (page 288)	Generate a standalone static library (as opposed to an executable). This is useful when cross compiling. The library together with all its dependencies ends up in a single static library that can be linked against.	dynamic	
<code>-threaded</code> (page ??)	Use the threaded runtime	dynamic	<code>-single-threaded</code> (page 291)
<code>-with-rtspts={opts}</code> (page 292)	Set the default RTS options to {opts}.	dynamic	

## 5.6.22 Plugin options

More details in *Compiler Plugins* (page 681)

Flag	Description	Type	Reverse
<code>-fclear-plugins</code> (page 682)	Clear the list of active plugins	dynamic	
<code>-fplugin-library={file- {unit-id};{module}; {args}}</code> (page 682)	Load a pre-compiled static plugin from an external library	dynamic	
<code>-fplugin-opt={module}:</code> (page 681)	Give arguments to a plugin module; module must be specified with <code>-fplugin={module}</code> (page 681)	dynamic	
<code>-fplugin-trustworthy</code> (page 682)	Trust the used plugins and no longer mark the compiled module as unsafe	dynamic	
<code>-fplugin={module}</code> (page 681)	Load a plugin exported by a given module	dynamic	
<code>-hide-all-plugin-packages</code> (page 683)	Hide all packages for plugins by default	dynamic	
<code>-plugin-package {pkg}</code> (page 683)	Expose {pkg} for plugins	dynamic	
<code>-plugin-package-id {pkg-id}</code> (page 683)	Expose {pkg-id} for plugins	dynamic	

## 5.6.23 Replacing phases

More details in *Replacing the program for one or more phases* (page 279)

Flag	Description	Type	Reverse
<code>-pgma {cmd}</code> (page 280)	Use {cmd} as the assembler	dynamic	

continues on next page

Table 22 – continued from previous page

Flag	Description	Type	Reverse
<code>-pgmc &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the C compiler	dynamic	
<code>-pgmCmmP &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the C-- C pre-processor	dynamic	
<code>-pgmcxx &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the C++ compiler	dynamic	
<code>-pgmF &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the pre-processor (with <code>-F</code> (page 285) only)	dynamic	
<code>-pgmi &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the external interpreter command.	dynamic	
<code>-pgminstall_name_tool &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the program to inject runpath into mach-o dylibs on macOS	dynamic	
<code>-pgmJSP &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the JavaScript C pre-processor (only for javascript-backend)	dynamic	
<code>-pgmL &lt;cmd&gt;</code> (page 279)	Use <code>&lt;cmd&gt;</code> as the literate pre-processor	dynamic	
<code>-pgml &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the linker	dynamic	
<code>-pgmlas &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the LLVM assembler	dynamic	
<code>-pgmlc &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the LLVM compiler	dynamic	
<code>-pgmlm &lt;cmd&gt;</code> (page 280)	Use <code>&lt;cmd&gt;</code> as the linker when merging object files	dynamic	

continues on next page



Table 22 – continued from previous page

Flag	Description	Type	Reverse
<code>-pgmlo &lt;cmd&gt;</code> (page 280)	Use <cmd> as the LLVM optimiser	dynamic	
<code>-pgmotool &lt;cmd&gt;</code> (page 280)	Use <cmd> as the program to inspect mach-o dylibs on macOS	dynamic	
<code>-pgmP &lt;cmd&gt;</code> (page 279)	Use <cmd> as the C pre-processor (with <code>-cpp</code> (page 282) only)	dynamic	
<code>-pgms &lt;cmd&gt;</code> (page 280)	Use <cmd> as the splitter	dynamic	
<code>-pgmwindres &lt;cmd&gt;</code> (page 280)	Use <cmd> as the program for embedding manifests on Windows.	dynamic	

### 5.6.24 Forcing options to particular phases

More details in *Forcing options to a particular phase* (page 281)

Flag	Description	Type	Reverse
<code>-opta &lt;option&gt;</code> (page 281)	pass <option> to the assembler	dynamic	
<code>-optc &lt;option&gt;</code> (page 281)	pass <option> to the C compiler	dynamic	
<code>-optCmmP &lt;option&gt;</code> (page 281)	pass <option> to the C- C pre-processor.	dynamic	
<code>-optcxx &lt;option&gt;</code> (page 281)	pass <option> to the C++ compiler	dynamic	
<code>-optF &lt;option&gt;</code> (page 281)	pass <option> to the custom pre-processor	dynamic	

continues on next page

Table 23 – continued from previous page

Flag	Description	Type	Reverse
<code>-opti</code> <i>(option)</i> (page 282)	pass <i>(option)</i> to the interpreter sub-process.	dynamic	
<code>-optJSP</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to JavaScript C pre-processor (only for javascript-backend)	dynamic	
<code>-optL</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to the literate pre-processor	dynamic	
<code>-optl</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to the linker	dynamic	
<code>-optlas</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to the LLVM assembler	dynamic	
<code>-optlc</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to the LLVM compiler	dynamic	
<code>-optlm</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to the linker when merging object files.	dynamic	
<code>-optlo</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to the LLVM optimiser	dynamic	
<code>-optP</code> <i>(option)</i> (page 281)	pass <i>(option)</i> to cpp (with <code>-cpp</code> (page 282) only)	dynamic	
<code>-optwindres</code> <i>(option)</i> (page 282)	pass <i>(option)</i> to windres.	dynamic	
<code>-pgmc-supports-no-pie</code> (page 281)	<i>(deprecated)</i> Indicate that the linker supports <code>-no-pie</code>	dynamic	
<code>-pgml-supports-no-pie</code> (page 281)	Indicate that the linker supports <code>-no-pie</code>	dynamic	

### 5.6.25 Platform-specific options

More details in *Platform-specific Flags* (page 93)

Flag	Description	Type	Reverse
<code>-mavx</code> (page 93)	(x86 only) Enable support for AVX SIMD extensions	dynamic	
<code>-mavx2</code> (page 93)	(x86 only) Enable support for AVX2 SIMD extensions	dynamic	
<code>-mavx512cd</code> (page 93)	(x86 only) Enable support for AVX512-CD SIMD extensions	dynamic	
<code>-mavx512er</code> (page 93)	(x86 only) Enable support for AVX512-ER SIMD extensions	dynamic	
<code>-mavx512f</code> (page 93)	(x86 only) Enable support for AVX512-F SIMD extensions	dynamic	
<code>-mavx512pf</code> (page 93)	(x86 only) Enable support for AVX512-PF SIMD extensions	dynamic	
<code>-mbmi</code> (page 94)	(x86 only) Use BMI1 for bit manipulation operations	dynamic	
<code>-mbmi2</code> (page 94)	(x86 only) Use BMI2 for bit manipulation operations	dynamic	
<code>-mfma</code> (page 94)	Use native FMA instructions for fused multiply-add floating-point operations	dynamic	
<code>-msse</code> (page 93)	(x86 only) Use SSE for floating-point operations	dynamic	
<code>-msse2</code> (page 93)	(x86 only) Use SSE2 for floating-point operations	dynamic	

continues on next page

Table 24 – continued from previous page

Flag	Description	Type	Reverse
<code>-msse3</code> (page 94)	(x86 only) Use SSE3 for floating-point operations	dynamic	
<code>-msse4</code> (page 94)	(x86 only) Use SSE4 for floating-point operations	dynamic	
<code>-msse4.2</code> (page 94)	(x86 only) Use SSE4.2 for floating-point operations	dynamic	

### 5.6.26 Compiler debugging options

More details in *Debugging the compiler* (page 297)

Flag	Description	Type	Reverse
<code>-dasm-lint</code> (page 309)	ASM pass sanity checking	dynamic	
<code>-dcmm-lint</code> (page 309)	C-\- pass sanity checking	dynamic	
<code>-dcore-lint</code> (page 309)	Turn on internal sanity checking	dynamic	
<code>-ddisable-js-c-sources</code> (page 306)	Disable the link with C sources compiled to JavaScript	dynamic	
<code>-ddisable-js-minifier</code> (page 306)	Generate pretty-printed JavaScript code instead of minified (compacted) code.	dynamic	
<code>-ddump-asm</code> (page 306)	Dump final assembly	dynamic	
<code>-ddump-asm-conflicts</code> (page 305)	Dump register conflicts from the register allocator.	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<i>-ddump-asm-liveness</i> (page 305)	Dump assembly augmented with register liveness	dynamic	
<i>-ddump-asm-native</i> (page 305)	Dump initial assembly	dynamic	
<i>-ddump-asm-regalloc</i> (page 305)	Dump the result of register allocation	dynamic	
<i>-ddump-asm-regalloc-stages</i> (page 305)	Dump the build/spill stages of the <i>-fregs-graph</i> (page 139) register allocator.	dynamic	
<i>-ddump-asm-stats</i> (page 305)	Dump statistics from the register allocator.	dynamic	
<i>-ddump-bcos</i> (page 306)	Dump interpreter byte code	dynamic	
<i>-ddump-c-backend</i> (page 305)	Dump C code produced by the C (unregisterised) backend.	dynamic	
<i>-ddump-call-arity</i> (page 301)	Dump output of the call arity analysis pass.	dynamic	
<i>-ddump-cfg-weights</i> (page 305)	Dump the assumed weights of the CFG.	dynamic	
<i>-ddump-cmm</i> (page 305)	Dump the final C-\- output	dynamic	
<i>-ddump-cmm-caf</i> (page 304)	Dump the results of the C-\- CAF analysis pass.	dynamic	
<i>-ddump-cmm-cbe</i> (page 304)	Dump the results of common block elimination	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<code>-ddump-cmm-cfg</code> (page 304)	Dump the results of the C-\- control flow optimisation pass.	dynamic	
<code>-ddump-cmm-cps</code> (page 305)	Dump the results of the CPS pass	dynamic	
<code>-ddump-cmm-from-stg</code> (page 304)	Dump STG-to-C-\- output	dynamic	
<code>-ddump-cmm-info</code> (page 304)	Dump the results of the C-\- info table augmentation pass.	dynamic	
<code>-ddump-cmm-opt</code> (page 305)	Dump the results of C-\- to C-\- optimising passes	dynamic	
<code>-ddump-cmm-proc</code> (page 304)	Dump the results of proc-point analysis	dynamic	
<code>-ddump-cmm-procmap</code> (page 304)	Dump the results of the C-\- proc-point map pass.	dynamic	
<code>-ddump-cmm-raw</code> (page 304)	Dump raw C-\-	dynamic	
<code>-ddump-cmm-sink</code> (page 304)	Dump the results of the C-\- sinking pass.	dynamic	
<code>-ddump-cmm-sp</code> (page 304)	Dump the results of the C-\- stack layout pass.	dynamic	
<code>-ddump-cmm-split</code> (page 304)	Dump the results of the C-\- proc-point splitting pass.	dynamic	
<code>-ddump-cmm-switch</code> (page 304)	Dump the results of switch lowering passes	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-ddump-cmm-thread-sanitize</a> (page 304)	Dump the results of the C-\- Thread-Sanitizer elaboration pass.	dynamic	
<a href="#">-ddump-cmm-verbose</a> (page 304)	Write output from main C-\- pipeline passes to files	dynamic	
<a href="#">-ddump-cmm-verbose-by-proc</a> (page 304)	Show output from main C-\- pipeline passes (grouped by proc)	dynamic	
<a href="#">-ddump-core-stats</a> (page 301)	Print a one-line summary of the size of the Core program at the end of the optimisation pipeline	dynamic	
<a href="#">-ddump-cpr-signatures</a> (page 302)	Dump CPR signatures	dynamic	
<a href="#">-ddump-cpranal</a> (page 302)	Dump CPR analysis output	dynamic	
<a href="#">-ddump-cs-trace</a> (page 300)	Trace constraint solver	dynamic	
<a href="#">-ddump-cse</a> (page 302)	Dump CSE output	dynamic	
<a href="#">-ddump-debug</a> (page 306)	Dump generated DWARF debug information	dynamic	
<a href="#">-ddump-deriv</a> (page 300)	Dump deriving output	dynamic	
<a href="#">-ddump-dmd-signatures</a> (page 302)	Dump top-level demand signatures	dynamic	
<a href="#">-ddump-dmdanal</a> (page 302)	Dump demand analysis output	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<code>-ddump-ds</code> (page 301), <code>-ddump-ds-preopt</code> (page 301)	Dump desugarer output.	dynamic	
<code>-ddump-ec-trace</code> (page 300)	Trace exhaustiveness checker	dynamic	
<code>-ddump-exitify</code> (page 301)	Dump output of the exitification pass.	dynamic	
<code>-ddump-faststrings</code> (page 299)	Dump the whole FastString table when finished	dynamic	
<code>-ddump-file-prefix={str}</code> (page 298)	Set the prefix of the filenames used for debugging output.	dynamic	
<code>-ddump-float-in</code> (page 303)	Dump float in output	dynamic	
<code>-ddump-foreign</code> (page 306)	Dump foreign export stubs	dynamic	
<code>-ddump-full-laziness</code> (page 303), <code>-ddump-float-out</code> (page 303)	Dump full laziness pass output	dynamic	
<code>-ddump-hie</code> (page 300)	Dump the hie file syntax tree	dynamic	
<code>-ddump-hpc</code> (page 306)	An alias for <code>-ddump-ticked</code> (page 306).	dynamic	
<code>-ddump-if-trace</code> (page 299)	Trace interface files	dynamic	
<code>-ddump-inlinings</code> (page 302)	Dump inlinings performed by the simplifier.	dynamic	

continues on next page



Table 25 – continued from previous page

Flag	Description	Type	Reverse
<code>-ddump-js</code> (page 306)	Dump final JavaScript code	dynamic	
<code>-ddump-json</code> (page 298)	<i>(deprecated)</i> Use <code>-fdiagnostics-as-json</code> (page 91) instead	dynamic	
<code>-ddump-late-cc</code> (page 303)	Dump core with late cost centres added	dynamic	
<code>-ddump-liberate-case</code> (page 303)	Dump liberate case output	dynamic	
<code>-ddump-llvm</code> (page 305)	Dump LLVM intermediate code.	dynamic	
<code>-ddump-mod-map</code> (page 306)	Dump the state of the module mapping database.	dynamic	
<code>-ddump-occur-anal</code> (page 303)	Dump occurrence analysis output	dynamic	
<code>-ddump-opt-cmm</code> (page 305)	Dump the results of C-\- to C-\- optimising passes	dynamic	
<code>-ddump-parsed</code> (page 299)	Dump parse tree	dynamic	
<code>-ddump-parsed-ast</code> (page 299)	Dump parser output as a syntax tree	dynamic	
<code>-ddump-prep</code> (page 303)	Dump prepared core	dynamic	
<code>-ddump-rn</code> (page 300)	Dump renamer output	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<code>-ddump-rn-ast</code> (page 300)	Dump renamer output as a syntax tree	dynamic	
<code>-ddump-rn-stats</code> (page 300)	Renamer stats	dynamic	
<code>-ddump-rn-trace</code> (page 300)	Trace renamer	dynamic	
<code>-ddump-rtti</code> (page 306)	Trace runtime type inference	dynamic	
<code>-ddump-rule-firings</code> (page 301)	Dump rule firing info	dynamic	
<code>-ddump-rule-rewrites</code> (page 302)	Dump detailed rule firing info	dynamic	
<code>-ddump-rules</code> (page 301)	Dump rewrite rules	dynamic	
<code>-ddump-simpl</code> (page 302)	Dump final simplifier output	dynamic	
<code>-ddump-simpl-iterations</code> (page 301)	Dump output from each simplifier iteration	dynamic	
<code>-ddump-simpl-stats</code> (page 301)	Dump simplifier stats	dynamic	
<code>-ddump-simpl-trace</code> (page 301)	Dump trace messages in simplifier	dynamic	
<code>-ddump-spec</code> (page 301)	Dump specialiser output	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-ddump-spec-constr</a> (page 301)	Dump specialiser output from Spec-Constr	dynamic	
<a href="#">-ddump-splices</a> (page 300)	Dump TH spliced expressions, and what they evaluate to	dynamic	
<a href="#">-ddump-static-argument-tran</a> (page 303)	Dump static argument transformation output	dynamic	
<a href="#">-ddump-stg</a> (page 303)	( <i>deprecated</i> ) Alias for <a href="#">-ddump-stg-from-core</a> (page 303)	dynamic	
<a href="#">-ddump-stg-cg</a> (page 303)	Show output after Stg2Stg	dynamic	
<a href="#">-ddump-stg-final</a> (page 303)	Show output of last STG pass.	dynamic	
<a href="#">-ddump-stg-from-core</a> (page 303)	Show CoreToStg output	dynamic	
<a href="#">-ddump-stg-tags</a> (page 303)	Show output of the tag inference pass.	dynamic	
<a href="#">-ddump-stg-unarised</a> (page 303)	Show unarised STG	dynamic	
<a href="#">-ddump-str-signatures</a> (page 302)	( <i>deprecated</i> ) Alias for <a href="#">-ddump-dmd-signatures</a> (page 302)	dynamic	
<a href="#">-ddump-stranal</a> (page 302)	( <i>deprecated</i> ) Alias for <a href="#">-ddump-dmdanal</a> (page 302)	dynamic	
<a href="#">-ddump-tc</a> (page 300)	Dump typechecker output	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<code>-ddump-tc-ast</code> (page 300)	Dump typechecker output as a syntax tree	dynamic	
<code>-ddump-tc-trace</code> (page 300)	Trace typechecker	dynamic	
<code>-ddump-ticked</code> (page 306)	Dump the code instrumented by HPC ( <i>Observing Code Coverage</i> (page 731)).	dynamic	
<code>-ddump-timings</code> (page 299)	Dump per-pass timing and allocation statistics	dynamic	
<code>-ddump-to-file</code> (page 298)	Dump to files instead of stdout	dynamic	
<code>-ddump-types</code> (page 300)	Dump type signatures	dynamic	
<code>-ddump-verbose-inlinings</code> (page 302)	Dump all considered inlinings	dynamic	
<code>-ddump-view-pattern-common</code> (page 303)	Dump commoned view patterns	dynamic	
<code>-ddump-worker-wrapper</code> (page 303)	Dump worker-wrapper output	dynamic	
<code>-dfaststring-stats</code> (page 299)	Show statistics for fast string usage when finished	dynamic	
<code>-dhex-word-literals</code> (page 307)	Print values of type <i>Word#</i> in hexadecimal.	dynamic	
<code>-dinitial-unique={s}</code> (page 310)	Start UniqSupply allocation from {s}.	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<code>-dinline-check={str}</code> (page 302)	Dump information about inlining decisions	dynamic	
<code>-dipe-stats</code> (page 299)	Show statistics about IPE information	dynamic	
<code>-dkeep-comments</code> (page 299)	Include comments in the parser. Useful in combination with <code>-ddump-parsed-ast</code> (page 299).	dynamic	
<code>-dlinear-core-lint</code> (page 309)	Turn on internal sanity checking	dynamic	
<code>-dlint</code> (page 308)	Enable several common internal sanity checkers	dynamic	
<code>-dno-debug-output</code> (page 307)	Suppress unsolicited debugging output	dynamic	<code>-ddebug-output</code> (page ??)
<code>-dno-typeable-binds</code> (page 310)	Don't generate bindings for Typeable methods	dynamic	
<code>-dppr-case-as-let</code> (page 307)	Print single alternative case expressions as strict lets.	dynamic	
<code>-dppr-cols={n}</code> (page 307)	Set the width of debugging output. For example <code>-dppr-cols200</code>	dynamic	
<code>-dppr-debug</code> (page 299)	Turn on debug printing (more verbose)	dynamic	
<code>-dppr-user-length</code> (page 307)	Set the depth for printing expressions in error msgs	dynamic	
<code>-drule-check={str}</code> (page 302)	Dump information about potential rule application	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<i>-dshow-passes</i> (page 298)	Print out each pass name as it happens	dynamic	
<i>-dstg-lint</i> (page 309)	STG pass sanity checking	dynamic	
<i>-dsuppress-all</i> (page 307)	In dumps, suppress everything (except for uniques) that is suppressible.	dynamic	
<i>-dsuppress-coercion-types</i> (page 308)	Suppress the printing of coercion types in Core dumps to make them shorter	dynamic	
<i>-dsuppress-coercions</i> (page 308)	Suppress the printing of coercions in Core dumps to make them shorter	dynamic	
<i>-dsuppress-core-sizes</i> (page 308)	Suppress the printing of core size stats per binding (since 9.4)	dynamic	
<i>-dsuppress-idinfo</i> (page 307)	Suppress extended information about identifiers where they are bound	dynamic	
<i>-dsuppress-module-prefixes</i> (page 308)	Suppress the printing of module qualification prefixes	dynamic	
<i>-dsuppress-stg-free-vars</i> (page 308)	Suppress the printing of closure free variable lists in STG output	dynamic	
<i>-dsuppress-stg-reps</i> (page 308)	Suppress rep annotations on STG args.	dynamic	
<i>-dsuppress-ticks</i> (page 307)	Suppress "ticks" in the pretty-printer output.	dynamic	
<i>-dsuppress-timestamps</i> (page 308)	Suppress timestamps in dumps	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<i>-dsuppress-type-applications</i> (page 308)	Suppress type applications	dynamic	
<i>-dsuppress-type-signatures</i> (page 308)	Suppress type signatures	dynamic	
<i>-dsuppress-unfoldings</i> (page 308)	Suppress the printing of the stable unfolding of a variable at its binding site	dynamic	
<i>-dsuppress-uniques</i> (page 307)	Suppress the printing of uniques in debug output (easier to use diff)	dynamic	
<i>-dsuppress-var-kinds</i> (page 308)	Suppress the printing of variable kinds	dynamic	
<i>-dtag-inference-checks</i> (page 310)	Affirm tag inference results are correct at runtime.	dynamic	
<i>-dth-dec-file</i> (page 300)	Dump evaluated TH declarations into *.th.hs files	dynamic	
<i>-dunique-increment={i}</i> (page 310)	Set the increment for the generated Unique's to {i}.	dynamic	
<i>-dverbose-core2core</i> (page 301)	Show output from each core-to-core pass	dynamic	
<i>-dverbose-stg2stg</i> (page 303)	Show output from each STG-to-STG pass	dynamic	
<i>-falignment-sanitisation</i> (page 309)	Compile with alignment checks for all info table dereferences.	dynamic	
<i>-fcatch-nonexhaustive-cases</i> (page 309)	Add a default error alternative to case expressions without a default alternative.	dynamic	

continues on next page

Table 25 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-fcheck-prim-bounds</a> (page 310)	Instrument array primops with bounds checks.	dynamic	
<a href="#">-fcmm-thread-sanitizer</a> (page 310)	Enable ThreadSanitizer instrumentation of memory accesses.	dynamic	
<a href="#">-fdistinct-constructor-table</a> (page 748)	Generate a fresh info table for each usage of a data constructor.	dynamic	
<a href="#">-fdump-with-ways</a> (page 298)	Include the tag of the enabled ways in the extension of dump files.	dynamic	
<a href="#">-finfo-table-map</a> (page 747)	Embed a lookup table in the generated binary which maps the address of an info table to the source position the closure originated from.	dynamic	
<a href="#">-finfo-table-map-with-fallthru</a> (page ??)	Include info tables with no source location information in the info table map.	dynamic	<a href="#">-fno-info-table-map</a> (page 748)
<a href="#">-finfo-table-map-with-stack-closures</a> (page ??)	Include info tables for STACK closures in the info table map.	dynamic	<a href="#">-fno-info-table-map</a> (page 748)
<a href="#">-fllvm-fill-undef-with-garbage</a> (page 309)	Instruct LLVM to fill dead STG registers with garbage	dynamic	
<a href="#">-fno-info-table-map-with-fallthru</a> (page 748)	Omit info tables with no source location information from the info table map.	dynamic	<a href="#">-finfo-table-map-with-fallthru</a> (page ??)
<a href="#">-fno-info-table-map-with-stack-closures</a> (page 748)	Omit info tables for STACK closures from the info table map.	dynamic	<a href="#">-finfo-table-map-with-stack-closures</a> (page ??)
<a href="#">-forig-thunk-info</a> (page 309)	Generate stg_orig_thunk_info stack frames on thunk entry	dynamic	
<a href="#">-fproc-alignment</a> (page 309)	Align functions at given boundary.	dynamic	

continues on next page



Table 25 – continued from previous page

Flag	Description	Type	Reverse
<a href="#">-funoptimized-core-for-inte</a> (page 310)	Disable optimizations with the interpreter	dynamic	<a href="#">-fno-unoptimized-co</a> (page ??)
<a href="#">-g</a> (page 741), <a href="#">-g(n)</a> (page 741)	Produce DWARF debug information in compiled object files. <code>(n)</code> can be 0, 1, or 2, with higher numbers producing richer output. If <code>(n)</code> is omitted, level 2 is assumed.	dynamic	

### 5.6.27 Miscellaneous compiler options

Flag	Description	Type	Reverse
<a href="#">-ddump-mod-cycles</a> (page 257)	Dump module cycles	dynamic	
<a href="#">-fdefer-out-of-scope-variables</a> (page 465)	Convert variable out of scope variables errors into warnings. Implied by <a href="#">-fdefer-type-errors</a> (page 464). See also <a href="#">-Wdeferred-out-of-scope-variables</a> (page 100).	dynamic	<a href="#">-fno-defer-out-of-s</a> (page ??)
<a href="#">-fdefer-type-errors</a> (page 464)	Turn type errors into warnings, <a href="#">deferring the error until runtime</a> (page 464). Implies <a href="#">-fdefer-typed-holes</a> (page 464) and <a href="#">-fdefer-out-of-scope-variables</a> (page 465). See also <a href="#">-Wdeferred-type-errors</a> (page 100).	dynamic	<a href="#">-fno-defer-type-err</a> (page ??)
<a href="#">-fdefer-typed-holes</a> (page 464)	Convert <a href="#">typed hole</a> (page 347) errors into warnings, <a href="#">deferring the error until runtime</a> (page 464). Implied by <a href="#">-fdefer-type-errors</a> (page 464). See also <a href="#">-Wtyped-holes</a> (page 99).	dynamic	<a href="#">-fno-defer-typed-ho</a> (page ??)
<a href="#">-fexternal-interpreter</a> (page 70)	Run interpreted code in a separate process	dynamic	
<a href="#">-ffamily-application-cache</a> (page 393)	Use a cache when reducing type family applications	dynamic	<a href="#">-fno-family-applica</a> (page ??)
<a href="#">-fglasgow-exts</a> (page 316)	Deprecated. Enable most language extensions; see <a href="#">Controlling editions and extensions</a> (page 313) for exactly which ones.	dynamic	<a href="#">-fno-glasgow-exts</a> (page ??)

continues on next page

Table 26 – continued from previous page

Flag	Description	Type	Reverse
<code>-fno-safe-haskell</code> (page 643)	Disable <i>Safe Haskell</i> (page 633)	dynamic	
<code>-ghcversion-file &lt;path to ghcversion.h&gt;</code> (page 95)	(GHC as a C compiler only) Use this ghcversion.h file	dynamic	
<code>-H &lt;size&gt;</code> (page 95)	Set the minimum size of the heap to <size>	dynamic	
<code>-hidden-module &lt;module name&gt;</code> (page 84)	A module which should not be visible outside its unit.	dynamic	
<code>-j[&lt;n&gt;]</code> (page 82)	When compiling with <code>--make</code> (page 78), compile <n> modules in parallel.	dynamic	
<code>-jsem</code> (page 83)	When compiling with <code>--make</code> (page 78), coordinate with other processes through the semaphore <sem> to compile modules in parallel.	dynamic	
<code>-reexported-module &lt;module name&gt;</code> (page 84)	A module which should be reexported from this unit.	dynamic	
<code>-this-package-name &lt;unit-id&gt;</code> (page 84)	The name of the package which this module would be part of when installed.	dynamic	
<code>-unit @&lt;filename&gt;</code> (page 84)	Specify the options to build a specific unit.	dynamic	
<code>-working-dir &lt;dir&gt;</code> (page 84)	Specify the directory a unit is expected to be compiled in.	dynamic	

## 5.7 Runtime system (RTS) options

To make an executable program, the GHC system compiles your code and then links it with a non-trivial runtime system, which handles storage management, thread scheduling, profiling, and so on.

The RTS has a lot of options to control its behaviour. For example, you can change the context-switch interval, the default size of the heap, and enable heap profiling. These options can be passed to the runtime system in a variety of different ways; the next section (*Setting RTS options* (page 217)) describes the various methods, and the following sections describe the RTS options themselves.

### 5.7.1 Setting RTS options

There are four ways to set RTS options:

- on the command line between `+RTS` ... `-RTS`, when running the program (*Setting RTS options on the command line* (page 217))
- at compile-time, using `-with-rtsopts={opts}` (page 292) (*Setting RTS options at compile time* (page 218))
- with the environment variable `GHCRTS` (page 218) (*Setting RTS options with the GHCRTS environment variable* (page 218))
- by overriding “hooks” in the runtime system (*“Hooks” to change RTS behaviour* (page 218))

#### 5.7.1.1 Setting RTS options on the command line

If you set the `-rtsopts[=(none|some|all|ignore|ignoreAll)]` (page 291) flag appropriately when linking (see *Options affecting linking* (page 288)), you can give RTS options on the command line when running your program.

When your Haskell program starts up, the RTS extracts command-line arguments bracketed between `+RTS` and `-RTS` as its own. For example:

```
$ ghc prog.hs -rtsopts
[1 of 1] Compiling Main           ( prog.hs, prog.o )
Linking prog ...
$ ./prog -f +RTS -H32m -S -RTS -h foo bar
```

The RTS will snaffle `-H32m -S` for itself, and the remaining arguments `-f -h foo bar` will be available to your program if/when it calls `System.Environment.getArgs`.

No `-RTS` option is required if the runtime-system options extend to the end of the command line, as in this example:

```
% hls -ltr /usr/etc +RTS -A5m
```

If you absolutely positively want all the rest of the options in a command line to go to the program (and not the RTS), use a `--RTS` or `--`. The difference is that `--RTS` will not be passed to the program, while `--` will.

As always, for RTS options that take (size)s: If the last character of (size) is a K or k, multiply by 1024; if an M or m, by 1024\*1024; if a G or G, by 1024<sup>3</sup>. (And any wraparound in the counters is *your* fault!)

Giving a `+RTS -? RTS` option will print out the RTS options actually available in your program (which vary, depending on how you compiled).

---

**Note:** Since GHC is itself compiled by GHC, you can change RTS options in the compiler using the normal `+RTS ... -RTS` combination. For instance, to set the maximum heap size for a compilation to 128M, you would add `+RTS -M128m -RTS` to the command line.

---

### 5.7.1.2 Setting RTS options at compile time

GHC lets you change the default RTS options for a program at compile time, using the `-with-rtsopts` flag (*Options affecting linking* (page 288)). A common use for this is to give your program a default heap and/or stack size that is greater than the default. For example, to set `-H128m -K64m`, link with `-with-rtsopts="-H128m -K64m"`.

### 5.7.1.3 Setting RTS options with the `GHCRTS` environment variable

#### **GHCRTS**

If the `-rtsopts` flag is set to something other than `none` or `ignoreAll` when linking, RTS options are also taken from the environment variable `GHCRTS` (page 218). For example, to set the maximum heap size to 2G for all GHC-compiled programs (using an sh-like shell):

```
GHCRTS='-M2G'  
export GHCRTS
```

RTS options taken from the `GHCRTS` (page 218) environment variable can be overridden by options given on the command line.

---

**Tip:** Setting something like `GHCRTS=-M2G` in your environment is a handy way to avoid Haskell programs growing beyond the real memory in your machine, which is easy to do by accident and can cause the machine to slow to a crawl until the OS decides to kill the process (and you hope it kills the right one).

---

### 5.7.1.4 “Hooks” to change RTS behaviour

GHC lets you exercise rudimentary control over certain RTS settings for any given program, by compiling in a “hook” that is called by the run-time system. The RTS contains stub definitions for these hooks, but by writing your own version and linking it on the GHC command line, you can override the defaults.

Owing to the vagaries of DLL linking, these hooks don’t work under Windows when the program is built dynamically.

## Runtime events

You can change the messages printed when the runtime system “blows up,” e.g., on stack overflow. The hooks for these are as follows:

void **OutOfHeapHook**(unsigned long, unsigned long)

The heap-overflow message.

void **StackOverflowHook**(long int)

The stack-overflow message.

void **MallocFailHook**(long int)

The message printed if malloc fails.

## Event log output

Furthermore GHC lets you specify the way event log data (see *-l {flags}* (page 234)) is written through a custom *EventLogWriter* (page 219):

type **size\_t**

### Hidden

type **EventLogWriter**

A sink of event-log data.

void **initEventLogWriter**(void)

Initializes your *EventLogWriter* (page 219). This is optional.

bool **writeEventLog**(void \*eventlog, *size\_t* (page 219) eventlog\_size)

Hands buffered event log data to your event log writer. Return true on success. Required for a custom *EventLogWriter* (page 219).

Note that this function may be called by multiple threads simultaneously.

void **flushEventLog**(void)

Flush buffers (if any) of your custom *EventLogWriter* (page 219). This can be NULL.

Note that this function may be called by multiple threads simultaneously.

void **stopEventLogWriter**(void)

Called when event logging is about to stop. This can be NULL.

To use an *EventLogWriter* (page 219) the RTS API provides the following functions:

*EventLogStatus* (page 219) **eventLogStatus**(void)

Query whether the current runtime system supports the eventlog (e.g. whether the current executable was linked with *-eventlog* (page 291)) and, if it is supported, whether it is currently logging.

bool **startEventLogging**(const *EventLogWriter* (page 219) \*writer)

Start logging events to the given *EventLogWriter* (page 219). Returns true on success or false if another writer has already been configured.

void **endEventLogging**()

Tear down the active *EventLogWriter* (page 219).

where the enum *EventLogStatus* (page 219) is:

type **EventLogStatus**

- **EVENTLOG\_NOT\_SUPPORTED**: The runtime system wasn't compiled with eventlog support.
- **EVENTLOG\_NOT\_CONFIGURED**: An *EventLogWriter* (page 219) has not yet been configured.
- **EVENTLOG\_RUNNING**: An *EventLogWriter* (page 219) has been configured and is running.

## 5.7.2 Miscellaneous RTS options

**--install-signal-handlers**=(yes|no)

If yes (the default), the RTS installs signal handlers to catch things like Ctrl-C. This option is primarily useful for when you are using the Haskell code as a DLL, and want to set your own signal handlers.

Note that even with `--install-signal-handlers=no`, the RTS interval timer signal is still enabled. The timer signal is either SIGVTALRM or SIGALRM, depending on the RTS configuration and OS capabilities. To disable the timer signal, use the `-V0` RTS option (see *-V (secs)* (page 718)).

**--install-seh-handlers**=(yes|no)

If yes (the default), the RTS on Windows installs exception handlers to catch unhandled exceptions using the Windows exception handling mechanism. This option is primarily useful for when you are using the Haskell code as a DLL, and don't want the RTS to ungracefully terminate your application on errors such as segfaults.

**--generate-crash-dumps**

If yes (the default), the RTS on Windows will generate a core dump on any crash. These dumps can be inspected using debuggers such as WinDBG. The dumps record all code, registers and threading information at the time of the crash. Note that this implies `--install-seh-handlers=yes`.

**--generate-stack-traces**=<yes|no>

If yes (the default), the RTS on Windows will generate a stack trace on crashes if exception handling are enabled. In order to get more information in compiled executables, C code or DLLs symbols need to be available.

**--disable-delayed-os-memory-return**

If given, uses `MADV_DONTNEED` instead of `MADV_FREE` on platforms where this results in more accurate resident memory usage of the program as shown in memory usage reporting tools (e.g. the RSS column in `top` and `htop`).

Using this is expected to make the program slightly slower.

On Linux, `MADV_FREE` is newer and faster because it can avoid zeroing pages if they are re-used by the process later (see `man 2 madvise`), but for the trade-off that memory inspection tools like `top` will not immediately reflect the freeing in their display of resident memory (RSS column): Only under memory pressure will Linux actually remove the freed pages from the process and update its RSS statistics. Until then, the pages show up as `LazyFree` in `/proc/PID/smmaps` (see `man 5 proc`).

The delayed RSS update can confuse programmers debugging memory issues, production memory monitoring tools, and end users who may complain about undue memory usage shown in reporting tools, so with this flag it can be turned off.

**-xp**

On 64-bit machines, the runtime linker usually needs to map object code into the low 2Gb of the address space, due to the x86\_64 small memory model where most symbol references are 32 bits. The problem is that this 2Gb of address space can fill up, especially if you're loading a very large number of object files into GHCi.

This flag offers a workaround, albeit a slightly convoluted one. To be able to load an object file outside of the low 2Gb, the object code needs to be compiled with `-fPIC -fexternal-dynamic-refs`. When the `+RTS -xp` flag is passed, the linker will assume that all object files were compiled with `-fPIC -fexternal-dynamic-refs` and load them anywhere in the address space. It's up to you to arrange that the object files you load (including all packages) were compiled in the right way. If this is not the case for an object, the linker will probably fail with an error message when the problem is detected.

On some platforms where PIC is always the case, e.g. macOS and OpenBSD on x86\_64, and macOS and Linux on aarch64 this flag is enabled by default. One repercussion of this is that referenced system libraries also need to be compiled with `-fPIC` if we need to load them in the runtime linker.

**-xm (address)**

**Warning:** This option is for working around memory allocation problems only. Do not use unless GHCi fails with a message like "failed to mmap() memory below 2Gb". Consider recompiling the objects with `-fPIC -fexternal-dynamic-refs` and using the `-xp` flag instead. If you need to use this option to get GHCi working on your machine, please file a bug.

On 64-bit machines, the RTS needs to allocate memory in the low 2Gb of the address space. Support for this across different operating systems is patchy, and sometimes fails. This option is there to give the RTS a hint about where it should be able to allocate memory in the low 2Gb of the address space. For example, `+RTS -xm200000000 -RTS` would hint that the RTS should allocate starting at the 0.5Gb mark. The default is to use the OS's built-in support for allocating memory in the low 2Gb if available (e.g. `mmap` with `MAP_32BIT` on Linux), or otherwise `-xm400000000`.

**-xq (size)**

**Default**  
100k

This option relates to allocation limits; for more about this see [GHC.Conc.enableAllocationLimit](#). When a thread hits its allocation limit, the RTS throws an exception to the thread, and the thread gets an additional quota of allocation before the exception is raised again, the idea being so that the thread can execute its exception handlers. The `-xq` controls the size of this additional quota.

**-xr (size)**

**Default**  
1T

This option controls the size of virtual memory address space reserved by the two step allocator on a 64-bit platform. It can be useful in scenarios where even reserving a large address range without committing can be expensive (e.g. WSL1), or when you actually have enough physical memory and want to support a Haskell heap larger than 1T. `-xr` is

a no-op if GHC is configured with `--disable-large-address-space` or if the platform is 32-bit.

### 5.7.3 RTS options to control the garbage collector

There are several options to give you precise control over garbage collection. Hopefully, you won't need any of these in normal operation, but there are several things that can be tweaked for maximum performance.

#### **`--copying-gc`**

**Default**

on

**Since**

8.10.2

**Reverse**

`-nonmoving-gc`

Uses the generational copying garbage collector for all generations. This is the default.

#### **`--nonmoving-gc`**

**Default**

off

**Since**

8.10.1

**Reverse**

`-copying-gc`

Enable the concurrent mark-and-sweep garbage collector for old generation collectors. Typically GHC uses a stop-the-world copying garbage collector for all generations. This can cause long pauses in execution during major garbage collections. `--nonmoving-gc` (page 222) enables the use of a concurrent mark-and-sweep garbage collector for oldest generation collections. Under this collection strategy oldest-generation garbage collection can proceed concurrently with mutation.

Note that `--nonmoving-gc` (page 222) cannot be used with `-G1`, [profiling](#) (page 724) nor `-c` (page 224).

#### **`-xn`**

**Default**

off

**Since**

8.10.1

An alias for `--nonmoving-gc` (page 222)

#### **`--nonmoving-dense-allocator-count={count}`**

**Default**

16

**Since**

9.10.1



**Reverse**

none

Specify the amount of dense allocators used by the non-moving garbage collector.

Increasing this value is likely to decrease the amount of memory lost to internal fragmentation while marginally increasing the baseline memory requirements and potentially regressing other metrics.

Large values are likely to lead to diminishing returns as , in practice, the Haskell heap tends to be dominated by small objects.

**-w****Default**

off

**Since**

a long time ago

**Reverse**

none

Uses a mark-region garbage collection strategy for the oldest-generation heap. Note that this cannot be used in conjunction with heap profiling (`-hT` (page 234)) unless linked against the profiling runtime system with `-prof` (page 715).

**-A (size)****Default**

4MB

Set the allocation area size used by the garbage collector. The allocation area (actually generation 0 step 0) is fixed and is never resized (unless you use `-H [{size}]` (page 227), below).

Optimal settings depend on the actual machine, program, and other RTS options. Increasing the allocation area size means worse cache behaviour but fewer garbage collections and less promotion.

In general settings  $\geq 4$ MB can reduce performance in some cases, in particular for single threaded operation. However in a parallel setting increasing the allocation area to 16MB, or even 64MB can increase gc throughput significantly.

With only 1 generation (e.g. `-G1`, see `-G (generations)` (page 225)) the `-A` option specifies the minimum allocation area, since the actual size of the allocation area will be resized according to the amount of data in the heap (see `-F (factor)` (page 225), below).

When heap profiling using a smaller allocation area can increase accuracy as more frequent major garbage collections also results in more frequent heap snapshots

**-AL (size)****Default**`-A` (page 223) value**Since**

8.2.1

Sets the limit on the total size of “large objects” (objects larger than about 3KB) that can be allocated before a GC is triggered. By default this limit is the same as the `-A` (page 223) value.

Large objects are not allocated from the normal allocation area set by the `-A` flag, which is why there is a separate limit for these. Large objects tend to be much rarer than small objects, so most programs hit the `-A` limit before the `-AL` limit. However, the `-A` limit is per-capability, whereas the `-AL` limit is global, so as `-N` gets larger it becomes more likely that we hit the `-AL` limit first. To counteract this, it might be necessary to use a larger `-AL` limit when using a large `-N`.

To see whether you're making good use of all the memory reserved for the allocation area (`-A` times `-N`), look at the output of `+RTS -S` and check whether the amount of memory allocated between GCs is equal to `-A` times `-N`. If not, there are two possible remedies: use `-n` to set a nursery chunk size, or use `-AL` to increase the limit for large objects.

#### **-O** {size}

##### **Default**

1m

Set the minimum size of the old generation.

The old generation is collected whenever it grows to this size or the value of the `-F` (*factor*) (page 225) option multiplied by the size of the live data at the previous major collection, whichever is larger.

#### **-n** {size}

##### **Default**

4m with `-A16m` (page 223) or larger, otherwise 0.

Set the allocation area chunksize. Setting `-n0` means the allocation area is not divided into chunks.

[Example: `-n4m`] When set to a non-zero value, this option divides the allocation area (`-A` value) into chunks of the specified size. During execution, when a processor exhausts its current chunk, it is given another chunk from the pool until the pool is exhausted, at which point a collection is triggered.

This option is only useful when running in parallel (`-N2` or greater). It allows the processor cores to make better use of the available allocation area, even when cores are allocating at different rates. Without `-n`, each core gets a fixed-size allocation area specified by the `-A`, and the first core to exhaust its allocation area triggers a GC across all the cores. This can result in a collection happening when the allocation areas of some cores are only partially full, so the purpose of the `-n` is to allow cores that are allocating faster to get more of the allocation area. This means less frequent GC, leading a lower GC overhead for the same heap size.

This is particularly useful in conjunction with larger `-A` values, for example `-A64m -n4m` is a useful combination on larger core counts (8+).

#### **-c**

Use a compacting algorithm for collecting the oldest generation. By default, the oldest generation is collected using a copying algorithm; this option causes it to be compacted in-place instead. The compaction algorithm is slower than the copying algorithm, but the savings in memory use can be considerable.

For a given heap size (using the `-H` [*size*] (page 227) option), compaction can in fact reduce the GC cost by allowing fewer GCs to be performed. This is more likely when the ratio of live data to heap size is high, say greater than 30%.

---

**Note:** Compaction doesn't currently work when a single generation is requested using the `-G1` option.

---

**-c** *(n)*

**Default**

30

Automatically enable compacting collection when the live data exceeds *(n)*% of the maximum heap size (see the `-M (size)` (page 229) option). Note that the maximum heap size is unlimited by default, so this option has no effect unless the maximum heap size is set with `-M (size)` (page 229).

**-F** *(factor)*

**Default**

2

This option controls the amount of memory reserved for the older generations (and in the case of a two space collector the size of the allocation area) as a factor of the amount of live data. For example, if there was 2M of live data in the oldest generation when we last collected it, then by default we'll wait until it grows to 4M before collecting it again.

The default seems to work well here. If you have plenty of memory, it is usually better to use `-H (size)` (see `-H [(size)]` (page 227)) than to increase `-F (factor)` (page 225).

The `-F (factor)` (page 225) setting will be automatically reduced by the garbage collector when the maximum heap size (the `-M (size)` (page 229) setting) is approaching.

**-Fd** *(factor)*

**Default**

4

The inverse rate at which unused memory is returned to the OS when it is no longer needed. After a large amount of allocation the RTS will start by retaining a lot of allocated blocks in case it will need them again shortly but then it will gradually release them based on the `-Fd (factor)` (page 225). On each subsequent major collection which is not caused by a heap overflow a little more memory will attempt to be returned until the amount retained is similar to the amount of live bytes.

Increasing this factor will make the rate memory is returned slower, decreasing it will make memory be returned more eagerly. Setting it to 0 will disable the memory return (which will emulate the behaviour in releases prior to 9.2).

**-G** *(generations)*

**Default**

2

Set the number of generations used by the garbage collector. The default of 2 seems to be good, but the garbage collector can support any number of generations. Anything larger than about 4 is probably not a good idea unless your program runs for a *long* time, because the oldest generation will hardly ever get collected.

Specifying 1 generation with `+RTS -G1` gives you a simple 2-space collector, as you would expect. In a 2-space collector, the `-A (size)` (page 223) option specifies the *minimum* allocation area size, since the allocation area will grow with the amount of live data in

the heap. In a multi-generational collector the allocation area is a fixed size (unless you use the `-H [size]` (page 227) option).

**-qg** *<gen>*

**Default**

0

**Since**

6.12.1

Use parallel GC in generation *<gen>* and higher. Omitting *<gen>* turns off the parallel GC completely, reverting to sequential GC.

The default parallel GC settings are usually suitable for parallel programs (i.e. those using `GHC.Conc.par`, Strategies, or with multiple threads). However, it is sometimes beneficial to enable the parallel GC for a single-threaded sequential program too, especially if the program has a large amount of heap data and GC is a significant fraction of runtime. To use the parallel GC in a sequential program, enable the parallel runtime with a suitable `-N <x>` (page 151) option, and additionally it might be beneficial to restrict parallel GC to the old generation with `-qg1`.

**-qb** *<gen>*

**Default**

1 for `-A` (page 223) < 32M, 0 otherwise

**Since**

6.12.1

Use load-balancing in the parallel GC in generation *<gen>* and higher. Omitting *<gen>* disables load-balancing entirely.

Load-balancing shares out the work of GC between the available cores. This is a good idea when the heap is large and we need to parallelise the GC work, however it is also pessimal for the short young-generation collections in a parallel program, because it can harm locality by moving data from the cache of the CPU where it is being used to the cache of another CPU. Hence the default is to do load-balancing only in the old-generation. In fact, for a parallel program it is sometimes beneficial to disable load-balancing entirely with `-qb`.

**-qn** *<x>*

**Default**

the value of `-N` (page 151) or the number of CPU cores, whichever is smaller.

**Since**

8.2.1

Set the number of threads to use for the parallel GC.

By default, all of the capabilities participate in parallel garbage collection. If we want to use a very large `-N` value, however, this can reduce the performance of the GC. For this reason, the `-qn` flag can be used to specify a lower number for the threads that should participate in GC. During GC, if there are more than this number of workers active, some of them will sleep for the duration of the GC.

The `-qn` flag may be useful when running with a large `-A` value (so that GC is infrequent), and a large `-N` value (so as to make use of hyperthreaded cores, for example). For example, on a 24-core machine with 2 hyperthreads per core, we might use `-N48 -qn24`

-A128m to specify that the mutator should use hyperthreads but the GC should only use real cores. Note that this configuration would use 6GB for the allocation area.

**-H** [(size)]

**Default**

0

This option provides a “suggested heap size” for the garbage collector. Think of -Hsize as a variable *-A (size)* (page 223) option. It says: I want to use at least (size) bytes, so use whatever is left over to increase the -A value.

This option does not put a *limit* on the heap size: the heap may grow beyond the given size as usual.

If (size) is omitted, then the garbage collector will take the size of the heap at the previous GC as the (size). This has the effect of allowing for a larger -A value but without increasing the overall memory requirements of the program. It can be useful when the default small -A value is suboptimal, as it can be in programs that create large amounts of long-lived data.

**-I** (seconds)

**Default**

0.3 seconds in the threaded runtime, 0 in the non-threaded runtime

Set the amount of idle time which must pass before a idle GC is performed. Setting -I0 disables the idle GC.

In the threaded and SMP versions of the RTS (see *-threaded* (page ??), *Options affecting linking* (page 288)), a major GC is automatically performed if the runtime has been idle (no Haskell computation has been running) for a period of time.

For an interactive application, it is probably a good idea to use the idle GC, because this will allow finalizers to run and deadlocked threads to be detected in the idle time when no Haskell computation is happening. Also, it will mean that a GC is less likely to happen when the application is busy, and so responsiveness may be improved. However, if the amount of live data in the heap is particularly large, then the idle GC can cause a significant delay, and too small an interval could adversely affect interactive responsiveness.

The idle period timer only resets after some activity by a Haskell thread. If your program is doing literally nothing then after the first idle collection is triggered then no more future collections will be scheduled until more work is performed.

This is an experimental feature, please let us know if it causes problems and/or could benefit from further tuning.

**-Iw** (seconds)

**Default**

0 seconds

Set the minimum wait time between runs of the idle GC.

By default, if idle GC is enabled in the threaded runtime, a major GC will be performed every time the process goes idle for a sufficiently long duration (see *-I (seconds)* (page 227)). For large server processes accepting regular but infrequent requests (e.g., once per second), an expensive, major GC may run after every request. As an alternative to shutting off idle GC entirely (with -I0), a minimum wait time between idle GCs can be specified with this flag. For example, -Iw60 will ensure that an idle GC runs at most once per minute.

This is an experimental feature, please let us know if it causes problems and/or could benefit from further tuning.

**-ki** *(size)*

**Default**

1k

Set the initial stack size for new threads.

Thread stacks (including the main thread's stack) live on the heap. As the stack grows, new stack chunks are added as required; if the stack shrinks again, these extra stack chunks are reclaimed by the garbage collector. The default initial stack size is deliberately small, in order to keep the time and space overhead for thread creation to a minimum, and to make it practical to spawn threads for even tiny pieces of work.

---

**Note:** This flag used to be simply `-k`, but was renamed to `-ki` in GHC 7.2.1. The old name is still accepted for backwards compatibility, but that may be removed in a future version.

---

**-kc** *(size)*

**Default**

32k

Set the size of "stack chunks". When a thread's current stack overflows, a new stack chunk is created and added to the thread's stack, until the limit set by `-K (size)` (page 228) is reached.

The advantage of smaller stack chunks is that the garbage collector can avoid traversing stack chunks if they are known to be unmodified since the last collection, so reducing the chunk size means that the garbage collector can identify more stack as unmodified, and the GC overhead might be reduced. On the other hand, making stack chunks too small adds some overhead as there will be more overflow/underflow between chunks. The default setting of 32k appears to be a reasonable compromise in most cases.

**-kb** *(size)*

**Default**

1k

Sets the stack chunk buffer size. When a stack chunk overflows and a new stack chunk is created, some of the data from the previous stack chunk is moved into the new chunk, to avoid an immediate underflow and repeated overflow/underflow at the boundary. The amount of stack moved is set by the `-kb` option.

Note that to avoid wasting space, this value should typically be less than 10% of the size of a stack chunk (`-kc (size)` (page 228)), because in a chain of stack chunks, each chunk will have a gap of unused space of this size.

**-K** *(size)*

**Default**

80% of physical memory

Set the maximum stack size for an individual thread to *(size)* bytes. If the thread attempts to exceed this limit, it will be sent the `StackOverflow` exception. The limit can be disabled entirely by specifying a size of zero.

This option is there mainly to stop the program eating up all the available memory in the machine if it gets into an infinite loop.

**-m** *(n)*

**Default**

3%

Minimum % *(n)* of heap which must be available for allocation.

**-M** *(size)*

**Default**

unlimited

Set the maximum heap size to *(size)* bytes. The heap normally grows and shrinks according to the memory requirements of the program. The only reason for having this option is to stop the heap growing without bound and filling up all the available swap space, which at the least will result in the program being summarily killed by the operating system.

The maximum heap size also affects other garbage collection parameters: when the amount of live data in the heap exceeds a certain fraction of the maximum heap size, compacting collection will be automatically enabled for the oldest generation, and the `-F` parameter will be reduced in order to avoid exceeding the maximum heap size.

**-M<sub>grace</sub>**=*(size)*

**Default**

1M

If the program's heap exceeds the value set by `-M (size)` (page 229), the RTS throws an exception to the program, and the program gets an additional quota of allocation before the exception is raised again, the idea being so that the program can execute its exception handlers. `-Mgrace` controls the size of this additional quota.

**--numa**

**--numa**=*<mask>*

Enable NUMA-aware memory allocation in the runtime (only available with `-threaded`, and only on Linux and Windows currently).

Background: some systems have a Non-Uniform Memory Architecture, whereby main memory is split into banks which are “local” to specific CPU cores. Accessing local memory is faster than accessing remote memory. The OS provides APIs for allocating local memory and binding threads to particular CPU cores, so that we can ensure certain memory accesses are using local memory.

The `--numa` option tells the RTS to tune its memory usage to maximize local memory accesses. In particular, the RTS will:

- Determine the number of NUMA nodes (*N*) by querying the OS.
- Manage separate memory pools for each node.
- Map capabilities to NUMA nodes. Capability *C* is mapped to NUMA node *C mod N*.
- Bind worker threads on a capability to the appropriate node.
- Allocate the nursery from node-local memory.
- Perform other memory allocation, including in the GC, from node-local memory.

- When load-balancing, we prefer to migrate threads to another Capability on the same node.

The `--numa` flag is typically beneficial when a program is using all cores of a large multi-core NUMA system, with a large allocation area (`-A`). All memory accesses to the allocation area will go to local memory, which can save a significant amount of remote memory access. A runtime speedup on the order of 10% is typical, but can vary a lot depending on the hardware and the memory behaviour of the program.

Note that the RTS will not set CPU affinity for bound threads and threads entering Haskell from C/C++, so if your program uses bound threads you should ensure that each bound thread calls the RTS API `rts_setInCallCapability(c,1)` from C/C++ before calling into Haskell. Otherwise there could be a mismatch between the CPU that the thread is running on and the memory it is using while running Haskell code, which will negate any benefits of `--numa`.

If given an explicit `<mask>`, the `<mask>` is interpreted as a bitmap that indicates the NUMA nodes on which to run the program. For example, `--numa=3` would run the program on NUMA nodes 0 and 1.

### **`--long-gc-sync`**

#### **`--long-gc-sync=<seconds>`**

When a GC starts, all the running mutator threads have to stop and synchronise. The period between when the GC is initiated and all the mutator threads are stopped is called the GC synchronisation phase. If this phase is taking a long time (longer than 1ms is considered long), then it can have a severe impact on overall throughput.

A long GC sync can be caused by a mutator thread that is inside an unsafe FFI call, or running in a loop that doesn't allocate memory and so doesn't yield. To fix the former, make the call *safe*, and to fix the latter, either avoid calling the code in question or compile it with `-fomit-yields` (page 139).

By default, the flag will cause a warning to be emitted to stderr when the sync time exceeds the specified time. This behaviour can be overridden, however: the `longGCSync()` hook is called when the sync time is exceeded during the sync period, and the `longGCSyncEnd()` hook at the end. Both of these hooks can be overridden in the `RtsConfig` when the runtime is started with `hs_init_ghc()`. The default implementations of these hooks (`LongGcSync()` and `LongGCSyncEnd()` respectively) print warnings to stderr.

One way to use this flag is to set a breakpoint on `LongGCSync()` in the debugger, and find the thread that is delaying the sync. You probably want to use `-g` (page 741) to provide more info to the debugger.

The GC sync time, along with other GC stats, are available by calling the `getRTSStats()` function from C, or `GHC.Stats.getRTSStats` from Haskell.



### 5.7.4 RTS options to produce runtime statistics

```
-T
-t [{file}]
-s [{file}]
-S [{file}]
--machine-readable
--internal-counters
```

These options produce runtime-system statistics, such as the amount of time spent executing the program and in the garbage collector, the amount of memory allocated, the maximum size of the heap, and so on. The three variants give different levels of detail: `-T` collects the data but produces no output, `-t` produces a single line of output in the same format as GHC's `-Rghc-timing` option, `-s` produces a more detailed summary at the end of the program, and `-S` additionally produces information about each and every garbage collection. Passing `--internal-counters` to a threaded runtime will cause a detailed summary to include various internal counts accumulated during the run; note that these are unspecified and may change between releases.

The output is placed in `{file}`. If `{file}` is omitted, then the output is sent to `stderr`.

If you use the `-T` flag then, you should access the statistics using [GHC.Stats](#).

If you use the `-t` flag then, when your program finishes, you will see something like this:

```
<<ghc: 36169392 bytes, 69 GCs, 603392/1065272 avg/max bytes residency (2
→ samples), 3M in use, 0.00 INIT (0.00 elapsed), 0.02 MUT (0.02 elapsed),
→ 0.07 GC (0.07 elapsed) :ghc>>
```

This tells you:

- The total number of bytes allocated by the program over the whole run.
- The total number of garbage collections performed.
- The average and maximum “residency”, which is the amount of live data in bytes. The runtime can only determine the amount of live data during a major GC, which is why the number of samples corresponds to the number of major GCs (and is usually relatively small). To get a better picture of the heap profile of your program, use the `-hT` (page 234) RTS option ([RTS options for profiling](#) (page 234)).
- The peak memory the RTS has allocated from the OS.
- The amount of CPU time and elapsed wall clock time while initialising the runtime system (INIT), running the program itself (MUT, the mutator), and garbage collecting (GC).

You can also get this in a more future-proof, machine readable format, with `-t --machine-readable`:

```
[("bytes allocated", "36169392")
, ("num_GC", "69")
, ("average_bytes_used", "603392")
, ("max_bytes_used", "1065272")
, ("num_byte_usage_samples", "2")
, ("peak_megabytes_allocated", "3")
, ("init_cpu_seconds", "0.00")
```

(continues on next page)

(continued from previous page)

```
,("init_wall_seconds", "0.00")
,("mutator_cpu_seconds", "0.02")
,("mutator_wall_seconds", "0.02")
,("GC_cpu_seconds", "0.07")
,("GC_wall_seconds", "0.07")
]
```

If you use the `-s` flag then, when your program finishes, you will see something like this (the exact details will vary depending on what sort of RTS you have, e.g. you will only see profiling data if your RTS is compiled for profiling):

```
36,169,392 bytes allocated in the heap
 4,057,632 bytes copied during GC
1,065,272 bytes maximum residency (2 sample(s))
 54,312 bytes maximum slop
   3 MB total memory in use (0 MB lost due to fragmentation)

Generation 0:    67 collections,      0 parallel,  0.04s,  0.03s elapsed
Generation 1:     2 collections,      0 parallel,  0.03s,  0.04s elapsed

SPARKS: 359207 (557 converted, 149591 pruned)

INIT  time    0.00s ( 0.00s elapsed)
MUT   time    0.01s ( 0.02s elapsed)
GC    time    0.07s ( 0.07s elapsed)
EXIT  time    0.00s ( 0.00s elapsed)
Total time    0.08s ( 0.09s elapsed)

%GC time      89.5% (75.3% elapsed)

Alloc rate    4,520,608,923 bytes per MUT second

Productivity  10.5% of total user, 9.1% of total elapsed
```

- The “bytes allocated in the heap” is the total bytes allocated by the program over the whole run.
- GHC uses a copying garbage collector by default. “bytes copied during GC” tells you how many bytes it had to copy during garbage collection.
- The maximum space actually used by your program is the “bytes maximum residency” figure. This is only checked during major garbage collections, so it is only an approximation; the number of samples tells you how many times it is checked.
- The “bytes maximum slop” tells you the most space that is ever wasted due to the way GHC allocates memory in blocks. Slop is memory at the end of a block that was wasted. There’s no way to control this; we just like to see how much memory is being lost this way.
- The “total memory in use” tells you the peak memory the RTS has allocated from the OS.
- Next there is information about the garbage collections done. For each generation it says how many garbage collections were done, how many of those collections were

done in parallel, the total CPU time used for garbage collecting that generation, and the total wall clock time elapsed while garbage collecting that generation.

- The SPARKS statistic refers to the use of `Control.Parallel.par` and related functionality in the program. Each spark represents a call to `par`; a spark is “converted” when it is executed in parallel; and a spark is “pruned” when it is found to be already evaluated and is discarded from the pool by the garbage collector. Any remaining sparks are discarded at the end of execution, so “converted” plus “pruned” does not necessarily add up to the total.
- Next there is the CPU time and wall clock time elapsed broken down by what the runtime system was doing at the time. INIT is the runtime system initialisation. MUT is the mutator time, i.e. the time spent actually running your code. GC is the time spent doing garbage collection. RP is the time spent doing retainer profiling. PROF is the time spent doing other profiling. EXIT is the runtime system shutdown time. And finally, Total is, of course, the total.

%GC time tells you what percentage GC is of Total. “Alloc rate” tells you the “bytes allocated in the heap” divided by the MUT CPU time. “Productivity” tells you what percentage of the Total CPU and wall clock elapsed times are spent in the mutator (MUT).

The `-S` flag, as well as giving the same output as the `-s` flag, prints information about each GC as it happens:

Alloc bytes	Copied bytes	Live bytes	GC user	GC elap	TOT user	TOT elap	Page Flts	
528496	47728	141512	0.01	0.02	0.02	0.02	0	0
→ (Gen: 1)								
[...]								
524944	175944	1726384	0.00	0.00	0.08	0.11	0	0
→ (Gen: 0)								

For each garbage collection, we print:

- How many bytes we allocated this garbage collection.
- How many bytes we copied this garbage collection.
- How many bytes are currently live.
- How long this garbage collection took (CPU time and elapsed wall clock time).
- How long the program has been running (CPU time and elapsed wall clock time).
- How many page faults occurred this garbage collection.
- How many page faults occurred since the end of the last garbage collection.
- Which generation is being garbage collected.

### 5.7.5 RTS options for concurrency and parallelism

The RTS options related to concurrency are described in *Using Concurrent Haskell* (page 150), and those for parallelism in *RTS options for SMP parallelism* (page 151).

### 5.7.6 RTS options for profiling

Most profiling runtime options are only available when you compile your program for profiling (see *Compiler options for profiling* (page 715), and *RTS options for heap profiling* (page 724) for the runtime options). However, there is one profiling option that is available for ordinary non-profiled executables:

**-hT**

**-h**

Generates a basic heap profile, in the file `prog.hp`. To produce the heap profile graph, use **hp2ps** (see *hp2ps - Rendering heap profiles to PostScript* (page 729)). The basic heap profile is broken down by data constructor, with other types of closures (functions, thunks, etc.) grouped into broad categories (e.g. FUN, THUNK). To get a more detailed profile, use the full profiling support (*Profiling* (page 709)). Can be shortened to **-h** (page 234).

---

**Note:** The meaning of the shortened **-h** (page 234) is dependent on whether your program was compiled for profiling. (See *RTS options for heap profiling* (page 724) for details.)

---

**-L** `{n}`

**Default**

25 characters

Sets the maximum length of the cost-centre names listed in the heap profile.

### 5.7.7 Tracing

When the program is linked with the **-eventlog** (page 291) option (*Options affecting linking* (page 288)), runtime events can be logged in several ways:

- In binary format to a file for later analysis by a variety of tools. One such tool is **ThreadScope**, which interprets the event log to produce a visual parallel execution profile of the program.
- In binary format to customized event log writer. This enables live analysis of the events while the program is running.
- As text to standard output, for debugging purposes.

**-l** `{flags}`

Log events in binary format. Without any `{flags}` specified, this logs a default set of events, suitable for use with tools like ThreadScope.

Per default the events are written to `program.eventlog` though the mechanism for writing event log data can be overridden with a custom *EventLogWriter*.

For some special use cases you may want more control over which events are included. The `(flags)` is a sequence of zero or more characters indicating which classes of events to log. Currently these the classes of events that can be enabled/disabled:

- `s` — scheduler events, including Haskell thread creation and start/stop events. Enabled by default.
- `g` — GC events, including GC start/stop. Enabled by default.
- `n` — non-moving garbage collector (see [--nonmoving-gc](#) (page 222)) events including start and end of the concurrent mark and census information to characterise heap fragmentation. Disabled by default.
- `p` — parallel sparks (sampled). Enabled by default.
- `f` — parallel sparks (fully accurate). Disabled by default.
- `T` — [ticky-ticky profiler](#) (page 737) events (see [Ticky counters](#) (page 829) for details). Disabled by default.
- `u` — user events. These are events emitted from Haskell code using functions such as `Debug.Trace.traceEvent`. Enabled by default.

You can disable specific classes, or enable/disable all classes at once:

- `a` — enable all event classes listed above
- `-{x}` — disable the given class of events, for any event class listed above
- `-a` — disable all classes

For example, `-l-ag` would disable all event classes (`-a`) except for GC events (`g`).

For spark events there are two modes: sampled and fully accurate. There are various events in the life cycle of each spark, usually just creating and running, but there are some more exceptional possibilities. In the sampled mode the number of occurrences of each kind of spark event is sampled at frequent intervals. In the fully accurate mode every spark event is logged individually. The latter has a higher runtime overhead and is not enabled by default.

The format of the log file is described in this users guide in [Eventlog encodings](#) (page 807) It can be parsed in Haskell using the [ghc-events](#) library. To dump the contents of a `.eventlog` file as text, use the tool `ghc-events show` that comes with the [ghc-events](#) package.

Each event is associated with a timestamp which is the number of nanoseconds since the start of execution of the running program. This is the elapsed time, not the CPU time.

**-ol{filename}**

**Default**

`(program).eventlog`

**Since**

8.8

Sets the destination for the eventlog produced with the `-l {flags}` (page 234) flag.

**--eventlog-flush-interval=(seconds)**

**Default**

disabled

**Since**  
9.2

When enabled, the eventlog will be flushed periodically every `<seconds>`. This can be useful in live-monitoring situations where the eventlog is consumed in real-time by another process.

**-v** [`<flags>`]

Log events as text to standard output, instead of to the `.eventlog` file. The `<flags>` are the same as for `-l`, with the additional option `t` which indicates that the each event printed should be preceded by a timestamp value (in the binary `.eventlog` file, all events are automatically associated with a timestamp).

The debugging options `-Dx` also generate events which are logged using the tracing framework. By default those events are dumped as text to `stdout` (`-Dx` implies `-v`), but they may instead be stored in the binary eventlog file by using the `-l` option.

### 5.7.8 RTS options for Haskell program coverage

When a program is compiled with the `-fhpc` (page 733) flag, then the generated code is instrumented with instructions which keep track of which code was executed while the program runs. This functionality is implemented in the runtime system and can be controlled by the following flags.

**--write-tix-file**

**Default**  
enabled

**Since**  
9.10

By default, the runtime system writes a file `<program>.tix` at the end of execution if the executable is compiled with the `-fhpc` option. This file is not written if the `--write-tix-file=no` option is passed to the runtime system.

This option is useful if you want to use the functionality provided by the `Trace.Hpc`. `Reflect` module of the `hpc` library. These functions allow to inspect the state of the Tix data structures during runtime, so that the executable can write Tix files to disk itself.

### 5.7.9 RTS options for hackers, debuggers, and over-interested souls

These RTS options might be used (a) to avoid a GHC bug, (b) to see “what’s really happening”, or (c) because you feel like it. Not recommended for everyday use!

**-B**

Sound the bell at the start of each garbage collection.

Oddly enough, people really do use this option! Our pal in Durham (England), Paul Callaghan, writes: “Some people here use it for a variety of purposes—honestly!—e.g., confirmation that the code/machine is doing something, infinite loop detection, gauging cost of recently added code. Certain people can even tell what stage [the program] is in by the beep pattern. But the major use is for annoying others in the same office...”

**-D** *(x)*

An RTS debugging flag; only available if the program was linked with the *-debug* (page 290) option. Various values of *(x)* are provided to enable debug messages and additional runtime sanity checks in different subsystems in the RTS, for example `+RTS -Ds` enables debug messages from the scheduler. Use `+RTS -?` to find out which debug flags are supported.

Full list of currently supported flags:

- Ds** DEBUG: scheduler
- Di** DEBUG: interpreter
- Dw** DEBUG: weak
- DG** DEBUG: gccafs
- Dg** DEBUG: gc
- Db** DEBUG: block
- DS** DEBUG: sanity
- DZ** DEBUG: zero freed memory on GC
- Dt** DEBUG: stable
- Dp** DEBUG: prof
- Da** DEBUG: apply
- Dl** DEBUG: linker
- DL** DEBUG: linker (verbose); implies `:rts-flag: -Dl`
- Dm** DEBUG: stm
- Dn** DEBUG: non-moving garbage collector
- Dz** DEBUG: stack squeezing
- Dc** DEBUG: program coverage
- Dr** DEBUG: sparks
- DC** DEBUG: compact
- Dk** DEBUG: continuation

Debug messages will be sent to the binary event log file instead of stdout if the *-l* (*flags*) (page 234) option is added. This might be useful for reducing the overhead of debug tracing.

To figure out what exactly they do, the least bad way is to `grep` the `rts/` directory in the ghc code for macros like `DEBUG(scheduler` or `DEBUG_scheduler`.

**-r** *(file)*

Produce “ticky-ticky” statistics at the end of the program run (only available if the program was linked with *-debug* (page 290)). The *(file)* business works just like on the *-S* [*file*] (page 231) RTS option, above.

For more information on ticky-ticky profiling, see *Using “ticky-ticky” profiling (for implementors)* (page 737).

**-xc**

(Only available when the program is compiled for profiling.) When an exception is raised in the program, this option causes a stack trace to be dumped to `stderr`.

This can be particularly useful for debugging: if your program is complaining about a `head []` error and you haven't got a clue which bit of code is causing it, compiling with `-prof -fprof-auto` (see *-prof* (page 715)) and running with `+RTS -xc -RTS` will tell you exactly the call stack at the point the error was raised.

The output contains one report for each exception raised in the program (the program might raise and catch several exceptions during its execution), where each report looks something like this:

```
*** Exception raised (reporting due to +RTS -xc), stack trace:
GHC.List.CAF
--> evaluated by: Main.polynomial.table_search,
called from Main.polynomial.theta_index,
called from Main.polynomial,
called from Main.zonal_pressure,
called from Main.make_pressure.p,
called from Main.make_pressure,
called from Main.compute_initial_state.p,
called from Main.compute_initial_state,
called from Main.CAF
...
```

The stack trace may often begin with something uninformative like `GHC.List.CAF`; this is an artifact of GHC's optimiser, which lifts out exceptions to the top-level where the profiling system assigns them to the cost centre "CAF". However, `+RTS -xc` doesn't just print the current stack, it looks deeper and reports the stack at the time the CAF was evaluated, and it may report further stacks until a non-CAF stack is found. In the example above, the next stack (after `--> evaluated by`) contains plenty of information about what the program was doing when it evaluated `head []`.

Implementation details aside, the function names in the stack should hopefully give you enough clues to track down the bug.

See also the function `traceStack` in the module `Debug.Trace` for another way to view call stacks.

**-Z**

Turn *off* update frame squeezing on context switch. (There's no particularly good reason to turn it off, except to ensure the accuracy of certain data collected regarding thunk entry counts.)

### 5.7.10 Getting information about the RTS

**--info**

It is possible to ask the RTS to give some information about itself. To do this, use the *--info* (page 238) flag, e.g.

```
$ ./a.out +RTS --info
[("GHC RTS", "YES")
,("GHC version", "6.7")]
```

(continues on next page)



(continued from previous page)

```

,("RTS way", "rts_p")
,("Host platform", "x86_64-unknown-linux")
,("Host architecture", "x86_64")
,("Host OS", "linux")
,("Host vendor", "unknown")
,("Build platform", "x86_64-unknown-linux")
,("Build architecture", "x86_64")
,("Build OS", "linux")
,("Build vendor", "unknown")
,("Target platform", "x86_64-unknown-linux")
,("Target architecture", "x86_64")
,("Target OS", "linux")
,("Target vendor", "unknown")
,("Word size", "64")
,("Compiler unregistered", "NO")
,("Tables next to code", "YES")
,("Flag -with-rtsopts", "")
]

```

The information is formatted such that it can be read as a of type `[(String, String)]`. Currently the following fields are present:

**GHC RTS**

Is this program linked against the GHC RTS? (always “YES”).

**GHC version**

The version of GHC used to compile this program.

**RTS way**

The variant (“way”) of the runtime. The most common values are `rts_v` (vanilla), `rts_thr` (threaded runtime, i.e. linked using the `-threaded` (page ??) option) and `rts_p` (profiling runtime, i.e. linked using the `-prof` (page 715) option). Other variants include `debug` (linked using `-debug` (page 290)), and `dyn` (the RTS is linked in dynamically, i.e. a shared library, rather than statically linked into the executable itself). These can be combined, e.g. you might have `rts_thr_debug_p`.

**Target platformTarget architectureTarget OSTarget vendor**

These are the platform the program is compiled to run on.

**Build platformBuild architectureBuild OSBuild vendor**

These are the platform where the program was built on. (That is, the target platform of GHC itself.) Ordinarily this is identical to the target platform. (It could potentially be different if cross-compiling.)

**Host platformHost architectureHost OSHost vendor**

These are the platform where GHC itself was compiled. Again, this would normally be identical to the build and target platforms.

**Word size**

Either “32” or “64”, reflecting the word size of the target platform.

**Compiler unregistered**

Was this program compiled with an “*unregistered*” (page 279) version of GHC? (I.e., a version of GHC that has no platform-specific optimisations compiled in, usually because this is a currently unsupported platform.) This value will usually be no, unless you’re using an experimental build of GHC.

**Tables next to code**

Putting info tables directly next to entry code is a useful performance optimisation that is not available on all platforms. This field tells you whether the program has been compiled with this optimisation. (Usually yes, except on unusual platforms.)

**Flag `-with-rtsopts`**

The value of the GHC flag `-with-rtsopts={opts}` (page 292) at compile/link time.

## 5.8 Filenames and separate compilation

This section describes what files GHC expects to find, what files it creates, where these files are stored, and what options affect this behaviour.

Pathname conventions vary from system to system. In particular, the directory separator is `/` on Unix systems and `\` on Windows systems. In the sections that follow, we shall consistently use `/` as the directory separator; substitute this for the appropriate character for your system.

### 5.8.1 Haskell source files

Each Haskell source module should be placed in a file on its own.

Usually, the file should be named after the module name, replacing dots in the module name by directory separators. For example, on a Unix system, the module `A.B.C` should be placed in the file `A/B/C.hs`, relative to some base directory. If the module is not going to be imported by another module (`Main`, for example), then you are free to use any filename for it.

GHC assumes that source files are ASCII or UTF-8 only, other encoding are not recognised. However, invalid UTF-8 sequences will be ignored in comments, so it is possible to use other encodings such as Latin-1, as long as the non-comment source code is ASCII only.

### 5.8.2 Output files

When asked to compile a source file, GHC normally generates two files: an object file, and an interface file.

The object file, which normally ends in a `.o` suffix, contains the compiled code for the module.

The interface file, which normally ends in a `.hi` suffix, contains the information that GHC needs in order to compile further modules that depend on this module. It contains things like the types of exported functions, definitions of data types, and so on. It is stored in a binary format, so don't try to read one; use the `--show-iface {file}` (page 79) option instead (see [Other options related to interface files](#) (page 245)).

You should think of the object file and the interface file as a pair, since the interface file is in a sense a compiler-readable description of the contents of the object file. If the interface file and object file get out of sync for any reason, then the compiler may end up making assumptions about the object file that aren't true; trouble will almost certainly follow. For this reason, we recommend keeping object files and interface files in the same place (GHC does this by default, but it is possible to override the defaults as we'll explain shortly).

Every module has a *module name* defined in its source code (module `A.B.C` where ...).

The name of the object file generated by GHC is derived according to the following rules, where `{osuf}` is the object-file suffix (this can be changed with the `-osuf` option).

- If there is no `-odir` option (the default), then the object filename is derived from the source filename (ignoring the module name) by replacing the suffix with `(osuf)`.
- If `-odir <dir>` has been specified, then the object filename is `<dir>/<mod>.(osuf)`, where `<mod>` is the module name with dots replaced by slashes. GHC will silently create the necessary directory structure underneath `<dir>`, if it does not already exist.

The name of the interface file is derived using the same rules, except that the suffix is `(hisuf)` (`.hi` by default) instead of `(osuf)`, and the relevant options are `-hidir <dir>` (page 243) and `-hisuf <suffix>` (page 244) instead of `-odir <dir>` (page 242) and `-osuf <suffix>` (page 243) respectively.

For example, if GHC compiles the module `A.B.C` in the file `src/A/B/C.hs`, with no `-odir` or `-hidir` flags, the interface file will be put in `src/A/B/C.hi` and the object file in `src/A/B/C.o`.

For any module that is imported, GHC requires that the name of the module in the import statement exactly matches the name of the module in the interface file (or source file) found using the strategy specified in *The search path* (page 241). This means that for most modules, the source file name should match the module name.

However, note that it is reasonable to have a module `Main` in a file named `foo.hs`, but this only works because GHC never needs to search for the interface for module `Main` (because it is never imported). It is therefore possible to have several `Main` modules in separate source files in the same directory, and GHC will not get confused.

In batch compilation mode, the name of the object file can also be overridden using the `-o <file>` (page 242) option, and the name of the interface file can be specified directly using the `-ohi <file>` (page 243) option.

### 5.8.3 The search path

In your program, you import a module `Foo` by saying `import Foo`. In `--make` (page 78) mode or `GHCi`, GHC will look for a source file for `Foo` and arrange to compile it first. Without `--make` (page 78), GHC will look for the interface file for `Foo`, which should have been created by an earlier compilation of `Foo`.

The strategy for looking for source files is as follows: GHC keeps a list of directories called the search path. For each of these directories, it tries appending `<basename>.<extension>` to the directory, and checks whether the file exists. The value of `<basename>` is the module name with dots replaced by the directory separator (`"/"` or `"\"`, depending on the system), and `<extension>` is a source extension (`hs`, `lhs`) if we are in `--make` (page 78) mode or `GHCi`.

When looking for interface files in `-c` (page 79) mode, we look for interface files in the `-hidir`, if it's set. Otherwise the same strategy as for source files is used to try to locate the interface file.

For example, suppose the search path contains directories `d1`, `d2`, and `d3`, and we are in `--make` (page 78) mode looking for the source file for a module `A.B.C`. GHC will look in `d1/A/B/C.hs`, `d1/A/B/C.lhs`, `d2/A/B/C.hs`, and so on.

The search path by default contains a single directory: `"."` (i.e. the current directory). The following options can be used to add to or change the contents of the search path:

**`-i<dir>[:<dir>]*`**

This flag appends a colon-separated list of `dirs` to the search path.

**`-i`**

resets the search path back to nothing.

This isn't the whole story: GHC also looks for modules in pre-compiled libraries, known as packages. See the section on packages ([Packages](#) (page 259)) for details.

### 5.8.4 Redirecting the compilation output(s)

#### **-o** {file}

GHC's compiled output normally goes into a `.hc`, `.o`, etc., file, depending on the last-run compilation phase. The option `-o file` re-directs the output of that last-run phase to {file}.

---

**Note:** This "feature" can be counterintuitive: `ghc -C -o foo.o foo.hs` will put the intermediate C code in the file `foo.o`, name notwithstanding!

---

This option is most often used when creating an executable file, to set the filename of the executable. For example:

```
ghc -o prog --make Main
```

will compile the program starting with module `Main` and put the executable in the file `prog`.

Note: on Windows, if the result is an executable file, the extension `".exe"` is added if the specified filename does not already have an extension. Thus

```
ghc -o foo Main.hs
```

will compile and link the module `Main.hs`, and put the resulting executable in `foo.exe` (not `foo`).

If you use `ghc --make` and you don't use the `-o`, the name GHC will choose for the executable will be based on the name of the file containing the module `Main`. Note that with GHC the `Main` module doesn't have to be put in file `Main.hs`. Thus both

```
ghc --make Prog
```

and

```
ghc --make Prog.hs
```

will produce `Prog` (or `Prog.exe` if you are on Windows).

#### **-dyno** {file}

When using `-dynamic-too`, option `-dyno {suffix}` is the counterpart of `-o`. It redirects the dynamic output to {file}.

#### **-odir** {dir}

Redirects object files to directory {dir}. For example:

```
$ ghc -c parse/Foo.hs parse/Bar.hs gurgle/Bumble.hs -odir `uname -m`
```

The object files, `Foo.o`, `Bar.o`, and `Bumble.o` would be put into a subdirectory named after the architecture of the executing machine (`x86`, `mips`, etc).

Note that the `-odir` option does *not* affect where the interface files are put; use the `-hidir` option for that. In the above example, they would still be put in `parse/Foo.hi`, `parse/Bar.hi`, and `gurgle/Bumble.hi`.

Please also note that when doing incremental compilation, this directory is where GHC looks into to find object files from previous builds.

**-ohi** *<file>*

The interface output may be directed to another file `bar2/Wurble.iface` with the option `-ohi bar2/Wurble.iface` (not recommended).

**Warning:** If you redirect the interface file somewhere that GHC can't find it, then the recompilation checker may get confused (at the least, you won't get any recompilation avoidance). We recommend using a combination of `-hidir` and `-hisuf` options instead, if possible.

To avoid generating an interface at all, you could use this option to redirect the interface into the bit bucket: `-ohi /dev/null`, for example.

**-dynohi** *<file>*

When using `-dynamic-too`, option `-dynohi <file>` is the counterpart of `-ohi`. It redirects the dynamic interface output to *<file>*.

**-hidir** *<dir>*

Redirects all generated interface files into *<dir>*, instead of the default.

Please also note that when doing incremental compilation (by `ghc --make` or `ghc -c`), this directory is where GHC looks into to find interface files.

**-hiedir** *<dir>*

Redirects all generated extended interface files into *<dir>*, instead of the default.

Please also note that when doing incremental compilation (by `ghc --make` or `ghc -c`), this directory is where GHC looks into to find extended interface files.

**-stubdir** *<dir>*

Redirects all generated FFI stub files into *<dir>*. Stub files are generated when the Haskell source contains a `foreign export` or `foreign import "wrapper"` declaration (see [Using foreign export and foreign import ccall "wrapper" with GHC](#) (page 624)). The `-stubdir` option behaves in exactly the same way as `-odir` and `-hidir` with respect to hierarchical modules.

**-dumpdir** *<dir>*

Redirects all dump files into *<dir>*. Dump files are generated when `-ddump-to-file` is used with other `-ddump-*` flags.

**-outputdir** *<dir>*

The `-outputdir` option is shorthand for the combination of `-odir <dir>` (page 242), `-hidir <dir>` (page 243), `-hiedir <dir>` (page 243), `-stubdir <dir>` (page 243) and `-dumpdir <dir>` (page 243).

**-osuf** *<suffix>*

The `-osuf <suffix>` will change the `.o` file suffix for object files to whatever you specify. We use this when compiling libraries, so that objects for the profiling versions of the libraries don't clobber the normal ones.

**-dynosuf** {suffix}

When using `-dynamic-too`, option `-dynosuf` {suffix} is the counterpart of `-osuf`. It changes the `.dyn_o` file suffix for dynamic object files.

**-hisuf** {suffix}

Similarly, the `-hisuf` {suffix} will change the `.hi` file suffix for non-system interface files (see *Other options related to interface files* (page 245)).

The `-hisuf/-osuf` game is particularly useful if you want to compile a program both with and without profiling, in the same directory. You can say:

```
ghc ...
```

to get the ordinary version, and

```
ghc ... -osuf prof.o -hisuf prof.hi -prof -fprof-auto
```

to get the profiled version.

**-dynhisuf** {suffix}

When using `-dynamic-too`, option `-dynhisuf` {suffix} is the counterpart of `-hisuf`. It changes the `.dyn_hi` file suffix for dynamic interface files.

**-hiesuf** {suffix}

The `-hiesuf` {suffix} will change the `.hie` file suffix for extended interface files to whatever you specify.

**-hcsuf** {suffix}

Finally, the option `-hcsuf` {suffix} will change the `.hc` file suffix for compiler-generated intermediate C files.

## 5.8.5 Keeping Intermediate Files

The following options are useful for keeping (or not keeping) certain intermediate files around, when normally GHC would throw these away after compilation:

**-keep-hc-file****-keep-hc-files**

Keep intermediate `.hc` files when doing `.hs-to-.o` compilations via *C* (page 278) (Note: `.hc` files are only generated by *unregisterised* (page 279) compilers).

**-keep-hi-files**

Keep intermediate `.hi` files. This is the default. You may use `-no-keep-hi-files` if you are not interested in the `.hi` files.

**-keep-hscpp-file****-keep-hscpp-files**

Keep the output of the CPP pre-processor phase as `.hscpp` files. A `.hscpp` file is only created, if a module gets compiled and uses the C pre-processor.

**-keep-llvm-file****-keep-llvm-files****Implies**

*-fllvm* (page 286)

Keep intermediate `.ll` files when doing `.hs-to-.o` compilations via [LLVM](#) (page 278) (Note: `.ll` files aren't generated when using the native code generator, you may need to use `-fllvm` (page 286) to force them to be produced).

**-keep-o-files**

Keep intermediate `.o` files. This is the default. You may use `-no-keep-o-files` if you are not interested in the `.o` files.

**-keep-s-file**

**-keep-s-files**

Keep intermediate `.s` files.

**-keep-tmp-files**

Instructs the GHC driver not to delete any of its temporary files, which it normally keeps in `/tmp` (or possibly elsewhere; see [Redirecting temporary files](#) (page 245)). Running GHC with `-v` will show you what temporary files were generated along the way.

## 5.8.6 Redirecting temporary files

**-tmpdir** *{dir}*

If you have trouble because of running out of space in `/tmp` (or wherever your installation thinks temporary files should go), you may use the `-tmpdir` *{dir}* (page 245) option to specify an alternate directory. For example, `-tmpdir .` says to put temporary files in the current working directory.

Alternatively, use your `TMPDIR` environment variable. Set it to the name of the directory where temporary files should be put. GCC and other programs will honour the `TMPDIR` variable as well.

## 5.8.7 Other options related to interface files

**-ddump-hi**

Dumps the new interface to standard output.

**-ddump-hi-diffs**

The compiler does not overwrite an existing `.hi` interface file if the new one is the same as the old one; this is friendly to **make**. When an interface does change, it is often enlightening to be informed. The `-ddump-hi-diffs` (page 245) option will make GHC report the differences between the old and new `.hi` files.

**-ddump-minimal-imports**

Dump to the file `M.imports` (where `M` is the name of the module being compiled) a “minimal” set of import declarations. The directory where the `.imports` files are created can be controlled via the `-dumpdir` *{dir}* (page 243) option.

You can safely replace all the import declarations in `M.hs` with those found in its respective `.imports` file. Why would you want to do that? Because the “minimal” imports (a) import everything explicitly, by name, and (b) import nothing that is not required. It can be quite painful to maintain this property by hand, so this flag is intended to reduce the labour.

**--show-iface** *{file}*

where *{file}* is the name of an interface file, dumps the contents of that interface in a human-readable format. See [Modes of operation](#) (page 78).



### 5.8.8 Options related to extended interface files

GHC builds up a wealth of information about a Haskell source file as it compiles it. Extended interface files are a way of persisting some of this information to disk so that external tools, such as IDE's, can avoid parsing, typechecking, and renaming all over again. These files contain

- a simplified AST
  - nodes are annotated with source positions and types
  - identifiers are annotated with scope information
- the raw bytes of the initial Haskell source

The GHC API exposes functions for reading and writing these files.

#### **-fwrite-ide-info**

Writes out extended interface files alongside regular interface files. Just like regular interface files, GHC has a recompilation check to detect out of date or missing extended interface files.

#### **-fvalidate-ide-info**

Runs a series of sanity checks and lints on the extended interface files that are being written out. These include testing things properties such as variables not occurring outside of their expected scopes.

The format in which GHC currently stores its typechecked AST, makes it costly to collect the types for some expressions nodes. For the sake of performance, GHC currently chooses to skip over these, so not all expression nodes should be expected to have type information on them. See [#16233](#) for more.

### 5.8.9 The recompilation checker

#### **-fforce-recomp**

Turn off recompilation checking (which is on by default). Recompilation checking normally stops compilation early, leaving an existing `.o` file in place, if it can be determined that the module does not need to be recompiled.

#### **-fignore-optim-changes**

#### **-fignore-hpc-changes**

In the olden days, GHC compared the newly-generated `.hi` file with the previous version; if they were identical, it left the old one alone and didn't change its modification date. In consequence, importers of a module with an unchanged output `.hi` file were not recompiled.

This doesn't work any more. Suppose module C imports module B, and B imports module A. So changes to module A might require module C to be recompiled, and hence when `A.hi` changes we should check whether C should be recompiled. However, the dependencies of C will only list `B.hi`, not `A.hi`, and some changes to A (changing the definition of a function that appears in an inlining of a function exported by B, say) may conceivably not change `B.hi` one jot. So now...

GHC calculates a fingerprint (in fact an MD5 hash) of each interface file, and of each declaration within the interface file. It also keeps in every interface file a list of the fingerprints of everything it used when it last compiled the file. If the MD5 hash of the source file stored in the `.hi` file hasn't changed, the `.o` file's modification date is greater than or equal to that



of the `.hi` file, and the recompilation checking is on, GHC will be clever. It compares the fingerprints on the things it needs this time with the fingerprints on the things it needed last time (gleaned from the interface file of the module being compiled); if they are all the same it stops compiling early in the process saying “Compilation IS NOT required”. What a beautiful sight!

You can read about [how all this works](#) in the GHC commentary.

#### 5.8.9.1 Recompilation for Template Haskell and Plugins

Recompilation checking gets a bit more complicated when using Template Haskell or plugins. Both these features execute code at compile time and so if any of the executed code changes then it's necessary to recompile the module. Consider the top-level splice:

```
main = $(foo bar [| () |])
```

When the module is compiled `foo bar [| () |]` will be evaluated and the resulting code placed into the program. The dependencies of the expression are calculated and stored during module compilation. When the interface file is written, additional dependencies are created on the object file dependencies of the expression. For instance, if `foo` is from module `A` and `bar` is from module `B`, the module will now depend on `A.o` and `B.o`, if either of these change then the module will be recompiled.

### 5.8.10 How to compile mutually recursive modules

GHC supports the compilation of mutually recursive modules. This section explains how.

Every cycle in the module import graph must be broken by a `hs-boot` file. Suppose that modules `A.hs` and `B.hs` are Haskell source files, thus:

```
module A where
  import B( TB(..) )

  newtype TA = MkTA Int

  f :: TB -> TA
  f (MkTB x) = MkTA x

module B where
  import {-# SOURCE #-} A( TA(..) )

  data TB = MkTB !Int

  g :: TA -> TB
  g (MkTA x) = MkTB x
```

Here `A` imports `B`, but `B` imports `A` with a `{-# SOURCE #-}` pragma, which breaks the circular dependency. Every loop in the module import graph must be broken by a `{-# SOURCE #-}` import; or, equivalently, the module import graph must be acyclic if `{-# SOURCE #-}` imports are ignored.

For every module `A.hs` that is `{-# SOURCE #-}`-imported in this way there must exist a source file `A.hs-boot`. This file contains an abbreviated version of `A.hs`, thus:

```
module A where
  newtype TA = MkTA Int
```

To compile these three files, issue the following commands:

```
ghc -c A.hs-boot      -- Produces A.hi-boot, A.o-boot
ghc -c B.hs           -- Consumes A.hi-boot, produces B.hi, B.o
ghc -c A.hs           -- Consumes B.hi, produces A.hi, A.o
ghc -o foo A.o B.o    -- Linking the program
```

There are several points to note here:

- The file `A.hs-boot` is a programmer-written source file. It must live in the same directory as its parent source file `A.hs`. Currently, if you use a literate source file `A.lhs` you must also use a literate boot file, `A.lhs-boot`; and vice versa.
- A `hs-boot` file is compiled by GHC, just like a `hs` file:

```
ghc -c A.hs-boot
```

When a `hs-boot` file `A.hs-boot` is compiled, it is checked for scope and type errors. When its parent module `A.hs` is compiled, the two are compared, and an error is reported if the two are inconsistent.

- Just as compiling `A.hs` produces an interface file `A.hi`, and an object file `A.o`, so compiling `A.hs-boot` produces an interface file `A.hi-boot`, and a pseudo-object file `A.o-boot`:
  - The pseudo-object file `A.o-boot` is empty (don't link it!), but it is very useful when using a Makefile, to record when the `A.hi-boot` was last brought up to date (see [Using make](#) (page 255)).
  - The `hi-boot` generated by compiling a `hs-boot` file is in the same machine-generated binary format as any other GHC-generated interface file (e.g. `B.hi`). You can display its contents with `ghc --show-iface`. If you specify a directory for interface files, the `-hidir` flag, then that affects `hi-boot` files too.
- If `hs-boot` files are considered distinct from their parent source files, and if a `{-# SOURCE #-}` import is considered to refer to the `hs-boot` file, then the module import graph must have no cycles. The command `ghc -M` will report an error if a cycle is found.
- A module `M` that is `{-# SOURCE #-}`-imported in a program will usually also be ordinarily imported elsewhere. If not, `ghc --make` automatically adds `M` to the set of modules it tries to compile and link, to ensure that `M`'s implementation is included in the final program.

A `hs-boot` file need only contain the bare minimum of information needed to get the bootstrapping process started. For example, it doesn't need to contain declarations for *everything* that module `A` exports, only the things required by the module(s) that import `A` recursively.

A `hs-boot` file is written in a subset of Haskell:

- The module header (including the export list), and import statements, are exactly as in Haskell, and so are the scoping rules. Hence, to mention a non-Prelude type or class, you must import it.
- There must be no value declarations, but there can be type signatures for values. For example:

```
double :: Int -> Int
```

- Fixity declarations are exactly as in Haskell.
- Vanilla type synonym declarations are exactly as in Haskell.
- Open type and data family declarations are exactly as in Haskell.
- A closed type family may optionally omit its equations, as in the following example:

```
type family ClosedFam a where ..
```

The `..` is meant literally – you should write two dots in your file. Note that the `where` clause is still necessary to distinguish closed families from open ones. If you give any equations of a closed family, you must give all of them, in the same order as they appear in the accompanying Haskell file.

- A data type declaration can either be given in full, exactly as in Haskell, or it can be given abstractly, by omitting the `'='` sign and everything that follows. For example:

```
data T a b
```

In a *source* program this would declare `TA` to have no constructors (a GHC extension: see [Data types with no constructors](#) (page 366)), but in an *hi-boot* file it means “I don’t know or care what the constructors are”. This is the most common form of data type declaration, because it’s easy to get right. You *can* also write out the constructors but, if you do so, you must write it out precisely as in its real definition.

If you do not write out the constructors, you may need to give a kind annotation ([Explicitly-kinded quantification](#) (page 564)), to tell GHC the kind of the type variable, if it is not `"*"`. (In source files, this is worked out from the way the type variable is used in the constructors.) For example:

```
data R (x :: * -> *) y
```

You cannot use deriving on a data type declaration; write an instance declaration instead.

- Class declarations can either be given in full, exactly as in Haskell, or they can be given abstractly by omitting everything other than the instance head: no superclasses, no class methods, no associated types. However, if the class has any `::extension::FunctionalDependencies`, those given in the *hs-boot* file must be the same.

If the class declaration is given in full, the entire class declaration must be identical, up to a renaming of the type variables bound by the class head. This means:

- The class head must be the same.
- The class context must be the same, up to simplification of constraints.
- If there are any `::extension::FunctionalDependencies`, these must be the same.
- The order, names, and types of the class methods must be the same.
- The arity and kinds of any associated types must be the same.
- Default methods as well as default signatures (see `::extension::DefaultSignatures`) must be provided for the same methods, and must be the same.
- Default declarations for associated types must be provided for the same types, and must be the same.

To declare a class with no methods in an *hs-boot* file, it must have a superclass. If the class has no superclass constraints, add an empty one, e.g.

```
class () => C a
```

This is a full class declaration, not an abstract declaration in which the methods were omitted.

- You can include instance declarations just as in Haskell; but omit the “where” part.
- The default role for abstract datatype parameters is now representational. (An abstract datatype is one with no constructors listed.) To get another role, use a role annotation. (See [Roles](#) (page 467).)

### 5.8.11 Module signatures

GHC 8.2 supports module signatures (hsig files), which allow you to write a signature in place of a module implementation, deferring the choice of implementation until a later point in time. This feature is not intended to be used without [Cabal](#); this manual entry will focus on the syntax and semantics of signatures.

To start with an example, suppose you had a module `A` which made use of some string operations. Using normal module imports, you would only be able to pick a particular implementation of strings:

```
module Str where
  type Str = String

  empty :: Str
  empty = ""

  toString :: Str -> String
  toString s = s

module A where
  import Str
  z = toString empty
```

By replacing `Str.hs` with a signature `Str.hsig`, `A` (and any other modules in this package) are now parametrized by a string implementation:

```
signature Str where
  data Str
  empty :: Str
  toString :: Str -> String
```

We can typecheck `A` against this signature, or we can instantiate `Str` with a module that provides the following declarations. Refer to [Cabal's documentation](#) for a more in-depth discussion on how to instantiate signatures.

Module signatures actually consist of two closely related features:

- The ability to define an `hsig` file, containing type definitions and type signature for values which can be used by modules that import the signature, and must be provided by the eventual implementing module, and
- The ability to *inherit* required signatures from packages we depend upon, combining the signatures into a single merged signature which reflects the requirements of any locally defined signature, as well as the requirements of our dependencies.

A signature file is denoted by an `hsig` file; every required signature must have an `hsig` file (even if it is an empty one), including required signatures inherited from dependencies. Signatures can be imported using an ordinary `import Sig` declaration.

`hsig` files are written in a variant of Haskell similar to `hs-boot` files, but with some slight changes:

- The header of a signature is `signature A where ...` (instead of the usual `module A where ...`).
- Import statements and scoping rules are exactly as in Haskell. To mention a non-Prelude type or class, you must import it.
- Unlike regular modules, the defined entities of a signature include not only those written in the local `hsig` file, but also those from inherited signatures (as inferred from the `-package-id {unit-id}` (page 262) flags). These entities are not considered in scope when typechecking the local `hsig` file, but are available for import by any module or signature which imports the signature. The one exception to this rule is the export list, described below.

If a declaration occurs in multiple inherited signatures, they will be *merged* together. For values, we require that the types from both signatures match exactly; however, other declarations may merge in more interesting ways. The merging operation in these cases has the effect of textually replacing all occurrences of the old name with a reference to the new, merged declaration. For example, if we have the following two signatures:

```
signature A where
  data T
  f :: T -> T

signature A where
  data T = MkT
  g :: T
```

the resulting merged signature would be:

```
signature A where
  data T = MkT
  f :: T -> T
  g :: T
```

- If no export list is provided for a signature, the exports of a signature are all of its defined entities merged with the exports of all inherited signatures.

If you want to reexport an entity from a signature, you must also include a `module SigName` export, so that all of the entities defined in the signature are exported. For example, the following module exports both `f` and `Int` from `Prelude`:

```
signature A(module A, Int) where
  import Prelude (Int)
  f :: Int
```

Reexports merge with local declarations; thus, the signature above would successfully merge with:

```
signature A where
  data Int
```

The only permissible implementation of such a signature is a module which reexports precisely the same entity:

```
module A (f, Int) where
  import Prelude (Int)
  f = 2 :: Int
```

Conversely, any entity requested by a signature can be provided by a reexport from the implementing module. This is different from `hs-boot` files, which require every entity to be defined locally in the implementing module.

- GHC has experimental support for *signature thinning*, which is used when a signature has an explicit export list without a module export of the signature itself. In this case, the export list applies to the final export list *after* merging, in particular, you may refer to entities which are not declared in the body of the local `hsig` file.

The semantics in this case is that the set of required entities is defined exclusively by its exports; if an entity is not mentioned in the export list, it is not required. The motivation behind this feature is to allow a library author to provide an omnibus signature containing the type of every function someone might want to use, while a client thins down the exports to the ones they actually require. For example, supposing that you have inherited a signature for strings, you might write a local signature of this form, listing only the entities that you need:

```
signature Str (Str, empty, append, concat) where
  -- empty
```

A few caveats apply here. First, it is illegal to export an entity which refers to a locally defined type which itself is not exported (GHC will report an error in this case). Second, signatures which come from dependencies which expose modules cannot be thinned in this way (after all, the dependency itself may need the entity); these requirements are unconditionally exported. Finally, any module reexports must refer to modules imported by the local signature (even if an inherited signature exported the module).

We may change the syntax and semantics of this feature in the future.

- The declarations and types from signatures of dependencies that will be merged in are not in scope when type checking an `hsig` file. To refer to any such type, you must declare it yourself:

```
-- OK, assuming we inherited an A that defines T
signature A (T) where
  -- empty

-- Not OK
signature A (T, f) where
  f :: T -> T

-- OK
signature A (T, f) where
  data T
  f :: T -> T
```

- There must be no value declarations, but there can be type signatures for values. For example, we might define the signature:

```
signature A where
  double :: Int -> Int
```

A module implementing A would have to export the function `double` with a type definitionally equal to the signature. Note that this means you can't implement `double` using a polymorphic function `double :: Num a => a -> a`.

Note that signature matching does check if *fixity* matches, so be sure specify fixity of ordinary identifiers if you intend to use them with backticks.

- Fixity, type synonym, open type/data family declarations are permitted as in normal Haskell.
- Closed type family declarations are permitted as in normal Haskell. They can also be given abstractly, as in the following example:

```
type family ClosedFam a where ..
```

The `..` is meant literally – you should write two dots in your file. The `where` clause distinguishes closed families from open ones.

- A data type declaration can either be given in full, exactly as in Haskell, or it can be given abstractly, by omitting the `'='` sign and everything that follows. For example:

```
signature A where
  data T a b
```

Abstract data types can be implemented not only with data declarations, but also newtypes and type synonyms (with the restriction that a type synonym must be fully eta-reduced, e.g., type `T = ...` to be accepted.) For example, the following are all valid implementations of the `T` above:

```
-- Algebraic data type
data T a b = MkT a b

-- Newtype
newtype T a b = MkT (a, b)

-- Type synonym
data T2 a b = MkT2 a a b b
type T = T2
```

Data type declarations merge only with other data type declarations which match exactly, except abstract data, which can merge with data, newtype or type declarations. Merges with type synonyms are especially useful: suppose you are using a package of strings which has left the type of characters in the string unspecified:

```
signature Str where
  data Str
  data Elem
  head :: Str -> Elem
```

If you locally define a signature which specifies type `Elem = Char`, you can now use `head` from the inherited signature as if it returned a `Char`.

If you do not write out the constructors, you may need to give a kind to tell GHC what the kinds of the type variables are, if they are not the default `*`. Unlike regular data

type declarations, the return kind of an abstract data declaration can be anything (in which case it probably will be implemented using a type synonym.) This can be used to allow compile-time representation polymorphism (as opposed to *run-time representation polymorphism* (page ??)), as in this example:

```
signature Number where
  import GHC.Types
  data Rep :: RuntimeRep
  data Number :: TYPE Rep
  plus :: Number -> Number -> Number
```

Roles of type parameters are subject to the subtyping relation `phantom < representational < nominal`: for example, an abstract type with a nominal type parameter can be implemented using a concrete type with a representational type parameter. Merging respects this subtyping relation (e.g., `nominal` merged with `representational` is `representational`.) Roles in signatures default to `nominal`, which gives maximum flexibility on the implementor's side. You should only need to give an explicit role annotation if a client of the signature would like to coerce the abstract type in a type parameter (in which case you should specify `representational` explicitly.) Unlike regular data types, we do *not* assume that abstract data types are representationally injective: if we have `Coercible (T a) (T b)`, and `T` has role `nominal`, this does not imply that `a ~ b`.

- A class declarations can either be abstract or concrete. An abstract class is one with no superclasses or class methods:

```
signature A where
  class Key k
```

It can be implemented in any way, with any set of superclasses and methods; however, modules depending on an abstract class are not permitted to define instances (as of GHC 8.2, this restriction is not checked, see [#13086](#).) These declarations can be implemented by type synonyms of kind `Constraint`; this can be useful if you want to parametrize over a constraint in functions. For example, with the `ConstraintKinds` extension, this type synonym is a valid implementation of the signature above:

```
module A where
  type Key = Eq
```

A concrete class specifies its superclasses, methods, default method signatures (but not their implementations) and a `MINIMAL` pragma. Unlike regular Haskell classes, you don't have to explicitly declare a default for a method to make it optional vis-a-vis the `MINIMAL` pragma.

When merging class declarations, we require that the superclasses and methods match exactly; however, `MINIMAL` pragmas are logically ORed together, and a method with a default signature will merge successfully against one that does not.

- You can include instance declarations as in Haskell; just omit the “where” part. An instance declaration need not be implemented directly; if an instance can be derived based on instances in the environment, it is considered implemented. For example, the following signature:

```
signature A where
  data Str
  instance Eq Str
```



is considered implemented by the following module, since there are instances of `Eq` for `[]` and `Char` which can be combined to form an instance `Eq [Char]`:

```
module A where
  type Str = [Char]
```

Unlike other declarations, for which only the entities declared in a signature file are brought into scope, instances from the implementation are always brought into scope, even if they were not declared in the signature file. This means that a module may typecheck against a signature, but not against a matching implementation. You can avoid situations like this by never defining orphan instances inside a package that has signatures.

Instance declarations are only merged if their heads are exactly the same, so it is possible to get into a situation where GHC thinks that instances in a signature are overlapping, even if they are implemented in a non-overlapping way. If this is giving you problems give us a shout.

- Any orphan instances which are brought into scope by an import from a signature are unconditionally considered in scope, even if the eventual implementing module doesn't actually import the same orphans.

Known limitations:

- Pattern synonyms are not supported.
- Algebraic data types specified in a signature cannot be implemented using pattern synonyms. See [#12717](#)

### 5.8.12 Using make

It is reasonably straightforward to set up a Makefile to use with GHC, assuming you name your source files the same as your modules. Thus:

```
HC      = ghc
HC_OPTS = -cpp $(EXTRA_HC_OPTS)

SRCS = Main.lhs Foo.lhs Bar.lhs
OBSJS = Main.o   Foo.o   Bar.o

.SUFFIXES : .o .hs .hi .lhs .hc .s

cool_pgm : $(OBSJS)
    rm -f $@
    $(HC) -o $@ $(HC_OPTS) $(OBSJS)

# Standard suffix rules
.o.hi:
    @:

.lhs.o:
    $(HC) -c $< $(HC_OPTS)

.hs.o:
    $(HC) -c $< $(HC_OPTS)
```

(continues on next page)

(continued from previous page)

```
.o-boot.hi-boot:
    @:

.lhs-boot.o-boot:
    $(HC) -c $< $(HC_OPTS)

.hs-boot.o-boot:
    $(HC) -c $< $(HC_OPTS)

# Inter-module dependencies
Foo.o Foo.hc Foo.s      : Baz.hi          # Foo imports Baz
Main.o Main.hc Main.s   : Foo.hi Baz.hi    # Main imports Foo and Baz
```

**Note:** Sophisticated **make** variants may achieve some of the above more elegantly. Notably, **gmake**'s pattern rules let you write the more comprehensible:

```
%.o : %.lhs
    $(HC) -c $< $(HC_OPTS)
```

What we've shown should work with any **make**.

Note the cheesy `.o.hi` rule: It records the dependency of the interface (`.hi`) file on the source. The rule says a `.hi` file can be made from a `.o` file by doing...nothing. Which is true.

Note that the suffix rules are all repeated twice, once for normal Haskell source files, and once for `hs-boot` files (see [How to compile mutually recursive modules](#) (page 247)).

Note also the inter-module dependencies at the end of the Makefile, which take the form

```
Foo.o Foo.hc Foo.s      : Baz.hi          # Foo imports Baz
```

They tell **make** that if any of `Foo.o`, `Foo.hc` or `Foo.s` have an earlier modification date than `Baz.hi`, then the out-of-date file must be brought up to date. To bring it up to date, **make** looks for a rule to do so; one of the preceding suffix rules does the job nicely. These dependencies can be generated automatically by **ghc**; see [Dependency generation](#) (page 256)

### 5.8.13 Dependency generation

Putting inter-dependencies of the form `Foo.o : Bar.hi` into your Makefile by hand is rather error-prone. Don't worry, **GHC** has support for automatically generating the required dependencies. Add the following to your Makefile:

```
depend :
    ghc -M $(HC_OPTS) $(SRCS)
```

Now, before you start compiling, and any time you change the `imports` in your program, do `make depend` before you do `make cool_pgm`. The command `ghc -M` will append the needed dependencies to your Makefile.

In general, `ghc -M Foo` does the following. For each module `M` in the set `Foo` plus all its imports (transitively), it adds to the Makefile:

- A line recording the dependence of the object file on the source file.

```
M.o : M.hs
```

(or `M.lhs` if that is the filename you used).

- For each import declaration `import X in M`, a line recording the dependence of `M` on `X`:

```
M.o : X.hi
```

- For each import declaration `import {-# SOURCE #-} X in M`, a line recording the dependence of `M` on `X`:

```
M.o : X.hi-boot
```

(See [How to compile mutually recursive modules](#) (page 247) for details of `hi-boot` style interface files.)

If `M` imports multiple modules, then there will be multiple lines with `M.o` as the target.

There is no need to list all of the source files as arguments to the `ghc -M` command; `ghc` traces the dependencies, just like `ghc --make` (a new feature in GHC 6.4).

Note that `ghc -M` needs to find a *source file* for each module in the dependency graph, so that it can parse the import declarations and follow dependencies. Any pre-compiled modules without source files must therefore belong to a package<sup>1</sup>.

By default, `ghc -M` generates all the dependencies, and then concatenates them onto the end of `makefile` (or `Makefile` if `makefile` doesn't exist) bracketed by the lines “# DO NOT DELETE: Beginning of Haskell dependencies” and “# DO NOT DELETE: End of Haskell dependencies”. If these lines already exist in the `makefile`, then the old dependencies are deleted first.

Don't forget to use the same `-package` options on the `ghc -M` command line as you would when compiling; this enables the dependency generator to locate any imported modules that come from packages. The package modules won't be included in the dependencies generated, though (but see the `-include-pkg-deps` option below).

The dependency generation phase of GHC can take some additional options, which you may find useful. The options which affect dependency generation are:

#### **-ddump-mod-cycles**

Display a list of the cycles in the module graph. This is useful when trying to eliminate such cycles.

#### **-v2**

Print a full list of the module dependencies to stdout. (This is the standard verbosity flag, so the list will also be displayed with `-v3` and `-v4`; see [Verbosity options](#) (page 86).)

#### **-dep-makefile** {file}

Use {file} as the `makefile`, rather than `makefile` or `Makefile`. If {file} doesn't exist, `mkdependHS` creates it. We often use `-dep-makefile .depend` to put the dependencies in `.depend` and then include the file `.depend` into `Makefile`.

#### **-dep-suffix** {suffix}

Make dependencies that declare that files with suffix `.{suf}{osuf}` depend on interface files with suffix `.{suf}hi`, or (for `{-# SOURCE #-}` imports) on `.hi-boot`. Multiple `-dep-suffix` flags are permitted. For example, `-dep-suffix a_ -dep-suffix b_ will`

<sup>1</sup> This is a change in behaviour relative to 6.2 and earlier.

make dependencies for `.hs` on `.hi`, `.a_hs` on `.a_hi`, and `.b_hs` on `.b_hi`. If you do not use this flag then the empty suffix is used.

**-exclude-module={file}**

Regard {file} as “stable”; i.e., exclude it from having dependencies on it.

**-include-pkg-deps**

Regard modules imported from packages as unstable, i.e., generate dependencies on any imported package modules (including `Prelude`, and all other standard Haskell libraries). Dependencies are not traced recursively into packages; dependencies are only generated for home-package modules on external-package modules directly imported by the home package module. This option is normally only used by the various system libraries.

**-include-cpp-deps**

Output preprocessor dependencies. This only has an effect when the CPP language extension is enabled. These dependencies are files included with the `#include` preprocessor directive (as well as transitive includes) and implicitly included files such as standard C preprocessor headers and a GHC version header. One exception to this is that GHC generates a temporary header file (during compilation) containing package version macros. As this is only a temporary file that GHC will always generate, it is not output as a dependency.

### 5.8.14 Orphan modules and instance declarations

Haskell specifies that when compiling module `M`, any instance declaration in any module “below” `M` is visible. (Module `A` is “below” `M` if `A` is imported directly by `M`, or if `A` is below a module that `M` imports directly.) In principle, GHC must therefore read the interface files of every module below `M`, just in case they contain an instance declaration that matters to `M`. This would be a disaster in practice, so GHC tries to be clever.

In particular, if an instance declaration is in the same module as the definition of any type or class mentioned in the *head* of the instance declaration (the part after the `=>`; see [Instance termination rules](#) (page 535)), then GHC has to visit that interface file anyway. Example:

```
module A where
  instance C a => D (T a) where ...
  data T a = ...
```

The instance declaration is only relevant if the type `T` is in use, and if so, GHC will have visited `A`'s interface file to find `T`'s definition.

The only problem comes when a module contains an instance declaration and GHC has no other reason for visiting the module. Example:

```
module Orphan where
  instance C a => D (T a) where ...
  class C a where ...
```

Here, neither `D` nor `T` is declared in module `Orphan`. We call such modules “orphan modules”. GHC identifies orphan modules, and visits the interface file of every orphan module below the module being compiled. This is usually wasted work, but there is no avoiding it. You should therefore do your best to have as few orphan modules as possible.

Functional dependencies complicate matters. Suppose we have:

```
module B where
  instance E T Int where ...
  data T = ...
```

Is this an orphan module? Apparently not, because `T` is declared in the same module. But suppose class `E` had a functional dependency:

```
module Lib where
  class E x y | y -> x where ...
```

Then in some importing module `M`, the constraint `(E a Int)` should be “improved” by setting `a = T`, even though there is no explicit mention of `T` in `M`.

These considerations lead to the following definition of an orphan module:

- An *orphan module* orphan module contains at least one *orphan instance* or at least one *orphan rule*.
- An instance declaration in a module `M` is an *orphan instance* if
  - The class of the instance declaration is not declared in `M`, and
  - *Either* the class has no functional dependencies, and none of the type constructors in the instance head is declared in `M`; *or* there is a functional dependency for which none of the type constructors mentioned in the *non-determined* part of the instance head is defined in `M`.

Only the instance head counts. In the example above, it is not good enough for `C`'s declaration to be in module `A`; it must be the declaration of `D` or `T`.

- A rewrite rule in a module `M` is an *orphan rule* orphan rule if none of the variables, type constructors, or classes that are free in the left hand side of the rule are declared in `M`.

If you use the flag `-Worphans` (page 112), GHC will warn you if you are creating an orphan module. Like any warning, you can switch the warning off with `-Wno-orphans` (page 112), and `-Werror` (page ??) will make the compilation fail if the warning is issued.

You can identify an orphan module by looking in its interface file, `M.hi`, using the `--show-iface {file}` (page 79) `mode` (page 78). If there is a `[orphan module]` on the first line, GHC considers it an orphan module.

## 5.9 Packages

A package is a library of Haskell modules known to the compiler. GHC comes with several packages: see the accompanying [library documentation](#). More packages to install can be obtained from [HackageDB](#).

Using a package couldn't be simpler: if you're using `--make` or `GHCi`, then most of the installed packages will be automatically available to your program without any further options. The exceptions to this rule are covered below in [Using Packages](#) (page 260).

Building your own packages is also quite straightforward: we provide the [Cabal](#) infrastructure which automates the process of configuring, building, installing and distributing a package. All you need to do is write a simple configuration file, put a few files in the right places, and you have a package. See the [Cabal documentation](#) for details, and also the Cabal libraries ([Distribution.Simple](#), for example).

### 5.9.1 Using Packages

GHC only knows about packages that are *installed*. Installed packages live in package databases. For details on package databases and how to control which package databases or specific set of packages are visible to GHC, see [Package Databases](#) (page 264).

To see which packages are currently available, use the `ghc-pkg list` command:

```
$ ghc-pkg list
/usr/lib/ghc-6.12.1/package.conf.d:
  Cabal-1.7.4
  array-0.2.0.1
  base-3.0.3.0
  base-4.2.0.0
  bin-package-db-0.0.0.0
  binary-0.5.0.1
  bytestring-0.9.1.4
  containers-0.2.0.1
  directory-1.0.0.2
  (dph-base-0.4.0)
  (dph-par-0.4.0)
  (dph-prim-interface-0.4.0)
  (dph-prim-par-0.4.0)
  (dph-prim-seq-0.4.0)
  (dph-seq-0.4.0)
  extensible-exceptions-0.1.1.0
  ffi-1.0
  filepath-1.1.0.1
  (ghc-6.12.1)
  ghc-prim-0.1.0.0
  haskeline-0.6.2
  haskell98-1.0.1.0
  hpc-0.5.0.2
  integer-gmp-0.1.0.0
  mtl-1.1.0.2
  old-locale-1.0.0.1
  old-time-1.0.0.1
  pretty-1.0.1.0
  process-1.0.1.1
  random-1.0.0.1
  rts-1.0.1
  syb-0.1.0.0
  template-haskell-2.4.0.0
  terminfo-0.3.1
  time-1.1.4
  unix-2.3.1.0
  utf8-string-0.3.4
```

An installed package is either *exposed* or *hidden* by default. Packages hidden by default are listed in parentheses (e.g. `(lang-1.0)`), or possibly in blue if your terminal supports colour, in the output of `ghc-pkg list`. Command-line flags, described below, allow you to expose a hidden package or hide an exposed one. Only modules from exposed packages may be imported by your Haskell code; if you try to import a module from a hidden package, GHC will emit an error message. It should be noted that a hidden package might still get linked with your program as a dependency of an exposed package, it is only restricted from direct

imports.

If there are multiple exposed versions of a package, GHC will prefer the latest one. Additionally, some packages may be broken: that is, they are missing from the package database, or one of their dependencies are broken; in this case, these packages are excluded from the default set of packages.

---

**Note:** If you're using Cabal, then the exposed or hidden status of a package is irrelevant: the available packages are instead determined by the dependencies listed in your `.cabal` specification. The exposed/hidden status of packages is only relevant when using `ghc` or `ghci` directly.

---

Similar to a package's hidden status is a package's trusted status. A package can be either trusted or not trusted (distrusted). By default packages are distrusted. This property of a package only plays a role when compiling code using GHC's Safe Haskell feature (see [Safe Haskell](#) (page 633)) with the `-fpackage-trust` flag enabled.

To see which modules are provided by a package use the `ghc-pkg` command (see [Package management \(the ghc-pkg command\)](#) (page 269)):

```
$ ghc-pkg field network exposed-modules
exposed-modules: Network.BSD,
                  Network.CGI,
                  Network.Socket,
                  Network.URI,
                  Network
```

The GHC command line options that control packages are:

#### **-package** `<pkg>`

This option causes the installed package `<pkg>` to be exposed. The package `<pkg>` can be specified in full with its version number (e.g. `network-1.0`) or the version number can be omitted in which case GHC will automatically expose the latest non-broken version from the installed versions of the package.

By default (when [-hide-all-packages](#) (page 262) is not specified), GHC exposes only one version of a package, all other versions become hidden. If `-package` option is specified multiple times for the same package the last one overrides the previous ones. On the other hand, if [-hide-all-packages](#) (page 262) is used, GHC allows you to expose multiple versions of a package by using the `-package` option multiple times with different versions of the same package.

`-package` supports thinning and renaming described in [Thinning and renaming modules](#) (page 264).

The `-package <pkg>` option also causes package `<pkg>` to be linked into the resulting executable or shared object. Whether a packages' library is linked statically or dynamically is controlled by the flag pair [-static](#) (page 289)/ [-dynamic](#) (page 289).

In [--make](#) (page 78) mode and [--interactive](#) (page 78) mode (see [Modes of operation](#) (page 78)), the compiler normally determines which packages are required by the current Haskell modules, and links only those. In batch mode however, the dependency information isn't available, and explicit `-package` options must be given when linking. The one other time you might need to use `-package` to force linking a package is when the package does not contain any Haskell modules (it might contain a C library only,



for example). In that case, GHC will never discover a dependency on it, so it has to be mentioned explicitly.

For example, to link a program consisting of objects `Foo.o` and `Main.o`, where we made use of the network package, we need to give GHC the `-package` flag thus:

```
$ ghc -o myprog Foo.o Main.o -package network
```

The same flag is necessary even if we compiled the modules from source, because GHC still reckons it's in batch mode:

```
$ ghc -o myprog Foo.hs Main.hs -package network
```

#### **-package-id** `<unit-id>`

Exposes a package like `-package <pkg>` (page 261), but the package is named by its unit ID (i.e. the value of `id` in its entry in the installed package database, also previously known as an installed package ID) rather than by name. This is a more robust way to name packages, and can be used to select packages that would otherwise be shadowed. Cabal passes `-package-id` flags to GHC. `-package-id` supports thinning and renaming described in *Thinning and renaming modules* (page 264).

#### **-hide-all-packages**

Ignore the exposed flag on installed packages, and hide them all by default. If you use this flag, then any packages you require (including `base`) need to be explicitly exposed using `-package <pkg>` (page 261) options.

This is a good way to insulate your program from differences in the globally exposed packages, and being explicit about package dependencies is a Good Thing. Cabal always passes the `-hide-all-packages` flag to GHC, for exactly this reason.

#### **-hide-package** `<pkg>`

This option does the opposite of `-package <pkg>` (page 261): it causes the specified package to be hidden, which means that none of its modules will be available for import by Haskell `import` directives.

Note that the package might still end up being linked into the final program, if it is a dependency (direct or indirect) of another exposed package.

#### **-ignore-package** `<pkg>`

Causes the compiler to behave as if package `<pkg>`, and any packages that depend on `<pkg>`, are not installed at all.

Saying `-ignore-package <pkg>` is the same as giving `-hide-package <pkg>` (page 262) flags for `<pkg>` and all the packages that depend on `<pkg>`. Sometimes we don't know ahead of time which packages will be installed that depend on `<pkg>`, which is when the `-ignore-package <pkg>` (page 262) flag can be useful.

#### **-no-auto-link-packages**

By default, GHC will automatically link in the `base` and `rts` packages. This flag disables that behaviour.

#### **-this-unit-id** `<unit-id>`

Tells GHC that the module being compiled forms part of unit ID `<unit-id>`; internally, these keys are used to determine type equality and linker symbols. As of GHC 8.0, unit IDs must consist solely of alphanumeric characters, dashes, underscores and periods. GHC reserves the right to interpret other characters in a special way in later releases.



**-trust** *<pkg>*

This option causes the install package *<pkg>* to be both exposed and trusted by GHC. This command functions in a very similar way to the *-package <pkg>* (page 261) command but in addition sets the selected packages to be trusted by GHC, regardless of the contents of the package database. (see *Safe Haskell* (page 633)).

**-distrust** *<pkg>*

This option causes the install package *<pkg>* to be both exposed and distrusted by GHC. This command functions in a very similar way to the *-package <pkg>* (page 261) command but in addition sets the selected packages to be distrusted by GHC, regardless of the contents of the package database. (see *Safe Haskell* (page 633)).

**-distrust-all-packages**

Ignore the trusted flag on installed packages, and distrust them by default. If you use this flag and Safe Haskell then any packages you require to be trusted (including base) need to be explicitly trusted using *-trust <pkg>* (page 641) options. This option does not change the exposed/hidden status of a package, so it isn't equivalent to applying *-distrust <pkg>* (page 641) to all packages on the system. (see *Safe Haskell* (page 633)).

## 5.9.2 The main package

Every complete Haskell program must define `main` in module `Main` in package `main`. Omitting the *-this-unit-id <unit-id>* (page 262) flag compiles code for package `main`. Failure to do so leads to a somewhat obscure link-time error of the form:

```
/usr/bin/ld: Undefined symbols:
_ZCMain_main_closure
```

## 5.9.3 Consequences of packages for the Haskell language

It is possible that by using packages you might end up with a program that contains two modules with the same name: perhaps you used a package `P` that has a *hidden* module `M`, and there is also a module `M` in your program. Or perhaps the dependencies of packages that you used contain some overlapping modules. Perhaps the program even contains multiple versions of a certain package, due to dependencies from other packages.

None of these scenarios gives rise to an error on its own<sup>1</sup>, but they may have some interesting consequences. For instance, if you have a type `M.T` from version 1 of package `P`, then this is *not* the same as the type `M.T` from version 2 of package `P`, and GHC will report an error if you try to use one where the other is expected.

Formally speaking, in Haskell 98, an entity (function, type or class) in a program is uniquely identified by the pair of the module name in which it is defined and its name. In GHC, an entity is uniquely defined by a triple: package, module, and name.

<sup>1</sup> it used to in GHC 6.4, but not since 6.6

### 5.9.4 Thinning and renaming modules

When incorporating packages from multiple sources, you may end up in a situation where multiple packages publish modules with the same name. Previously, the only way to distinguish between these modules was to use *Package-qualified imports* (page 363). However, since GHC 7.10, the `-package {pkg}` (page 261) flags (and their variants) have been extended to allow a user to explicitly control what modules a package brings into scope, by analogy to the import lists that users can attach to module imports.

The basic syntax is that instead of specifying a package name `P` to the package flag `-package`, instead we specify both a package name and a parenthesized, comma-separated list of module names to import. For example, `-package "base (Data.List, Data.Bool)"` makes only `Data.List` and `Data.Bool` visible from package `base`. We also support renaming of modules, in case you need to refer to both modules simultaneously; this is supported by writing `OldModName` as `NewModName`, e.g. `-package "base (Data.Bool as Bool)"`. You can also write `-package "base with (Data.Bool as Bool)"` to include all of the original bindings (e.g. the renaming is strictly additive). It's important to specify quotes so that your shell passes the package name and thinning/renaming list as a single argument to GHC.

Package imports with thinning/renaming do not hide other versions of the package: e.g. if `containers-0.9` is already exposed, `-package "containers-0.8 (Data.List as ListV8)"` will only add an additional binding to the environment. Similarly, `-package "base (Data.Bool as Bool)"` `-package "base (Data.List as List)"` is equivalent to `-package "base (Data.Bool as Bool, Data.List as List)"`. Literal names must refer to modules defined by the original package, so for example `-package "base (Data.Bool as Bool, Bool as Baz)"` is invalid unless there was a `Bool` module defined in the original package. Hiding a package also clears all of its renamings.

You can use renaming to provide an alternate prelude, e.g. `-hide-all-packages -package "basic-prelude (BasicPrelude as Prelude)"`, in lieu of the *Rebindable syntax and the implicit Prelude import* (page 339) extension.

### 5.9.5 Package Databases

A package database is where the details about installed packages are stored. It is a directory, usually called `package.conf.d`, that contains a file for each package, together with a binary cache of the package data in the file `package.cache`. Normally you won't need to look at or modify the contents of a package database directly; all management of package databases can be done through the **ghc-pkg** tool (see *Package management (the ghc-pkg command)* (page 269)).

GHC knows about two package databases in particular:

- The *global package database*, which comes with your GHC installation, e.g. `/usr/lib/ghc-6.12.1/package.conf.d`.
- The *user package database* private to each user. On Unix systems this will be `$XDG_DATA_HOME/ghc/arch-os-version/package.conf.d`, and on Windows it will be something like `C:\Documents And Settings\user\ghc\package.conf.d`. The `ghc-pkg` tool knows where this file should be located, and will create it if it doesn't exist (see *Package management (the ghc-pkg command)* (page 269)).

*Package database stack:* Package databases are arranged in a stack structure. When GHC starts up it adds the global and the user package databases to the stack, in that order, unless `GHC_PACKAGE_PATH` (page 265) is specified. When `GHC_PACKAGE_PATH` is specified then it will determine the initial database stack. Several command line options described below can

further manipulate this initial stack. You can see GHC's effective package database stack by running GHC with the `-v` (page 86) flag.

This stack structure means that the order of `-package-db (file)` (page 265) flags or `GHC_PACKAGE_PATH` (page 265) is important. Each substack of the stack must be well formed (packages in databases on top of the stack can refer to packages below, but not vice versa).

*Package shadowing:* When multiple package databases are in use it is possible, though rarely, that the same installed package id is present in more than one database. In that case, packages closer to the top of the stack will override (*shadow*) those below them. If the conflicting packages are found to be equivalent (by ABI hash comparison) then one of them replaces all references to the other, otherwise the overridden package and all those depending on it will be removed.

*Package version selection:* When selecting a package, GHC will search for packages in all available databases. If multiple versions of the same package are available the latest non-broken version will be chosen.

*Version conflict resolution:* If multiple instances of a package version chosen by GHC are available then GHC will choose an unspecified instance.

You can control GHC's package database stack using the following options:

**-package-db (file)**

Add the package database (file) on top of the current stack.

**-no-global-package-db**

Remove the global package database from the package database stack.

**-no-user-package-db**

Prevent loading of the user's local package database in the initial stack.

**-clear-package-db**

Reset the current package database stack. This option removes every previously specified package database (including those read from the `GHC_PACKAGE_PATH` (page 265) environment variable) from the package database stack.

**-global-package-db**

Add the global package database on top of the current stack. This option can be used after `-no-global-package-db` (page 265) to specify the position in the stack where the global package database should be loaded.

**-user-package-db**

Add the user's package database on top of the current stack. This option can be used after `-no-user-package-db` (page 265) to specify the position in the stack where the user's package database should be loaded.

### 5.9.5.1 The `GHC_PACKAGE_PATH` environment variable

#### `GHC_PACKAGE_PATH`

The `GHC_PACKAGE_PATH` environment variable may be set to a `:-`separated (`;-`separated on Windows) list of files containing package databases. This list of package databases, used by GHC and `ghc-pkg`, specifies a stack of package databases from top to bottom. This order was chosen to match the behaviour of the `PATH` environment variable where entries earlier in the `PATH` override ones that come later. See [Package Databases](#) (page 264) for details on how the package database stack is used.

Normally *GHC\_PACKAGE\_PATH* replaces the default package stack. For example, all of the following commands are equivalent, creating a stack with db1 at the top followed by db2 (use `;` instead of `:` on Windows):

```
$ ghc -clear-package-db -package-db db2.conf -package-db db1.conf
$ env GHC_PACKAGE_PATH=db1.conf:db2.conf ghc
$ env GHC_PACKAGE_PATH=db2.conf ghc -package-db db1.conf
```

However, if *GHC\_PACKAGE\_PATH* ends in a separator, the default databases (i.e. the user and global package databases, in that order) are appended to the path. For example, to augment the usual set of packages with a database of your own, you could say (on Unix):

```
$ export GHC_PACKAGE_PATH=$XDG_DATA_HOME/.my-ghc-packages.conf:
```

To check whether your *GHC\_PACKAGE\_PATH* setting is doing the right thing, `ghc-pkg list` will list all the databases in use, in the reverse order they are searched.

### 5.9.5.2 Package environments

A *package environment file* is a file that tells ghc precisely which packages should be visible. It can be used to create environments for ghc or ghci that are local to a shell session or to some file system location. They are intended to be managed by build/package tools, to enable ghc and ghci to automatically use an environment created by the tool.

In the case of ghci, the environment file will be read once, during initialisation. If the file changes then you have to restart GHCi to reflect the updated file.

The file contains package IDs and optionally package databases, one directive per line:

```
clear-package-db
global-package-db
user-package-db
package-db db.d/
package-id id_1
package-id id_2
...
package-id id_n
```

If such a package environment is found, it is equivalent to passing these command line arguments to ghc:

```
-hide-all-packages
-clear-package-db
-global-package-db
-user-package-db
-package-db db.d/
-package-id id_1
-package-id id_2
...
-package-id id_n
```

Note the implicit *-hide-all-packages* (page 262) and the fact that it is *-package-id {unit-id}* (page 262), not *-package {pkg}* (page 261). This is because the environment specifies precisely which packages should be visible.

Note that for the `package-db` directive, if a relative path is given it must be relative to the location of the package environment file.

**-package-env** `{file}|{name}`

Use the package environment in `{file}`, or in `$XDG_DATA_HOME/ghc/arch-os-version/environments/{name}`. If set to `-` no package environment is read.

### GHC\_ENVIRONMENT

Specifies the path to the package environment file to be used by GHC. Overridden by the `-package-env {file}|{name}` (page 267) flag if set.

In order, ghc will look for the package environment in the following locations:

- File `{file}` if you pass the option `-package-env {file}|{name}` (page 267).
- File `$XDG_DATA_HOME/ghc/arch-os-version/environments/name` if you pass the option `-package-env {name}`.
- File `{file}` if the environment variable `GHC_ENVIRONMENT` (page 267) is set to `{file}`.
- File `$XDG_DATA_HOME/ghc/arch-os-version/environments/name` if the environment variable `GHC_ENVIRONMENT` (page 267) is set to `{name}`.

Additionally, unless `-hide-all-packages` is specified ghc will also look for the package environment in the following locations:

- File `.ghc.environment.arch-os-version` if it exists in the current directory or any parent directory (but not the user's home directory).
- File `$XDG_DATA_HOME/ghc/arch-os-version/environments/default` if it exists.

Package environments can be modified by further command line arguments; for example, if you specify `-package foo` on the command line, then package `{foo}` will be visible even if it's not listed in the currently active package environment.

## 5.9.6 Installed package IDs, dependencies, and broken packages

Each installed package has a unique identifier (the “installed package ID”), which distinguishes it from all other installed packages on the system. To see the installed package IDs associated with each installed package, use `ghc-pkg list -v`:

```
$ ghc-pkg list -v
using cache: /usr/lib/ghc-6.12.1/package.conf.d/package.cache
/usr/lib/ghc-6.12.1/package.conf.d
  Cabal-1.7.4 (Cabal-1.7.4-48f5247e06853af93593883240e11238)
  array-0.2.0.1 (array-0.2.0.1-9cbf76a576b6ee9c1f880cf171a0928d)
  base-3.0.3.0 (base-3.0.3.0-6cbb157b9ae852096266e113b8fac4a2)
  base-4.2.0.0 (base-4.2.0.0-247bb20cde37c3ef4093ee124e04bc1c)
  ...
```

The string in parentheses after the package name is the installed package ID: it normally begins with the package name and version, and ends in a hash string derived from the compiled package. Dependencies between packages are expressed in terms of installed package IDs, rather than just packages and versions. For example, take a look at the dependencies of the `haskell98` package:

```
$ ghc-pkg field haskell98 depends
depends: array-0.2.0.1-9cbf76a576b6ee9c1f880cf171a0928d
        base-4.2.0.0-247bb20cde37c3ef4093ee124e04bc1c
        directory-1.0.0.2-f51711bc872c35ce4a453aa19c799008
        old-locale-1.0.0.1-d17c9777c8ee53a0d459734e27f2b8e9
        old-time-1.0.0.1-1c0d8ea38056e5087ef1e75cb0d139d1
        process-1.0.1.1-d8fc6d3baf44678a29b9d59ca0ad5780
        random-1.0.0.1-423d08c90f004795fd10e60384ce6561
```

The purpose of the installed package ID is to detect problems caused by re-installing a package without also recompiling the packages that depend on it. Recompiling dependencies is necessary, because the newly compiled package may have a different ABI (Application Binary Interface) than the previous version, even if both packages were built from the same source code using the same compiler. With installed package IDs, a recompiled package will have a different installed package ID from the previous version, so packages that depended on the previous version are now orphaned - one of their dependencies is not satisfied. Packages that are broken in this way are shown in the `ghc-pkg list` output either in red (if possible) or otherwise surrounded by braces. In the following example, we have recompiled and reinstalled the `filepath` package, and this has caused various dependencies including `Cabal` to break:

```
$ ghc-pkg list
WARNING: there are broken packages.  Run 'ghc-pkg check' for more details.
/usr/lib/ghc-6.12.1/package.conf.d:
  {Cabal-1.7.4}
  array-0.2.0.1
  base-3.0.3.0
  ... etc ...
```

Additionally, `ghc-pkg list` reminds you that there are broken packages and suggests `ghc-pkg check`, which displays more information about the nature of the failure:

```
$ ghc-pkg check
There are problems in package ghc-6.12.1:
  dependency "filepath-1.1.0.1-87511764eb0af2bce4db05e702750e63" doesn't exist
There are problems in package haskeline-0.6.2:
  dependency "filepath-1.1.0.1-87511764eb0af2bce4db05e702750e63" doesn't exist
There are problems in package Cabal-1.7.4:
  dependency "filepath-1.1.0.1-87511764eb0af2bce4db05e702750e63" doesn't exist
There are problems in package process-1.0.1.1:
  dependency "filepath-1.1.0.1-87511764eb0af2bce4db05e702750e63" doesn't exist
There are problems in package directory-1.0.0.2:
  dependency "filepath-1.1.0.1-87511764eb0af2bce4db05e702750e63" doesn't exist

The following packages are broken, either because they have a problem
listed above, or because they depend on a broken package.
ghc-6.12.1
haskeline-0.6.2
Cabal-1.7.4
process-1.0.1.1
directory-1.0.0.2
bin-package-db-0.0.0.0
hpc-0.5.0.2
haskell98-1.0.1.0
```

To fix the problem, you need to recompile the broken packages against the new dependencies. The easiest way to do this is to use `cabal-install`, or download the packages from [HackageDB](#) and build and install them as normal.

Be careful not to recompile any packages that GHC itself depends on, as this may render the `ghc` package itself broken, and `ghc` cannot be simply recompiled. The only way to recover from this would be to re-install GHC.

### 5.9.7 Package management (the `ghc-pkg` command)

The `ghc-pkg` tool is for querying and modifying package databases. To see what package databases are in use, use `ghc-pkg list`. The stack of databases that `ghc-pkg` knows about can be modified using the `GHC_PACKAGE_PATH` (page 265) environment variable (see *The `GHC_PACKAGE_PATH` environment variable* (page 265)), and using `-package-db {file}` (page 265) options on the `ghc-pkg` command line.

When asked to modify a database, `ghc-pkg` modifies the global database by default. Specifying `--user` causes it to act on the user database, or `--package-db` can be used to act on another database entirely. When multiple of these options are given, the rightmost one is used as the database to act upon.

Commands that query the package database (`list`, `latest`, `describe`, `field`, `dot`) operate on the list of databases specified by the flags `--user`, `--global`, and `--package-db`. If none of these flags are given, the default is `--global --user`.

If the environment variable `GHC_PACKAGE_PATH` (page 265) is set, and its value does not end in a separator (`:` on Unix, `;` on Windows), then the last database is considered to be the global database, and will be modified by default by `ghc-pkg`. The intention here is that `GHC_PACKAGE_PATH` can be used to create a virtual package environment into which Cabal packages can be installed without setting anything other than `GHC_PACKAGE_PATH`.

The `ghc-pkg` program may be run in the ways listed below. Where a package name is required, the package can be named in full including the version number (e.g. `network-1.0`), or without the version number. Naming a package without the version number matches all versions of the package; the specified action will be applied to all the matching packages. A package specifier that matches all version of the package can also be written `{pkg} *`, to make it clearer that multiple packages are being matched. To match against the installed package ID instead of just package name and version, pass the `--ipid` flag.

#### `ghc-pkg init path`

Creates a new, empty, package database at `{path}`, which must not already exist.

#### `ghc-pkg register {file}`

Reads a package specification from `{file}` (which may be `-` to indicate standard input), and adds it to the database of installed packages. The syntax of `{file}` is given in *Installed-PackageInfo: a package specification* (page 273).

The package specification must be a package that isn't already installed.

#### `ghc-pkg update {file}`

The same as `register`, except that if a package of the same name is already installed, it is replaced by the new one.

#### `ghc-pkg unregister {P}`

Remove the specified package from the database.

#### `ghc-pkg check`

Check consistency of dependencies in the package database, and report packages that have missing dependencies.



**ghc-pkg expose <P>**

Sets the exposed flag for package <P> to True.

**ghc-pkg hide <P>**

Sets the exposed flag for package <P> to False.

**ghc-pkg trust <P>**

Sets the trusted flag for package <P> to True.

**ghc-pkg distrust <P>**

Sets the trusted flag for package <P> to False.

**ghc-pkg list [<P>] [--simple-output]**

This option displays the currently installed packages, for each of the databases known to ghc-pkg. That includes the global database, the user's local database, and any further files specified using the -f option on the command line.

Hidden packages (those for which the exposed flag is False) are shown in parentheses in the list of packages.

If an optional package identifier <P> is given, then only packages matching that identifier are shown.

If the option --simple-output is given, then the packages are listed on a single line separated by spaces, and the database names are not included. This is intended to make it easier to parse the output of ghc-pkg list using a script.

**ghc-pkg find-module <M> [--simple-output]**

This option lists registered packages exposing module <M>. Examples:

```
$ ghc-pkg find-module Var
c:/fpools/validate/ghc/driver/package.conf.inplace:
  (ghc-6.9.20080428)

$ ghc-pkg find-module Data.Sequence
c:/fpools/validate/ghc/driver/package.conf.inplace:
  containers-0.1
```

Otherwise, it behaves like ghc-pkg list, including options.

**ghc-pkg latest <P>**

Prints the latest available version of package <P>.

**ghc-pkg describe <P>**

Emit the full description of the specified package. The description is in the form of an InstalledPackageInfo, the same as the input file format for ghc-pkg register. See *InstalledPackageInfo: a package specification* (page 273) for details.

If the pattern matches multiple packages, the description for each package is emitted, separated by the string --- on a line by itself.

**ghc-pkg field <P> {field}[,{field}]\***

Show just a single field of the installed package description for P. Multiple fields can be selected by separating them with commas

**ghc-pkg dot**

Generate a graph of the package dependencies in a form suitable for input for the graphviz tools. For example, to generate a PDF of the dependency graph:

```
ghc-pkg dot | tred | dot -Tpdf >pkgs.pdf
```



**ghc-pkg dump**

Emit the full description of every package, in the form of an `InstalledPackageInfo`. Multiple package descriptions are separated by the string `---` on a line by itself.

This is almost the same as `ghc-pkg describe '*'`, except that `ghc-pkg dump` is intended for use by tools that parse the results, so for example where `ghc-pkg describe '*'` will emit an error if it can't find any packages that match the pattern, `ghc-pkg dump` will simply emit nothing.

**ghc-pkg recache**

Re-creates the binary cache file `package.cache` for the selected database. This may be necessary if the cache has somehow become out-of-sync with the contents of the database (`ghc-pkg` will warn you if this might be the case).

The other time when `ghc-pkg recache` is useful is for registering packages manually: it is possible to register a package by simply putting the appropriate file in the package database directory and invoking `ghc-pkg recache` to update the cache. This method of registering packages may be more convenient for automated packaging systems.

Substring matching is supported for `(M)` in `find-module` and for `(P)` in `list`, `describe`, and `field`, where a `'*'` indicates open substring ends (`prefix*`, `*suffix`, `*infix*`). Examples (output omitted):

```
-- list all regex-related packages
ghc-pkg list '*regex*' --ignore-case
-- list all string-related packages
ghc-pkg list '*string*' --ignore-case
-- list OpenGL-related packages
ghc-pkg list '*gl*' --ignore-case
-- list packages exporting modules in the Data hierarchy
ghc-pkg find-module 'Data.*'
-- list packages exporting Monad modules
ghc-pkg find-module '*Monad*'
-- list names and maintainers for all packages
ghc-pkg field '*' name,maintainer
-- list location of haddock htmls for all packages
ghc-pkg field '*' haddock-html
-- dump the whole database
ghc-pkg describe '*'
```

Additionally, the following flags are accepted by `ghc-pkg`:

**-f (file), -package-db (file)**

Adds `(file)` to the stack of package databases. Additionally, `(file)` will also be the database modified by a `register`, `unregister`, `expose` or `hide` command, unless it is overridden by a later `--package-db`, `--user` or `--global` option.

**--force**

Causes `ghc-pkg` to ignore missing dependencies, directories and libraries when registering a package, and just go ahead and add it anyway. This might be useful if your package installation system needs to add the package to GHC before building and installing the files.

**--global**

Operate on the global package database (this is the default). This flag affects the `register`, `update`, `unregister`, `expose`, and `hide` commands.

**--help, -?**

Outputs the command-line syntax.

**--user**

Operate on the current user's local package database. This flag affects the register, update, unregister, expose, and hide commands.

**-v [{n}], --verbose [= {n}]**

Control verbosity. Verbosity levels range from 0-2, where the default is 1, and -v alone selects level 2.

**-V; --version**

Output the ghc-pkg version number.

**--ipid, --unit-id**

Causes ghc-pkg to interpret arguments as installed unit IDs (e.g., an identifier like `unix-2.3.1.0-de7803f1a8cd88d2161b29b083c94240`). This is useful if providing just the package name and version are ambiguous (in old versions of GHC, this was guaranteed to be unique, but this invariant no longer necessarily holds).

## 5.9.8 Building a package from Haskell source

We don't recommend building packages the hard way. Instead, use the [Cabal](#) infrastructure if possible. If your package is particularly complicated or requires a lot of configuration, then you might have to fall back to the low-level mechanisms, so a few hints for those brave souls follow.

You need to build an "installed package info" file for passing to ghc-pkg when installing your package. The contents of this file are described in [InstalledPackageInfo: a package specification](#) (page 273).

The Haskell code in a package may be built into one or more archive libraries (e.g. `libHSfoo.a`), or a single shared object (e.g. `libHSfoo.dll/.so/.dylib`). The restriction to a single shared object is because the package system is used to tell the compiler when it should make an inter-shared-object call rather than an intra-shared-object-call call (inter-shared-object calls require an extra indirection).

- Building a static library is done by using the `ar` tool, like so:

```
ar cqs libHSfoo-1.0.a A.o B.o C.o ...
```

where `A.o`, `B.o` and so on are the compiled Haskell modules, and `libHSfoo.a` is the library you wish to create. The syntax may differ slightly on your system, so check the documentation if you run into difficulties.

- To load a package `foo`, GHCi can load its `libHSfoo.a` library directly, but it can also load a package in the form of a single `HSfoo.o` file that has been pre-linked. Loading the `.o` file is slightly quicker, but at the expense of having another copy of the compiled package. The rule of thumb is that if the modules of the package were compiled with [-split-sections](#) (page 289) then building the `HSfoo.o` is worthwhile because it saves time when loading the package into GHCi. Without [-split-sections](#) (page 289), there is not much difference in load time between the `.o` and `.a` libraries, so it is better to save the disk space and only keep the `.a` around. In a GHC distribution we provide `.o` files for most packages except the GHC package itself.

The `HSfoo.o` file is built by Cabal automatically; use `--disable-library-for-ghci` to disable it. To build one manually, the following GNU `ld` command can be used:

```
ld -r --whole-archive -o HSfoo.o libHSfoo.a
```

(replace `--whole-archive` with `-all_load` on MacOS X)

- When building the package as shared library, GHC can be used to perform the link step. This hides some of the details out the underlying linker and provides a common interface to all shared object variants that are supported by GHC (DLLs, ELF DSOs, and Mac OS dylibs). The shared object must be named in specific way for two reasons: (1) the name must contain the GHC compiler version, so that two library variants don't collide that are compiled by different versions of GHC and that therefore are most likely incompatible with respect to calling conventions, (2) it must be different from the static name otherwise we would not be able to control the linker as precisely as necessary to make the `-static` (page 289)/`-dynamic` (page 289) flags work, see [Options affecting linking](#) (page 288).

```
ghc -shared -dynamic -o libHSfoo-1.0-ghcGHCVersion.so A.o B.o C.o
```

Using GHC's version number in the shared object name allows different library versions compiled by different GHC versions to be installed in standard system locations, e.g. under `*nix /usr/lib`. To obtain the version number of GHC invoke `ghc --numeric-version` and use its output in place of `{GHCVersion}`. See also [Options affecting code generation](#) (page 286) on how object files must be prepared for shared object linking.

- When building a shared library, care must be taken to ensure that the resulting object is named appropriately. In particular, GHC expects the name of a shared object to have the form `libHS<unit id>-ghc<ghc version>.<ext>` where *unit id* is the unit ID given during compilation via the `-this-unit-id {unit-id}` (page 262) flag, *ghc version* is the version of GHC that produced/consumes the object and *ext* is the host system's usual file extension for shared objects.

To compile a module which is to be part of a new package, use the `-package-name` (to identify the name of the package) and `-library-name` (to identify the version and the version hashes of its identities.) options ([Using Packages](#) (page 260)). Failure to use these options when compiling a package will probably result in disaster, but you will only discover later when you attempt to import modules from the package. At this point GHC will complain that the package name it was expecting the module to come from is not the same as the package name stored in the `.hi` file.

It is worth noting with shared objects, when each package is built as a single shared object file, since a reference to a shared object costs an extra indirection, intra-package references are cheaper than inter-package references. Of course, this applies to the main package as well.

### 5.9.9 InstalledPackageInfo: a package specification

A package specification is a Haskell record; in particular, it is the record `Distribution.InstalledPackageInfo.InstalledPackageInfo` in the module `Distribution.InstalledPackageInfo`, which is part of the Cabal package distributed with GHC.

An `InstalledPackageInfo` has a human readable/writable syntax. The functions `parseInstalledPackageInfo` and `showInstalledPackageInfo` read and write this syntax respectively. Here's an example of the `InstalledPackageInfo` for the `unix` package:

```
$ ghc-pkg describe unix
name: unix
```

(continues on next page)

(continued from previous page)

```

version: 2.3.1.0
id: unix-2.3.1.0-de7803f1a8cd88d2161b29b083c94240
license: BSD3
copyright:
maintainer: libraries@haskell.org
stability:
homepage:
package-url:
description: This package gives you access to the set of operating system
              services standardised by POSIX 1003.1b (or the IEEE Portable
              Operating System Interface for Computing Environments -
              IEEE Std. 1003.1).

              The package is not supported under Windows (except under Cygwin).
category: System
author:
exposed: True
exposed-modules: System.Posix System.Posix.DynamicLinker.Module
                  System.Posix.DynamicLinker.Prim System.Posix.Directory
                  System.Posix.DynamicLinker System.Posix.Env System.Posix.
→Error
                  System.Posix.Files System.Posix.IO System.Posix.Process
                  System.Posix.Process.Internals System.Posix.Resource
                  System.Posix.Temp System.Posix.Terminal System.Posix.Time
                  System.Posix.Unistd System.Posix.User System.Posix.Signals
                  System.Posix.Signals.Exts System.Posix.Semaphore
                  System.Posix.SharedMem
hidden-modules:
trusted: False
import-dirs: /usr/lib/ghc-6.12.1/unix-2.3.1.0
library-dirs: /usr/lib/ghc-6.12.1/unix-2.3.1.0
hs-libraries: HUnix-2.3.1.0
extra-libraries: rt util dl
extra-ghci-libraries:
include-dirs: /usr/lib/ghc-6.12.1/unix-2.3.1.0/include
includes: HsUnix.h execvpe.h
depends: base-4.2.0.0-247bb20cde37c3ef4093ee124e04bc1c
hugs-options:
cc-options:
ld-options:
framework-dirs:
frameworks:
haddock-interfaces: /usr/share/doc/ghc/html/libraries/unix/unix.haddock
haddock-html: /usr/share/doc/ghc/html/libraries/unix

```

Here is a brief description of the syntax of this file:

A package description consists of a number of field/value pairs. A field starts with the field name in the left-hand column followed by a “:”, and the value continues until the next line that begins in the left-hand column, or the end of file.

The syntax of the value depends on the field. The various field types are:

### **freeform**

Any arbitrary string, no interpretation or parsing is done.

**string**

A sequence of non-space characters, or a sequence of arbitrary characters surrounded by quotes " . . . . ".

**string list**

A sequence of strings, separated by commas. The sequence may be empty.

In addition, there are some fields with special syntax (e.g. package names, version, dependencies).

The allowed fields, with their types, are:

**name**

(string) The package's name (without the version).

**id**

(string) The installed package ID. It is up to you to choose a suitable one.

**version**

(string) The package's version, usually in the form A.B (any number of components are allowed).

**license**

(string) The type of license under which this package is distributed. This field is a value of the [Distribution.License.License](#) type.

**license-file**

(optional string) The name of a file giving detailed license information for this package.

**copyright**

(optional freeform) The copyright string.

**maintainer**

(optional freeform) The email address of the package's maintainer.

**stability**

(optional freeform) A string describing the stability of the package (e.g. stable, provisional or experimental).

**homepage**

(optional freeform) URL of the package's home page.

**package-url**

(optional freeform) URL of a downloadable distribution for this package. The distribution should be a Cabal package.

**description**

(optional freeform) Description of the package.

**category**

(optional freeform) Which category the package belongs to. This field is for use in conjunction with a future centralised package distribution framework, tentatively titled Hackage.

**author**

(optional freeform) Author of the package.

**exposed**

(bool) Whether the package is exposed or not.

**exposed-modules**

(string list) modules exposed by this package.

**hidden-modules**

(string list) modules provided by this package, but not exposed to the programmer. These modules cannot be imported, but they are still subject to the overlapping constraint: no other package in the same program may provide a module of the same name.

**reexported-modules**

Modules reexported by this package. This list takes the form of `pkg:OldName as NewName (A@orig-pkg-0.1-HASH)`: the first portion of the string is the user-written re-export specification (possibly omitting the package qualifier and the renaming), while the parenthetical is the original package which exposed the module under a particular name. Reexported modules have a relaxed overlap constraint: it's permissible for two packages to reexport the same module as the same name if the reexported module is identical.

**trusted**

(bool) Whether the package is trusted or not.

**import-dirs**

(string list) A list of directories containing interface files (`.hi` files) for this package.

If the package contains profiling libraries, then the interface files for those library modules should have the suffix `.p_hi`. So the package can contain both normal and profiling versions of the same library without conflict (see also `library_dirs` below).

**library-dirs**

(string list) A list of directories containing libraries for this package.

**hs-libraries**

(string list) A list of libraries containing Haskell code for this package, with the `.a` or `.dll` suffix omitted. When packages are built as libraries, the `lib` prefix is also omitted.

For use with GHCi, each library should have an object file too. The name of the object file does *not* have a `lib` prefix, and has the normal object suffix for your platform.

For example, if we specify a Haskell library as `HSfoo` in the package spec, then the various flavours of library that GHC actually uses will be called:

**libHSfoo.a**

The name of the library on Unix and Windows (mingw) systems.

**HSfoo.dll**

The name of the dynamic library on Windows systems (optional).

**HSfoo.o; HSfoo.obj**

The object version of the library used by GHCi.

**extra-libraries**

(string list) A list of extra libraries for this package. The difference between `hs-libraries` and `extra-libraries` is that `hs-libraries` normally have several versions, to support profiling, parallel and other build options. The various versions are given different suffixes to distinguish them, for example the profiling version of the standard prelude library is named `libHSbase_p.a`, with the `_p` indicating that this is a profiling version. The suffix is added automatically by GHC for `hs-libraries` only, no suffix is added for libraries in `extra-libraries`.

The libraries listed in `extra-libraries` may be any libraries supported by your system's linker, including dynamic libraries (`.so` on Unix, `.DLL` on Windows).

Also, extra-libraries are placed on the linker command line after the hs-libraries for the same package. If your package has dependencies in the other direction (i.e. extra-libraries depends on hs-libraries), and the libraries are static, you might need to make two separate packages.

**include-dirs**

(string list) A list of directories containing C includes for this package.

**includes**

(string list) A list of files to include for via-C compilations using this package. Typically the include file(s) will contain function prototypes for any C functions used in the package, in case they end up being called as a result of Haskell functions from the package being inlined.

**depends**

(package id list) Packages on which this package depends.

**hugs-options**

(string list) Options to pass to Hugs for this package.

**cc-options**

(string list) Extra arguments to be added to the gcc command line when this package is being used (only for via-C compilations).

**ld-options**

(string list) Extra arguments to be added to the gcc command line (for linking) when this package is being used.

**framework-dirs**

(string list) On Darwin/MacOS X, a list of directories containing frameworks for this package. This corresponds to the -framework-path option. It is ignored on all other platforms.

**frameworks**

(string list) On Darwin/MacOS X, a list of frameworks to link to. This corresponds to the -framework option. Take a look at Apple's developer documentation to find out what frameworks actually are. This entry is ignored on all other platforms.

**haddock-interfaces**

(string list) A list of filenames containing [Haddock](#) interface files (.haddock files) for this package.

**haddock-html**

(optional string) The directory containing the Haddock-generated HTML for this package.

## 5.9.10 Linking against C++ libraries

Use of C++ libraries requires that the user link against the host system's C++ standard library. As the configuration necessary to achieve this is generally quite platform-dependent, GHC provides a built-in package, `system-cxx-std-lib`. This package captures the configuration necessary for linking against the C++ standard library and can be used via the `-package <pkg>` (page 261) flag or the Cabal `build-depends` field to link code against the C++ standard library.

## 5.10 GHC Backends

GHC supports multiple backend code generators. This is the part of the compiler responsible for taking the last intermediate representation that GHC uses (a form called Cmm that is a simple, C like language) and compiling it to executable code. The backends that GHC support are described below.

### 5.10.1 Native Code Generator (-fasm)

The default backend for GHC. It is a native code generator, compiling Cmm all the way to assembly code. It is the fastest backend and generally produces good performance code. It has the best support for compiling shared libraries. Select it with the `-fasm` flag.

### 5.10.2 LLVM Code Generator (-fllvm)

This is an alternative backend that uses the [LLVM](#) compiler to produce executable code. It generally produces code with performance as good as the native code generator but for some cases can produce much faster code. This is especially true for numeric, array heavy code using packages like `vector`. The penalty is a significant increase in compilation times. Select the LLVM backend with the `-fllvm` (page 286) flag.

You must install and have LLVM available on your `PATH` for the LLVM code generator to work. Specifically GHC needs to be able to call the `opt` and `llc` tools. Secondly, if you are running Mac OS X with LLVM 3.0 or greater then you also need the [Clang C compiler](#) compiler available on your `PATH`.

---

**Note:** Note that this GHC release expects an LLVM version in the 13 up to 16 (not inclusive) release series.

---

To install LLVM and Clang:

- *Linux*: Use your package management tool.
- *Mac OS X*: Clang is included by default on recent OS X machines when Xcode is installed (from 10.6 and later). LLVM is not included. In order to use the LLVM based code generator, you should install the [Homebrew](#) package manager for OS X. Alternatively you can download binaries for LLVM and Clang from [here](#).
- *Windows*: You should download binaries for LLVM and clang from [here](#).

### 5.10.3 C Code Generator (-fvia-C)

#### **-fvia-C**

Use the C code generator. Only supposed in unregistered GHC builds.

This is the oldest code generator in GHC and is generally not included any more having been deprecated around GHC 7.0. Select it with the `-fvia-C` (page 278) flag.

The C code generator is only supported when GHC is built in unregistered mode, a mode where GHC produces “portable” C code as output to facilitate porting GHC itself to a new platform. This mode produces much slower code though so it’s unlikely your version of GHC



was built this way. If it has then the native code generator probably won't be available. You can check this information by calling `ghc --info` (see [--info](#) (page 79)).

### 5.10.4 JavaScript Code Generator

This is an alternative code generator included in GHC 9.6 and above. It generates [ECMA-262](#) compliant JavaScript and is included as a technical preview. At time of writing, it is being actively developed but is not suitable for serious projects and production environments. The JavaScript backend is not distributed in the GHC bindist and requires a manual build. See [building the JavaScript backend](#) page on the GHC wiki for build instructions.

A JavaScript cross-compiling GHC produces an executable script, and a directory of the same name suffixed with `.jsexec`. For example, compiling a file named `Foo.hs` will produce an executable script `Foo` and a `Foo.jsexec` directory. The script is a thin wrapper that calls [Node.js](#) on the payload of the compiled Haskell code and can be run in the usual way, e.g., `./Foo`, as long as `node` is in your environment. The actual payload is in `<ModuleName>.jsexec/all.js`, for example `Foo.jsexec/all.js`. This file is the Haskell program cross-compiled to JavaScript *concrete syntax* and can be wrapped in a `<script>` HTML tag. For a breakdown of the rest of the build artifacts see the [compiler output](#) section in the wiki.

### 5.10.5 Unregisterised compilation

The term “unregisterised” really means “compile via vanilla C”, disabling some of the platform-specific tricks that GHC normally uses to make programs go faster. When compiling unregisterised, GHC simply generates a C file which is compiled via `gcc`.

When GHC is built in unregisterised mode only the C code generator is available. Neither the LLVM nor native code generator can be used by an unregisterised build.

Unregisterised compilation can be useful when porting GHC to a new machine, since it reduces the prerequisite tools to `gcc`, `as`, and `ld` and nothing more, and furthermore the amount of platform-specific code that needs to be written in order to get unregisterised compilation going is usually fairly small.

Unregisterised compilation cannot be selected at compile-time; you have to build GHC with the appropriate options set. Consult the [GHC Building Guide](#) for details.

You can check if your GHC is unregisterised by calling `ghc --print-unregisterised` (see [--print-unregisterised](#) (page 81)) or `ghc --info` (see [--info](#) (page 79)).

## 5.11 Options related to a particular phase

### 5.11.1 Replacing the program for one or more phases

You may specify that a different program be used for one of the phases of the compilation system, in place of whatever the `ghc` has wired into it. For example, you might want to try a different assembler. The following options allow you to change the external program used for a given compilation phase:

**-pgmL** *<cmd>*

Use *<cmd>* as the *literate* pre-processor.

- pgmP** `<cmd>`  
Use `<cmd>` as the C pre-processor (with `-cpp` (page 282) only).
- pgmJSP** `<cmd>`  
Use `<cmd>` as the JavaScript C pre-processor (only for javascript-backend).
- pgmCmmP** `<cmd>`  
Use `<cmd>` as the C- C pre-processor.
- pgmc** `<cmd>`  
Use `<cmd>` as the C compiler.
- pgmcxx** `<cmd>`  
Use `<cmd>` as the C++ compiler.
- pgmlo** `<cmd>`  
Use `<cmd>` as the LLVM optimiser.
- pgmlc** `<cmd>`  
Use `<cmd>` as the LLVM compiler.
- pgmlas** `<cmd>`  
Use `<cmd>` as the LLVM assembler
- pgms** `<cmd>`  
Use `<cmd>` as the splitter.
- pgma** `<cmd>`  
Use `<cmd>` as the assembler.
- pgml** `<cmd>`  
Use `<cmd>` as the linker.
- pgmlm** `<cmd>`  
Use `<cmd>` as the linker when merging object files (e.g. when generating joined objects for loading into GHCi).
- pgmF** `<cmd>`  
Use `<cmd>` as the pre-processor (with `-F` (page 285) only).
- pgmotool** `<cmd>`  
Use `<cmd>` as the program to inspect mach-o dynamic libraries and executables to read the dynamic library dependencies. We will compute the necessary runpath``s to embed for the dependencies based on the result of the ``otool call.
- pgminstall\_name\_tool** `<cmd>`  
Use `<cmd>` as the program to inject runpath``s into mach-o dynamic libraries and executables. As detected by the ``otool call.
- pgmwindres** `<cmd>`  
Use `<cmd>` as the program to use for embedding manifests on Windows. Normally this is the program windres, which is supplied with a GHC installation. See `-fno-embed-manifest` in *Options affecting linking* (page 288).
- pgmi** `<cmd>`  
Use `<cmd>` as the external interpreter command (see *Running the interpreter in a separate process* (page 70)). Default: `ghc-iserv-prof` if `-prof` (page 715) is enabled, `ghc-iserv-dyn` if `-dynamic` (page 289) is enabled, or `ghc-iserv` otherwise.

### 5.11.2 Forcing options to a particular phase

Options can be forced through to a particular compilation phase, using the following flags:

**-optL** {option}

Pass {option} to the literate pre-processor

**-optP** {option}

Pass {option} to CPP (makes sense only if *-cpp* (page 282) is also on).

**-optJSP** {option}

Pass {option} to JavaScript C pre-processor (only for javascript-backend).

**-optCmmP** {option}

Pass {option} to the C- C pre-processor.

The C- C pre-processor also receives C compiler flags. Those flags will come *before* the flags added by this option. As a result, the net effect of the following pair of flags is zero: *-optCmmP-UF00 -optc-DF00*.

**-optF** {option}

Pass {option} to the custom pre-processor (see *Options affecting a Haskell pre-processor* (page 285)).

**-optc** {option}

Pass {option} to the C compiler and, for compatibility, C- pre-processor.

**-pgmc-supports-no-pie**

Does the same thing as *-pgml-supports-no-pie*, which replaced it.

**-pgml-supports-no-pie**

When *-pgml* is used, GHC by default will never pass the *-no-pie* command line flag. The rationale is that it is not known whether the specified compiler used for linking (recall we use a C compiler to invoke the linker on our behalf) will support it. This flag can be used to indicate that *-no-pie* is supported. It has to be passed after *-pgml*.

This flag is not necessary when *-pgmc* is not used, since GHC remembers whether the default C compiler supports *-no-pie* in an internal settings file.

**-optcxx** {option}

Pass {option} to the C++ compiler.

**-optlo** {option}

Pass {option} to the LLVM optimiser.

**-optlc** {option}

Pass {option} to the LLVM compiler.

**-optlas** {option}

Pass {option} to the LLVM assembler (typically clang).

**-opta** {option}

Pass {option} to the assembler.

**-optl** {option}

Pass {option} to the linker.

**-optlm** {option}

Pass {option} to the linker when merging object files. In the case of a standard ld-style linker this should generally include the -r flag.

**-optwindres** {option}

Pass {option} to windres when embedding manifests on Windows. See -fno-embed-manifest in *Options affecting linking* (page 288).

**-opti** {option}

Pass {option} to the interpreter sub-process (see *Running the interpreter in a separate process* (page 70)). A common use for this is to pass RTS options e.g., -opti+RTS -opti-A64m, or to enable verbosity with -opti-v to see what messages are being exchanged by GHC and the interpreter.

So, for example, to force an -Ewurbble option to the assembler, you would tell the driver -opta-Ewurbble (the dash before the E is required).

GHC is itself a Haskell program, so if you need to pass options directly to GHC's runtime system you can enclose them in +RTS ... -RTS (see *Runtime system (RTS) options* (page 217)).

### 5.11.3 Options affecting the C pre-processor

**CPP**

Since  
6.8.1

The *CPP* (page 282) language extension enables the C pre-processor. This can be turned into a command-line flag by prefixing it with -X; For example:

```
$ ghc -XCPP foo.hs
```

The *CPP* (page 282) language extension can also be enabled using the *LANGUAGE* (page 662) pragma; For example:

```
{-# LANGUAGE CPP #-}
```

**-cpp**

The C pre-processor **cpp** is run over your Haskell code if the *-cpp* (page 282) option or *CPP* (page 282) extension are given. Unless you are building a large system with significant doses of conditional compilation, you really shouldn't need it.

**-D{symbol} [= {value}]**

Define macro {symbol} in the usual way. When no value is given, the value is taken to be 1. For instance, -DUSE\_MYLIB is equivalent to -DUSE\_MYLIB=1.

---

**Note:** *-D{symbol} [= {value}]* (page 282) does *not* affect -D macros passed to the C compiler when compiling an unregistered build! In this case use the -optc-Dfoo hack... (see *Forcing options to a particular phase* (page 281)).

---

**-U{symbol}**

Undefine macro {symbol} in the usual way.

**-I(dir)**

Specify a directory in which to look for `#include` files, in the usual C way.

The GHC driver pre-defines several macros when processing Haskell source code (`.hs` or `.lhs` files).

**5.11.3.1 Standard CPP macros**

The symbols defined by GHC are listed below. To check which symbols are defined by your local GHC installation, the following trick is useful:

```
$ ghc -E -optP-dM -cpp foo.hs
$ cat foo.hspp
```

(you need a file `foo.hs`, but it isn't actually used).

**\_\_GLASGOW\_HASKELL\_\_**

For version `x.y.z` of GHC, the value of `__GLASGOW_HASKELL__` is the integer `<xyy>` (if `<y>` is a single digit, then a leading zero is added, so for example in version 6.2 of GHC, `__GLASGOW_HASKELL__==602`). More information in [GHC version numbering policy](#) (page 4).

With any luck, `__GLASGOW_HASKELL__` will be undefined in all other implementations that support C-style pre-processing.

---

**Note:** The comparable symbols for other systems are: `__HUGS__` for Hugs, `__NHC__` for `nhc98`, and `__HBC__` for `hbc`.

---

NB. This macro is set when pre-processing both Haskell source and C source, including the C source generated from a Haskell module (i.e. `.hs`, `.lhs`, `.c` and `.hc` files).

**\_\_GLASGOW\_HASKELL\_FULL\_VERSION\_\_**

This macro exposes the full version string. For instance: `__GLASGOW_HASKELL_FULL_VERSION__==8.11.0.20200319`. Its value comes from the `ProjectVersion` Autotools variable.

Added in GHC 9.0.1

**\_\_GLASGOW\_HASKELL\_PATCHLEVEL1\_\_; \_\_GLASGOW\_HASKELL\_PATCHLEVEL2\_\_**

These macros are available starting with GHC 7.10.1.

For three-part GHC version numbers `x.y.z`, the value of `__GLASGOW_HASKELL_PATCHLEVEL1__` is the integer `<z>`.

For four-part GHC version numbers `x.y.z.z'`, the value of `__GLASGOW_HASKELL_PATCHLEVEL1__` is the integer `<z>` while the value of `__GLASGOW_HASKELL_PATCHLEVEL2__` is set to the integer `<z'>`.

These macros are provided for allowing finer granularity than is provided by `__GLASGOW_HASKELL__`. Usually, this should not be necessary as it's expected for most APIs to remain stable between patchlevel releases, but occasionally internal API changes are necessary to fix bugs. Also conditional compilation on the patchlevel can be useful for working around bugs in older releases.

---

**Tip:** These macros are set when pre-processing both Haskell source and C source, including the C source generated from a Haskell module (i.e. `.hs`, `.lhs`, `.c` and `.hc`).

---

files).

### **MIN\_VERSION\_GLASGOW\_HASKELL(x,y,z,z')**

This macro is available starting with GHC 7.10.1.

This macro is provided for convenience to write CPP conditionals testing whether the GHC version used is version `x.y.z.z'` or later.

If compatibility with Haskell compilers (including GHC prior to version 7.10.1) which do not define `MIN_VERSION_GLASGOW_HASKELL` is required, the presence of the `MIN_VERSION_GLASGOW_HASKELL` macro needs to be ensured before it is called, e.g.:

```
#if defined(MIN_VERSION_GLASGOW_HASKELL)
#if MIN_VERSION_GLASGOW_HASKELL(7,10,2,0)
/* code that applies only to GHC 7.10.2 or later */
#endif
#endif
```

---

**Tip:** This macro is set when pre-processing both Haskell source and C source, including the C source generated from a Haskell module (i.e. `.hs`, `.lhs`, `.c` and `.hc` files).

---

### **\_\_GLASGOW\_HASKELL\_TH\_\_**

This is set to 1 when the compiler supports Template Haskell, and to 0 when not. The latter is the case for a stage-1 compiler during bootstrapping, or on architectures where the interpreter is not available.

### **\_\_GLASGOW\_HASKELL\_LLVM\_\_**

Only defined when `-fllvm` (page 286) is specified. When GHC is using version `x.y.z` of LLVM, the value of `__GLASGOW_HASKELL_LLVM__` is the integer `<xy>` (if `<y>` is a single digit, then a leading zero is added, so for example when using version 3.7 of LLVM, `__GLASGOW_HASKELL_LLVM__==307`).

### **\_\_PARALLEL\_HASKELL\_\_**

Only defined when `-parallel` is in use! This symbol is defined when pre-processing Haskell (input) and pre-processing C (GHC output).

### **os\_HOST\_OS=1**

This define allows conditional compilation based on the Operating System, where `(os)` is the name of the current Operating System (eg. `linux`, `mingw32` for Windows, `solaris`, etc.).

### **arch\_HOST\_ARCH=1**

This define allows conditional compilation based on the host architecture, where `(arch)` is the name of the current architecture (eg. `i386`, `x86_64`, `powerpc`, `sparc`, etc.).

### **VERSION\_pkgname**

This macro is available starting GHC 8.0. It is defined for every exposed package. This macro expands to a string recording the version of `pkgname` that is exposed for module import. It is identical in behavior to the `VERSION_pkgname` macros that Cabal defines.

### **MIN\_VERSION\_pkgname(x,y,z)**

This macro is available starting GHC 8.0. It is defined for every exposed package. This macro is provided for convenience to write CPP conditionals testing if a package version is `x.y.z` or later. It is identical in behavior to the `MIN_VERSION_pkgname` macros that Cabal defines.

### 5.11.3.2 CPP and string gaps

A small word of warning: `-cpp` (page 282) is not friendly to “string gaps”. In other words, strings such as the following:

```
strmod = "\
\ p \
\"
```

don't work with `-cpp` (page 282); `/usr/bin/cpp` elides the backslash-newline pairs.

However, it appears that if you add a space at the end of the line, then `cpp` (at least GNU `cpp` and possibly other `cpps`) leaves the backslash-space pairs alone and the string gap works as expected.

### 5.11.4 Options affecting a Haskell pre-processor

#### -F

A custom pre-processor is run over your Haskell source file only if the `-F` option is given.

Running a custom pre-processor at compile-time is in some settings appropriate and useful. The `-F` option lets you run a pre-processor as part of the overall GHC compilation pipeline, which has the advantage over running a Haskell pre-processor separately in that it works in interpreted mode and you can continue to take reap the benefits of GHC's recompilation checker.

The pre-processor is run just before the Haskell compiler proper processes the Haskell input, but after the literate markup has been stripped away and (possibly) the C pre-processor has washed the Haskell input.

Use `-pgmF {cmd}` (page 280) to select the program to use as the preprocessor. When invoked, the `{cmd}` pre-processor is given at least three arguments on its command-line: the first argument is the name of the original source file, the second is the name of the file holding the input, and the third is the name of the file where `{cmd}` should write its output to.

Additional arguments to the pre-processor can be passed in using the `-optF {option}` (page 281) option. These are fed to `{cmd}` on the command line after the three standard input and output arguments.

An example of a pre-processor is to convert your source files to the input encoding that GHC expects, i.e. create a script `convert.sh` containing the lines:

```
#!/bin/sh
( echo "{-# LINE 1 \"$1\" #-}" ; iconv -f ll -t utf-8 $2 ) > $3
```

and pass `-F -pgmF convert.sh` to GHC. The `-f ll` option tells `iconv` to convert your Latin-1 file, supplied in argument `$2`, while the `-t utf-8` options tell `iconv` to return a UTF-8 encoded file. The result is redirected into argument `$3`. The `echo "{-# LINE 1 \"$1\" #-}"` just makes sure that your error positions are reported as in the original source file.

### 5.11.5 Options affecting code generation

#### **-fasm**

Use GHC's *native code generator* (page 278) rather than compiling via LLVM. `-fasm` is the default.

#### **-fllvm**

Compile via *LLVM* (page 278) instead of using the native code generator. This will generally take slightly longer than the native code generator to compile. Produced code is generally the same speed or faster than the other two code generators. Compiling via LLVM requires LLVM's **opt** and **llc** executables to be in PATH.

---

**Note:** Note that this GHC release expects an LLVM version between 13 and 16.

---

#### **-fno-code**

Omit code generation (and all later phases) altogether. This is useful if you're only interested in type checking code.

If a module contains a Template Haskell splice then in `-make` mode, code generation will be automatically turned on for all dependencies. By default, object files are generated, but if `ghc-flag:-fprefer-byte-code` is enabled, byte-code will be generated instead.

#### **-fwrite-interface**

Always write interface files. GHC will normally write interface files automatically, but this flag is useful with `-fno-code` (page 286), which normally suppresses generation of interface files. This is useful if you want to type check over multiple runs of GHC without compiling dependencies.

#### **-fwrite-if-simplified-core**

The interface file will contain all the bindings for a module. From this interface file we can restart code generation to produce byte-code.

The definition of bindings which are included in this depend on the optimisation level. Any definitions which are already included in an interface file (via an unfolding for an exported identifier) are reused.

#### **-fobject-code**

Generate object code. This is the default outside of GHCi, and can be used with GHCi to cause object code to be generated in preference to byte-code. Therefore this flag disables `-fbyte-code-and-object-code` (page 286).

#### **-fbyte-code**

Generate byte-code instead of object-code. This is the default in GHCi. Byte-code can currently only be used in the interactive interpreter, not saved to disk. This option is only useful for reversing the effect of `-fobject-code` (page 286).

#### **-fbyte-code-and-object-code**

Generate object code and byte-code. This is useful with the flags `-fprefer-byte-code` (page 287) and `-fwrite-if-simplified-core` (page 286).

This flag implies `-fwrite-if-simplified-core` (page 286).

`-fbyte-code` (page 286) and `-fobject-code` (page 286) disable this flag as they specify that GHC should *only* write object code or byte-code respectively.



**-fPIC**

Generate position-independent code (code that can be put into shared libraries). This currently works on Linux x86 and x86-64. On Windows, position-independent code is never used so the flag is a no-op on that platform.

**-fexternal-dynamic-refs**

When generating code, assume that entities imported from a different module might be dynamically linked. This flag is enabled automatically by *-dynamic* (page 289).

**-fPIE**

Generate code in such a way to be linkable into a position-independent executable. This currently works on Linux x86 and x86-64. On Windows, position-independent code is never used so the flag is a no-op on that platform. To link the final executable use *-pie* (page ??).

**-dynamic**

Build code for dynamic linking. This can reduce code size tremendously, but may slow-down cross-module calls of non-inlined functions. There can be some complications combining *-shared* (page 79) with this flag relating to linking in the RTS under Linux. See [#10352](#).

Note that using this option when linking causes GHC to link against shared libraries.

**-dynamic-too**

Generates both dynamic and static object files in a single run of GHC. This option is functionally equivalent to running GHC twice, the second time adding *-dynamic -osuf dyn\_o -hisuf dyn\_hi*.

Although it is equivalent to running GHC twice, using *-dynamic-too* is more efficient, because the earlier phases of the compiler up to code generation are performed just once.

When using *-dynamic-too*, the options *-dyno*, *-dynosuf*, and *-dynhisuf* are the counterparts of *-o*, *-osuf*, and *-hisuf* respectively, but applying to the dynamic compilation.

*-dynamic-too* is ignored if *-dynamic* (page 289) is also specified.

**-fexpose-internal-symbols**

Request that GHC emits verbose symbol tables which include local symbols for module-internal functions. These can be useful for tools like *perf* but increase object file sizes. This is implied by *-g2* (page 741) and above.

*-fno-expose-internal-symbols* (page 287) suppresses all non-global symbol table entries, resulting in smaller object file sizes at the expense of debuggability.

**-fprefer-byte-code**

If a home package module has byte-code available then use that instead of an object file (if that's available) to evaluate and run TH splices.

This is useful with flags such as *-fbyte-code-and-object-code* (page 286), which tells the compiler to generate byte-code, and *-fwrite-if-simplified-core* (page 286) which allows byte-code to be generated from an interface file.

This flag also interacts with *-fno-code* (page 286), if this flag is enabled then any modules which are required to be compiled for Template Haskell evaluation will generate byte-code rather than object code.

### 5.11.6 Options affecting linking

GHC has to link your code with various libraries, possibly including: user-supplied, GHC-supplied, and system-supplied (`-lm` math library, for example).

#### **-l** *<lib>*

Link in the *<lib>* library. On Unix systems, this will be in a file called `liblib.a` or `liblib.so` which resides somewhere on the library directories path.

Because of the sad state of most UNIX linkers, the order of such options does matter. If library *<foo>* requires library *<bar>*, then in general `-l <foo>` should come *before* `-l <bar>` on the command line.

There's one other gotcha to bear in mind when using external libraries: if the library contains a `main()` function, then this will be a link conflict with GHC's own `main()` function (eg. `libf2c` and `libl` have their own `main()`s).

You can use an external main function if you initialize the RTS manually and pass `-no-hs-main`. See also *Using your own main()* (page 625).

#### **-c**

Omits the link step. This option can be used with `--make` (page 78) to avoid the automatic linking that takes place if the program contains a `Main` module.

#### **-package** *<name>*

If you are using a Haskell “package” (see *Packages* (page 259)), don't forget to add the relevant `-package` option when linking the program too: it will cause the appropriate libraries to be linked in with the program. Forgetting the `-package` option will likely result in several pages of link errors.

#### **-framework** *<name>*

On Darwin/OS X/iOS only, link in the framework *<name>*. This option corresponds to the `-framework` option for Apple's Linker. Please note that frameworks and packages are two different things - frameworks don't contain any Haskell code. Rather, they are Apple's way of packaging shared libraries. To link to Apple's “Carbon” API, for example, you'd use `-framework Carbon`.

#### **-staticlib**

##### **Implies**

`-flink-rtts` (page 289)

Link all passed files into a static library suitable for linking. To control the name, use the `-o <file>` (page 242) option as usual. The default name is `liba.a`.

#### **-L** *<dir>*

Where to find user-supplied libraries... Prepend the directory *<dir>* to the library directories path.

#### **-fuse-rpaths**

This flag is enabled by default and will set the rpath of the linked object to the library directories of dependent packages.

When building binaries to distribute it can be useful to pass your own linker options to control the rpath and disable the automatic injection of rpath entries by disabling this flag.

**-framework-path** *<dir>*

On Darwin/OS X/iOS only, prepend the directory *<dir>* to the framework directories path. This option corresponds to the `-F` option for Apple's Linker (`-F` already means something else for GHC).

**-fsplit-sections****-split-sections**

Place each generated function or data item into its own section in the output file if the target supports arbitrary sections. The name of the function or the name of the data item determines the section's name in the output file.

When linking, the linker can automatically remove all unreferenced sections and thus produce smaller executables.

**-static**

Tell the linker to avoid shared Haskell libraries, if possible. This is the default.

**-dynamic**

This flag tells GHC to link against shared Haskell libraries. This flag only affects the selection of dependent libraries, not the form of the current target (see *-shared* (page 79)). See *Using shared libraries* (page 294) on how to create them.

Note that this option also has an effect on code generation (see above).

**-shared**

Instead of creating an executable, GHC produces a shared object with this linker flag. Depending on the operating system target, this might be an ELF DSO, a Windows DLL, or a Mac OS dylib. GHC hides the operating system details beneath this uniform flag.

The flags *-dynamic* (page 289) and *-static* (page 289) control whether the resulting shared object links statically or dynamically to Haskell package libraries given as *-package <pkg>* (page 261) option. Non-Haskell libraries are linked as gcc would regularly link it on your system, e.g. on most ELF system the linker uses the dynamic libraries when found.

Object files linked into shared objects must be compiled with *-fPIC* (page 286), see *Options affecting code generation* (page 286)

When creating shared objects for Haskell packages, the shared object must be named properly, so that GHC recognizes the shared object when linking against this package. See *shared object name mangling* (page 272) for details.

**-dynload**

This flag selects one of a number of modes for finding shared libraries at runtime. See *Finding shared libraries at runtime* (page 296) for a description of each mode.

**-flink-rtts**

When linking shared libraries (*-shared* (page 79)) GHC does not automatically link the RTS. This is to allow choosing the RTS flavour (*-threaded* (page ??), *-eventlog* (page 291), etc) when linking an executable. However when the shared library is the intended product it is useful to be able to reverse this default. See *Shared libraries that export a C API* (page 295) for an usage example.

When linking a static library (*-staticlib* (page 288)) GHC links the RTS automatically, you can reverse this behaviour by reversing this flag: `-fno-link-rtts`.

**-main-is** *<thing>*

The normal rule in Haskell is that your program must supply a `main` function in module `Main`. When testing, it is often convenient to change which function is the “main” one, and the `-main-is` flag allows you to do so. The *<thing>* can be one of:

- A lower-case identifier `foo`. GHC assumes that the main function is `Main.foo`.
- A module name `A`. GHC assumes that the main function is `A.main`.
- A qualified name `A.foo`. GHC assumes that the main function is `A.foo`.

Strictly speaking, `-main-is` is not a link-phase flag at all; it has no effect on the link step. The flag must be specified when compiling the module containing the specified main function (e.g. module `A` in the latter two items above). It has no effect for other modules, and hence can safely be given to `ghc -make`. However, if all the modules are otherwise up to date, you may need to force recompilation both of the module where the new “main” is, and of the module where the “main” function used to be; `ghc` is not clever enough to figure out that they both need recompiling. You can force recompilation by removing the object file, or by using the `-fforce-recomp` (page 246) flag.

**-no-hs-main**

In the event you want to include `ghc`-compiled code as part of another (non-Haskell) program, the RTS will not be supplying its definition of `main()` at link-time, you will have to. To signal that to the compiler when linking, use `-no-hs-main`. See also [Using your own main\(\)](#) (page 625).

Notice that since the command-line passed to the linker is rather involved, you probably want to use `ghc` to do the final link of your ‘mixed-language’ application. This is not a requirement though, just try linking once with `-v` (page 86) on to see what options the driver passes through to the linker.

The `-no-hs-main` flag can also be used to persuade the compiler to do the link step in `-make` (page 78) mode when there is no Haskell `Main` module present (normally the compiler will not attempt linking when there is no `Main`).

The flags `-rtsopts[=<none|some|all|ignore|ignoreAll>|>]` (page 291) and `-with-rtsopts[=<opts>|>]` (page 292) have no effect when used with `-no-hs-main` (page 290), because they are implemented by changing the definition of `main` that GHC generates. See [Using your own main\(\)](#) (page 625) for how to get the effect of `-rtsopts[=<none|some|all|ignore|ignoreAll>|>]` (page 291) and `-with-rtsopts[=<opts>|>]` (page 292) when using your own `main`.

**-debug**

Link the program with a debugging version of the runtime system. The debugging runtime turns on numerous assertions and sanity checks, and provides extra options for producing debugging output at runtime (run the program with `+RTS -?` to see a list).

**-threaded**

Link the program with the “threaded” version of the runtime system. The threaded runtime system is so-called because it manages multiple OS threads, as opposed to the default runtime system which is purely single-threaded.

Note that you do *not* need `-threaded` in order to use concurrency; the single-threaded runtime supports concurrency between Haskell threads just fine.

The threaded runtime system provides the following benefits:

- It enables the `-N <x>` (page 151) RTS option to be used, which allows threads to run in parallel on a multiprocessor or multicore machine. See [Using SMP parallelism](#) (page 150).

- If a thread makes a foreign call (and the call is not marked unsafe), then other Haskell threads in the program will continue to run while the foreign call is in progress. Additionally, foreign exported Haskell functions may be called from multiple OS threads simultaneously. See [Multi-threading and the FFI](#) (page 629).

**-single-threaded**

**Since**  
9.8

Switch to the single threaded (default) version of the runtime.

**-eventlog**

**Since**  
Unconditionally enabled with 9.4 and later

Link the program with the “eventlog” version of the runtime system. A program linked in this way can generate a runtime trace of events (such as thread start/stop) to a binary file *program.eventlog*, which can then be interpreted later by various tools. See [Tracing](#) (page 234) for more information.

Note that as of GHC 9.4 and later eventlog support is included in the RTS by default and the *-eventlog* (page 291) is deprecated.

**-rtsopts**[(none|some|all|ignore|ignoreAll)]

**Default**  
some

This option affects the processing of RTS control options given either on the command line or via the [GHCRTS](#) (page 218) environment variable. There are five possibilities:

**-rtsopts=none**

Disable all processing of RTS options. If +RTS appears anywhere on the command line, then the program will abort with an error message. If the GHCRTS environment variable is set, then the program will emit a warning message, GHCRTS will be ignored, and the program will run as normal.

**-rtsopts=ignore**

Disables all processing of RTS options. Unlike none this treats all RTS flags appearing on the command line the same way as regular arguments. (Passing them on to your program as arguments). GHCRTS options will be processed normally.

**-rtsopts=ignoreAll**

Same as ignore but also ignores GHCRTS.

**-rtsopts=some**

[this is the default setting] Enable only the “safe” RTS options: (Currently only -? and --info.) Any other RTS options on the command line or in the GHCRTS environment variable causes the program with to abort with an error message.

**-rtsopts=all or just -rtsopts**

Enable *all* RTS option processing, both on the command line and through the GHCRTS environment variable.

In GHC 6.12.3 and earlier, the default was to process all RTS options. However, since RTS options can be used to write logging data to arbitrary files under the security context of the running program, there is a potential security problem. For this reason, GHC 7.0.1 and later default to *-rtsopts=some*.

Note that `-rtsopts` has no effect when used with `-no-hs-main` (page 290); see *Using your own main()* (page 625) for details.

`-rtsopts` does not affect RTS options passed via `-with-rtsopts`; those are used regardless of `-rtsopts`.

#### **-with-rtsopts=(opts)**

This option allows you to set the default RTS options at link-time. For example, `-with-rtsopts="-H128m"` sets the default heap size to 128MB. This will always be the default heap size for this program, unless the user overrides it. (Depending on the setting of the `-rtsopts` option, the user might not have the ability to change RTS options at run-time, in which case `-with-rtsopts` would be the *only* way to set them.)

Use the runtime flag `--info` (page 238) on the executable program to see the options set with `-with-rtsopts`.

Note that `-with-rtsopts` has no effect when used with `-no-hs-main`; see *Using your own main()* (page 625) for details.

#### **-no-rtsopts-suggestions**

This option disables RTS suggestions about linking with `-rtsopts=[none|some|all|ignore|ignoreAll]` (page 291) when they are not available. These suggestions would be unhelpful if the users have installed Haskell programs through their package managers. With this option enabled, these suggestions will not appear. It is recommended for people distributing binaries to build with either `-rtsopts` or `-no-rtsopts-suggestions`.

#### **-fno-gen-manifest**

On Windows, GHC normally generates a manifest file when linking a binary. The manifest is placed in the file `prog.exe.manifest` where `(prog.exe)` is the name of the executable. The manifest file currently serves just one purpose: it disables the “installer detection” in Windows Vista that attempts to elevate privileges for executables with certain names (e.g. names containing “install”, “setup” or “patch”). Without the manifest file to turn off installer detection, attempting to run an executable that Windows deems to be an installer will return a permission error code to the invoker. Depending on the invoker, the result might be a dialog box asking the user for elevated permissions, or it might simply be a permission denied error.

Installer detection can be also turned off globally for the system using the security control panel, but GHC by default generates binaries that don't depend on the user having disabled installer detection.

The `-fno-gen-manifest` disables generation of the manifest file. One reason to do this would be if you had a manifest file of your own, for example.

In the future, GHC might use the manifest file for more things, such as supplying the location of dependent DLLs.

`-fno-gen-manifest` (page 292) also implies `-fno-embed-manifest` (page 292), see below.

#### **-fno-embed-manifest**

The manifest file that GHC generates when linking a binary on Windows is also embedded in the executable itself, by default. This means that the binary can be distributed without having to supply the manifest file too. The embedding is done by running **windres**; to see exactly what GHC does to embed the manifest, use the `-v` (page 86) flag. A GHC installation comes with its own copy of **windres** for this reason.



See also `-pgmwindres {cmd}` (page 280) (*Replacing the program for one or more phases* (page 279)) and `-optwindres {option}` (page 282) (*Forcing options to a particular phase* (page 281)).

### **-fno-shared-implib**

DLLs on Windows are typically linked to by linking to a corresponding `.lib` or `.dll.a` — the so-called import library. GHC will typically generate such a file for every DLL you create by compiling in `-shared` (page 79) mode. However, sometimes you don't want to pay the disk-space cost of creating this import library, which can be substantial — it might require as much space as the code itself, as Haskell DLLs tend to export lots of symbols.

As long as you are happy to only be able to link to the DLL using `GetProcAddress` and friends, you can supply the `-fno-shared-implib` (page 293) flag to disable the creation of the import library entirely.

### **-dylib-install-name {path}**

On Darwin/OS X, dynamic libraries are stamped at build time with an “install name”, which is the ultimate install path of the library file. Any libraries or executables that subsequently link against it will pick up that path as their runtime search location for it. By default, `ghc` sets the install name to the location where the library is built. This option allows you to override it with the specified file path. (It passes `-install_name` to Apple's linker.) Ignored on other platforms.

### **-rdynamic**

This instructs the linker to add all symbols, not only used ones, to the dynamic symbol table. Currently Linux and Windows/MinGW32 only. This is equivalent to using `-optl -rdynamic` on Linux, and `-optl -export-all-symbols` on Windows.

### **-fwhole-archive-hs-libs**

When linking a binary executable, this inserts the flag `-Wl,--whole-archive` before any `-l` flags for Haskell libraries, and `-Wl,--no-whole-archive` afterwards (on OS X, the flag is `-Wl,-all_load`, there is no equivalent for `-Wl,--no-whole-archive`). This flag also disables the use of `-Wl,--gc-sections` (`-Wl,-dead_strip` on OS X).

This is for specialist applications that may require symbols defined in these Haskell libraries at runtime even though they aren't referenced by any other code linked into the executable. If you're using `-fwhole-archive-hs-libs`, you probably also want `-rdynamic`.

### **-pie**

#### **Since**

8.2.2

This instructs the linker to produce a position-independent executable. This flag is only valid while producing executables and all object code being linked must have been produced with `-fPIE` (page 287).

Position independent executables are required by some platforms as they enable address-space layout randomization (ASLR), a common security measure. They can also be useful as they can be dynamically loaded and used as shared libraries by other executables.

Position independent executables should be dynamically-linked (e.g. built with `-dynamic` (page 289) and only loaded into other dynamically-linked executables to ensure that only one `libHSrts` is present if loaded into the address space of another Haskell process.

Also, you may need to use the `-rdynamic` (page 293) flag to ensure that that symbols are not dropped from your PIE objects.

**-no-pie**

If required, the C compiler will still produce a PIE. Otherwise, this is the default. Refer to `-pie` for more information about PIEs.

**-fkeep-cafs****Since**

8.8.1

Disables the RTS's normal behaviour of garbage-collecting CAFs (Constant Applicative Forms, in other words top-level expressions). This option is useful for specialised applications that do runtime dynamic linking, where code dynamically linked in the future might require the value of a CAF that would otherwise be garbage-collected.

**-fcompact-unwind****Default**

on

**Since**

9.4.1

This instructs the linker to produce an executable that supports Apple's compact unwinding sections. These are used by C++ and Objective-C code to unwind the stack when an exception occurs.

In theory, the older `__eh_frame` section should also be usable for this purpose, but this does not always work.

## 5.12 Using shared libraries

On some platforms GHC supports building Haskell code into shared libraries. Shared libraries are also sometimes known as dynamic libraries, in particular on Windows they are referred to as dynamic link libraries (DLLs).

Shared libraries allow a single instance of some pre-compiled code to be shared between several programs. In contrast, with static linking the code is copied into each program. Using shared libraries can thus save disk space. They also allow a single copy of code to be shared in memory between several programs that use it. Shared libraries are often used as a way of structuring large projects, especially where different parts are written in different programming languages. Shared libraries are also commonly used as a plugin mechanism by various applications. This is particularly common on Windows using COM.

In GHC version 6.12 building shared libraries is supported for Linux (on x86 and x86-64 architectures). GHC version 7.0 adds support on Windows (see [Building and using Win32 DLLs](#) (page 770)), FreeBSD and OpenBSD (x86 and x86-64), Solaris (x86) and Mac OS X (x86 and PowerPC).

Building and using shared libraries is slightly more complicated than building and using static libraries. When using Cabal much of the detail is hidden, just use `--enable-shared` when configuring a package to build it into a shared library, or to link it against other packages built as shared libraries. The additional complexity when building code is to distinguish whether the code will be used in a shared library or will use shared library versions of other packages it depends on. There is additional complexity when installing and distributing shared libraries or programs that use shared libraries, to ensure that all shared libraries that are required at runtime are present in suitable locations.



### 5.12.1 Building programs that use shared libraries

To build a simple program and have it use shared libraries for the runtime system and the base libraries use the `-dynamic` (page 289) flag:

```
ghc --make -dynamic Main.hs
```

This has two effects. The first is to compile the code in such a way that it can be linked against shared library versions of Haskell packages (such as `base`). The second is when linking, to link against the shared versions of the packages' libraries rather than the static versions. Obviously this requires that the packages were built with shared libraries. On supported platforms GHC comes with shared libraries for all the core packages, but if you install extra packages (e.g. with Cabal) then they would also have to be built with shared libraries (`--enable-shared` for Cabal).

### 5.12.2 Shared libraries for Haskell packages

You can build Haskell code into a shared library and make a package to be used by other Haskell programs. The easiest way is using Cabal, simply configure the Cabal package with the `--enable-shared` flag.

If you want to do the steps manually or are writing your own build system then there are certain conventions that must be followed. Building a shared library that exports Haskell code, to be used by other Haskell code is a bit more complicated than it is for one that exports a C API and will be used by C code. If you get it wrong you will usually end up with linker errors.

In particular Haskell shared libraries *must* be made into packages. You cannot freely assign which modules go in which shared libraries. The Haskell shared libraries must match the package boundaries. The reason for this is that GHC handles references to symbols *within* the same shared library (or main executable binary) differently from references to symbols *between* different shared libraries. GHC needs to know for each imported module if that module lives locally in the same shared lib or in a separate shared lib. The way it does this is by using packages. When using `-dynamic` (page 289), a module from a separate package is assumed to come from a separate shared lib, while modules from the same package (or the default “main” package) are assumed to be within the same shared lib (or main executable binary).

Most of the conventions GHC expects when using packages are described in [Building a package from Haskell source](#) (page 272). In addition note that GHC expects the `.hi` files to use the extension `.dyn_hi`. The other requirements are the same as for C libraries and are described below, in particular the use of the flags `-dynamic` (page 289), `-fPIC` (page 286) and `-shared` (page 79).

### 5.12.3 Shared libraries that export a C API

Building Haskell code into a shared library is a good way to include Haskell code in a larger mixed-language project. While with static linking it is recommended to use GHC to perform the final link step, with shared libraries a Haskell library can be treated just like any other shared library. The linking can be done using the normal system C compiler or linker.

It is possible to load shared libraries generated by GHC in other programs not written in Haskell, so they are suitable for using as plugins. Of course to construct a plugin you will have to use the FFI to export C functions and follow the rules about initialising the RTS. See

*Making a Haskell library that can be called from foreign code* (page 627). In particular you will probably want to export a C function from your shared library to initialise the plugin before any Haskell functions are called.

To build Haskell modules that export a C API into a shared library use the `-dynamic` (page 289), `-fPIC` (page 286) and `-shared` (page 79) flags:

```
ghc --make -dynamic -shared -fPIC -flink-rtts Foo.hs -o libfoo.so
```

As before, the `-dynamic` (page 289) flag specifies that this library links against the shared library versions of the base package. `-flink-rtts` (page 289) additionally links against the shared library version of the `rtts` package (linking against the `rtts` package is not enabled by default when building shared libraries). You may also omit `-flink-rtts` and link the RTS library into your final executable.

The `-fPIC` (page 286) flag is required for all code that will end up in a shared library. The `-shared` (page 79) flag specifies to make a shared library rather than a program. To make this clearer we can break this down into separate compilation and link steps:

```
ghc -dynamic -fPIC -c Foo.hs
ghc -dynamic -shared -flink-rtts Foo.o -o libfoo.so
```

In principle you can use `-shared` (page 79) without `-dynamic` (page 289) in the link step. That means to statically link the runtime system and all of the base libraries into your new shared library. This would make a very big, but standalone shared library. On most platforms however that would require all the static libraries to have been built with `-fPIC` (page 286) so that the code is suitable to include into a shared library and we do not do that at the moment.

**Warning:** If your shared library exports a Haskell API then you cannot directly link it into another Haskell program and use that Haskell API. You will get linker errors. You must instead make it into a package as described in the section above.

## 5.12.4 Finding shared libraries at runtime

The primary difficulty with managing shared libraries is arranging things such that programs can find the libraries they need at runtime. The details of how this works varies between platforms, in particular the three major systems: Unix ELF platforms, Windows and Mac OS X.

### 5.12.4.1 Unix

On Unix there are two mechanisms. Shared libraries can be installed into standard locations that the dynamic linker knows about. For example `/usr/lib` or `/usr/local/lib` on most systems. The other mechanism is to use a “runtime path” or “rpath” embedded into programs and libraries themselves. These paths can either be absolute paths or on at least Linux and Solaris they can be paths relative to the program or library itself. In principle this makes it possible to construct fully relocatable sets of programs and libraries.

GHC has a `-dynload` linking flag to select the method that is used to find shared libraries at runtime. There are currently two modes:

#### **sysdep**

A system-dependent mode. This is also the default mode. On Unix ELF systems this

embeds RPATH/RUNPATH entries into the shared library or executable. In particular it uses absolute paths to where the shared libraries for the rts and each package can be found. This means the program can immediately be run and it will be able to find the libraries it needs. However it may not be suitable for deployment if the libraries are installed in a different location on another machine.

### deploy

This does not embed any runtime paths. It relies on the shared libraries being available in a standard location or in a directory given by the LD\_LIBRARY\_PATH environment variable.

To use relative paths for dependent libraries on Linux and Solaris you can pass a suitable -rpath flag to the linker:

```
ghc -dynamic Main.hs -o main -lfoo -L. -optl-Wl,-rpath,'$ORIGIN'
```

This assumes that the library libfoo.so is in the current directory and will be able to be found in the same directory as the executable main once the program is deployed. Similarly it would be possible to use a subdirectory relative to the executable e.g. -optl-Wl,-rpath,'\$ORIGIN/lib'.

This relative path technique can be used with either of the two -dynload modes, though it makes most sense with the deploy mode. The difference is that with the deploy mode, the above example will end up with an ELF RUNPATH of just \$ORIGIN while with the sysdep mode the RUNPATH will be \$ORIGIN followed by all the library directories of all the packages that the program depends on (e.g. base and rts packages etc.) which are typically absolute paths. The unix tool readelf --dynamic is handy for inspecting the RPATH/RUNPATH entries in ELF shared libraries and executables.

On most UNIX platforms it is also possible to build executables that can be dlopen'd like shared libraries using the -pie (page ??) flag during linking.

#### 5.12.4.2 Mac OS X

The standard assumption on Darwin/Mac OS X is that dynamic libraries will be stamped at build time with an “install name”, which is the full ultimate install path of the library file. Any libraries or executables that subsequently link against it (even if it hasn't been installed yet) will pick up that path as their runtime search location for it. When compiling with ghc directly, the install name is set by default to the location where it is built. You can override this with the *-dylib-install-name (path)* (page 293) option (which passes -install\_name to the Apple linker). Cabal does this for you. It automatically sets the install name for dynamic libraries to the absolute path of the ultimate install location.

## 5.13 Debugging the compiler

HACKER TERRITORY. HACKER TERRITORY. (You were warned.)

### Dump flags

- *Debugging the compiler* (page 297)
  - *Dumping out compiler intermediate structures* (page 298)
  - \* *Front-end* (page 299)

- \* *Type-checking and renaming* (page 300)
- \* *Core representation and simplification* (page 301)
- \* *STG representation* (page 303)
- \* *C-\- representation* (page 304)
- \* *LLVM code generator* (page 305)
- \* *C code generator* (page 305)
- \* *Native code generator* (page 305)
- \* *JavaScript code generator* (page 306)
- \* *Miscellaneous backend dumps* (page 306)
- *Formatting dumps* (page 307)
- *Suppressing unwanted information* (page 307)
- *Checking for consistency* (page 308)
- *Checking for determinism* (page 310)
- *Other* (page 310)

### 5.13.1 Dumping out compiler intermediate structures

#### **-ddump-to-file**

Causes the output from each of flags starting with “-ddump”, to be dumped to a file or files. If you want to have all the output from one single flag saved to one file, use *-ddump-file-prefix={str}* (page 298) (see descriptions below). Otherwise, the output will go to several files, including one for non-module specific and several for module specific. The suffix of a dump file depends on the flag turned on, for instance, output from *-ddump-simpl* (page 302) will end up in `prefix.dump-simpl`.

#### **-ddump-file-prefix={str}**

Set the prefix of the filenames used for debugging output. For example, *-ddump-file-prefix=Foo* will cause the output from *-ddump-simpl* (page 302) to be dumped to `Foo.dump-simpl`.

#### **-fdump-with-ways**

##### **Default**

enabled

When compiling `Main.hs` with profiling and without this will now produce `Main.p.dump-simpl` and `Main.dump-simpl` instead of overwriting the output of one way with the output of another.

#### **-ddump-json**

This flag was previously used to generated JSON formatted GHC diagnostics, but has been deprecated. Instead, use *-fdiagnostics-as-json* (page 91).

#### **-dshow-passes**

Print out each pass name, its runtime and heap allocations as it happens. Note that this may come at a slight performance cost as the compiler will be a bit more eager in forcing pass results to more accurately account for their costs.

Two types of messages are produced: Those beginning with `***` do denote the beginning of a compilation phase whereas those starting with `!!!` mark the end of a pass and are accompanied by allocation and runtime statistics.

**-dipe-stats**

For each module, show some simple statistics about which info tables have IPE information, and how many info tables with IPE information each closure type has. This is useful, for example, for verifying that STACK info tables are being appropriately omitted or included from the info table map.

**-dfaststring-stats**

Show statistics on the usage of fast strings by the compiler.

**-ddump-faststrings**

Dump the whole FastString table when finished. Consider using `-ddump-file-prefix={str}` (page 298) to dump it into a file.

**-dppr-debug**

Debugging output is in one of several “styles.” Take the printing of types, for example. In the “user” style (the default), the compiler’s internal ideas about types are presented in Haskell source-level syntax, insofar as possible. In the “debug” style (which is the default for debugging output), the types are printed in with explicit forall, and variables have their unique-id attached (so you can check for things that look the same but aren’t). This flag makes debugging output appear in the more verbose debug style.

**-ddump-timings**

Show allocation and runtime statistics for various stages of compilation. Allocations are measured in bytes. Timings are measured in milliseconds.

GHC is a large program consisting of a number of stages. You can tell GHC to dump information from various stages of compilation using the `-ddump-(pass)` flags listed below. Note that some of these tend to produce a lot of output. You can prevent them from clogging up your standard output by passing `-ddump-to-file` (page 298).

### 5.13.1.1 Front-end

These flags dump various information from GHC’s frontend. This includes the parser and interface file reader.

**-ddump-parsed**

Dump parser output

**-ddump-parsed-ast**

Dump parser output as a syntax tree

**-dkeep-comments**

Include comments in the parser. Useful in combination with `-ddump-parsed-ast` (page 299).

**-ddump-if-trace**

Make the interface loader be *real* chatty about what it is up to.

### 5.13.1.2 Type-checking and renaming

These flags dump various information from GHC's typechecker and renamer.

**-ddump-tc-trace**

Make the type checker be *real* chatty about what it is up to.

**-ddump-rn-trace**

Make the renamer be *real* chatty about what it is up to.

**-ddump-ec-trace**

Make the pattern match exhaustiveness checker be *real* chatty about what it is up to.

**-ddump-cs-trace**

Make the constraint solver be *real* chatty about what it is up to.

**-ddump-rn-stats**

Print out summary of what kind of information the renamer had to bring in.

**-ddump-rn**

Dump renamer output

**-ddump-rn-ast**

Dump renamer output as a syntax tree

**-ddump-tc**

Dump typechecker output. Note that this hides a great deal of detail by default; you might consider using this with *-fprint-typechecker-elaboration* (page 90).

**-ddump-tc-ast**

Dump typechecker output as a syntax tree

**-ddump-hie**

Dump the hie file syntax tree if we are generating extended interface files

**-ddump-splices**

Dump Template Haskell expressions that we splice in, and what Haskell code the expression evaluates to.

**-dth-dec-file**

Dump expansions of all top-level Template Haskell splices into *module.th.hs* for each file *module.hs*.

**-ddump-types**

Dump a type signature for each value defined at the top level of the module. The list is sorted alphabetically. Using *-dppr-debug* (page 299) dumps a type signature for all the imported and system-defined things as well; useful for debugging the compiler.

**-ddump-deriv**

Dump derived instances

### 5.13.1.3 Core representation and simplification

These flags dump various phases of GHC's Core-to-Core pipeline. This begins with the desugarer and includes the simplifier, worker-wrapper transformation, the rule engine, the specialiser, the strictness/occurrence analyser, and a common subexpression elimination pass.

#### **-ddump-call-arity**

Dump output of the call arity analysis pass (*-fcall-arity* (page 129)).

#### **-ddump-core-stats**

Print a one-line summary of the size of the Core program at the end of the optimisation pipeline.

#### **-ddump-ds**

#### **-ddump-ds-preopt**

Dump desugarer output. *-ddump-ds* (page 301) dumps the output after the very simple optimiser has run (which discards a lot of clutter and hence is a sensible default. *-ddump-ds-preopt* (page 301) shows the output after desugaring but before the very simple optimiser.

#### **-ddump-exitify**

Dump output of the exitification pass (*-fexitification* (page 129)), which tries to pull out code out of recursive functions.

#### **-ddump-simpl-iterations**

Show the output of each *iteration* of the simplifier (each run of the simplifier has a maximum number of iterations, normally 4).

#### **-ddump-simpl-stats**

Dump statistics about how many of each kind of transformation took place. If you add *-dppr-debug* (page 299) you get more detailed information.

#### **-ddump-simpl-trace**

Dump trace messages from various functions of the simplifier. Produces quite a lot of output.

#### **-dverbose-core2core**

Show the output of the intermediate Core-to-Core pass. (*lots* of output!) So: when we're really desperate:

```
% ghc -noC -O -ddump-simpl -dverbose-core2core -dcore-lint Foo.hs
```

#### **-ddump-spec**

Dump output of typeclass specialisation pass

#### **-ddump-spec-constr**

**Since**

9.8.1

Dump output of the SpecConstr specialisation pass

#### **-ddump-rules**

Dumps all rewrite rules specified in this module; see *Controlling what's going on in rewrite rules* (page 653).

**-ddump-rule-firings**

Dumps the names of all rules that fired in this module

**-ddump-rule-rewrites**

Dumps detailed information about all rules that fired in this module

**-drule-check=(str)**

This flag is useful for debugging why a rule you expect to be firing isn't.

Rules are filtered by the user provided string, a rule is kept if a prefix of its name matches the string. The pass then checks whether any of these rules could apply to the program but which didn't fire for some reason. For example, specifying `-drule-check=SPEC` will check whether there are any applications which might be subject to a rule created by specialisation.

**-dinline-check=(str)**

This flag is useful for debugging why a definition is not inlined.

When a string is passed to this flag we report information about all functions whose name shares a prefix with the string.

For example, if you are inspecting the core of your program and you observe that `foo` is not being inlined. You can pass `-dinline-check foo` and you will see a report about why `foo` is not inlined.

**-ddump-simpl**

Dump simplifier output (Core-to-Core passes)

**-ddump-inlinings**

Dumps inlinings performed by the simplifier.

**-ddump-verbose-inlinings**

Dumps all inlinings considered by the simplifier, even those ultimately not performed. This output includes various information that the simplifier uses to determine whether the inlining is beneficial.

**-ddump-stranal**

Has been renamed to `-ddump-dmdanal` (page 302).

**-ddump-dmdanal**

Dump demand analysis output.

See `-fstrictness` (page 144) for the syntax and semantics of demand annotations.

**-ddump-str-signatures**

Has been renamed to `-ddump-dmd-signatures` (page 302).

**-ddump-dmd-signatures**

Dump top-level demand signatures as produced by demand analysis.

See `-fstrictness` (page 144) for the syntax and semantics of demand annotations.

**-ddump-cpranal**

Dump Constructed Product Result analysis output

**-ddump-cpr-signatures**

Dump Constructed Product Result signatures



**-ddump-cse**

Dump common subexpression elimination (CSE) pass output

**-ddump-full-laziness****-ddump-float-out**

Dump full laziness pass (also known as float-out) output (see *-ffull-laziness* (page 134))

**-ddump-float-in**

Dump float-in pass output (see *-ffloat-in* (page 134))

**-ddump-liberate-case**

Dump liberate case pass output (see *-fliberate-case* (page 136))

**-ddump-static-argument-transformation**

Dump static argument transformation pass output (see *-fstatic-argument-transformation* (page 143))

**-ddump-worker-wrapper**

Dump worker/wrapper split output

**-ddump-occur-anal**

Dump “occurrence analysis” output

**-ddump-prep**

Dump output of Core preparation pass

**-ddump-late-cc**

Dump output of LateCC pass after cost centres have been added.

**-ddump-view-pattern-commoning**

Print the view patterns that are commoned.

#### 5.13.1.4 STG representation

These flags dump various phases of GHC’s STG pipeline.

**-ddump-stg-from-core**

Show the output of CoreToStg pass.

**-dverbose-stg2stg**

Show the output of the intermediate STG-to-STG pass. (*lots* of output!)

**-ddump-stg-unarised**

Show the output of the unarise pass.

**-ddump-stg-cg**

Show the output of the STG after Stg2Stg. This is the result after applying the Stg2Stg optimization passes.

**-ddump-stg-tags**

Show the output of the tag inference pass.

**-ddump-stg-final**

Show the output of the last STG pass before we generate Cmm.

**-ddump-stg**

Alias for *-ddump-stg-from-core* (page 303). Deprecated in favor of more explicit flags: *-ddump-stg-from-core* (page 303), *-ddump-stg-final* (page 303), etc.

**5.13.1.5 C-\- representation**

These flags dump various phases of GHC's C-\- pipeline.

**-ddump-cmm-verbose-by-proc**

Dump output from main C-\- pipeline stages. In case of .cmm compilation this also dumps the result of file parsing. Not included are passes run by the chosen backend. Currently only the NCG backends runs additional passes ( *-ddump-opt-cmm* (page 305) ).

Cmm dumps don't include unreachable blocks since we print blocks in reverse post-order.

**-ddump-cmm-verbose**

If used in conjunction with *-ddump-to-file* (page 298), writes dump output from main C-\- pipeline stages to files (each stage per file).

**-ddump-cmm-from-stg**

Dump the result of STG-to-C-\- conversion

**-ddump-cmm-raw**

Dump the "raw" C-\-.

**-ddump-cmm-cfg**

Dump the results of the C-\- control flow optimisation pass.

**-ddump-cmm-thread-sanitizer**

Dump the results of the C-\- pass responsible for adding instrumentation added by *-fcmm-thread-sanitizer* (page 310).

**-ddump-cmm-cbe**

Dump the results of the C-\- Common Block Elimination (CBE) pass.

**-ddump-cmm-switch**

Dump the results of the C-\- switch lowering pass.

**-ddump-cmm-proc**

Dump the results of the C-\- proc-point analysis pass.

**-ddump-cmm-sp**

Dump the results of the C-\- stack layout pass.

**-ddump-cmm-sink**

Dump the results of the C-\- sinking pass.

**-ddump-cmm-caf**

Dump the results of the C-\- CAF analysis pass.

**-ddump-cmm-procmap**

Dump the results of the C-\- proc-point map pass.

**-ddump-cmm-split**

Dump the results of the C-\- proc-point splitting pass.

**-ddump-cmm-info**

Dump the results of the C-\- info table augmentation pass.

**-ddump-cmm-cps**

Dump the results of the CPS pass.

**-ddump-cmm**

Dump the result of the C-\- pipeline processing

**-ddump-cfg-weights**

Dumps the CFG with weights used by the new block layout code. Each CFG is dumped in dot format graph making it easy to visualize them.

### 5.13.1.6 LLVM code generator

**-ddump-llvm****Implies**

-*flvm* (page 286)

LLVM code from the *LLVM code generator* (page 278)

### 5.13.1.7 C code generator

**-ddump-c-backend****Shortdesc**

Dump C code produced by the C (unregisterised) backend.

### 5.13.1.8 Native code generator

These flags dump various stages of the *native code generator's* (page 278) pipeline, which starts with C-\- and produces native assembler.

**-ddump-cmm-opt**

Dump the results of C-\- to C-\- optimising passes performed by the NCG.

**-ddump-opt-cmm**

Alias for -*ddump-cmm-opt* (page 305)

**-ddump-asm-conflicts**

Dump (virtual) register conflicts ("interferences") from the graph coloring register allocator (-*fregs-graph* (page 139)).

**-ddump-asm-native**

Dump the initial assembler output produced from C-\-.

**-ddump-asm-liveness**

Dump the result of the register liveness pass.

**-ddump-asm-regalloc**

Dump the result of the register allocation pass.

**-ddump-asm-regalloc-stages**

Dump the build/spill stages of the -*fregs-graph* (page 139) register allocator.

**-ddump-asm-stats**

Dump statistics from the register allocator.

**-ddump-asm**

Dump the final assembly produced by the native code generator.

**-ddump-js**

Dump the final JavaScript code produced by the JavaScript code generator.

### 5.13.1.9 JavaScript code generator

**-ddisable-js-minifier**

Include human-readable spacing and indentation when generating JavaScript.

**-ddisable-js-c-sources**

For debugging it can be useful to avoid linking with C sources compiled to JavaScript with Emscripten. This also avoids linking with Emscripten's RTS. Note that code that calls into this C code or that uses Emscripten's primitives will fail at runtime (e.g. undefined function errors).

### 5.13.1.10 Miscellaneous backend dumps

These flags dump various bits of information from other backends.

**-ddump-bcos**

Dump byte-code objects (BCOs) produced for the GHC's byte-code interpreter.

**-ddump-debug**

Dump generated debug information (DWARF) produced with the [-g](#) (page 741) flag.

**-ddump-rtti**

Trace runtime type inference done by various interpreter commands.

**-ddump-foreign**

Dump foreign export stubs.

**-ddump-ticked**

Dump the code instrumented by HPC ([Observing Code Coverage](#) (page 731)).

**-ddump-hpc**

An alias for [-ddump-ticked](#) (page 306).

**-ddump-mod-map**

Dump a mapping of modules to where they come from, and how:

- (hidden module): Module is hidden, and thus will never be available for import.
- (unusable module): Module is unavailable because the package is unusable.
- (hidden package): This module is in someone's exported-modules list, but that package is hidden.
- (exposed package): Module is available for import.
- (reexport by <PACKAGES>): This module is available from a reexport of some set of exposed packages.

- (hidden reexport by <PACKAGES>): This module is available from a reexport of some set of hidden packages.
- (package flag): This module export comes from a package flag.

### 5.13.2 Formatting dumps

#### **-dppr-user-length**

In error messages, expressions are printed to a certain “depth”, with subexpressions beyond the depth replaced by ellipses. This flag sets the depth. Its default value is 5.

#### **-dppr-cols=(n)**

Set the width of debugging output. Use this if your code is wrapping too much. For example: `-dppr-cols=200`.

#### **-dppr-case-as-let**

Print single alternative case expressions as though they were strict let expressions. This is helpful when your code does a lot of unboxing.

#### **-dhex-word-literals**

Print values of type *Word#* and *Word64#* (but not values of type *Int#* and *Int64#*) in hexadecimal instead of decimal. The hexadecimal is zero-padded to make the length of the representation a power of two. For example: `0x0A0A##`, `0x000FFFFFF##`, `0xC##`. This flag may be helpful when you are producing a bit pattern that to expect to work correctly on a 32-bit or a 64-bit architecture. Dumping hexadecimal literals after optimizations and constant folding makes it easier to confirm that the generated bit pattern is correct.

#### **-dno-debug-output**

Suppress any unsolicited debugging output. When GHC has been built with the `DEBUG` option it occasionally emits debug output of interest to developers. The extra output can confuse the testing framework and cause bogus test failures, so this flag is provided to turn it off.

### 5.13.3 Suppressing unwanted information

Core dumps contain a large amount of information. Depending on what you are doing, not all of it will be useful. Use these flags to suppress the parts that you are not interested in.

#### **-dsuppress-all**

Suppress everything that can be suppressed, except for unique ids as this often makes the printout ambiguous. If you just want to see the overall structure of the code, then start here.

#### **-dsuppress-ticks**

Suppress “ticks” in the pretty-printer output.

#### **-dsuppress-uniques**

Suppress the printing of uniques. This may make the printout ambiguous (e.g. unclear where an occurrence of ‘x’ is bound), but it makes the output of two compiler runs have many fewer gratuitous differences, so you can realistically apply `diff`. Once `diff` has shown you where to look, you can try again without `-dsuppress-uniques` (page 307)

**-dsuppress-idinfo**

Suppress extended information about identifiers where they are bound. This includes strictness information and inliner templates. Using this flag can cut the size of the core dump in half, due to the lack of inliner templates

**-dsuppress-unfoldings**

Suppress the printing of the stable unfolding of a variable at its binding site.

**-dsuppress-module-prefixes**

Suppress the printing of module qualification prefixes. This is the `Data.List` in `Data.List.length`.

**-dsuppress-timestamps**

Suppress the printing of timestamps. This makes it easier to diff dumps.

**-dsuppress-type-signatures**

Suppress the printing of type signatures.

**-dsuppress-type-applications**

Suppress the printing of type applications.

**-dsuppress-coercions**

Suppress the printing of type coercions.

**-dsuppress-coercion-types**

**-dsuppress-var-kinds**

Suppress the printing of variable kinds

**-dsuppress-stg-free-vars**

Suppress the printing of closure free variable lists in STG output

**-dsuppress-core-sizes**

**Since**

9.4.1

Suppress the printing of core size stats per binding

**-dsuppress-stg-reps**

**Since**

9.6.1

default: enabled

Disabling this will annoate certain stg arguments with their prim rep.

### 5.13.4 Checking for consistency

**-dlint**

**Implies**

-dcore-lint, -dstg-lint, -dcmm-lint, -dasm-lint, -flvm-fill-undef-with-garbage, -fcatch-nonexhaustive-cases, -debug

**Since**

9.4.1

Turn on various heavy-weight intra-pass sanity-checking measures within GHC and its runtime system. Notably, this does not include *-falignment-sanitisation* (page 309) as it incurs a rather hefty runtime cost.

**-dcore-lint**

Turn on heavyweight intra-pass sanity-checking within GHC, at Core level. (It checks GHC's sanity, not yours.)

**-dlinear-core-lint**

Turn on linearity checking in GHC. Currently, some optimizations in GHC might not preserve linearity and there are valid programs that fail Linear Core Lint. In the near future, this option will be removed and folded into normal Core Lint.

**-dstg-lint**

Ditto for STG level.

**-dcmm-lint**

Ditto for C-\- level.

**-dasm-lint**

Turn on intra-pass sanity-checking within GHC, at the code generator level.

**-fllvm-fill-undef-with-garbage**

Instructs the LLVM code generator to fill dead STG registers with garbage instead of undef in calls. This makes it easier to catch subtle code generator and runtime system bugs (e.g. see [#11487](#)).

**-falignment-sanitisation**

Compile with alignment checks for all info table dereferences. This can be useful when finding pointer tagging issues.

**-fproc-alignment**

Since  
8.6.1

Align functions to multiples of the given value. Only valid values are powers of two.

`-fproc-alignment=64` can be used to limit alignment impact on performance as each function will start at a cache line. However forcing larger alignments in general reduces performance.

**-fcatch-nonexhaustive-cases**

GHC generates case expressions without a default alternative in some cases:

- When the demand analysis thinks that the scrutinee does not return (i.e. a bottoming expression)
- When the scrutinee is a GADT and its type rules out some constructors, and others constructors are already handled by the case expression.

With this flag GHC generates a default alternative with `error` in these cases. This is helpful when debugging demand analysis or type checker bugs which can sometimes manifest as segmentation faults.

**-forig-thunk-info**

When debugging cyclic thunks it can be helpful to know the original info table of a thunk being evaluated. This flag enables code generation logic to facilitate this, producing a `stg_orig_thunk_info` stack frame alongside the usual update frame; such `orig_thunk` frames have no operational effect but capture the original info table of the updated thunk

for inspection by debugging tools. See Note [Original thunk info table frames] in `GHC.StgToCmm.Bind` for details.

#### **-fcheck-prim-bounds**

Typically primops operations like `writeArray#` exhibit unsafe behavior, relying on the user to perform any bounds checking. This flag instructs the code generator to instrument such operations with bound checking logic which aborts the program when an out-of-bounds access is detected.

Note that this is only intended to be used as a debugging measure, not as the primary means of catching out-of-bounds accesses.

#### **-fcmm-thread-sanitizer**

This enables generation of *ThreadSanitizer* <<https://github.com/google/sanitizers/wiki/ThreadSanitizer>> instrumentation of memory accesses. Requires use of `-fsanitize=thread` or similar when compiling and linking.

### 5.13.5 Checking for determinism

#### **-dinitial-unique={s}**

Start `UniqSupply` allocation from {s}.

#### **-dunique-increment={i}**

Set the increment for the generated Unique's to {i}.

This is useful in combination with `-dinitial-unique={s}` (page 310) to test if the generated files depend on the order of Unique's.

Some interesting values:

- `-dinitial-unique=0 -dunique-increment=1` - current sequential `UniqSupply`
- `-dinitial-unique=16777215 -dunique-increment=-1` - `UniqSupply` that generates in decreasing order
- `-dinitial-unique=1 -dunique-increment=PRIME` - where `PRIME` big enough to overflow often - nonsequential order

### 5.13.6 Other

#### **-dno-typeable-binds**

This avoids generating Typeable-related bindings for modules and types. This is useful when debugging because it gives smaller modules and dumps, but the compiler will panic if you try to use Typeable instances of things that you built with this flag.

#### **-dtag-inference-checks**

When tag inference tells as a specific value is supposed to be tagged then generate code to check this at runtime. If the check fails the program will be terminated. This helps narrowing down if an issue is due to tag inference if things go wrong. Which would otherwise be quite difficult.

#### **-funoptimized-core-for-interpreter**

Since  
9.8.1



default: enabled

At the moment, `ghci` disables optimizations, because not all passes are compatible with the interpreter. This option can be used to override this check, e.g. `ghci -O2 -fno-unoptimized-core-for-interpreter`. It is not recommended for normal use and can cause a compiler panic.

Note that this has an effect on the debugger interface: With optimizations in play, free variables in breakpoints may now be substituted with complex expressions. Those cannot be stored in breakpoints, so any free variable that refers to optimized code will not be inspectable when this flag is enabled.



## LANGUAGE EXTENSIONS

### 6.1 Introduction

GHC implements several variants of the Haskell language, along with many extensions. They can all be enabled or disabled by command line flags or [LANGUAGE](#) (page 662) pragmas.

Some of the extensions serve to give you access to the underlying facilities with which we implement Haskell. Thus, you can get at the Raw Iron, if you are willing to write some non-portable code at a more primitive level. You need not be “stuck” on performance because of the implementation costs of Haskell’s “high-level” features—you can always code “under” them. In an extreme case, you can write all your time-critical code in C, and then just glue it together with Haskell!

#### 6.1.1 Controlling editions and extensions

GHC supports multiple language editions: [Haskell98](#) (page 316), [Haskell2010](#) (page 315), [GHC2021](#) (page 314) and [GHC2024](#) (page 314). Each language edition consists of a collection of language extensions, and there are many other language extensions not currently part of a language edition but that can be enabled explicitly.

Currently, [GHC2021](#) (page 314) is used by default if no other language edition is explicitly requested, for backwards compatibility purposes. Since later versions of GHC may use a different language edition by default, users are advised to declare a language edition explicitly. Using [GHC2024](#) (page 314) is recommended for new code.

A language edition can be selected:

- at the package level, e.g. using `default-language: GHC2024` in a `.cabal` file;
- with a command-line flag prefixed by “-X...” (e.g. `-XGHC2024`); or
- for an individual module using the [LANGUAGE](#) (page 662) pragma, e.g. `{-# LANGUAGE GHC2024 #-}`.

Selecting a language edition overrides any previous selection. It is not possible to disable a language edition.

Similarly, language extensions can be controlled (either enabled or disabled):

- at the package level, e.g. using `default-extensions: TemplateHaskell` in a `.cabal` file;
- with command-line flags, switched on by a command-line flag “-X...” (e.g. `-XTemplateHaskell`), and switched off by the flag “-XNo...”; (e.g. `-XNoTemplateHaskell`);

- for an individual module using the [LANGUAGE](#) (page 662) pragma, e.g. `{-# LANGUAGE TemplateHaskell #-}` or `{-# LANGUAGE NoTemplateHaskell #-}`.

## GHC2024

### Since

9.10.1

GHC blesses a number of extensions, beyond Haskell 2010, to be suitable to be turned on by default. These extensions are considered to be stable and conservative.

Note that, because GHC2024 includes a number of non-standardized extensions, the stability guarantees it provides are not quite as strong as those provided by, e.g., [Haskell2010](#) (page 315). While GHC does take pains to avoid changing the semantics of these extensions, changes may still happen (e.g. the simplified subsumption change introduced in GHC 9.0 which caused GHC to reject some programs using [RankNTypes](#) (page 451)).

The GHC2024 language edition includes the following extensions:

- [BangPatterns](#) (page 595)
- [BinaryLiterals](#) (page 544)
- [ConstrainedClassMethods](#) (page 523)
- [ConstraintKinds](#) (page 553)
- [DataKinds](#) (page 404)
- [DeriveDataTypeable](#) (page 496)
- [DeriveFoldable](#) (page 493)
- [DeriveFunctor](#) (page 489)
- [DeriveGeneric](#) (page 655)
- [DeriveLift](#) (page 497)
- [DeriveTraversable](#) (page 495)
- [DerivingStrategies](#) (page 507)
- [DisambiguateRecordFields](#) (page 473)
- [DoAndIfThenElse](#)
- [EmptyCase](#) (page 343)
- [EmptyDataDecls](#) (page 366)
- [EmptyDataDeriving](#) (page 486)
- [ExistentialQuantification](#) (page 370)
- [ExplicitForAll](#) (page 560)
- [ExplicitNamespaces](#) (page 364)
- [FieldSelectors](#) (page 476)
- [FlexibleContexts](#) (page 552)
- [FlexibleInstances](#) (page 533)
- [ForeignFunctionInterface](#) (page 616)
- [GADTs](#) (page 380)
- [GADTSyntax](#) (page 374)
- [GeneralisedNewtypeDeriving](#) (page 499)
- [HexFloatLiterals](#) (page 544)
- [ImplicitPrelude](#) (page 339)
- [ImportQualifiedPost](#) (page 366)
- [InstanceSigs](#) (page 542)
- [KindSignatures](#) (page 564)
- [LambdaCase](#) (page 343)
- [MonoLocalBinds](#) (page 580)
- [MonomorphismRestriction](#) (page 579)
- [MultiParamTypeClasses](#) (page 522)
- [NamedFieldPuns](#) (page 478)
- [NamedWildCards](#) (page 576)
- [NumericUnderscores](#) (page 546)
- [PatternGuards](#) (page 510)
- [PolyKinds](#) (page 411)
- [PostfixOperators](#) (page 341)
- [RankNTypes](#) (page 451)
- [RelaxedPolyRec](#)
- [RoleAnnotations](#) (page 469)
- [ScopedTypeVariables](#) (page 565)
- [StandaloneDeriving](#) (page 487)
- [StandaloneKindSignatures](#) (page 417)
- [StarIsType](#) (page 426)
- [TraditionalRecordSyntax](#) (page 471)
- [TupleSections](#) (page 342)
- [TypeApplications](#) (page 435)
- [TypeOperators](#) (page 368)
- [TypeSynonymInstances](#) (page 533)

## GHC2021

### Since

9.2.1

See [GHC2024](#) (page 314) for general comments about GHC20xx language editions.

Also note that due to a [minor oversight](#), enabling this edition behaves slightly differently than enabling each of its constituent extensions. Specifically, while [TypeOperators](#) (page 368) implies [ExplicitNamespaces](#) (page 364), [ExplicitNamespaces](#) (page 364) is not included in [GHC2021](#) (page 314). Moreover, while [GADTs](#) (page 380) is not part of [GHC2021](#) (page 314), the combination of [GADTSyntax](#) (page 374) and [ExistentialQuantification](#) (page 370) is enough to define and use GADTs.

The GHC2021 language edition includes the following extensions:

- [BangPatterns](#) (page 595)
- [BinaryLiterals](#) (page 544)
- [ConstrainedClassMethods](#) (page 523)
- [ConstraintKinds](#) (page 553)
- [DeriveDataTypeable](#) (page 496)
- [DeriveFoldable](#) (page 493)
- [DeriveFunctor](#) (page 489)
- [DeriveGeneric](#) (page 655)
- [DeriveLift](#) (page 497)
- [DeriveTraversable](#) (page 495)
- [DoAndIfThenElse](#)
- [EmptyCase](#) (page 343)
- [EmptyDataDecls](#) (page 366)
- [EmptyDataDeriving](#) (page 486)
- [ExistentialQuantification](#) (page 370)
- [ExplicitForAll](#) (page 560)
- [FieldSelectors](#) (page 476)
- [FlexibleContexts](#) (page 552)
- [FlexibleInstances](#) (page 533)
- [ForeignFunctionInterface](#) (page 616)
- [GADTSyntax](#) (page 374)
- [GeneralisedNewtypeDeriving](#) (page 499)
- [HexFloatLiterals](#) (page 544)
- [ImplicitPrelude](#) (page 339)
- [ImportQualifiedPost](#) (page 366)
- [InstanceSigs](#) (page 542)
- [KindSignatures](#) (page 564)
- [MonomorphismRestriction](#) (page 579)
- [MultiParamTypeClasses](#) (page 522)
- [NamedFieldPuns](#) (page 478)
- [NamedWildCards](#) (page 576)
- [NumericUnderscores](#) (page 546)
- [PatternGuards](#) (page 510)
- [PolyKinds](#) (page 411)
- [PostfixOperators](#) (page 341)
- [RankNTypes](#) (page 451)
- [RelaxedPolyRec](#)
- [ScopedTypeVariables](#) (page 565)
- [StandaloneDeriving](#) (page 487)
- [StandaloneKindSignatures](#) (page 417)
- [StarIsType](#) (page 426)
- [TraditionalRecordSyntax](#) (page 471)
- [TupleSections](#) (page 342)
- [TypeApplications](#) (page 435)
- [TypeOperators](#) (page 368)
- [TypeSynonymInstances](#) (page 533)
- [NoExplicitNamespaces](#) (page 364)

## Haskell2010

Compile using the Haskell 2010 language edition, as specified by the [Haskell 2010 report](#). GHC aims to behave mostly as a Haskell 2010 compiler, but there are a few known deviations from the standard (see [Haskell standards vs. Glasgow Haskell: language non-compliance](#) (page 795)).

The Haskell2010 language edition includes the following language extensions:

- [CUSKs](#) (page 415)
- [DatatypeContexts](#) (page 367)
- [DeepSubsumption](#) (page 454)
- [DoAndIfThenElse](#)
- [EmptyDataDecls](#) (page 366)
- [FieldSelectors](#) (page 476)
- [ForeignFunctionInterface](#) (page 616)
- [ImplicitPrelude](#) (page 339)
- [MonomorphismRestriction](#) (page 579)
- [PatternGuards](#) (page 510)
- [RelaxedPolyRec](#)
- [StarIsType](#) (page 426)
- [TraditionalRecordSyntax](#) (page 471)

## Haskell98

Compile using the Haskell 98 language edition, as specified by the [Haskell 98 report](#). GHC aims to behave mostly as a Haskell 98 compiler, but there are a few known deviations from the standard (see [Haskell standards vs. Glasgow Haskell: language non-compliance](#) (page 795)).

The Haskell98 language edition includes the following language extensions:

- [CUSKs](#) (page 415)
- [DatatypeContexts](#) (page 367)
- [DeepSubsumption](#) (page 454)
- [FieldSelectors](#) (page 476)
- [ImplicitPrelude](#) (page 339)
- [MonomorphismRestriction](#) (page 579)
- [NPlusKPatterns](#) (page 513)
- [NondecreasingIndentation](#) (page 797)
- [StarIsType](#) (page 426)
- [TraditionalRecordSyntax](#) (page 471)

Although not recommended, the deprecated [-fglasgow-exts](#) (page 316) flag enables a large swath of the extensions supported by GHC at once.

### -fglasgow-exts

The flag `-fglasgow-exts` is equivalent to enabling the following extensions:

- [ConstrainedClassMethods](#) (page 523)
- [DeriveDataTypeable](#) (page 496)
- [DeriveFoldable](#) (page 493)
- [DeriveFunctor](#) (page 489)
- [DeriveGeneric](#) (page 655)
- [DeriveTraversable](#) (page 495)
- [EmptyDataDecls](#) (page 366)
- [ExistentialQuantification](#) (page 370)
- [ExplicitNamespaces](#) (page 364)
- [FlexibleContexts](#) (page 552)
- [FlexibleInstances](#) (page 533)
- [ForeignFunctionInterface](#) (page 616)
- [FunctionalDependencies](#) (page 528)
- [GeneralizedNewtypeDeriving](#) (page 499)
- [ImplicitParams](#) (page 570)
- [InterruptibleFFI](#) (page 621)
- [KindSignatures](#) (page 564)
- [LiberalTypeSynonyms](#) (page 369)
- [MagicHash](#) (page 321)
- [MultiParamTypeClasses](#) (page 522)
- [ParallelListComp](#) (page 331)
- [PatternGuards](#) (page 510)
- [PostfixOperators](#) (page 341)
- [RankNTypes](#) (page 451)
- [RecursiveDo](#) (page 322)
- [ScopedTypeVariables](#) (page 565)
- [StandaloneDeriving](#) (page 487)
- [TypeOperators](#) (page 368)
- [TypeSynonymInstances](#) (page 533)
- [UnboxedTuples](#) (page 611)
- [UnicodeSyntax](#) (page 320)
- [UnliftedFFITypes](#) (page 618)

Enabling these options is the *only* effect of `-fglasgow-exts`. We are trying to move away from this portmanteau flag, and towards enabling features individually.

## 6.1.2 Overview of all language extensions

GHC supports these language extensions:

Extension	Description
<a href="#">AllowAmbiguousTypes</a> (page 562)	Allow the user to write ambiguous types, and the type inference engine to infer ambiguous types.
<a href="#">ApplicativeDo</a> (page 325)	Enable Applicative do-notation desugaring
<a href="#">Arrows</a> (page 355)	Enable arrow notation extension
<a href="#">BangPatterns</a> (page 595)	Enable bang patterns.
<a href="#">BinaryLiterals</a> (page 544)	Enable support for binary literals.
<a href="#">BlockArguments</a> (page 346)	Allow do blocks and other constructs as function arguments.
<a href="#">CApiFFI</a> (page 622)	Enable the CAPI calling convention.
<a href="#">ConstrainedClassMethods</a> (page 523)	Enable constrained class methods. Implied by <a href="#">MultiParamTypeClasses</a> .
<a href="#">ConstraintKinds</a> (page 553)	Enable a kind of constraints.
<a href="#">CPP</a> (page 282)	Enable the C preprocessor.
<a href="#">CUSKs</a> (page 415)	Enable detection of complete user-supplied kind signatures.
<a href="#">DataKinds</a> (page 404)	Enable datatype promotion.
<a href="#">DatatypeContexts</a> (page 367)	Allow contexts on data types.
<a href="#">DeepSubsumption</a> (page 454)	Enable deep subsumption
<a href="#">DefaultSignatures</a> (page 524)	Enable default signatures.
<a href="#">DeriveAnyClass</a> (page 504)	Enable deriving for any class.
<a href="#">DeriveDataTypeable</a> (page 496)	Enable deriving for the Data class.
<a href="#">DeriveFoldable</a> (page 493)	Enable deriving for the Foldable class. Implied by <a href="#">DeriveTraversable</a> .
<a href="#">DeriveFunctor</a> (page 489)	Enable deriving for the Functor class. Implied by <a href="#">DeriveTraversable</a> .
<a href="#">DeriveGeneric</a> (page 655)	Enable deriving for the Generic class.
<a href="#">DeriveLift</a> (page 497)	Enable deriving for the Lift class
<a href="#">DeriveTraversable</a> (page 495)	Enable deriving for the Traversable class. Implies <a href="#">DeriveFunctor</a> .
<a href="#">DerivingStrategies</a> (page 507)	Enables deriving strategies.
<a href="#">DerivingVia</a> (page 508)	Enable deriving instances via types of the same runtime representation.
<a href="#">DisambiguateRecordFields</a> (page 473)	Enable record field disambiguation. Implied by <a href="#">RecordWildCards</a> .
<a href="#">DuplicateRecordFields</a> (page 475)	Allow definition of record types with identically-named fields.
<a href="#">EmptyCase</a> (page 343)	Allow empty case alternatives.
<a href="#">EmptyDataDecls</a> (page 366)	Allow definition of empty data types.
<a href="#">EmptyDataDeriving</a> (page 486)	Allow deriving instances of standard type classes for empty data types.
<a href="#">ExistentialQuantification</a> (page 370)	Enable liberalised type synonyms.
<a href="#">ExplicitForAll</a> (page 560)	Enable explicit universal quantification. Implied by <a href="#">ScopedTypeVariables</a> .
<a href="#">ExplicitNamespaces</a> (page 364)	Enable using the keyword <code>type</code> to specify the namespace of a type.
<a href="#">ExtendedDefaultRules</a> (page 37)	Use GHCi's extended default rules in a normal module.
<a href="#">ExtendedLiterals</a> (page 546)	Enable numeric literal postfix syntax for unboxed integers.
<a href="#">FieldSelectors</a> (page 476)	Control visibility of field selector functions.
<a href="#">FlexibleContexts</a> (page 552)	Remove some restrictions on class contexts
<a href="#">FlexibleInstances</a> (page 533)	Enable flexible instances. Implies <a href="#">TypeSynonymInstances</a> (page 533).
<a href="#">ForeignFunctionInterface</a> (page 616)	Enable foreign function interface.
<a href="#">FunctionalDependencies</a> (page 528)	Enable functional dependencies. Implies <a href="#">MultiParamTypeClasses</a> .
<a href="#">GADTs</a> (page 380)	Enable generalised algebraic data types. Implies <a href="#">GADTSyntax</a> .
<a href="#">GADTSyntax</a> (page 374)	Enable generalised algebraic data type syntax.
<a href="#">GeneralisedNewtypeDeriving</a> (page 499)	Enable newtype deriving.
<a href="#">GHC2021</a> (page 314)	Use GHC's set of default language extensions from 2021
<a href="#">GHC2024</a> (page 314)	Use GHC's set of default language extensions from 2024
<a href="#">GHCForeignImportPrim</a> (page 621)	Enable prim calling convention. Intended for internal use only.
<a href="#">Haskell2010</a> (page 315)	Use the Haskell 2010 language edition.
<a href="#">Haskell98</a> (page 316)	Use the Haskell 98 language edition.



Extension	Description
<a href="#">HexFloatLiterals</a> (page 544)	Enable support for <i>hexadecimal floating point literals</i> (page 544).
<a href="#">ImplicitParams</a> (page 570)	Enable Implicit Parameters.
<a href="#">ImplicitPrelude</a> (page 339)	Don't implicitly import Prelude. Implied by <a href="#">RebindableSyntax</a> .
<a href="#">ImportQualifiedPost</a> (page 366)	<a href="#">ImportQualifiedPost</a> allows the syntax <code>import M qualified</code> .
<a href="#">ImpredicativeTypes</a> (page 457)	Enable impredicative types. Implies <a href="#">RankNTypes</a> (page 451).
<a href="#">IncoherentInstances</a> (page 538)	Enable incoherent instances. Implies <a href="#">OverlappingInstances</a> .
<a href="#">InstanceSigs</a> (page 542)	Enable instance signatures.
<a href="#">InterruptibleFFI</a> (page 621)	Enable interruptible FFI.
<a href="#">KindSignatures</a> (page 564)	Enable kind signatures. Implied by <a href="#">TypeFamilies</a> (page 384).
<a href="#">LambdaCase</a> (page 343)	Enable lambda-case expressions.
<a href="#">LexicalNegation</a> (page 362)	Use whitespace to determine whether the minus sign stands for negation.
<a href="#">LiberalTypeSynonyms</a> (page 369)	Enable liberalised type synonyms.
<a href="#">LinearTypes</a> (page 458)	Enable linear types. Implies <a href="#">MonoLocalBinds</a> (page 580).
<a href="#">ListTuplePuns</a> (page 409)	Enable punning for list, tuple and sum types.
<a href="#">MagicHash</a> (page 321)	Allow <code>#</code> as a postfix modifier on identifiers.
<a href="#">MonadComprehensions</a> (page 333)	Enable monad comprehensions.
<a href="#">MonoLocalBinds</a> (page 580)	Enable do not generalise local bindings. Implied by <a href="#">TypeFamilies</a> .
<a href="#">MonomorphismRestriction</a> (page 579)	Disable the monomorphism restriction.
<a href="#">MultiParamTypeClasses</a> (page 522)	Enable multi parameter type classes. Implied by <a href="#">FunctionalDependencies</a> .
<a href="#">MultiWayIf</a> (page 344)	Enable multi-way if-expressions.
<a href="#">NamedFieldPuns</a> (page 478)	Enable record puns.
<a href="#">NamedWildCards</a> (page 576)	Enable named wildcards.
<a href="#">NegativeLiterals</a> (page 543)	Enable support for negative literals.
<a href="#">NondecreasingIndentation</a> (page 797)	Allow nested contexts to be at the same indentation level as their parents.
<a href="#">NPlusKPatterns</a> (page 513)	Enable support for n+k patterns. Implied by <a href="#">Haskell98</a> (page 316).
<a href="#">NullaryTypeClasses</a> (page 527)	Deprecated, does nothing. nullary (no parameter) type classes.
<a href="#">NumDecimals</a> (page 545)	Enable support for 'fractional' integer literals.
<a href="#">NumericUnderscores</a> (page 546)	Enable support for <i>numeric underscores</i> (page 546).
<a href="#">OverlappingInstances</a> (page 538)	Enable overlapping instances.
<a href="#">OverloadedLabels</a> (page 549)	Enable overloaded labels.
<a href="#">OverloadedLists</a> (page 336)	Enable overloaded lists.
<a href="#">OverloadedRecordDot</a> (page 483)	Record <code>'.</code> syntax
<a href="#">OverloadedRecordUpdate</a> (page 484)	Record <code>'.</code> syntax record updates
<a href="#">OverloadedStrings</a> (page 548)	Enable overloaded string literals.
<a href="#">PackageImports</a> (page 363)	Enable package-qualified imports.
<a href="#">ParallelListComp</a> (page 331)	Enable parallel list comprehensions.
<a href="#">PartialTypeSignatures</a> (page 574)	Enable partial type signatures.
<a href="#">PatternGuards</a> (page 510)	Disable pattern guards. Implied by <a href="#">Haskell98</a> (page 316).
<a href="#">PatternSynonyms</a> (page 513)	Enable pattern synonyms.
<a href="#">PolyKinds</a> (page 411)	Enable kind polymorphism. Implies <a href="#">KindSignatures</a> (page 564).
<a href="#">PostfixOperators</a> (page 341)	Enable postfix operators.
<a href="#">QualifiedDo</a> (page 328)	Enable qualified do-notation desugaring.
<a href="#">QuantifiedConstraints</a> (page 555)	Allow forall quantifiers in constraints.
<a href="#">QuasiQuotes</a> (page 592)	Enable quasiquotation.
<a href="#">Rank2Types</a> (page 451)	Enable rank-2 types. Synonym for <a href="#">RankNTypes</a> (page 451).
<a href="#">RankNTypes</a> (page 451)	Enable rank-N types. Implied by <a href="#">ImpredicativeTypes</a> (page 457).
<a href="#">RebindableSyntax</a> (page 339)	Employ rebinding syntax. Implies <a href="#">NoImplicitPrelude</a> (page 339).
<a href="#">RecordWildCards</a> (page 479)	Enable record wildcards. Implies <a href="#">DisambiguateRecordFields</a> .
<a href="#">RecursiveDo</a> (page 322)	Enable recursive do (mdo) notation.
<a href="#">RequiredTypeArguments</a> (page 444)	Enable required type arguments in terms.



Extension	Description
<a href="#">RoleAnnotations</a> (page 469)	Enable role annotations.
<a href="#">Safe</a> (page 642)	Enable the <a href="#">Safe Haskell</a> (page 633) Safe mode.
<a href="#">ScopedTypeVariables</a> (page 565)	Enable lexically-scoped type variables.
<a href="#">StandaloneDeriving</a> (page 487)	Enable standalone deriving.
<a href="#">StandaloneKindSignatures</a> (page 417)	Allow the use of standalone kind signatures.
<a href="#">StarIsType</a> (page 426)	Treat <code>*</code> as <code>Data.Kind.Type</code> .
<a href="#">StaticPointers</a> (page 606)	Enable static pointers.
<a href="#">Strict</a> (page 597)	Make bindings in the current module strict by default.
<a href="#">StrictData</a> (page 597)	Enable default strict datatype fields.
<a href="#">TemplateHaskell</a> (page 582)	Enable Template Haskell.
<a href="#">TemplateHaskellQuotes</a> (page 582)	Enable quotation subset of <a href="#">Template Haskell</a> (page 581).
<a href="#">TraditionalRecordSyntax</a> (page 471)	Disable support for traditional record syntax (as supported by Haskell 98).
<a href="#">TransformListComp</a> (page 332)	Enable generalised list comprehensions.
<a href="#">Trustworthy</a> (page 643)	Enable the <a href="#">Safe Haskell</a> (page 633) Trustworthy mode.
<a href="#">TupleSections</a> (page 342)	Enable tuple sections.
<a href="#">TypeAbstractions</a> (page 439)	Enable type abstraction syntax in patterns and type variable bindings.
<a href="#">TypeApplications</a> (page 435)	Enable type application syntax in terms and types.
<a href="#">TypeData</a> (page 410)	Enable type data declarations.
<a href="#">TypeFamilies</a> (page 384)	Enable type families. Implies <a href="#">ExplicitNamespaces</a> (page 364).
<a href="#">TypeFamilyDependencies</a> (page 402)	Enable injective type families. Implies <a href="#">TypeFamilies</a> (page 384).
<a href="#">TypeInType</a> (page 411)	Deprecated. Enable kind polymorphism and datatype promotion.
<a href="#">TypeOperators</a> (page 368)	Enable type operators. Implies <a href="#">ExplicitNamespaces</a> (page 364).
<a href="#">TypeSynonymInstances</a> (page 533)	Enable type synonyms in instance heads. Implied by <a href="#">FlexibleInstances</a> .
<a href="#">UnboxedSums</a> (page 612)	Enable unboxed sums.
<a href="#">UnboxedTuples</a> (page 611)	Enable the use of unboxed tuple syntax.
<a href="#">UndecidableInstances</a> (page 537)	Enable undecidable instances.
<a href="#">UndecidableSuperClasses</a> (page 522)	Allow all superclass constraints, including those that may require undecidable instances.
<a href="#">UnicodeSyntax</a> (page 320)	Enable unicode syntax.
<a href="#">UnliftedDatatypes</a> (page 615)	Enable unlifted data types.
<a href="#">UnliftedFFITypes</a> (page 618)	Enable unlifted FFI types.
<a href="#">UnliftedNewtypes</a> (page 613)	Enable unlifted newtypes.
<a href="#">Unsafe</a> (page 643)	Enable <a href="#">Safe Haskell</a> (page 633) Unsafe mode.
<a href="#">ViewPatterns</a> (page 511)	Enable view patterns.

### 6.1.3 Summary of stolen syntax

Turning on an option that enables special syntax *might* cause working Haskell 98 code to fail to compile, perhaps because it uses a variable name which has become a reserved word. This section lists the syntax that is “stolen” by language extensions. We use notation and nonterminal names from the Haskell 98 lexical syntax (see the Haskell 98 Report). We only list syntax changes here that might affect existing working programs (i.e. “stolen” syntax). Many of these extensions will also enable new context-free syntax, but in all cases programs written to use the new syntax would not be compilable without the option enabled.

There are two classes of special syntax:

- New reserved words and symbols: character sequences which are no longer available for use as identifiers in the program.
- Other special syntax: sequences of characters that have a different meaning when this particular option is turned on.

The following syntax is stolen:

**forall**

Stolen (in types) by default (see [Lexical syntax](#) (page 795)). `forall` is a reserved keyword and never a type variable, in accordance with [GHC Proposal #43](#).

**mdo**

Stolen by: [RecursiveDo](#) (page 322)

**foreign**

Stolen by: [ForeignFunctionInterface](#) (page 616)

**rec, proc, -<, >-, -<<, >>-, (|, |)**

Stolen by: [Arrows](#) (page 355)

**?varid**

Stolen by: [ImplicitParams](#) (page 570)

**[|, [e|, [p|, [d|, [t|, [|], [e|]**

Stolen by: [QuasiQuotes](#) (page 592). Moreover, this introduces an ambiguity with list comprehension syntax. See the [discussion on quasi-quoting](#) (page 593) for details.

**\$(, \$\$, \$varid, \$\$varid**

Stolen by: [TemplateHaskell](#) (page 582)

**[varid|**

Stolen by: [QuasiQuotes](#) (page 592)

**<varid>, #{char}, #, <string>, #, <integer>, #, <float>, #, <float>, ##**

Stolen by: [MagicHash](#) (page 321)

**<integer>, #(Int|Word) (8|16|32|64)?**

Stolen by: [ExtendedLiterals](#) (page 546)

**(#, #)**

Stolen by: [UnboxedTuples](#) (page 611)

**<varid>, !, <varid>**

Stolen by: [BangPatterns](#) (page 595)

**pattern**

Stolen by: [PatternSynonyms](#) (page 513)

**static**

Stolen by: [StaticPointers](#) (page 606)

## 6.2 Syntax

### 6.2.1 Unicode syntax

#### UnicodeSyntax

**Since**

6.8.1

Enable the use of Unicode characters in place of their equivalent ASCII sequences.

The language extension [UnicodeSyntax](#) (page 320) enables Unicode characters to be used to stand for certain ASCII character sequences. The following alternatives are provided:

ASCII	Unicode tive	alterna- tive	Code point	Name
::	☐		0x2237	PROPORTION
=>	⇒		0x21D2	RIGHTWARDS DOUBLE ARROW
->	→		0x2192	RIGHTWARDS ARROW
<-	←		0x2190	LEFTWARDS ARROW
>-	↘		0x291a	RIGHTWARDS ARROW-TAIL
<-	↙		0x2919	LEFTWARDS ARROW-TAIL
>>-	↘		0x291C	RIGHTWARDS DOUBLE ARROW-TAIL
-<<	↙		0x291B	LEFTWARDS DOUBLE ARROW-TAIL
*	☐		0x2605	BLACK STAR
forall	∀		0x2200	FOR ALL
(	☐		0x2987	Z NOTATION LEFT IMAGE BRACKET
)	☐		0x2988	Z NOTATION RIGHT IMAGE BRACKET
[	☐		0x27E6	MATHEMATICAL LEFT WHITE SQUARE BRACKET
]	☐		0x27E7	MATHEMATICAL RIGHT WHITE SQUARE BRACKET
%1->	☐		0x22B8	MULTIMAP

## 6.2.2 The magic hash

### MagicHash

Since  
6.8.1

Enables the use of the hash character (#) as an identifier suffix.

The language extension *MagicHash* (page 321) allows # as a postfix modifier to identifiers. Thus, `x#` is a valid variable, and `T#` is a valid type constructor or data constructor.

The hash sign does not change semantics at all. We tend to use variable names ending in “#” for unboxed values or types (e.g. `Int#`), but there is no requirement to do so; they are just plain ordinary variables. Nor does the *MagicHash* (page 321) extension bring anything into scope. For example, to bring `Int#` into scope you must import `GHC.Exts` (see *Unboxed types and primitive operations* (page 609)); the *MagicHash* (page 321) extension then allows you to refer to the `Int#` that is now in scope. Note that with this option, the meaning of `x#y = 0` is changed: it defines a function `x#` taking a single argument `y`; to define the operator `#`, put a space: `x # y = 0`.

The *MagicHash* (page 321) also enables some new forms of literals (see *Unboxed types* (page 609)):

- `'x'#` has type `Char#`
- `"foo"#` has type `Addr#`
- `3#` has type `Int#`. In general, any Haskell integer lexeme followed by a # is an `Int#` literal, e.g. `-0x3A#` as well as `32#`.
- `3##` has type `Word#`. In general, any non-negative Haskell integer lexeme followed by ## is a `Word#`.
- `3.2#` has type `Float#`.

- 3.2## has type Double#

### 6.2.3 The recursive do-notation

#### RecursiveDo

##### Since

6.8.1

Allow the use of recursive do notation.

The do-notation of Haskell 98 does not allow *recursive bindings*, that is, the variables bound in a do-expression are visible only in the textually following code block. Compare this to a let-expression, where bound variables are visible in the entire binding group.

It turns out that such recursive bindings do indeed make sense for a variety of monads, but not all. In particular, recursion in this sense requires a fixed-point operator for the underlying monad, captured by the `mfix` method of the `MonadFix` class, defined in `Control.Monad.Fix` as follows:

```
class Monad m => MonadFix m where
  mfix :: (a -> m a) -> m a
```

Haskell's `Maybe`, `[]` (list), `ST` (both strict and lazy versions), `I0`, and many other monads have `MonadFix` instances. On the negative side, the continuation monad, with the signature `(a -> r) -> r`, does not.

For monads that do belong to the `MonadFix` class, GHC provides an extended version of the do-notation that allows recursive bindings. The [RecursiveDo](#) (page 322) (language pragma: `RecursiveDo`) provides the necessary syntactic support, introducing the keywords `mdo` and `rec` for higher and lower levels of the notation respectively. Unlike bindings in a do expression, those introduced by `mdo` and `rec` are recursively defined, much like in an ordinary let-expression. Due to the new keyword `mdo`, we also call this notation the *mdo-notation*.

Here is a simple (albeit contrived) example:

```
{-# LANGUAGE RecursiveDo #-}
justOnes = mdo { xs <- Just (1:xs)
               ; return (map negate xs) }
```

or equivalently

```
{-# LANGUAGE RecursiveDo #-}
justOnes = do { rec { xs <- Just (1:xs) }
              ; return (map negate xs) }
```

As you can guess `justOnes` will evaluate to `Just [-1, -1, -1, ...]`.

GHC's implementation the *mdo-notation* closely follows the original translation as described in the paper [A recursive do for Haskell](#), which in turn is based on the work [Value Recursion in Monadic Computations](#). Furthermore, GHC extends the syntax described in the former paper with a lower level syntax flagged by the `rec` keyword, as we describe next.

### 6.2.3.1 Recursive binding groups

The extension *RecursiveDo* (page 322) also introduces a new keyword `rec`, which wraps a mutually-recursive group of monadic statements inside a `do` expression, producing a single statement. Similar to a `let` statement inside a `do`, variables bound in the `rec` are visible throughout the `rec` group, and below it. For example, compare

```
do { a <- getChar
    ; let { r1 = f a r2
          ;   ; r2 = g r1 }
    ; return (r1 ++ r2) }
do { a <- getChar
    ; rec { r1 <- f a r2
           ;   ; r2 <- g r1 }
    ; return (r1 ++ r2) }
```

In both cases, `r1` and `r2` are available both throughout the `let` or `rec` block, and in the statements that follow it. The difference is that `let` is non-monadic, while `rec` is monadic. (In Haskell `let` is really `letrec`, of course.)

The semantics of `rec` is fairly straightforward. Whenever GHC finds a `rec` group, it will compute its set of bound variables, and will introduce an appropriate call to the underlying monadic value-recursion operator `mfix`, belonging to the `MonadFix` class. Here is an example:

```
rec { b <- f a c
      ; c <- f b a }
      ==> (b,c) <- mfix (\ ~(b,c) -> do { b <- f a c
                                           ; c <- f b a
                                           ; return (b,c) })
```

As usual, the meta-variables `b`, `c` etc., can be arbitrary patterns. In general, the statement `rec ss` is desugared to the statement

```
vs <- mfix (\ ~vs -> do { ss; return vs })
```

where `vs` is a tuple of the variables bound by `ss`.

Note in particular that the translation for a `rec` block only involves wrapping a call to `mfix`: it performs no other analysis on the bindings. The latter is the task for the `mdo` notation, which is described next.

### 6.2.3.2 The `mdo` notation

A `rec`-block tells the compiler where precisely the recursive knot should be tied. It turns out that the placement of the recursive knots can be rather delicate: in particular, we would like the knots to be wrapped around as minimal groups as possible. This process is known as *segmentation*, and is described in detail in Section 3.2 of [A recursive do for Haskell](#). Segmentation improves polymorphism and reduces the size of the recursive knot. Most importantly, it avoids unnecessary interference caused by a fundamental issue with the so-called *right-shrinking* axiom for monadic recursion. In brief, most monads of interest (IO, strict state, etc.) do *not* have recursion operators that satisfy this axiom, and thus not performing segmentation can cause unnecessary interference, changing the termination behavior of the resulting translation. (Details can be found in Sections 3.1 and 7.2.2 of [Value Recursion in Monadic Computations](#).)

The `mdo` notation removes the burden of placing explicit `rec` blocks in the code. Unlike an ordinary `do` expression, in which variables bound by statements are only in scope for later statements, variables bound in an `mdo` expression are in scope for all statements of the expression. The compiler then automatically identifies minimal mutually recursively dependent segments of statements, treating them as if the user had wrapped a `rec` qualifier around them.

The definition is syntactic:

- A generator  $\langle g \rangle$  *depends* on a textually following generator  $\langle g' \rangle$ , if
  - $\langle g' \rangle$  defines a variable that is used by  $\langle g \rangle$ , or
  - $\langle g' \rangle$  textually appears between  $\langle g \rangle$  and  $\langle g'' \rangle$ , where  $\langle g \rangle$  depends on  $\langle g'' \rangle$ .
- A *segment* of a given mdo-expression is a minimal sequence of generators such that no generator of the sequence depends on an outside generator. As a special case, although it is not a generator, the final expression in an mdo-expression is considered to form a segment by itself.

Segments in this sense are related to *strongly-connected components* analysis, with the exception that bindings in a segment cannot be reordered and must be contiguous.

Here is an example mdo-expression, and its translation to rec blocks:

<code>mdo { a &lt;- getChar</code>	<code>==&gt; do { a &lt;- getChar</code>
<code>  ; b &lt;- f a c</code>	<code>  ; rec { b &lt;- f a c</code>
<code>  ; c &lt;- f b a</code>	<code>    ; c &lt;- f b a }</code>
<code>  ; z &lt;- h a b</code>	<code>  ; z &lt;- h a b</code>
<code>  ; d &lt;- g d e</code>	<code>  ; rec { d &lt;- g d e</code>
<code>  ; e &lt;- g a z</code>	<code>    ; e &lt;- g a z }</code>
<code>  ; putChar c }</code>	<code>  ; putChar c }</code>

Note that a given mdo expression can cause the creation of multiple rec blocks. If there are no recursive dependencies, mdo will introduce no rec blocks. In this latter case an mdo expression is precisely the same as a do expression, as one would expect.

In summary, given an mdo expression, GHC first performs segmentation, introducing rec blocks to wrap over minimal recursive groups. Then, each resulting rec is desugared, using a call to `Control.Monad.Fix.mfix` as described in the previous section. The original mdo-expression typechecks exactly when the desugared version would do so.

Here are some other important points in using the recursive-do notation:

- It is enabled with the extension *RecursiveDo* (page 322), or the `LANGUAGE RecursiveDo` pragma. (The same extension enables both mdo-notation, and the use of rec blocks inside do expressions.)
- rec blocks can also be used inside mdo-expressions, which will be treated as a single statement. However, it is good style to either use mdo or rec blocks in a single expression.
- If recursive bindings are required for a monad, then that monad must be declared an instance of the `MonadFix` class.
- The following instances of `MonadFix` are automatically provided: `List`, `Maybe`, `IO`. Furthermore, the `Control.Monad.ST` and `Control.Monad.ST.Lazy` modules provide the instances of the `MonadFix` class for Haskell's internal state monad (strict and lazy, respectively).
- Like `let` and `where` bindings, name shadowing is not allowed within an mdo-expression or a rec-block; that is, all the names bound in a single rec must be distinct. (GHC will complain if this is not the case.)

## 6.2.4 Applicative do-notation

### ApplicativeDo

Since  
8.0.1

Allow use of Applicative do notation.

The language option [ApplicativeDo](#) (page 325) enables an alternative translation for the do-notation, which uses the operators `<$>`, `<*>`, along with `join` as far as possible. There are two main reasons for wanting to do this:

- We can use do-notation with types that are an instance of `Applicative` and `Functor`, but not `Monad`
- In some monads, using the applicative operators is more efficient than monadic `bind`. For example, it may enable more parallelism.

Applicative do-notation desugaring preserves the original semantics, provided that the `Applicative` instance satisfies `<*> = ap` and `pure = return` (these are true of all the common monadic types). Thus, you can normally turn on [ApplicativeDo](#) (page 325) without fear of breaking your program. There is one pitfall to watch out for; see [Things to watch out for](#) (page 327).

There are no syntactic changes with [ApplicativeDo](#) (page 325). The only way it shows up at the source level is that you can have a `do` expression that doesn't require a `Monad` constraint. For example, in GHCi:

```
Prelude> :set -XApplicativeDo
Prelude> :t \m -> do { x <- m; return (not x) }
\m -> do { x <- m; return (not x) }
:: Functor f => f Bool -> f Bool
```

This example only requires `Functor`, because it is translated into `(\x -> not x) <$> m`. A more complex example requires `Applicative`,

```
Prelude> :t \m -> do { x <- m 'a'; y <- m 'b'; return (x || y) }
\m -> do { x <- m 'a'; y <- m 'b'; return (x || y) }
:: Applicative f => (Char -> f Bool) -> f Bool
```

Here GHC has translated the expression into

```
(\x y -> x || y) <$> m 'a' <*> m 'b'
```

It is possible to see the actual translation by using `-ddump-ds` (page 301), but be warned, the output is quite verbose.

Note that if the expression can't be translated into uses of `<$>`, `<*>` only, then it will incur a `Monad` constraint as usual. This happens when there is a dependency on a value produced by an earlier statement in the `do`-block:

```
Prelude> :t \m -> do { x <- m True; y <- m x; return (x || y) }
\m -> do { x <- m True; y <- m x; return (x || y) }
:: Monad m => (Bool -> m Bool) -> m Bool
```

Here, `m x` depends on the value of `x` produced by the first statement, so the expression cannot be translated using `<*>`.



In general, the rule for when a `do` statement incurs a `Monad` constraint is as follows. If the `do`-expression has the following form:

```
do p1 <- E1; ...; pn <- En; return E
```

where none of the variables defined by `p1...pn` are mentioned in `E1...En`, and `p1...pn` are all variables or lazy patterns, then the expression will only require `Applicative`. The `do` expression may also contain `let` statements anywhere, provided that the right-hand-sides of the `let` bindings do not mention any of `p1...pn`. Otherwise, the expression will require `Monad`. The block may return a pure expression `E` depending upon the results `p1...pn` and the `let` bindings, with either `return` or `pure`.

Note: the final statement must match one of these patterns exactly:

- `return E`
- `return $ E`
- `pure E`
- `pure $ E`

otherwise GHC cannot recognise it as a `return` statement, and the transformation to use `<$>` that we saw above does not apply. In particular, slight variations such as `return . Just $ x` or `let x = e in return x` would not be recognised.

If the final statement is not of one of these forms, GHC falls back to standard `do` desugaring, and the expression will require a `Monad` constraint.

When the statements of a `do` expression have dependencies between them, and `ApplicativeDo` cannot infer an `Applicative` type, it uses a heuristic algorithm to try to use `<*>` as much as possible. This algorithm usually finds the best solution, but in rare complex cases it might miss an opportunity. There is an algorithm that finds the optimal solution, provided as an option:

#### **-foptimal-applicative-do**

**Since**  
8.0.1

Enables an alternative algorithm for choosing where to use `<*>` in conjunction with the `ApplicativeDo` language extension. This algorithm always finds the optimal solution, but it is expensive:  $O(n^3)$ , so this option can lead to long compile times when there are very large `do` expressions (over 100 statements). The default `ApplicativeDo` algorithm is  $O(n^2)$ .

#### **6.2.4.1 Strict patterns**

A strict pattern match in a `bind` statement prevents `ApplicativeDo` from transforming that statement to use `Applicative`. This is because the transformation would change the semantics by making the expression lazier.

For example, this code will require a `Monad` constraint:

```
> :t \m -> do { (x:xs) <- m; return x }  
\m -> do { (x:xs) <- m; return x } :: Monad m => m [b] -> m b
```

but making the pattern match lazy allows it to have a `Functor` constraint:



```
> :t \m -> do { ~(x:xs) <- m; return x }
\m -> do { ~(x:xs) <- m; return x } :: Functor f => f [b] -> f b
```

A “strict pattern match” is any pattern match that can fail. For example, `()`, `(x:xs)`, `!z`, and `C x` are strict patterns, but `x` and `~(1,2)` are not. For the purposes of `ApplicativeDo`, a pattern match against a newtype constructor is considered strict.

When there’s a strict pattern match in a sequence of statements, `ApplicativeDo` places a `>=>` between that statement and the one that follows it. The sequence may be transformed to use `<*>` elsewhere, but the strict pattern match and the following statement will always be connected with `>=>`, to retain the same strictness semantics as the standard `do`-notation. If you don’t want this, simply put a `~` on the pattern match to make it lazy.

#### 6.2.4.2 Things to watch out for

Your code should just work as before when *ApplicativeDo* (page 325) is enabled, provided you use conventional `Applicative` instances. However, if you define a `Functor` or `Applicative` instance using `do`-notation, then it will likely get turned into an infinite loop by GHC. For example, if you do this:

```
instance Functor MyType where
    fmap f m = do x <- m; return (f x)
```

Then applicative desugaring will turn it into

```
instance Functor MyType where
    fmap f m = fmap (\x -> f x) m
```

And the program will loop at runtime. Similarly, an `Applicative` instance like this

```
instance Applicative MyType where
    pure = return
    x <*> y = do f <- x; a <- y; return (f a)
```

will result in an infinite loop when `<*>` is called.

Just as you wouldn’t define a `Monad` instance using the `do`-notation, you shouldn’t define `Functor` or `Applicative` instance using `do`-notation (when using `ApplicativeDo`) either. The correct way to define these instances in terms of `Monad` is to use the `Monad` operations directly, e.g.

```
instance Functor MyType where
    fmap f m = m >=> return . f

instance Applicative MyType where
    pure = return
    (<*>) = ap
```

## 6.2.5 Qualified do-notation

### QualifiedDo

**Since**  
9.0.1

Allow the use of qualified do notation.

QualifiedDo enables qualifying a do block with a module name, to control which operations to use for the monadic combinators that the do notation desugars to. When `-XQualifiedDo` is enabled, you can *qualify* the do notation by writing `modid.do`, where `modid` is a module name in scope:

```
{-# LANGUAGE QualifiedDo #-}
import qualified Some.Module.Monad as M

action :: M.SomeType a
action = M.do x <- u
           res
           M.return x
```

The additional module name (here `M`) is called the qualifier of the do-expression.

The unqualified do syntax is convenient for writing monadic code, but it only works for data types that provide an instance of the `Monad` type class. There are other types which are “monad-like” but can’t provide an instance of `Monad` (e.g. indexed monads, graded monads or relative monads), yet they could still use the do syntax if it weren’t hardwired to the methods of the `Monad` type class. `-XQualifiedDo` comes to make the do syntax customizable in this respect. It allows you to mix and match do blocks of different types with suitable operations to use on each case:

```
{-# LANGUAGE QualifiedDo #-}
import qualified Control.Monad.Linear as L

import MAC (label, box, runMAC)
import qualified MAC as MAC

f :: IO ()
f = do
  x <- runMAC $                -- (Prelude.>=)
                                -- (runMAC $
  MAC.do                       --
    d <- label "y"             -- label "y" MAC.>= |d ->
    box $                      --
                                -- (box $
    L.do                       --
      r <- L.f d                -- L.f d L.>= |r ->
      L.g r                    -- L.g r L.>>
      L.return r               -- L.return r
                                -- ) MAC.>>
    MAC.return d               -- (MAC.return d)
                                -- )
  print x                      -- (\x -> print x)
```

The semantics of do notation statements with `-XQualifiedDo` is as follows:

- The `x <- u` statement uses `(M.>=)`

```
M.do { x <- u; stmts } = u M.>= \x -> M.do { stmts }
```

- The `u` statement uses `(M.>>)`

```
M.do { u; stmts } = u M.>> M.do { stmts }
```

- The `a pat <- u` statement uses `M.fail` for the failing case, if such a case is needed

```
M.do { pat <- u; stmts } = u M.>= \case
  { pat -> M.do { stmts }
  ; _ -> M.fail "..."}
}
```

If the pattern cannot fail, then we don't need to use `M.fail`.

```
M.do { pat <- u; stmts } = u M.>= \case pat -> M.do { stmts }
```

- The desugaring of `-XApplicativeDo` uses `M.fmap`, `(M.<*>)`, and `M.join` (after the applicative-do grouping has been performed)

```
M.do { (x1 <- u1 | ... | xn <- un); M.return e } =
  (\x1 ... xn -> e) `M.fmap` u1 M.<*> ... M.<*> un

M.do { (x1 <- u1 | ... | xn <- un); stmts } =
  M.join ((\x1 ... xn -> M.do { stmts }) `M.fmap` u1 M.<*> ... M.<*> un)
```

Note that `M.join` is only needed if the final expression is not identifiably a `return`. With `-XQualifiedDo` enabled, `-XApplicativeDo` looks only for the qualified `return/pure` in a qualified `do`-block.

- With `-XRecursiveDo`, `rec` and `mdo` blocks use `M.mfix` and `M.return`:

```
M.do { rec { x1 <- u1; ... ; xn <- un }; stmts } =
  M.do
  { (x1, ..., xn) <- M.mfix (\~(x1, ..., xn) -> M.do { x1 <- u1; ...; xn <- un;
    ↪ M.return (x1, ..., xn)})
  ; stmts
  }
```

If a name `M.op` is required by the desugaring process (and only if it's required!) but the name is not in scope, it is reported as an error.

The types of the operations picked for desugaring must produce an expression which is accepted by the typechecker. But other than that, there are no specific requirements on the types.

If no qualifier is specified with `-XQualifiedDo` enabled, it defaults to the operations defined in the Prelude, or, if `-XRebindableSyntax` is enabled, to whatever operations are in scope.

Note that the operations to be qualified must be in scope for `QualifiedDo` to work. I.e. `import MAC (label)` in the example above would result in an error, since `MAC.>=` and `MAC.>>` would not be in scope.

### 6.2.5.1 Examples

-XQualifiedDo does not affect return in the monadic do notation.

```
import qualified Some.Monad.M as M

boolM :: (a -> M.M Bool) -> b -> b -> a -> M.M b
boolM p a b x = M.do
  px <- p x      -- M.>=
  if px then
    return b     -- Prelude.return
  else
    M.return a   -- M.return
```

-XQualifiedDo does not affect explicit (>=) in the monadic do notation.

```
import qualified Some.Monad.M as M
import Data.Bool (bool)

boolMM :: (a -> M.M Bool) -> M b -> M b -> a -> M.M b
boolMM p ma mb x = M.do
  p x >= bool ma mb  -- Prelude.>=
```

Nested do blocks do not affect each other's meanings.

```
import qualified Some.Monad.M as M

f :: M.M SomeType
f = M.do
  x <- f1          -- M.>=
  f2 (do y <- g1    -- Prelude.>=
      g2 x y)
  where
    f1 = ...
    f2 m = ...
    g1 = ...
    g2 x y = ...
```

The type of (>=) can also be modified, as seen here for a graded monad:

```
{-# LANGUAGE ConstraintKinds #-}
{-# LANGUAGE PolyKinds #-}
{-# LANGUAGE TypeFamilies #-}
module Control.Monad.Granted (GradedMonad(..)) where

import Data.Kind (Constraint)

class GradedMonad (m :: k -> * -> *) where
  type Unit m :: k
  type Plus m (i :: k) (j :: k) :: k
  type Inv m (i :: k) (j :: k) :: Constraint
  (>=) :: Inv m i j => m i a -> (a -> m j b) -> m (Plus m i j) b
  return :: a -> m (Unit m) a
```

(continues on next page)

(continued from previous page)

```

-----
module M where

import Control.Monad.Granted as Granted

g :: GrantedMonad m => a -> m SomeTypeIndex b
g a = Granted.do
  b <- someGrantedFunction a Granted.>=> someOtherGrantedFunction
  c <- anotherGrantedFunction b
  Granted.return c

```

## 6.2.6 Parallel List Comprehensions

### ParallelListComp

Since  
6.8.1

Allow parallel list comprehension syntax.

Parallel list comprehensions are a natural extension to list comprehensions. List comprehensions can be thought of as a nice syntax for writing maps and filters. Parallel comprehensions extend this to include the `zipWith` family.

A parallel list comprehension has multiple independent branches of qualifier lists, each separated by a `|` symbol. For example, the following zips together two lists:

```
[ (x, y) | x <- xs | y <- ys ]
```

The behaviour of parallel list comprehensions follows that of `zip`, in that the resulting list will have the same length as the shortest branch.

We can define parallel list comprehensions by translation to regular comprehensions. Here's the basic idea:

Given a parallel comprehension of the form:

```
[ e | p1 <- e11, p2 <- e12, ...
      | q1 <- e21, q2 <- e22, ...
      ...
]
```

This will be translated to:

```
[ e | ((p1,p2), (q1,q2), ...) <- zipN [(p1,p2) | p1 <- e11, p2 <- e12, ...]
                                     [(q1,q2) | q1 <- e21, q2 <- e22, ...]
                                     ...
]
```

where `zipN` is the appropriate zip for the given number of branches.

## 6.2.7 Generalised (SQL-like) List Comprehensions

### TransformListComp

#### Since

6.10.1

Allow use of generalised list (SQL-like) comprehension syntax. This introduces the `group`, `by`, and `using` keywords.

Generalised list comprehensions are a further enhancement to the list comprehension syntactic sugar to allow operations such as sorting and grouping which are familiar from SQL. They are fully described in the paper [Comprehensive comprehensions: comprehensions with “order by” and “group by”](#), except that the syntax we use differs slightly from the paper.

The extension is enabled with the extension *TransformListComp* (page 332).

Here is an example:

```
employees = [ ("Simon", "MS", 80)
              , ("Erik", "MS", 100)
              , ("Phil", "Ed", 40)
              , ("Gordon", "Ed", 45)
              , ("Paul", "Yale", 60) ]

output = [ (the dept, sum salary)
          | (name, dept, salary) <- employees
          , then group by dept using groupWith
          , then sortWith by (sum salary)
          , then take 5 ]
```

In this example, the list output would take on the value:

```
[("Yale", 60), ("Ed", 85), ("MS", 180)]
```

There are three new keywords: `group`, `by`, and `using`. (The functions `sortWith` and `groupWith` are not keywords; they are ordinary functions that are exported by `GHC.Exts`.)

There are five new forms of comprehension qualifier, all introduced by the (existing) keyword `then`:

- `then f`

This statement requires that `f` have the type `forall a. [a] -> [a]`. You can see an example of its use in the motivating example, as this form is used to apply `take 5`.

- `then f by e`

This form is similar to the previous one, but allows you to create a function which will be passed as the first argument to `f`. As a consequence `f` must have the type `forall a. (a -> t) -> [a] -> [a]`. As you can see from the type, this function lets `f` “project out” some information from the elements of the list it is transforming.

An example is shown in the opening example, where `sortWith` is supplied with a function that lets it find out the `sum salary` for any item in the list comprehension it transforms.

- `then group by e using f`

This is the most general of the grouping-type statements. In this form, `f` is required to have type `forall a. (a -> t) -> [a] -> [[a]]`. As with the `then f by e` case above, the first argument is a function supplied to `f` by the compiler which lets it compute `e` on every element of the list being transformed. However, unlike the non-grouping case, `f` additionally partitions the list into a number of sublists: this means that at every point after this statement, binders occurring before it in the comprehension refer to *lists* of possible values, not single values. To help understand this, let's look at an example:

```
-- This works similarly to groupWith in GHC.Exts, but doesn't sort its
-- input first
groupRuns :: Eq b => (a -> b) -> [a] -> [[a]]
groupRuns f = groupBy (\x y -> f x == f y)

output = [ (the x, y)
| x <- ([1..3] ++ [1..2])
, y <- [4..6]
, then group by x using groupRuns ]
```

This results in the variable `output` taking on the value below:

```
[(1, [4, 5, 6]), (2, [4, 5, 6]), (3, [4, 5, 6]), (1, [4, 5, 6]), (2, [4,
5, 6])]
```

Note that we have used the `then` function to change the type of `x` from a list to its original numeric type. The variable `y`, in contrast, is left unchanged from the list form introduced by the grouping.

- `then group using f`

With this form of the group statement, `f` is required to simply have the type `forall a. [a] -> [[a]]`, which will be used to group up the comprehension so far directly. An example of this form is as follows:

```
output = [ x
| y <- [1..5]
, x <- "hello"
, then group using inits]
```

This will yield a list containing every prefix of the word “hello” written out 5 times:

```
["", "h", "he", "hel", "hell", "hello", "helloh", "hellohe", "hellohel",
"hellohell", "hellohello", "hellohelloh", ...]
```

## 6.2.8 Monad comprehensions

### MonadComprehensions

Since  
7.2.1

Enable list comprehension syntax for arbitrary monads.

Monad comprehensions generalise the list comprehension notation, including parallel comprehensions (*Parallel List Comprehensions* (page 331)) and transform comprehensions (*Generalised (SQL-like) List Comprehensions* (page 332)) to work for any monad.

Monad comprehensions support:

- Bindings:

```
[ x + y | x <- Just 1, y <- Just 2 ]
```

Bindings are translated with the (`>=>`) and `return` functions to the usual `do`-notation:

```
do x <- Just 1
  y <- Just 2
  return (x+y)
```

- Guards:

```
[ x | x <- [1..10], x <= 5 ]
```

Guards are translated with the `guard` function, which requires an `Alternative` instance:

```
do x <- [1..10]
  guard (x <= 5)
  return x
```

- Transform statements (as with *[TransformListComp](#)* (page 332)):

```
[ x+y | x <- [1..10], y <- [1..x], then take 2 ]
```

This translates to:

```
do (x,y) <- take 2 (do x <- [1..10]
                    y <- [1..x]
                    return (x,y))
  return (x+y)
```

- Group statements (as with *[TransformListComp](#)* (page 332)):

```
[ x | x <- [1,1,2,2,3], then group by x using GHC.Exts.groupWith ]
[ x | x <- [1,1,2,2,3], then group using myGroup ]
```

- Parallel statements (as with *[ParallelListComp](#)* (page 331)):

```
[ (x+y) | x <- [1..10]
        | y <- [11..20]
        ]
```

Parallel statements are translated using the `mzip` function, which requires a `MonadZip` instance defined in `Control.Monad.Zip`:

```
do (x,y) <- mzip (do x <- [1..10]
                  return x)
              (do y <- [11..20]
                return y)
  return (x+y)
```

All these features are enabled by default if the *[MonadComprehensions](#)* (page 333) extension is enabled. The types and more detailed examples on how to use comprehensions are explained in the previous chapters *[Generalised \(SQL-like\) List Comprehensions](#)* (page 332) and *[Parallel](#)*



[List Comprehensions](#) (page 331). In general you just have to replace the type `[a]` with the type `Monad m => m a` for monad comprehensions.

**Note:** Even though most of these examples are using the list monad, monad comprehensions work for any monad. The base package offers all necessary instances for lists, which make [MonadComprehensions](#) (page 333) backward compatible to built-in, transform and parallel list comprehensions.

More formally, the desugaring is as follows. We write `D[ e | Q ]` to mean the desugaring of the monad comprehension `[ e | Q ]`:

```
Expressions: e
Declarations: d
Lists of qualifiers: Q,R,S

-- Basic forms
D[ e | ]           = return e
D[ e | p <- e, Q ] = e >=> \p -> D[ e | Q ]
D[ e | e, Q ]      = guard e >> \p -> D[ e | Q ]
D[ e | let d, Q ]   = let d in D[ e | Q ]

-- Parallel comprehensions (iterate for multiple parallel branches)
D[ e | (Q | R), S ] = mzip D[ Qv | Q ] D[ Rv | R ] >=> \ (Qv,Rv) -> D[ e |
  ↪ S ]

-- Transform comprehensions
D[ e | Q then f, R ] = f D[ Qv | Q ] >=> \Qv -> D[ e | R ]

D[ e | Q then f by b, R ] = f (\Qv -> b) D[ Qv | Q ] >=> \Qv ->
  ↪ D[ e | R ]

D[ e | Q then group using f, R ] = f D[ Qv | Q ] >=> \ys ->
  ↪ case (fmap selQv1 ys, ..., fmap
  ↪ selQvn ys) of
  ↪       Qv -> D[ e | R ]

D[ e | Q then group by b using f, R ] = f (\Qv -> b) D[ Qv | Q ] >=> \ys ->
  ↪ case (fmap selQv1 ys, ..., fmap
  ↪ selQvn ys) of
  ↪       Qv -> D[ e | R ]

where Qv is the tuple of variables bound by Q (and used subsequently)
      selQvi is a selector mapping Qv to the ith component of Qv
```

Operator	Standard binding	Expected type
return	GHC.Base	<code>t1 -&gt; m t2</code>
<code>(&gt;=&gt;)</code>	GHC.Base	<code>m1 t1 -&gt; (t2 -&gt; m2 t3) -&gt; m3 t3</code>
<code>(&gt;&gt;)</code>	GHC.Base	<code>m1 t1 -&gt; m2 t2 -&gt; m3 t3</code>
guard	Control.Monad	<code>t1 -&gt; m t2</code>
fmap	GHC.Base	<code>forall a b. (a-&gt;b) -&gt; n a -&gt; n b</code>
mzip	Control.Monad.Zip	<code>forall a b. m a -&gt; m b -&gt; m (a,b)</code>

The comprehension should typecheck when its desugaring would typecheck, except that (as discussed in *Generalised (SQL-like) List Comprehensions* (page 332)) in the “then f” and “then group using f” clauses, when the “by b” qualifier is omitted, argument f should have a polymorphic type. In particular, “then Data.List.sort” and “then group using Data.List.group” are insufficiently polymorphic.

Monad comprehensions support rebindable syntax (*Rebindable syntax and the implicit Prelude import* (page 339)). Without rebindable syntax, the operators from the “standard binding” module are used; with rebindable syntax, the operators are looked up in the current lexical scope. For example, parallel comprehensions will be typechecked and desugared using whatever “mzip” is in scope.

The rebindable operators must have the “Expected type” given in the table above. These types are surprisingly general. For example, you can use a bind operator with the type

```
(>=>) :: T x y a -> (a -> T y z b) -> T x z b
```

In the case of transform comprehensions, notice that the groups are parameterised over some arbitrary type n (provided it has an fmap, as well as the comprehension being over an arbitrary monad).

## 6.2.9 Overloaded lists

### OverloadedLists

Since  
7.8.1

Enable overloaded list syntax (e.g. desugaring of lists via the IsList class).

GHC supports *overloading of the list notation*. Let us recap the notation for constructing lists. In Haskell, the list notation can be used in the following seven ways:

```
[ ]           -- Empty list
[x]           -- x : [ ]
[x,y,z]       -- x : y : z : [ ]
[x .. ]       -- enumFrom x
[x,y .. ]     -- enumFromThen x y
[x .. y]      -- enumFromTo x y
[x,y .. z]    -- enumFromThenTo x y z
```

When the OverloadedLists extension is turned on, the aforementioned seven notations are desugared as follows:

```
[ ]           -- fromListN 0 [ ]
[x]           -- fromListN 1 (x : [ ])
[x,y,z]       -- fromListN 3 (x : y : z : [ ])
[x .. ]       -- fromList (enumFrom x)
[x,y .. ]     -- fromList (enumFromThen x y)
[x .. y]      -- fromList (enumFromTo x y)
[x,y .. z]    -- fromList (enumFromThenTo x y z)
```

This extension allows programmers to use the list notation for construction of structures like: Set, Map, IntMap, Vector, Text and Array. The following code listing gives a few examples:

```
['0' .. '9']      :: Set Char
[1 .. 10]         :: Vector Int
[("default",0), (k1,v1)] :: Map String Int
['a' .. 'z']      :: Text
```

List patterns are also overloaded. When the `OverloadedLists` extension is turned on, these definitions are desugared as follows

```
f [] = ...          -- f (toList -> []) = ...
g [x,y,z] = ...     -- g (toList -> [x,y,z]) = ...
```

(Here we are using view-pattern syntax for the translation, see [View patterns](#) (page 511).)

### 6.2.9.1 The `IsList` class

In the above desugarings, the functions `toList`, `fromList` and `fromListN` are all methods of the `IsList` class, which is itself exported from the `GHC.Exts` module. The type class is defined as follows:

```
class IsList l where
  type Item l

  fromList :: [Item l] -> l
  toList   :: l -> [Item l]

  fromListN :: Int -> [Item l] -> l
  fromListN _ = fromList
```

The `IsList` class and its methods are intended to be used in conjunction with the `OverloadedLists` extension.

- The type function `Item` returns the type of items of the structure `l`.
- The function `fromList` constructs the structure `l` from the given list of `Item l`.
- The function `fromListN` takes the input list's length as a hint. Its behaviour should be equivalent to `fromList`. The hint can be used for more efficient construction of the structure `l` compared to `fromList`. If the given hint is not equal to the input list's length the behaviour of `fromListN` is not specified.
- The function `toList` should be the inverse of `fromList`.

It is perfectly fine to declare new instances of `IsList`, so that list notation becomes useful for completely new data types. Here are several example instances:

```
instance IsList [a] where
  type Item [a] = a
  fromList = id
  toList   = id

instance (Ord a) => IsList (Set a) where
  type Item (Set a) = a
  fromList = Set.fromList
  toList   = Set.toList
```

(continues on next page)

(continued from previous page)

```
instance (Ord k) => IsList (Map k v) where
  type Item (Map k v) = (k,v)
  fromList = Map.fromList
  toList = Map.toList

instance IsList (IntMap v) where
  type Item (IntMap v) = (Int,v)
  fromList = IntMap.fromList
  toList = IntMap.toList

instance IsList Text where
  type Item Text = Char
  fromList = Text.pack
  toList = Text.unpack

instance IsList (Vector a) where
  type Item (Vector a) = a
  fromList = Vector.fromList
  fromListN = Vector.fromListN
  toList = Vector.toList
```

Users should not, however, provide any instance that overlaps with the first instance above. Namely, `fromList` and `toList`, when used on lists, should always be the identity function. For example, the following instance is disallowed:

```
instance {-# OVERLAPPING #-} IsList [Int] where
  type Item [Int] = Int
  fromList = reverse
  toList = reverse
```

### 6.2.9.2 Rebindable syntax

When desugaring list notation with *OverloadedLists* (page 336) GHC uses the `fromList` (etc) methods from module `GHC.Exts`. You do not need to import `GHC.Exts` for this to happen.

However if you use *RebindableSyntax* (page 339), then GHC instead uses whatever is in scope with the names of `toList`, `fromList` and `fromListN`. That is, these functions are rebindable; c.f. *Rebindable syntax and the implicit Prelude import* (page 339).

### 6.2.9.3 Defaulting

Currently, the `IsList` class is not accompanied with defaulting rules. Although feasible, not much thought has gone into how to specify the meaning of the default declarations like:

```
default ([a])
```

#### 6.2.9.4 Speculation about the future

The current implementation of the `OverloadedLists` extension can be improved by handling the lists that are only populated with literals in a special way. More specifically, the compiler could allocate such lists statically using a compact representation and allow `IsList` instances to take advantage of the compact representation. Equipped with this capability the `OverloadedLists` extension will be in a good position to subsume the `OverloadedStrings` extension (currently, as a special case, string literals benefit from statically allocated compact representation).

### 6.2.10 Rebindable syntax and the implicit Prelude import

#### `NoImplicitPrelude`

##### Implied by

[RebindableSyntax](#) (page 339)

##### Since

6.8.1

Don't import `Prelude` by default.

GHC normally imports `Prelude.hi` files for you. If you'd rather it didn't, then give it a `-XNoImplicitPrelude` option. The idea is that you can then import a `Prelude` of your own.

#### `RebindableSyntax`

##### Implies

[NoImplicitPrelude](#) (page 339)

##### Since

7.0.1

Enable rebinding of a variety of usually-built-in operations.

Suppose you are importing a `Prelude` of your own in order to define your own numeric class hierarchy. It completely defeats that purpose if the literal `"1"` means `"Prelude.fromInteger 1"`, which is what the Haskell Report specifies. So the [RebindableSyntax](#) (page 339) extension causes the following pieces of built-in syntax to refer to *whatever is in scope*, not the `Prelude` versions:

- An integer literal `368` means `"fromInteger (368::Integer)"`, rather than `"Prelude.fromInteger (368::Integer)"`.
- Fractional literals are handled in just the same way, except that the translation is `fromRational (3.68::Rational)`.
- String literals are also handled the same way, except that the translation is `fromString ("368"::String)`.
- The equality test in an overloaded numeric pattern uses whatever `(==)` is in scope.
- The subtraction operation, and the greater-than-or-equal test, in `n+k` patterns use whatever `(-)` and `(>=)` are in scope.
- Negation (e.g. `"- (f x)"`) means `"negate (f x)"`, both in numeric patterns, and expressions.

- Conditionals (e.g. “if e1 then e2 else e3”) means “ifThenElse e1 e2 e3”. However case expressions are unaffected.
- “Do” notation is translated using whatever functions (`>=>`), (`>>`), and `fail`, are in scope (not the Prelude versions). List comprehensions, `mdo` (*The recursive do-notation* (page 322)), and parallel array comprehensions, are unaffected.
- Arrow notation (see *Arrow notation* (page 355)) uses whatever `arr`, (`>>>`), `first`, `app`, (`|||`) and loop functions are in scope. But unlike the other constructs, the types of these functions must match the Prelude types very closely. Details are in flux; if you want to use this, ask!
- List notation, such as `[x,y]` or `[m..n]` can also be treated via rebindable syntax if you use `-XOverloadedLists`; see *Overloaded lists* (page 336).
- An overloaded label “#foo” means “fromLabel @"foo””, rather than “GHC.OverloadedLabels.fromLabel @"foo”” (see *Overloaded labels* (page 549)).

*RebindableSyntax* (page 339) implies *NoImplicitPrelude* (page 339).

In all cases (apart from arrow notation), the static semantics should be that of the desugared form, even if that is a little unexpected. For example, the static semantics of the literal `368` is exactly that of `fromInteger (368::Integer)`; it's fine for `fromInteger` to have any of the types:

```
fromInteger :: Integer -> Integer
fromInteger :: forall a. Foo a => Integer -> a
fromInteger :: Num a => a -> Integer
fromInteger :: Integer -> Bool -> Bool
```

Be warned: this is an experimental facility, with fewer checks than usual. Use `-dcore-lint` to typecheck the desugared program. If Core Lint is happy you should be all right.

### 6.2.10.1 Custom Prelude modules named Prelude

If you call your custom Prelude module `Prelude` and place it in a file called `Prelude.hs`, then your custom Prelude will be implicitly imported instead of the default Prelude.

Here is an example that compiles:

```
$ cat Prelude.hs
module Prelude where

a = ()

$ cat B.hs
module B where

foo = a

$ ghc Prelude.hs B.hs
[1 of 2] Compiling Prelude      ( Prelude.hs, Prelude.o )
[2 of 2] Compiling B           ( B.hs, B.o )
```

The new Prelude is implicitly imported in `B.hs`.

Here is an example that does not compile:

```
$ cat Prelude.hs
module Prelude where

foo = True

$ ghc Prelude.hs
[1 of 1] Compiling Prelude          ( Prelude.hs, Prelude.o )

Prelude.hs:3:7: error: Data constructor not in scope: True
```

The original `Prelude` module is shadowed by the custom `Prelude` in this case. To include the original `Prelude` in your custom `Prelude`, you can explicitly import it with the `-XPackageImports` option and `import "base" Prelude`.

### 6.2.10.2 Things unaffected by `RebindableSyntax`

*RebindableSyntax* (page 339) does not apply to any code generated from a deriving clause or declaration. To see why, consider the following code:

```
{-# LANGUAGE RebindableSyntax, OverloadedStrings #-}
newtype Text = Text String

fromString :: String -> Text
fromString = Text

data Foo = Foo deriving Show
```

This will generate code to the effect of:

```
instance Show Foo where
  showsPrec _ Foo = showString "Foo"
```

But because *RebindableSyntax* (page 339) and *OverloadedStrings* (page 548) are enabled, the `"Foo"` string literal would now be of type `Text`, not `String`, which `showString` doesn't accept! This causes the generated `Show` instance to fail to typecheck. It's hard to imagine any scenario where it would be desirable have *RebindableSyntax* (page 339) behavior within derived code, so GHC simply ignores *RebindableSyntax* (page 339) entirely when checking derived code.

## 6.2.11 Postfix operators

### PostfixOperators

**Since**  
7.10.1

**Status**  
Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow the use of post-fix operators

The *PostfixOperators* (page 341) extension enables a small extension to the syntax of left operator sections, which allows you to define postfix operators. The extension is this: for any expression `e` and operator `(!)`, the left section

```
(e !)
```

is equivalent (from the point of view of both type checking and execution) to the expression

```
((!) e)
```

The strict Haskell 98 interpretation is that the section is equivalent to

```
(\y -> (!) e y)
```

That is, the operator must be a function of two arguments. GHC allows it to take only one argument, and that in turn allows you to write the function postfix.

The extension does not extend to the left-hand side of function definitions; you must define such a function in prefix form.

## 6.2.12 Tuple sections

### TupleSections

**Since**  
6.12

**Status**  
Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow the use of tuple section syntax

The [TupleSections](#) (page 342) extension enables partially applied tuple constructors. For example, the following program

```
(, True)
```

is considered to be an alternative notation for the more unwieldy alternative

```
\x -> (x, True)
```

You can omit any combination of arguments to the tuple, as in the following

```
(, "I", , , "Love", , 1337)
```

which translates to

```
\a b c d -> (a, "I", b, c, "Love", d, 1337)
```

If you have *unboxed tuples* (page ??) enabled, tuple sections will also be available for them, like so

```
(# , True #)
```

Because there is no unboxed unit tuple, the following expression

```
(# #)
```

continues to stand for the unboxed singleton tuple data constructor.



### 6.2.13 Lambda-case

#### LambdaCase

##### Since

7.6.1

##### Status

Included in [GHC2024](#) (page 314)

Allow the use of lambda-case syntax.

The [LambdaCase](#) (page 343) extension enables expressions of the form

```
\case { p1 -> e1; ...; pN -> eN }
```

which is equivalent to

```
\freshName -> case freshName of { p1 -> e1; ...; pN -> eN }
```

Since GHC 9.4.1, it also allows expressions with multiple scrutinees (see [GHC proposal #302](#)) of the form

```
\cases { p11 ... pM1 -> e1; ...; p1N ... pMN -> eN }
```

which is equivalent to a function defined as

```
f p11 ... pM1 = e1
...
f p1N ... pMN = eN
```

Note that both `\case` and `\cases` start a layout, so you can write

```
\case
  p1 -> e1
  ...
  pN -> eN
```

Additionally, since GHC 9.0.1, combining [LambdaCase](#) (page 343) with [Arrows](#) (page 355) allows `\case` (and since GHC 9.4.1 `\cases`) syntax to be used as a command in `proc` notation:

```
proc x -> (f -< x) `catchA` \case
  p1 -> cmd1
  ...
  pN -> cmdN
```

### 6.2.14 Empty case alternatives

#### EmptyCase

##### Since

7.8.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow empty case expressions.

The *EmptyCase* (page 343) extension enables case expressions, or lambda-case expressions, that have no alternatives, thus:

```
case e of { }    -- No alternatives
```

or

```
\case { }        -- -XLambdaCase is also required
```

Note that it is not allowed for `\cases`, since it would be unclear how many patterns are being matched.

This can be useful when you know that the expression being scrutinised has no non-bottom values. For example:

```
data Void
f :: Void -> Int
f x = case x of { }
```

With dependently-typed features it is more useful (see #2431). For example, consider these two candidate definitions of `absurd`:

```
data a ::> b where
  Refl :: a ::> a

absurd :: True ::> False -> a
absurd x = error "absurd"      -- (A)
absurd x = case x of {}       -- (B)
```

We much prefer (B). Why? Because GHC can figure out that `(True ::> False)` is an empty type. So (B) has no partiality and GHC is able to compile with *-Wincomplete-patterns* (page 107) and *-Werror* (page ??). On the other hand (A) looks dangerous, and GHC doesn't check to make sure that, in fact, the function can never get called.

## 6.2.15 Multi-way if-expressions

### MultiWayIf

Since  
7.6.1

Allow the use of multi-way-if syntax.

With *MultiWayIf* (page 344) extension GHC accepts conditional expressions with multiple branches:

```
if | guard1 -> expr1
   | ...
   | guardN -> exprN
```

which is roughly equivalent to

```
case () of
  _ | guard1 -> expr1
  ...
  _ | guardN -> exprN
```

Multi-way if expressions introduce a new layout context. So the example above is equivalent to:

```
if { | guard1 -> expr1
    ; | ...
    ; | guardN -> exprN
}
```

The following behaves as expected:

```
if | guard1 -> if | guard2 -> expr2
    | guard3 -> expr3
    | guard4 -> expr4
```

because layout translates it as

```
if { | guard1 -> if { | guard2 -> expr2
                    ; | guard3 -> expr3
                    }
    ; | guard4 -> expr4
}
```

Layout with multi-way if works in the same way as other layout contexts, except that the semi-colons between guards in a multi-way if are optional. So it is not necessary to line up all the guards at the same column; this is consistent with the way guards work in function definitions and case expressions.

Note that multi-way if supports guards other than boolean conditions:

```
if | parseNumbers settings
    , Just (exponent, mantissa) <- decomposeNumber str
    , let (integralPart, fractionPart) = parse mantissa
    , integralPart >= 0 -> ...
    | otherwise -> ...
```

## 6.2.16 Local Fixity Declarations

A careful reading of the Haskell 98 Report reveals that fixity declarations (`infix`, `infixl`, and `infixr`) are permitted to appear inside local bindings such those introduced by `let` and `where`. However, the Haskell Report does not specify the semantics of such bindings very precisely.

In GHC, a fixity declaration may accompany a local binding:

```
let f = ...
    infixr 3 `f`
in
    ...
```

and the fixity declaration applies wherever the binding is in scope. For example, in a `let`, it applies in the right-hand sides of other `let`-bindings and the body of the `let`. Or, in recursive `do` expressions (*The recursive do-notation* (page 322)), the local fixity declarations of a `let` statement scope over other statements in the group, just as the bound name does.

Moreover, a local fixity declaration *must* accompany a local binding of that name: it is not possible to revise the fixity of name bound elsewhere, as in

```
let infixr 9 $ in ...
```

Because local fixity declarations are technically Haskell 98, no extension is necessary to enable them.

## 6.2.17 More liberal syntax for function arguments

### BlockArguments

Since  
8.6.1

Allow `do` expressions, lambda expressions, etc. to be directly used as a function argument.

In Haskell 2010, certain kinds of expressions can be used without parentheses as an argument to an operator, but not as an argument to a function. They include `do`, lambda, `if`, `case`, and `let` expressions. Some GHC extensions also define language constructs of this type: `mdo` (*The recursive do-notation* (page 322)), `\case` (*Lambda-case* (page 343)), and `proc` (*Arrow notation* (page 355)).

The *BlockArguments* (page 346) extension allows these constructs to be directly used as a function argument. For example:

```
when (x > 0) do
  print x
  exitFailure
```

will be parsed as:

```
when (x > 0) (do
  print x
  exitFailure)
```

and

```
withForeignPtr fptr \ptr -> c_memcpy buf ptr size
```

will be parsed as:

```
withForeignPtr fptr (\ptr -> c_memcpy buf ptr size)
```

### 6.2.17.1 Changes to the grammar

The Haskell report defines the `lexp` nonterminal thus (\* indicates a rule of interest)

<code>lexp</code>	$\rightarrow$	<code>\ apat1 ... apatn -&gt; exp</code>	(lambda abstraction, $n \geq 1$ )	*
		<code>let decls in exp</code>	(let expression)	*
		<code>if exp [;] then exp [;] else exp</code>	(conditional)	*
		<code>case exp of { alts }</code>	(case expression)	*
		<code>do { stmts }</code>	(do expression)	*
		<code>fexp</code>		

(continues on next page)

(continued from previous page)

fexp	→	[fexp] aexp	(function application)
aexp	→	qvar	(variable)
		gcon	(general constructor)
		literal	
		( exp )	(parenthesized expression)
		qcon { fbind1 ... fbindn }	(labeled construction)
		aexp { fbind1 ... fbindn }	(labelled update)
		...	

The [BlockArguments](#) (page 346) extension moves these production rules under aexp

lexp	→	fexp	
fexp	→	[fexp] aexp	(function application)
aexp	→	qvar	(variable)
		gcon	(general constructor)
		literal	
		( exp )	(parenthesized expression)
		qcon { fbind1 ... fbindn }	(labeled construction)
		aexp { fbind1 ... fbindn }	(labelled update)
		\ apat1 ... apatn -> exp	(lambda abstraction, $n \geq 1$ ) *
		let decls in exp	(let expression) *
		if exp [;] then exp [;] else exp	(conditional) *
		case exp of { alts }	(case expression) *
		do { stmts }	(do expression) *
		...	

Now the lexp nonterminal is redundant and can be dropped from the grammar.

Note that this change relies on an existing meta-rule to resolve ambiguities:

The grammar is ambiguous regarding the extent of lambda abstractions, let expressions, and conditionals. The ambiguity is resolved by the meta-rule that each of these constructs extends as far to the right as possible.

For example, `f \a -> a b` will be parsed as `f (\a -> a b)`, not as `f (\a -> a) b`.

## 6.2.18 Typed Holes

Typed holes are a feature of GHC that allows special placeholders written with a leading underscore (e.g., `"_"`, `"_foo"`, `"_bar"`), to be used as expressions. During compilation these holes will generate an error message that describes which type is expected at the hole's location, information about the origin of any free type variables, and a list of local bindings that might help fill the hole and bindings in scope that fit the type of the hole that might help fill the hole with actual code. Typed holes are always enabled in GHC.

The goal of typed holes is to help with writing Haskell code rather than to change the type system. Typed holes can be used to obtain extra information from the type checker, which might otherwise be hard to get. Normally, using GHCi, users can inspect the (inferred) type signatures of all top-level bindings. However, this method is less convenient with terms that are not defined on top-level or inside complex expressions. Holes allow the user to check the type of the term they are about to write.

For example, compiling the following module with GHC:

```
f :: a -> a
f x = _
```

will fail with the following error:

```
hole.hs:2:7:
  Found hole `_' with type: a
  Where: `a' is a rigid type variable bound by
         the type signature for f :: a -> a at hole.hs:1:6
  In the expression:
  In an equation for `f': f x = _
  Relevant bindings include
    x :: a (bound at hole.hs:2:3)
    f :: a -> a (bound at hole.hs:2:1)
  Valid hole fits include x :: a (bound at hole.hs:2:3)
```

Here are some more details:

- A “Found hole” error usually terminates compilation, like any other type error. After all, you have omitted some code from your program. Nevertheless, you can run and test a piece of code containing holes, by using the `-fdefer-typed-holes` (page 464) flag. This flag defers errors produced by typed holes until runtime, and converts them into compile-time warnings. These warnings can in turn be suppressed entirely by `-Wno-typed-holes` (page 99).

The same behaviour for “Variable out of scope” errors, it terminates compilation by default. You can defer such errors by using the `-fdefer-out-of-scope-variables` (page 465) flag. This flag defers errors produced by out of scope variables until runtime, and converts them into compile-time warnings. These warnings can in turn be suppressed entirely by `-Wno-deferred-out-of-scope-variables` (page 100).

The result is that a hole or a variable will behave like undefined, but with the added benefits that it shows a warning at compile time, and will show the same message if it gets evaluated at runtime. This behaviour follows that of the `-fdefer-type-errors` (page 464) option, which implies `-fdefer-typed-holes` (page 464) and `-fdefer-out-of-scope-variables` (page 465). See *Deferring type errors to runtime* (page 464).

- All unbound identifiers are treated as typed holes, *whether or not they start with an underscore*. The only difference is in the error message:

```
cons z = z : True : _x : y
```

yields the errors

```
Foo.hs:3:21: error:
  Found hole: _x :: Bool
  Or perhaps `_x' is mis-spelled, or not in scope
  In the first argument of `(:)', namely `_x'
  In the second argument of `(:)', namely `_x : y'
  In the second argument of `(:)', namely `True : _x : y'
  Relevant bindings include
    z :: Bool (bound at Foo.hs:3:6)
    cons :: Bool -> [Bool] (bound at Foo.hs:3:1)
```

(continues on next page)

(continued from previous page)

```
Valid hole fits include
  z :: Bool (bound at mpt.hs:2:6)
  otherwise :: Bool
    (imported from 'Prelude' at mpt.hs:1:8-10
     (and originally defined in 'GHC.Base'))
  False :: Bool
    (imported from 'Prelude' at mpt.hs:1:8-10
     (and originally defined in 'GHC.Types'))
  True :: Bool
    (imported from 'Prelude' at mpt.hs:1:8-10
     (and originally defined in 'GHC.Types'))
  maxBound :: forall a. Bounded a => a
    with maxBound @Bool
    (imported from 'Prelude' at mpt.hs:1:8-10
     (and originally defined in 'GHC.Enum'))
  minBound :: forall a. Bounded a => a
    with minBound @Bool
    (imported from 'Prelude' at mpt.hs:1:8-10
     (and originally defined in 'GHC.Enum'))

Foo.hs:3:26: error:
  Variable not in scope: y :: [Bool]
```

More information is given for explicit holes (i.e. ones that start with an underscore), than for out-of-scope variables, because the latter are often unintended typos, so the extra information is distracting. If you want the detailed information, use a leading underscore to make explicit your intent to use a hole.

- Unbound identifiers with the same name are never unified, even within the same function, but shown individually. For example:

```
cons = _x : _x
```

results in the following errors:

```
unbound.hs:1:8:
  Found hole '_x' with type: a
  Where: `a' is a rigid type variable bound by
         the inferred type of cons :: [a] at unbound.hs:1:1
  In the first argument of `(:)', namely `_x'
  In the expression: _x : _x
  In an equation for `cons': cons = _x : _x
  Relevant bindings include cons :: [a] (bound at unbound.hs:1:1)

unbound.hs:1:13:
  Found hole: _x :: [a]
  Where: `a' is a rigid type variable bound by
         the inferred type of cons :: [a]
         at unbound.hs:3:1-12
  Or perhaps `_x' is mis-spelled, or not in scope
  In the second argument of `(:)', namely `_x'
  In the expression: _x : _x
  In an equation for `cons': cons = _x : _x
```

(continues on next page)

(continued from previous page)

```

Relevant bindings include cons :: [a] (bound at unbound.hs:3:1)
Valid hole fits include
  cons :: forall a. [a]
    with cons @a
    (defined at mpt.hs:3:1)
  mempty :: forall a. Monoid a => a
    with mempty @[a]
    (imported from 'Prelude' at mpt.hs:1:8-10
     (and originally defined in 'GHC.Base'))

```

Notice the two different types reported for the two different occurrences of `_x`.

- No language extension is required to use typed holes. The lexeme `"_"` was previously illegal in Haskell, but now has a more informative error message. The lexeme `"_x"` is a perfectly legal variable, and its behaviour is unchanged when it is in scope. For example

```
f _x = _x + 1
```

does not elicit any errors. Only a variable *that is not in scope* (whether or not it starts with an underscore) is treated as an error (which it always was), albeit now with a more informative error message.

- Unbound data constructors used in expressions behave exactly as above. However, unbound data constructors used in *patterns* cannot be deferred, and instead bring compilation to a halt. (In implementation terms, they are reported by the renamer rather than the type checker.)
- The list of valid hole fits is found by checking which bindings in scope would fit into the hole. As an example, compiling the following module with GHC:

```

import Data.List (inits)

g :: [String]
g = _ "hello, world"

```

yields the errors:

```

• Found hole: _ :: [Char] -> [String]
• In the expression: _
  In the expression: _ "hello, world"
  In an equation for 'g': g = _ "hello, world"
• Relevant bindings include g :: [String] (bound at mpt.hs:6:1)
Valid hole fits include
  lines :: String -> [String]
    (imported from 'Prelude' at mpt.hs:3:8-9
     (and originally defined in 'base-4.11.0.0:Data.OldList'))
  words :: String -> [String]
    (imported from 'Prelude' at mpt.hs:3:8-9
     (and originally defined in 'base-4.11.0.0:Data.OldList'))
  inits :: forall a. [a] -> [[a]]
    with inits @Char
    (imported from 'Data.List' at mpt.hs:4:19-23
     (and originally defined in 'base-4.11.0.0:Data.OldList'))
  repeat :: forall a. a -> [a]

```

(continues on next page)



(continued from previous page)

```

with repeat @String
  (imported from 'Prelude' at mpt.hs:3:8-9
   (and originally defined in 'GHC.List'))
fail :: forall (m :: * -> *). Monad m => forall a. String -> m a
with fail @[] @String
  (imported from 'Prelude' at mpt.hs:3:8-9
   (and originally defined in 'GHC.Base'))
return :: forall (m :: * -> *). Monad m => forall a. a -> m a
with return @[] @String
  (imported from 'Prelude' at mpt.hs:3:8-9
   (and originally defined in 'GHC.Base'))
pure :: forall (f :: * -> *). Applicative f => forall a. a -> f a
with pure @[] @String
  (imported from 'Prelude' at mpt.hs:3:8-9
   (and originally defined in 'GHC.Base'))
read :: forall a. Read a => String -> a
with read @[String]
  (imported from 'Prelude' at mpt.hs:3:8-9
   (and originally defined in 'Text.Read'))
mempty :: forall a. Monoid a => a
with mempty @([Char] -> [String])
  (imported from 'Prelude' at mpt.hs:3:8-9
   (and originally defined in 'GHC.Base'))

```

There are a few flags for controlling the amount of context information shown for typed holes:

### **-fshow-hole-constraints**

When reporting typed holes, also print constraints that are in scope. Example:

```

f :: Eq a => a -> Bool
f x = _

```

results in the following message:

```

show_constraints.hs:4:7: error:
• Found hole: _ :: Bool
• In the expression: _
  In an equation for 'f': f x = _
• Relevant bindings include
  x :: a (bound at show_constraints.hs:4:3)
  f :: a -> Bool (bound at show_constraints.hs:4:1)
Constraints include Eq a (from show_constraints.hs:3:1-22)
Valid hole fits include
  otherwise :: Bool
  False :: Bool
  True :: Bool
  maxBound :: forall a. Bounded a => a
    with maxBound @Bool
  minBound :: forall a. Bounded a => a
    with minBound @Bool

```

### 6.2.18.1 Valid Hole Fits

GHC sometimes suggests valid hole fits for typed holes, which is configurable by a few flags.

#### **-fno-show-valid-hole-fits**

**Default**  
off

This flag can be toggled to turn off the display of valid hole fits entirely.

#### **-fmax-valid-hole-fits=<n>**

**Default**  
6

The list of valid hole fits is limited by displaying up to 6 hole fits per hole. The number of hole fits shown can be set by this flag. Turning the limit off with *-fno-max-valid-hole-fits* (page ??) displays all found hole fits.

#### **-fshow-type-of-hole-fits**

**Default**  
on

By default, the hole fits show the type of the hole fit. This can be turned off by the reverse of this flag.

#### **-fshow-type-app-of-hole-fits**

**Default**  
on

By default, the hole fits show the type application needed to make this hole fit fit the type of the hole, e.g. for the hole (`_ :: Int -> [Int]`), `mempty` is a hole fit with `mempty @(Int -> [Int])`. This can be toggled off with the reverse of this flag.

#### **-fshow-docs-of-hole-fits**

**Default**  
off

It can sometime be the case that the name and type of a valid hole fit is not enough to realize what the fit stands for. This flag adds the documentation of the fit to the message, if the documentation is available (and the module from which the function comes was compiled with the *-haddock* flag).

#### **-fshow-type-app-vars-of-hole-fits**

**Default**  
on

By default, the hole fits show the type application needed to make this hole fit fit the type of the hole, e.g. for the hole (`_ :: Int -> [Int]`), `mempty :: Monoid a => a` is a hole fit with `mempty @(Int -> [Int])`. This flag toggles whether to show `a ~ (Int -> [Int])` instead of `mempty @(Int -> [Int])` in the where clause of the valid hole fit message.

**-fshow-provenance-of-hole-fits****Default**

on

By default, each hole fit shows the provenance information of its hole fit, i.e. where it was bound or defined, and what module it was originally defined in if it was imported. This can be toggled off using the reverse of this flag.

**-funclutter-valid-hole-fits****Default**

off

This flag can be toggled to decrease the verbosity of the valid hole fit suggestions by not showing the provenance nor type application of the suggestions.

**Refinement Hole Fits**

When the flag *-frefinement-level-hole-fits=(n)* (page 354) is set to an *n* larger than 0, GHC will offer up a list of valid refinement hole fits, which are valid hole fits that need up to *n* levels of additional refinement to be complete, where each level represents an additional hole in the hole fit that requires filling in. As an example, consider the hole in

```
f :: [Integer] -> Integer
f = _
```

When the refinement level is not set, it will only offer valid hole fits suggestions:

```
Valid hole fits include
f :: [Integer] -> Integer
head :: forall a. [a] -> a
  with head @Integer
last :: forall a. [a] -> a
  with last @Integer
maximum :: forall (t :: * -> *).
  Foldable t =>
    forall a. Ord a => t a -> a
  with maximum @[] @Integer
minimum :: forall (t :: * -> *).
  Foldable t =>
    forall a. Ord a => t a -> a
  with minimum @[] @Integer
product :: forall (t :: * -> *).
  Foldable t =>
    forall a. Num a => t a -> a
  with product @[] @Integer
sum :: forall (t :: * -> *).
  Foldable t =>
    forall a. Num a => t a -> a
  with sum @[] @Integer
```

However, with *-frefinement-level-hole-fits=(n)* (page 354) set to e.g. 1, it will additionally offer up a list of refinement hole fits, in this case:

```
Valid refinement hole fits include
foldl1 (_ :: Integer -> Integer -> Integer)
  with foldl1 @[] @Integer
  where foldl1 :: forall (t :: * -> *).
    Foldable t =>
      forall a. (a -> a -> a) -> t a -> a
foldr1 (_ :: Integer -> Integer -> Integer)
  with foldr1 @[] @Integer
  where foldr1 :: forall (t :: * -> *).
    Foldable t =>
      forall a. (a -> a -> a) -> t a -> a
const (_ :: Integer)
  with const @Integer @[Integer]
  where const :: forall a b. a -> b -> a
($) (_ :: [Integer] -> Integer)
  with ($) @GHC.Types.LiftedRep @[Integer] @Integer
  where ($) :: forall a b. (a -> b) -> a -> b
fail (_ :: String)
  with fail @((->) [Integer]) @Integer
  where fail :: forall (m :: * -> *).
    Monad m =>
      forall a. String -> m a
return (_ :: Integer)
  with return @((->) [Integer]) @Integer
  where return :: forall (m :: * -> *). Monad m => forall a. a -> m a
(Some refinement hole fits suppressed;
 use -fmax-refinement-hole-fits=N or -fno-max-refinement-hole-fits)
```

Which shows that the hole could be replaced with e.g. `foldl1 _`. While not fixing the hole, this can help users understand what options they have.

**-frefinement-level-hole-fits={n}**

**Default**  
off

The list of valid refinement hole fits is generated by considering hole fits with a varying amount of additional holes. The amount of holes in a refinement can be set by this flag. If the flag is set to 0 or not set at all, no valid refinement hole fits will be suggested.

**-fabstract-refinement-hole-fits**

**Default**  
off

Valid list of valid refinement hole fits can often grow large when the refinement level is  $\geq 2$ , with holes like `head _ _` or `fst _ _`, which are valid refinements, but which are unlikely to be relevant since one or more of the holes are still completely open, in that neither the type nor kind of those holes are constrained by the proposed identifier at all. By default, such holes are not reported. By turning this flag on, such holes are included in the list of valid refinement hole fits.

**-fmax-refinement-hole-fits={n}**

**Default**  
6

The list of valid refinement hole fits is limited by displaying up to 6 hole fits per hole. The number of hole fits shown can be set by this flag. Turning the limit off with *-fno-max-refinement-hole-fits* (page ??) displays all found hole fits.

#### **-fshow-hole-matches-of-hole-fits**

##### **Default**

on

The types of the additional holes in refinement hole fits are displayed in the output, e.g. `foldl1 (_ :: a -> a -> a)` is a refinement for the hole `_ :: [a] -> a`. If this flag is toggled off, the output will display only `foldl1 _`, which can be used as a direct replacement for the hole, without requiring `-XScopedTypeVariables`.

### **Sorting Valid Hole Fits**

There are currently two ways to sort valid hole fits. Sorting can be toggled with *-fsort-valid-hole-fits* (page ??)

#### **-fno-sort-valid-hole-fits**

##### **Default**

off

By default the valid hole fits are sorted to show the most relevant hole fits at the top of the list of valid hole fits. This can be toggled off with this flag.

#### **-fsort-by-size-hole-fits**

##### **Default**

on

Sorts by how big the types the quantified type variables in the type of the function would have to be in order to match the type of the hole.

#### **-fsort-by-subsumption-hole-fits**

##### **Default**

off

An alternative sort. Sorts by checking which hole fits subsume other hole fits, such that if hole fit a could be used as hole fits for hole fit b, then b appears before a in the output. It is more precise than the default sort, but also a lot slower, since a subsumption check has to be run for each pair of valid hole fits.

## **6.2.19 Arrow notation**

### **Arrows**

#### **Since**

6.8.1

Enable arrow notation.

Arrows are a generalisation of monads introduced by John Hughes. For more details, see

- “Generalising Monads to Arrows”, John Hughes, in *Science of Computer Programming* 37, pp. 67–111, May 2000. The paper that introduced arrows: a friendly introduction, motivated with programming examples.

- “[A New Notation for Arrows](#)”, Ross Paterson, in ICFP, Sep 2001. Introduced the notation described here.
- “[Arrows and Computation](#)”, Ross Paterson, in The Fun of Programming, Palgrave, 2003.
- “[Programming with Arrows](#)”, John Hughes, in 5th International Summer School on Advanced Functional Programming, Lecture Notes in Computer Science vol. 3622, Springer, 2004. This paper includes another introduction to the notation, with practical examples.
- “[Type and Translation Rules for Arrow Notation in GHC](#)”, Ross Paterson and Simon Peyton Jones, September 16, 2004. A terse enumeration of the formal rules used (extracted from comments in the source code).
- The arrows web page at <https://www.haskell.org/arrows/> <<https://www.haskell.org/arrows/>>`\_\_.

With the [Arrows](#) (page 355) extension, GHC supports the arrow notation described in the second of these papers, translating it using combinators from the [Control.Arrow](#) module. What follows is a brief introduction to the notation; it won't make much sense unless you've read Hughes's paper.

The extension adds a new kind of expression for defining arrows:

```
exp10 ::= ...
      |  proc apat -> cmd
```

where `proc` is a new keyword. The variables of the pattern are bound in the body of the `proc`-expression, which is a new sort of thing called a command. The syntax of commands is as follows:

```
cmd    ::= exp10 -< exp
      |  exp10 -<< exp
      |  cmd0
```

with  $\langle \text{cmd} \rangle^0$  up to  $\langle \text{cmd} \rangle^9$  defined using infix operators as for expressions, and

```
cmd10 ::= \ apat ... apat -> cmd
      |  let decls in cmd
      |  if exp then cmd else cmd
      |  case exp of { calts }
      |  do { cstmt ; ... cstmt ; cmd }
      |  fcmd

fcmd   ::= fcmd aexp
      |  ( cmd )
      |  (| aexp cmd ... cmd |)

cstmt  ::= let decls
      |  pat <- cmd
      |  rec { cstmt ; ... cstmt [;] }
      |  cmd
```

where  $\langle \text{calts} \rangle$  are like  $\langle \text{alts} \rangle$  except that the bodies are commands instead of expressions.

Commands produce values, but (like monadic computations) may yield more than one value, or none, and may do other things as well. For the most part, familiarity with monadic notation is a good guide to using commands. However the values of expressions, even monadic ones,

are determined by the values of the variables they contain; this is not necessarily the case for commands.

A simple example of the new notation is the expression

```
proc x -> f -< x+1
```

We call this a procedure or arrow abstraction. As with a lambda expression, the variable `x` is a new variable bound within the `proc`-expression. It refers to the input to the arrow. In the above example, `-<` is not an identifier but a new reserved symbol used for building commands from an expression of arrow type and an expression to be fed as input to that arrow. (The weird look will make more sense later.) It may be read as analogue of application for arrows. The above example is equivalent to the Haskell expression

```
arr (\ x -> x+1) >>> f
```

That would make no sense if the expression to the left of `-<` involves the bound variable `x`. More generally, the expression to the left of `-<` may not involve any local variable, i.e. a variable bound in the current arrow abstraction. For such a situation there is a variant `-<<`, as in

```
proc x -> f x -<< x+1
```

which is equivalent to

```
arr (\ x -> (f x, x+1)) >>> app
```

so in this case the arrow must belong to the `ArrowApply` class. Such an arrow is equivalent to a monad, so if you're using this form you may find a monadic formulation more convenient.

### 6.2.19.1 do-notation for commands

Another form of command is a form of `do`-notation. For example, you can write

```
proc x -> do
  y <- f -< x+1
  g -< 2*y
  let z = x+y
  t <- h -< x*z
  returnA -< t+z
```

You can read this much like ordinary `do`-notation, but with commands in place of monadic expressions. The first line sends the value of `x+1` as an input to the arrow `f`, and matches its output against `y`. In the next line, the output is discarded. The arrow `returnA` is defined in the `Control.Arrow` module as `arr id`. The above example is treated as an abbreviation for

```
arr (\ x -> (x, x)) >>>
  first (arr (\ x -> x+1) >>> f) >>>
  arr (\ (y, x) -> (y, (x, y))) >>>
  first (arr (\ y -> 2*y) >>> g) >>>
  arr snd >>>
  arr (\ (x, y) -> let z = x+y in ((x, z), z)) >>>
  first (arr (\ (x, z) -> x*z) >>> h) >>>
  arr (\ (t, z) -> t+z) >>>
  returnA
```

Note that variables not used later in the composition are projected out. After simplification using rewrite rules (see [Rewrite rules](#) (page 645)) defined in the `Control.Arrow` module, this reduces to

```
arr (\ x -> (x+1, x)) >>>
  first f >>>
  arr (\ (y, x) -> (2*y, (x, y))) >>>
  first g >>>
  arr (\ (_, (x, y)) -> let z = x+y in (x*z, z)) >>>
  first h >>>
  arr (\ (t, z) -> t+z)
```

which is what you might have written by hand. With arrow notation, GHC keeps track of all those tuples of variables for you.

Note that although the above translation suggests that let-bound variables like `z` must be monomorphic, the actual translation produces Core, so polymorphic variables are allowed.

It's also possible to have mutually recursive bindings, using the new `rec` keyword, as in the following example:

```
counter :: ArrowCircuit a => a Bool Int
counter = proc reset -> do
  rec      output <- returnA -< if reset then 0 else next
          next <- delay 0 -< output+1
  returnA -< output
```

The translation of such forms uses the `loop` combinator, so the arrow concerned must belong to the `ArrowLoop` class.

### 6.2.19.2 Conditional commands

In the previous example, we used a conditional expression to construct the input for an arrow. Sometimes we want to conditionally execute different commands, as in

```
proc (x,y) ->
  if f x y
  then g -< x+1
  else h -< y+2
```

which is translated to

```
arr (\ (x,y) -> if f x y then Left x else Right y) >>>
  (arr (\x -> x+1) >>> g) ||| (arr (\y -> y+2) >>> h)
```

Since the translation uses `|||`, the arrow concerned must belong to the `ArrowChoice` class.

There are also case commands, like

```
case input of
  [] -> f -< ()
  [x] -> g -< x+1
  x1:x2:xs -> do
    y <- h -< (x1, x2)
```

(continues on next page)



(continued from previous page)

```
ys <- k -< xs
returnA -< y:ys
```

The syntax is the same as for case expressions, except that the bodies of the alternatives are commands rather than expressions. The translation is similar to that of `if` commands.

### 6.2.19.3 Defining your own control structures

As we've seen, arrow notation provides constructs, modelled on those for expressions, for sequencing, value recursion and conditionals. But suitable combinators, which you can define in ordinary Haskell, may also be used to build new commands out of existing ones. The basic idea is that a command defines an arrow from environments to values. These environments assign values to the free local variables of the command. Thus combinators that produce arrows from arrows may also be used to build commands from commands. For example, the `ArrowPlus` class includes a combinator

```
ArrowPlus a => (<+>) :: a b c -> a b c -> a b c
```

so we can use it to build commands:

```
expr' = proc x -> do
    returnA -< x
    <+> do
        symbol Plus -< ()
        y <- term -< ()
        expr' -< x + y
    <+> do
        symbol Minus -< ()
        y <- term -< ()
        expr' -< x - y
```

(The `do` on the first line is needed to prevent the first `<+>` ... from being interpreted as part of the expression on the previous line.) This is equivalent to

```
expr' = (proc x -> returnA -< x)
    <+> (proc x -> do
        symbol Plus -< ()
        y <- term -< ()
        expr' -< x + y)
    <+> (proc x -> do
        symbol Minus -< ()
        y <- term -< ()
        expr' -< x - y)
```

We are actually using `<+>` here with the more specific type

```
ArrowPlus a => (<+>) :: a (e,()) c -> a (e,()) c -> a (e,()) c
```

It is essential that this operator be polymorphic in `e` (representing the environment input to the command and thence to its subcommands) and satisfy the corresponding naturality property

```
arr (first k) >>> (f <+> g) = (arr (first k) >>> f) <+> (arr (first k) >>> g)
```

at least for strict `k`. (This should be automatic if you're not using `seq`.) This ensures that environments seen by the subcommands are environments of the whole command, and also allows the translation to safely trim these environments. (The second component of the input pairs can contain unnamed input values, as described in the next section.) The operator must also not use any variable defined within the current arrow abstraction.

We could define our own operator

```
untilA :: ArrowChoice a => a (e,s) () -> a (e,s) Bool -> a (e,s) ()
untilA body cond = proc x -> do
  b <- cond -< x
  if b then returnA -< ()
  else do
    body -< x
    untilA body cond -< x
```

and use it in the same way. Of course this infix syntax only makes sense for binary operators; there is also a more general syntax involving special brackets:

```
proc x -> do
  y <- f -< x+1
  (|untilA (increment -< x+y) (within 0.5 -< x)|)
```

#### 6.2.19.4 Primitive constructs

Some operators will need to pass additional inputs to their subcommands. For example, in an arrow type supporting exceptions, the operator that attaches an exception handler will wish to pass the exception that occurred to the handler. Such an operator might have a type

```
handleA :: ... => a (e,s) c -> a (e,(Ex,s)) c -> a (e,s) c
```

where `Ex` is the type of exceptions handled. You could then use this with arrow notation by writing a command

```
body `handleA` \ ex -> handler
```

so that if an exception is raised in the command `body`, the variable `ex` is bound to the value of the exception and the command `handler`, which typically refers to `ex`, is entered. Though the syntax here looks like a functional lambda, we are talking about commands, and something different is going on. The input to the arrow represented by a command consists of values for the free local variables in the command, plus a stack of anonymous values. In all the prior examples, we made no assumptions about this stack. In the second argument to `handleA`, the value of the exception has been added to the stack input to the handler. The command form of lambda merely gives this value a name.

More concretely, the input to a command consists of a pair of an environment and a stack. Each value on the stack is paired with the remainder of the stack, with an empty stack being `()`. So operators like `handleA` that pass extra inputs to their subcommands can be designed for use with the notation by placing the values on the stack paired with the environment in this way. More precisely, the type of each argument of the operator (and its result) should have the form

```
a (e, (t1, ... (tn, ()))...) t
```

where  $\langle e \rangle$  is a polymorphic variable (representing the environment) and  $\langle ti \rangle$  are the types of the values on the stack, with  $\langle t1 \rangle$  being the “top”. The polymorphic variable  $\langle e \rangle$  must not occur in  $\langle a \rangle$ ,  $\langle ti \rangle$  or  $\langle t \rangle$ . However the arrows involved need not be the same. Here are some more examples of suitable operators:

```
bracketA :: ... => a (e,s) b -> a (e,(b,s)) c -> a (e,(c,s)) d -> a (e,s) d
runReader :: ... => a (e,s) c -> a' (e,(State,s)) c
runState :: ... => a (e,s) c -> a' (e,(State,s)) (c,State)
```

We can supply the extra input required by commands built with the last two by applying them to ordinary expressions, as in

```
proc x -> do
  s <- ...
  (|runReader (do { ... })|) s
```

which adds  $s$  to the stack of inputs to the command built using `runReader`.

The command versions of lambda abstraction and application are analogous to the expression versions. In particular, the beta and eta rules describe equivalences of commands. These three features (operators, lambda abstraction and application) are the core of the notation; everything else can be built using them, though the results would be somewhat clumsy. For example, we could simulate `do`-notation by defining

```
bind :: Arrow a => a (e,s) b -> a (e,(b,s)) c -> a (e,s) c
u `bind` f = returnA &&& u >>> f

bind_ :: Arrow a => a (e,s) b -> a (e,s) c -> a (e,s) c
u `bind_` f = u `bind` (arr fst >>> f)
```

We could simulate `if` by defining

```
cond :: ArrowChoice a => a (e,s) b -> a (e,s) b -> a (e,(Bool,s)) b
cond f g = arr (\ (e,(b,s)) -> if b then Left (e,s) else Right (e,s)) >>> f
  ↳ ||| g
```

### 6.2.19.5 Differences with the paper

- Instead of a single form of arrow application (arrow tail) with two translations, the implementation provides two forms `-<` (first-order) and `-<<` (higher-order).
- User-defined operators are flagged with banana brackets instead of a new `form` keyword.
- In the paper and the previous implementation, values on the stack were paired to the right of the environment in a single argument, but now the environment and stack are separate arguments.

### 6.2.19.6 Portability

Although only GHC implements arrow notation directly, there is also a preprocessor (available from the [arrows web page](#)) that translates arrow notation into Haskell 98 for use with other Haskell systems. You would still want to check arrow programs with GHC; tracing type errors in the preprocessor output is not easy. Modules intended for both GHC and the preprocessor must observe some additional restrictions:

- The module must import `Control.Arrow`.
- The preprocessor cannot cope with other Haskell extensions. These would have to go in separate modules.
- Because the preprocessor targets Haskell (rather than Core), `let`-bound variables are monomorphic.

## 6.2.20 Lexical negation

### LexicalNegation

Since  
9.0.1

Detect if the minus sign stands for negation during lexical analysis by checking for the surrounding whitespace.

In Haskell 2010, the minus sign stands for negation when it has no left-hand side. Consider `x = - 5` and `y = 2 - 5`. In `x`, there's no expression between the `=` and `-`, so the minus stands for negation, whereas in `y`, there's `2` to the left of the minus, therefore it stands for subtraction.

This leads to certain syntactic anomalies:

- `(% x)` is an operator section for any operator `(%)` except for `(-)`. `(- x)` is negated `x` rather than the right operator section of subtraction. Consequently, it is impossible to write such a section, and users are advised to write `(subtract x)` instead.
- Negative numbers must be parenthesized when they appear in function argument position. `f (-5)` is correct, whereas `f -5` is parsed as `(-) f 5`.

The latter issue is partly mitigated by [NegativeLiterals](#) (page 543). When it is enabled, `-5` is parsed as negative 5 regardless of context, so `f -5` works as expected. However, it only applies to literals, so `f -x` or `f -(a*2)` are still parsed as subtraction.

With [LexicalNegation](#) (page 362), both anomalies are resolved:

- `(% x)` is an operator section for any operator `(%)`, no exceptions, as long as there's whitespace between `%` and `x`.
- In `f -x`, the `-x` is parsed as the negation of `x` for any syntactically atomic expression `x` (variable, literal, or parenthesized expression).
- The prefix `-` binds tighter than any infix operator. `-a % b` is parsed as `(-a) % b` regardless of the fixity of `%`.

This means that `(- x)` is the right operator section of subtraction, whereas `(-x)` is the negation of `x`. Note that these expressions will often have different types (`(- x)` might have type `Int -> Int` while `(-x)` will have type `Int`), and so users mistaking one for the other will likely get a compile error.

Under [LexicalNegation](#) (page 362), negated literals are desugared without `negate`. That is, `-123` stands for `fromInteger (-123)` rather than `negate (fromInteger 123)`. This makes [LexicalNegation](#) (page 362) a valid replacement for [NegativeLiterals](#) (page 543).

## 6.3 Import and export

### 6.3.1 Hiding things the imported module doesn't export

Technically in Haskell 2010 this is illegal:

```
module A( f ) where
  f = True

module B where
  import A hiding( g )  -- A does not export g
  g = f
```

The `import A hiding( g )` in module B is technically an error ([Haskell Report, 5.3.1](#)) because A does not export `g`. However GHC allows it, in the interests of supporting backward compatibility; for example, a newer version of A might export `g`, and you want B to work in either case.

The warning [-Wdodgy-imports](#) (page 104), which is off by default but included with [-W](#) (page 97), warns if you hide something that the imported module does not export.

### 6.3.2 Package-qualified imports

#### PackageImports

Since  
6.10.1

Allow the use of package-qualified import syntax.

With the [PackageImports](#) (page 363) extension, GHC allows import declarations to be qualified by the package name that the module is intended to be imported from. For example:

```
import "network" Network.Socket
```

would import the module `Network.Socket` from the package `network` (any version). This may be used to disambiguate an import when the same module is available from multiple packages, or is present in both the current package being built and an external package.

The special package name `this` can be used to refer to the current package being built.

---

**Note:** You probably don't need to use this feature, it was added mainly so that we can build backwards-compatible versions of packages when APIs change. It can lead to fragile dependencies in the common case: modules occasionally move from one package to another, rendering any package-qualified imports broken. See also [Thinning and renaming modules](#) (page 264) for an alternative way of disambiguating between module names.

---

### 6.3.3 Safe imports

With the *Safe* (page 642), *Trustworthy* (page 643) and *Unsafe* (page 643) language flags, GHC extends the import declaration syntax to take an optional `safe` keyword after the `import` keyword. This feature is part of the Safe Haskell GHC extension. For example:

```
import safe qualified Network.Socket as NS
```

would import the module `Network.Socket` with compilation only succeeding if `Network.Socket` can be safely imported. For a description of when a import is considered safe see *Safe Haskell* (page 633).

### 6.3.4 Explicit namespaces in import/export

#### ExplicitNamespaces

##### Implied by

*TypeOperators* (page 368), *TypeFamilies* (page 384)

##### Since

7.6.1

##### Status

Included in *GHC2024* (page 314)

Enable use of explicit namespaces in module export lists, patterns, and expressions.

In an import or export list, such as

```
module M( f, (++) ) where ...
  import N( f, (++) )
  ...
```

the entities `f` and `(++)` are *values*. However, with type operators (*Type operators* (page 368)) it becomes possible to declare `(++)` as a *type constructor*. In that case, how would you export or import it?

The *ExplicitNamespaces* (page 364) extension allows you to prefix the name of a type constructor in an import or export list with “`type`” to disambiguate this case, thus:

```
module M( f, type (++) ) where ...
  import N( f, type (++) )
  ...
module N( f, type (++) ) where
  data family a ++ b = L a | R b
```

It is also possible to use the type namespace specifier in subordinate import and export lists:

```
module N (C(type (#))) where
  class C a b where
    type a # b
    (#) :: a -> b -> (a # b)
module M where
  import N as T (C(type (#)))
  import N as D (C((#)))
```

(continues on next page)

(continued from previous page)

```
-- (T.#) is the associated type
-- (D.#) is the class method
```

The extension *ExplicitNamespaces* (page 364) is implied by *TypeOperators* (page 368) and (for some reason) by *TypeFamilies* (page 384).

In addition, with *PatternSynonyms* (page 513) you can prefix the name of a data constructor in an import or export list with the keyword `pattern`, to allow the import or export of a data constructor without its parent type constructor (see *Import and export of pattern synonyms* (page 517)).

Furthermore, *ExplicitNamespaces* (page 364) permits the use of the `type` keyword in patterns and expressions:

```
f (type t) x = ...      -- in a pattern
r = f (type Integer) 10 -- in an expression
```

This is used in conjunction with *RequiredTypeArguments* (page 444).

When *ExplicitNamespaces* (page 364) is enabled, it is possible to use the `type` and `data` keywords to specify the namespace of the name used in a fixity signature or a `WARNING/DEPRECATED` pragma. This can be useful for disambiguating between names in different namespaces that may conflict with each other.

Here is an example of using namespace specifiers to set different fixities for type-level and term-level operators:

```
type f $ a = f a
f $ a = f a

infixl 9 type $ -- type-level $ is left-associative with priority 9
infixr 0 data $ -- term-level $ is right-associative with priority 0
```

Similarly, it can be used in pragmas to deprecate only one name in a namespace:

```
data Solo = MkSolo

pattern Solo = MkSolo
{-# DEPRECATED data Solo "Use `MkSolo` instead" #-}

type family Head xs where
  Head (x : _) = x

pattern Head x <- (head -> x)

{-# WARNING in "x-partial" data Head "this is a partial type synonym" #-}
```

It is considered bad practice to use a fixity signature, `WARNING` pragma, or `DEPRECATED` pragma for a type-level name without an explicit type namespace, and doing so will become an error in a future version of GHC.

### 6.3.5 Writing qualified in postpositive position

#### ImportQualifiedPost

**Since**  
8.10.1

**Status**  
Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

ImportQualifiedPost allows the syntax `import M qualified`, that is, to annotate a module as qualified by writing `qualified` after the module name.

To import a qualified module usually you must specify `qualified` in prepositive position : `import qualified M`. This often leads to a “hanging indent” (which is automatically inserted by some autoformatters and common in many code bases. For example:

```
import qualified A
import          B
import          C
```

The ImportQualifiedPost extension allows `qualified` to appear in postpositive position : `import M qualified`. With this extension enabled, one can write:

```
import A qualified
import B
import C
```

It is an error if `qualified` appears in both pre and postpositive positions.

The warning `-Wprepositive-qualified-module` (page 99) (off by default) reports on any occurrences of imports annotated `qualified` using prepositive syntax.

## 6.4 Types

### 6.4.1 Data types with no constructors

#### EmptyDataDecls

**Since**  
6.8.1

**Status**  
Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314) and [Haskell2010](#) (page 315)

Allow definition of empty data types.

With the [EmptyDataDecls](#) (page 366) extension, GHC lets you declare a data type with no constructors.

You only need to enable this extension if the language you're using is Haskell 98, in which a data type must have at least one constructor. Haskell 2010 relaxed this rule to allow data types with no constructors, and thus [EmptyDataDecls](#) (page 366) is enabled by default when the language is Haskell 2010.

For example:



```
data S      -- S :: Type
data T a    -- T :: Type -> Type
```

Syntactically, the declaration lacks the “= constrs” part. The type can be parameterised over types of any kind, but if the kind is not `Type` then an explicit kind annotation must be used (see [Explicitly-kinded quantification](#) (page 564)).

Such data types have only one value, namely bottom. Nevertheless, they can be useful when defining “phantom types”.

In conjunction with the [EmptyDataDeriving](#) (page 486) extension, empty data declarations can also derive instances of standard type classes (see [Deriving instances for empty data types](#) (page 486)).

## 6.4.2 Data type contexts

### DatatypeContexts

#### Since

7.0.1

#### Status

Deprecated, Included in [Haskell98](#) (page 316), [Haskell2010](#) (page 315)

Allow contexts on data types.

Haskell allows datatypes to be given contexts, e.g.

```
data Eq a => Set a = NilSet | ConsSet a (Set a)
```

give constructors with types:

```
NilSet :: Set a
ConsSet :: Eq a => a -> Set a -> Set a
```

This is widely considered a misfeature, and is going to be removed from the language. In GHC, it is controlled by the deprecated extension `DatatypeContexts`.

## 6.4.3 Infix type constructors, classes, and type variables

GHC allows type constructors, classes, and type variables to be operators, and to be written infix, very much like expressions. More specifically:

- A type constructor or class can be any non-reserved operator. Symbols used in types are always like capitalized identifiers; they are never variables. Note that this is different from the lexical syntax of data constructors, which are required to begin with a `:`.
- Data type and type-synonym declarations can be written infix, parenthesised if you want further arguments. E.g.

```
data a :*: b = Foo a b
type a :+: b = Either a b
class a :=: b where ...

data (a :**: b) x = Baz a b x
type (a :++: b) y = Either (a,b) y
```

- Types, and class constraints, can be written infix. For example

```
x :: Int :+: Bool
f :: (a == b) => a -> b
```

- Back-quotes work as for expressions, both for type constructors and type variables; e.g. `Int `Either` Bool`, or `Int `a` Bool`. Similarly, parentheses work the same; e.g. `(:::)` `Int Bool`.
- Fixities may be declared for type constructors, or classes, just as for data constructors. However, one cannot distinguish between the two in a fixity declaration; a fixity declaration sets the fixity for a data constructor and the corresponding type constructor. For example:

```
infixl 7 T, :+:
```

sets the fixity for both type constructor `T` and data constructor `T`, and similarly for `+::`.

- The function arrow `->` is `infixr` with fixity `-1`.

## 6.4.4 Type operators

### TypeOperators

#### Implies

[ExplicitNamespaces](#) (page 364)

#### Since

6.8.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow the use and definition of types with operator names.

The language [TypeOperators](#) (page 368) allows you to use infix operators in types.

- Operator symbols are *constructors* rather than *type variables* (as they are in terms).
- Operator symbols in types can be written infix, both in definitions and uses. For example:

```
data a + b = Plus a b
type Foo = Int + Bool
```

- Alphanumeric type constructors can now be written infix, using backquote syntax:

```
x :: Int `Either` Bool
x = Left 5
```

- There is now some potential ambiguity in import and export lists; for example if you write `import M( (+) )` do you mean the *function* `(+)` or the *type constructor* `(+)`? The default is the former, but with [ExplicitNamespaces](#) (page 364) (which is implied by [TypeOperators](#) (page 368)) GHC allows you to specify the latter by preceding it with the keyword `type`, thus:

```
import M( type (+) )
```

See [Explicit namespaces in import/export](#) (page 364).

- The fixity of a type operator may be set using the usual fixity declarations but, as in *Infix type constructors, classes, and type variables* (page 367), the function and type constructor share a single fixity.
- There is now potential ambiguity in the traditional syntax for data constructor declarations. For example:

```
type a :+: b = Either a b
data X = Int :+: Bool :+: Char
```

This code wants to declare both a type-level `:+:` and a term-level `:+:` (which is, generally, allowed). But we cannot tell how to parenthesize the data constructor declaration in `X`: either way makes sense. We might imagine that a fixity declaration could help us, but it is awkward to apply the fixity declaration to the very definition of a new data constructor. Instead of declaring delicate rules around this issue, GHC simply rejects if the top level of a traditional-syntax data constructor declaration uses two operators without parenthesizing.

## 6.4.5 Liberalised type synonyms

### LiberalTypeSynonyms

#### Implies

*ExplicitForAll* (page 560)

#### Since

6.8.1

Relax many of the Haskell 98 rules on type synonym definitions.

Type synonyms are like macros at the type level, but Haskell 98 imposes many rules on individual synonym declarations. With the *LiberalTypeSynonyms* (page 369) extension, GHC does validity checking on types *only after expanding type synonyms*. That means that GHC can be very much more liberal about type synonyms than Haskell 98.

- You can apply a type synonym to a forall type:

```
type Foo a = a -> a -> Bool

f :: Foo (forall b. b->b)
```

After expanding the synonym, `f` has the legal (in GHC) type:

```
f :: (forall b. b->b) -> (forall b. b->b) -> Bool
```

- You can apply a type synonym to a partially applied type synonym:

```
type Generic i o = forall x. i x -> o x
type Id x = x

foo :: Generic Id []
```

After expanding the synonym, `foo` has the legal (in GHC) type:

```
foo :: forall x. x -> [x]
```

GHC does kind checking before expanding synonyms.

After expanding type synonyms, GHC does validity checking on types, looking for the following malformedness which isn't detected simply by kind checking:

- Type constructor applied to a type involving for-alls (if *ImpredicativeTypes* (page 457) is off)
- Partially-applied type synonym.

So, for example, this will be rejected:

```
type Pr = forall a. a

h :: [Pr]
h = ...
```

because GHC does not allow type constructors applied to for-all types.

## 6.4.6 Existentially quantified data constructors

### ExistentialQuantification

#### Implies

*ExplicitForAll* (page 560)

#### Since

6.8.1

#### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow existentially quantified type variables in types.

The idea of using existential quantification in data type declarations was suggested by Perry, and implemented in Hope+ (Nigel Perry, *The Implementation of Practical Functional Programming Languages*, PhD Thesis, University of London, 1991). It was later formalised by Laufer and Odersky (*Polymorphic type inference and abstract data types*, TOPLAS, 16(5), pp. 1411-1430, 1994). It's been in Lennart Augustsson's hbc Haskell compiler for several years, and proved very useful. Here's the idea. Consider the declaration:

```
data Foo = forall a. MkFoo a (a -> Bool)
         | Nil
```

The data type Foo has two constructors with types:

```
MkFoo :: forall a. a -> (a -> Bool) -> Foo
Nil   :: Foo
```

Notice that the type variable a in the type of MkFoo does not appear in the data type itself, which is plain Foo. For example, the following expression is fine:

```
[MkFoo 3 even, MkFoo 'c' isUpper] :: [Foo]
```

Here, (MkFoo 3 even) packages an integer with a function even that maps an integer to Bool; and MkFoo 'c' isUpper packages a character with a compatible function. These two things are each of type Foo and can be put in a list.

What can we do with a value of type `Foo`? In particular, what happens when we pattern-match on `MkFoo`?

```
f (MkFoo val fn) = ???
```

Since all we know about `val` and `fn` is that they are compatible, the only (useful) thing we can do with them is to apply `fn` to `val` to get a boolean. For example:

```
f :: Foo -> Bool
f (MkFoo val fn) = fn val
```

What this allows us to do is to package heterogeneous values together with a bunch of functions that manipulate them, and then treat that collection of packages in a uniform manner. You can express quite a bit of object-oriented-like programming this way.

#### 6.4.6.1 Why existential?

What has this to do with *existential* quantification? Simply that `MkFoo` has the (nearly) isomorphic type

```
MkFoo :: (exists a . (a, a -> Bool)) -> Foo
```

But Haskell programmers can safely think of the ordinary *universally* quantified type given above, thereby avoiding adding a new existential quantification construct.

#### 6.4.6.2 Existentials and type classes

An easy extension is to allow arbitrary contexts before the constructor. For example:

```
data Baz = forall a. Eq a => Baz1 a a
         | forall b. Show b => Baz2 b (b -> b)
```

The two constructors have the types you'd expect:

```
Baz1 :: forall a. Eq a => a -> a -> Baz
Baz2 :: forall b. Show b => b -> (b -> b) -> Baz
```

But when pattern matching on `Baz1` the matched values can be compared for equality, and when pattern matching on `Baz2` the first matched value can be converted to a string (as well as applying the function to it). So this program is legal:

```
f :: Baz -> String
f (Baz1 p q) | p == q    = "Yes"
              | otherwise = "No"
f (Baz2 v fn)           = show (fn v)
```

Operationally, in a dictionary-passing implementation, the constructors `Baz1` and `Baz2` must store the dictionaries for `Eq` and `Show` respectively, and extract it on pattern matching.

### 6.4.6.3 Record Constructors

GHC allows existentials to be used with records syntax as well. For example:

```
data Counter a = forall self. NewCounter
  { _this    :: self
  , _inc     :: self -> self
  , _display :: self -> IO ()
  , tag      :: a
  }
```

Here `tag` is a public field, with a well-typed selector function `tag :: Counter a -> a`. See [Field selectors and TypeApplications](#) (page 471) for a full description of how the types of top-level field selectors are determined.

The `self` type is hidden from the outside; any attempt to apply `_this`, `_inc` or `_display` as functions will raise a compile-time error. In other words, *GHC defines a record selector function only for fields whose type does not mention the existentially-quantified variables*. (This example used an underscore in the fields for which record selectors will not be defined, but that is only programming style; GHC ignores them.)

To make use of these hidden fields, we need to create some helper functions:

```
inc :: Counter a -> Counter a
inc (NewCounter x i d t) = NewCounter
  { _this = i x, _inc = i, _display = d, tag = t }

display :: Counter a -> IO ()
display NewCounter{ _this = x, _display = d } = d x
```

Now we can define counters with different underlying implementations:

```
counterA :: Counter String
counterA = NewCounter
  { _this = 0, _inc = (1+), _display = print, tag = "A" }

counterB :: Counter String
counterB = NewCounter
  { _this = "", _inc = ('#':), _display = putStrLn, tag = "B" }

main = do
  display (inc counterA)      -- prints "1"
  display (inc (inc counterB)) -- prints "##"
```

Record update syntax is supported for existentials (and GADTs):

```
setTag :: Counter a -> a -> Counter a
setTag obj t = obj{ tag = t }
```

The rule for record update is this:

the types of the updated fields may mention only the universally-quantified type variables of the data constructor. For GADTs, the field may mention only types that appear as a simple type-variable argument in the constructor's result type.

For example:

```

data T a b where { T1 { f1::a, f2::b, f3::(b,c) } :: T a b } -- c is existential
upd1 t x = t { f1=x }    -- OK:   upd1 :: T a b -> a' -> T a' b
upd2 t x = t { f3=x }    -- BAD   (f3's type mentions c, which is
                           --      existentially quantified)

data G a b where { G1 { g1::a, g2::c } :: G a [c] }
upd3 g x = g { g1=x }    -- OK:   upd3 :: G a b -> c -> G c b
upd4 g x = g { g2=x }    -- BAD   (g2's type mentions c, which is not a simple
                           --      type-variable argument in G1's result type)

```

#### 6.4.6.4 Restrictions

There are several restrictions on the ways in which existentially-quantified constructors can be used.

- When pattern matching, each pattern match introduces a new, distinct, type for each existential type variable. These types cannot be unified with any other type, nor can they escape from the scope of the pattern match. For example, these fragments are incorrect:

```
f1 (MkFoo a f) = a
```

Here, the type bound by MkFoo “escapes”, because `a` is the result of `f1`. One way to see why this is wrong is to ask what type `f1` has:

```
f1 :: Foo -> a           -- Weird!
```

What is this “`a`” in the result type? Clearly we don’t mean this:

```
f1 :: forall a. Foo -> a  -- Wrong!
```

The original program is just plain wrong. Here’s another sort of error

```
f2 (Baz1 a b) (Baz1 p q) = a==q
```

It’s ok to say `a==b` or `p==q`, but `a==q` is wrong because it equates the two distinct types arising from the two `Baz1` constructors.

- You can’t pattern-match on an existentially quantified constructor in a `let` or `where` group of bindings. So this is illegal:

```
f3 x = a==b where { Baz1 a b = x }
```

Instead, use a case expression:

```
f3 x = case x of Baz1 a b -> a==b
```

In general, you can only pattern-match on an existentially-quantified constructor in a case expression or in the patterns of a function definition. The reason for this restriction is really an implementation one. Type-checking binding groups is already a nightmare without existentials complicating the picture. Also an existential pattern binding at the top level of a module doesn’t make sense, because it’s not clear how to prevent the existentially-quantified type “escaping”. So for now, there’s a simple-to-state restriction. We’ll see how annoying it is.

- You can't use existential quantification for newtype declarations. So this is illegal:

```
newtype T = forall a. Ord a => MkT a
```

Reason: a value of type T must be represented as a pair of a dictionary for Ord t and a value of type t. That contradicts the idea that newtype should have no concrete representation. You can get just the same efficiency and effect by using data instead of newtype. If there is no overloading involved, then there is more of a case for allowing an existentially-quantified newtype, because the data version does carry an implementation cost, but single-field existentially quantified constructors aren't much use. So the simple restriction (no existential stuff on newtype) stands, unless there are convincing reasons to change it.

- You can't use deriving to define instances of a data type with existentially quantified data constructors. Reason: in most cases it would not make sense. For example:

```
data T = forall a. MkT [a] deriving( Eq )
```

To derive Eq in the standard way we would need to have equality between the single component of two MkT constructors:

```
instance Eq T where  
  (MkT a) == (MkT b) = ???
```

But a and b have distinct types, and so can't be compared. It's just about possible to imagine examples in which the derived instance would make sense, but it seems altogether simpler simply to prohibit such declarations. Define your own instances!

## 6.4.7 Declaring data types with explicit constructor signatures

### GADTSyntax

#### Implied by

[GADTs](#) (page 380)

#### Since

7.2.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow the use of GADT syntax in data type definitions (but not GADTs themselves; for this see [GADTs](#) (page 380))

When the GADTSyntax extension is enabled, GHC allows you to declare an algebraic data type by giving the type signatures of constructors explicitly. For example:

```
data Maybe a where  
  Nothing :: Maybe a  
  Just    :: a -> Maybe a  
  
newtype Down a where  
  Down :: a -> Down a
```

The form is called a “GADT-style declaration” because Generalised Algebraic Data Types, described in [Generalised Algebraic Data Types \(GADTs\)](#) (page 380), can only be declared using this form.



Notice that GADT-style syntax generalises existential types (*Existentially quantified data constructors* (page 370)). For example, these two declarations are equivalent:

```
data Foo = forall a. MkFoo a (a -> Bool)
data Foo' where { MkFoo :: a -> (a->Bool) -> Foo' }
```

Any datatype (or newtype) that can be declared in standard Haskell 98 syntax, can also be declared using GADT-style syntax. The choice is largely stylistic, but GADT-style declarations differ in one important respect: they treat class constraints on the data constructors differently. Specifically, if the constructor is given a type-class context, that context is made available by pattern matching. For example:

```
data Set a where
  MkSet :: Eq a => [a] -> Set a

makeSet :: Eq a => [a] -> Set a
makeSet xs = MkSet (nub xs)

insert :: a -> Set a -> Set a
insert a (MkSet as) | a `elem` as = MkSet as
                  | otherwise   = MkSet (a:as)
```

A use of MkSet as a constructor (e.g. in the definition of makeSet) gives rise to a (Eq a) constraint, as you would expect. The new feature is that pattern-matching on MkSet (as in the definition of insert) makes *available* an (Eq a) context. In implementation terms, the MkSet constructor has a hidden field that stores the (Eq a) dictionary that is passed to MkSet; so when pattern-matching that dictionary becomes available for the right-hand side of the match. In the example, the equality dictionary is used to satisfy the equality constraint generated by the call to elem, so that the type of insert itself has no Eq constraint.

For example, one possible application is to reify dictionaries:

```
data NumInst a where
  MkNumInst :: Num a => NumInst a

intInst :: NumInst Int
intInst = MkNumInst

plus :: NumInst a -> a -> a -> a
plus MkNumInst p q = p + q
```

Here, a value of type NumInst a is equivalent to an explicit (Num a) dictionary.

All this applies to constructors declared using the syntax of *Existentials and type classes* (page 371). For example, the NumInst data type above could equivalently be declared like this:

```
data NumInst a
  = Num a => MkNumInst (NumInst a)
```

Notice that, unlike the situation when declaring an existential, there is no forall, because the Num constrains the data type's universally quantified type variable a. A constructor may have both universal and existential type variables: for example, the following two declarations are equivalent:

```
data T1 a
  = forall b. (Num a, Eq b) => MkT1 a b
data T2 a where
  MkT2 :: (Num a, Eq b) => a -> b -> T2 a
```

All this behaviour contrasts with Haskell 98's peculiar treatment of contexts on a data type declaration (Section 4.2.1 of the Haskell 98 Report). In Haskell 98 the definition

```
data Eq a => Set' a = MkSet' [a]
```

gives `MkSet'` the same type as `MkSet` above. But instead of *making available* an `(Eq a)` constraint, pattern-matching on `MkSet'` *requires* an `(Eq a)` constraint! GHC faithfully implements this behaviour, odd though it is. But for GADT-style declarations, GHC's behaviour is much more useful, as well as much more intuitive.

Note that the restrictions of [Restrictions](#) (page 373) are still in place; for example, a newtype declared with `GADTSyntax` cannot use existential quantification.

#### 6.4.7.1 Formal syntax for GADTs

To make more precise what is and what is not permitted inside of a GADT-style constructor, we provide a BNF-style grammar for GADT below. Note that this grammar is subject to change in the future.

```
gadt_con ::= conids '::' opt_forall opt_ctxt gadt_body

conids ::= conid
        | conid ',' conids

opt_forall ::= <empty>
            | 'forall' tv_bndrs '.'

tv_bndrs ::= <empty>
            | tv_bndr tv_bndrs

tv_bndr ::= tyvar
          | '(' tyvar '::' ctype ')'

opt_ctxt ::= <empty>
           | btype '=>'
           | '(' ctxt ')' '=>'

ctxt ::= ctype
      | ctype ',' ctxt

gadt_body ::= prefix_gadt_body
           | record_gadt_body

prefix_gadt_body ::= '(' prefix_gadt_body ')'
                  | return_type
                  | opt_unpack btype '->' prefix_gadt_body

record_gadt_body ::= '{' fieldtypes '}' '->' return_type
```

(continues on next page)

(continued from previous page)

```

fieldtypes ::= <empty>
            | fieldnames '::' opt_unpack ctype
            | fieldnames '::' opt_unpack ctype ',' fieldtypes

fieldnames ::= fieldname
            | fieldname ',' fieldnames

opt_unpack ::= opt_bang
            : {-# UNPACK #-} opt_bang
            | {-# NOUNPACK #-} opt_bang

opt_bang  ::= <empty>
            | '!'
            | '~'

```

Where:

- `btype` is a type that is not allowed to have an outermost `forall/=>` unless it is surrounded by parentheses. For example, `forall a. a` and `Eq a => a` are not legal `btypes`, but `(forall a. a)` and `(Eq a => a)` are legal.
- `ctype` is a `btype` that has no restrictions on an outermost `forall/=>`, so `forall a. a` and `Eq a => a` are legal `ctypes`.
- `return_type` is a type that is not allowed to have `forall`s, `=>`s, or `->`s.

This is a simplified grammar that does not fully delve into all of the implementation details of GHC's parser (such as the placement of Haddock comments), but it is sufficient to attain an understanding of what is syntactically allowed. Some further various observations about this grammar:

- GADT constructor types are currently not permitted to have nested `forall`s or `=>`s. (e.g., something like `MkT :: Int -> forall a. a -> T` would be rejected.) As a result, `gadt_sig` puts all of its quantification and constraints up front with `opt_forall` and `opt_context`. Note that higher-rank `forall`s and `=>`s are only permitted if they do not appear directly to the right of a function arrow in a *prefix\_gadt\_body*. (e.g., something like `MkS :: Int -> (forall a. a) -> S` is allowed, since parentheses separate the `forall` from the `->`.)
- Furthermore, GADT constructors do not permit outermost parentheses that surround the `opt_forall` or `opt_ctxt`, if at least one of them are used. For example, `MkU :: (forall a. a -> U)` would be rejected, since it would treat the `forall` as being nested.

Note that it is acceptable to use parentheses in a *prefix\_gadt\_body*. For instance, `MkV1 :: forall a. (a) -> (V1)` is acceptable, as is `MkV2 :: forall a. (a -> V2)`.

- The function arrows in a *prefix\_gadt\_body*, as well as the function arrow in a *record\_gadt\_body*, are required to be used infix. For example, `MkA :: (->) Int A` would be rejected.
- GHC uses the function arrows in a *prefix\_gadt\_body* and *prefix\_gadt\_body* to syntactically demarcate the function and result types. Note that GHC does not attempt to be clever about looking through type synonyms here. If you attempt to do this, for instance:

```
type C = Int -> B
```

(continues on next page)

(continued from previous page)

```
data B where
  MkB :: C
```

Then GHC will interpret the return type of `MkB` to be `C`, and since GHC requires that the return type must be headed by `B`, this will be rejected. On the other hand, it is acceptable to use type synonyms within the argument and result types themselves, so the following is permitted:

```
type B1 = Int
type B2 = B

data B where
  MkB :: B1 -> B2
```

- GHC will accept any combination of `!/~` and `{-# UNPACK #-}`/`{-# NOUNPACK #-}`, although GHC will ignore some combinations. For example, GHC will produce a warning if you write `{-# UNPACK #-} ~Int` and proceed as if you had written `Int`.

#### 6.4.7.2 GADT syntax odds and ends

The rest of this section gives further details about GADT-style data type declarations.

- The result type of each data constructor must begin with the type constructor being defined. If the result type of all constructors has the form `T a1 ... an`, where `a1 ... an` are distinct type variables, then the data type is *ordinary*; otherwise is a *generalised* data type (*Generalised Algebraic Data Types (GADTs)* (page 380)).
- As with other type signatures, you can give a single signature for several data constructors. In this example we give a single signature for `T1` and `T2`:

```
data T a where
  T1,T2 :: a -> T a
  T3 :: T a
```

- The type signature of each constructor is independent, and is implicitly universally quantified as usual. In particular, the type variable(s) in the “`data T a where`” header have no scope, and different constructors may have different universally-quantified type variables:

```
data T a where           -- The 'a' has no scope
  T1,T2 :: b -> T b      -- Means forall b. b -> T b
  T3 :: T a              -- Means forall a. T a
```

- A constructor signature may mention type class constraints, which can differ for different constructors. For example, this is fine:

```
data T a where
  T1 :: Eq b => b -> b -> T b
  T2 :: (Show c, Ix c) => c -> [c] -> T c
```

When pattern matching, these constraints are made available to discharge constraints in the body of the match. For example:

```
f :: T a -> String
f (T1 x y) | x==y      = "yes"
           | otherwise = "no"
f (T2 a b)           = show a
```

Note that `f` is not overloaded; the `Eq` constraint arising from the use of `==` is discharged by the pattern match on `T1` and similarly the `Show` constraint arising from the use of `show`.

- Unlike a Haskell-98-style data type declaration, the type variable(s) in the “data Set a where” header have no scope. Indeed, one can write a kind signature instead:

```
data Set :: Type -> Type where ...
```

or even a mixture of the two:

```
data Bar a :: (Type -> Type) -> Type where ...
```

The type variables (if given) may be explicitly kinded, so we could also write the header for `Foo` like this:

```
data Bar a (b :: Type -> Type) where ...
```

- You can use strictness annotations, in the obvious places in the constructor type:

```
data Term a where
  Lit    :: !Int -> Term Int
  If     :: Term Bool -> !(Term a) -> !(Term a) -> Term a
  Pair   :: Term a -> Term b -> Term (a,b)
```

- You can use a deriving clause on a GADT-style data type declaration. For example, these two declarations are equivalent

```
data Maybe1 a where {
  Nothing1 :: Maybe1 a ;
  Just1    :: a -> Maybe1 a
} deriving( Eq, Ord )

data Maybe2 a = Nothing2 | Just2 a
  deriving( Eq, Ord )
```

- The type signature may have quantified type variables that do not appear in the result type:

```
data Foo where
  MkFoo :: a -> (a->Bool) -> Foo
  Nil   :: Foo
```

Here the type variable `a` does not appear in the result type of either constructor. Although it is universally quantified in the type of the constructor, such a type variable is often called “existential”. Indeed, the above declaration declares precisely the same type as the `data Foo` in *Existentially quantified data constructors* (page 370).

The type may contain a class context too, of course:

```
data Showable where
  MkShowable :: Show a => a -> Showable
```

- You can use record syntax on a GADT-style data type declaration:

```
data Person where
  Adult :: { name :: String, children :: [Person] } -> Person
  Child :: Show a => { name :: !String, funny :: a } -> Person
```

As usual, for every constructor that has a field *f*, the type of field *f* must be the same (modulo alpha conversion). The *Child* constructor above shows that the signature may have a context, existentially-quantified variables, and strictness annotations, just as in the non-record case. (NB: the “type” that follows the double-colon is not really a type, because of the record syntax and strictness annotations. A “type” of this form can appear only in a constructor signature.)

- Record updates are allowed with GADT-style declarations, only fields that have the following property: the type of the field mentions no existential type variables.
- As in the case of existentials declared using the Haskell-98-like record syntax (*Record Constructors* (page 372)), record-selector functions are generated only for those fields that have well-typed selectors. Here is the example of that section, in GADT-style syntax:

```
data Counter a where
  NewCounter :: { _this      :: self
                 , _inc      :: self -> self
                 , _display  :: self -> IO ()
                 , tag       :: a
                 } -> Counter a
```

As before, only one selector function is generated here, that for *tag*. Nevertheless, you can still use all the field names in pattern matching and record construction.

- In a GADT-style data type declaration there is no obvious way to specify that a data constructor should be infix, which makes a difference if you derive *Show* for the type. (Data constructors declared infix are displayed infix by the derived *show*.) So GHC implements the following design: a data constructor declared in a GADT-style data type declaration is displayed infix by *Show* iff (a) it is an operator symbol, (b) it has two arguments, (c) it has a programmer-supplied fixity declaration. For example

```
infix 6 (:-:-)
data T a where
  (:-:-) :: Int -> Bool -> T Int
```

## 6.4.8 Generalised Algebraic Data Types (GADTs)

### GADTs

#### Implies

*MonoLocalBinds* (page 580), *GADTSyntax* (page 374)

#### Since

6.8.1

### Status

Included in [GHC2024](#) (page 314)

Allow use of Generalised Algebraic Data Types (GADTs).

Generalised Algebraic Data Types generalise ordinary algebraic data types by allowing constructors to have richer return types. Here is an example:

```
data Term a where
  Lit    :: Int -> Term Int
  Succ   :: Term Int -> Term Int
  IsZero :: Term Int -> Term Bool
  If      :: Term Bool -> Term a -> Term a -> Term a
  Pair   :: Term a -> Term b -> Term (a,b)
```

Notice that the return type of the constructors is not always `Term a`, as is the case with ordinary data types. This generality allows us to write a well-typed `eval` function for these Terms:

```
eval :: Term a -> a
eval (Lit i)      = i
eval (Succ t)     = 1 + eval t
eval (IsZero t)   = eval t == 0
eval (If b e1 e2) = if eval b then eval e1 else eval e2
eval (Pair e1 e2) = (eval e1, eval e2)
```

The key point about GADTs is that *pattern matching causes type refinement*. For example, in the right hand side of the equation

```
eval :: Term a -> a
eval (Lit i) = ...
```

the type `a` is refined to `Int`. That's the whole point! A precise specification of the type rules is beyond what this user manual aspires to, but the design closely follows that described in the paper [Simple unification-based type inference for GADTs](#) (ICFP 2006). The general principle is this: *type refinement is only carried out based on user-supplied type annotations*. So if no type signature is supplied for `eval`, no type refinement happens, and lots of obscure error messages will occur. However, the refinement is quite general. For example, if we had:

```
eval :: Term a -> a -> a
eval (Lit i) j = i+j
```

the pattern match causes the type `a` to be refined to `Int` (because of the type of the constructor `Lit`), and that refinement also applies to the type of `j`, and the result type of the case expression. Hence the addition `i+j` is legal.

These and many other examples are given in papers by Hongwei Xi, and Tim Sheard. There is a longer introduction [on the wiki](#), and Ralf Hinze's [Fun with phantom types](#) also has a number of examples. Note that papers may use different notation to that implemented in GHC.

The rest of this section outlines the extensions to GHC that support GADTs. The extension is enabled with [GADTs](#) (page 380). The [GADTs](#) (page 380) extension also sets [GADTSyntax](#) (page 374) and [MonoLocalBinds](#) (page 580).

- A GADT can only be declared using GADT-style syntax ([Declaring data types with explicit constructor signatures](#) (page 374)); the old Haskell 98 syntax for data declarations always declares an ordinary data type. The result type of each constructor must begin

with the type constructor being defined, but for a GADT the arguments to the type constructor can be arbitrary monotypes. For example, in the `Term` data type above, the type of each constructor must end with `Term ty`, but the `ty` need not be a type variable (e.g. the `Lit` constructor).

- GADT constructors can include contexts and existential variables, generalising existential quantification (*Existentially quantified data constructors* (page 370)). For example:

```
data SomeShow where
  SomeShow :: Show a => a -> SomeShow
    -- `a` is existential, as it does not appear in the return type

data G a where
  MkG :: (a ~ Int) => a -> a -> G a
    -- essentially the same as:
    -- MkG :: Int -> Int -> G Int
```

- It is permitted to declare an ordinary algebraic data type using GADT-style syntax. What makes a GADT into a GADT is not the syntax, but rather the presence of data constructors whose result type is not just `T a b`, or which include contexts.
- A newtype may use GADT-style syntax, but it must declare an ordinary data type, not a GADT. That is, the constructor must not bind existential variables (as per *Existentially quantified data constructors* (page 370)) nor include a context.
- You cannot use a deriving clause for a GADT; only for an ordinary data type (possibly using GADT-style syntax). However, you can still use a *Stand-alone deriving declarations* (page 487) declaration.
- As mentioned in *Declaring data types with explicit constructor signatures* (page 374), record syntax is supported. For example:

```
data Term a where
  Lit    :: { val    :: Int }      -> Term Int
  Succ   :: { num    :: Term Int } -> Term Int
  Pred   :: { num    :: Term Int } -> Term Int
  IsZero :: { arg    :: Term Int } -> Term Bool
  Pair   :: { arg1   :: Term a
             , arg2  :: Term b
             }          -> Term (a,b)
  If     :: { cnd    :: Term Bool
             , tru   :: Term a
             , fls   :: Term a
             }          -> Term a
```

However, for GADTs there is the following additional constraint: every constructor that has a field `f` must have the same result type (modulo alpha conversion). Hence, in the above example, we cannot merge the `num` and `arg` fields above into a single name. Although their field types are both `Term Int`, their selector functions actually have different types:

```
num :: Term Int -> Term Int
arg :: Term Bool -> Term Int
```

See *Field selectors and TypeApplications* (page 471) for a full description of how the types of top-level field selectors are determined.



- When pattern-matching against data constructors drawn from a GADT, for example in a case expression, the following rules apply:
  - The type of the scrutinee must be rigid.
  - The type of the entire case expression must be rigid.
  - The type of any free variable mentioned in any of the case alternatives must be rigid.

A type is “rigid” if it is completely known to the compiler at its binding site. The easiest way to ensure that a variable has a rigid type is to give it a type signature. For more precise details see [Simple unification-based type inference for GADTs](#). The criteria implemented by GHC are given in the Appendix.

- When GHC typechecks multiple patterns in a function clause, it typechecks each pattern in order from left to right. This has consequences for patterns that match on GADTs, such as in this example:

```
data U a where
  MkU :: U ()

v1 :: U a -> a -> a
v1 MkU () = ()

v2 :: a -> U a -> a
v2 () MkU = ()
```

Although v1 and v2 may appear to be the same function but with differently ordered arguments, GHC will only typecheck v1. This is because in v1, GHC will first typecheck the MkU pattern, which causes a to be refined to (). This refinement is what allows the subsequent () pattern to typecheck at type a. In v2, however, GHC first tries to typecheck the () pattern, and because a has not been refined to () yet, GHC concludes that () is not of type a. v2 can be made to typecheck by matching on MkU before (), like so:

```
v2 :: a -> U a -> a
v2 x MkU = case x of () -> ()
```

- Not only does GHC typecheck patterns from left to right, it also typechecks them from the outside in. This can be seen in this example:

```
data F x y where
  MkF :: y -> F (Maybe z) y

g :: F a a -> a
g (MkF Nothing) = Nothing
```

In the function clause for g, GHC first checks MkF, the outermost pattern, followed by the inner Nothing pattern. This outside-in order can interact somewhat counterintuitively with [Pattern type signatures](#) (page 568). Consider the following variation of g:

```
g2 :: F a a -> a
g2 (MkF Nothing :: F (Maybe z) (Maybe z)) = Nothing @z
```

The g2 function attempts to use the pattern type signature F (Maybe z) (Maybe z) to bring the type variable z into scope so that it can be used on the right-hand side of the

definition with *Visible type application* (page 435). However, GHC will reject the pattern type signature in g2:

- Couldn't match type 'a' with 'Maybe z'  
Expected: F a a  
Actual: F (Maybe z) (Maybe z)

Again, this is because of the outside-in order GHC uses when typechecking patterns. GHC first tries to check the pattern type signature `F (Maybe z) (Maybe z)`, but at that point, GHC has not refined `a` to be `Maybe z`, so GHC is unable to conclude that `F a a` is equal to `F (Maybe z) (Maybe z)`. Here, the `MkF` pattern is considered to be inside of the pattern type signature, so GHC cannot use the type refinement from the `MkF` pattern when typechecking the pattern type signature.

There are two possible ways to repair g2. One way is to use a case expression to write a pattern signature *after* matching on `MkF`, like so:

```
g3 :: F a a -> a
g3 f@(MkF Nothing) =
  case f of
    (_ :: F (Maybe z) (Maybe z)) -> Nothing @z
```

Another way is to use *Type Abstractions in Patterns* (page 439) instead of a pattern type signature:

```
g4 :: F a a -> a
g4 (MkF @(Maybe z) Nothing) = Nothing @z
```

Here, the visible type argument `@(Maybe z)` indicates that the `y` in the type of `MkF :: y -> F (Maybe z) y` should be instantiated to `Maybe z`. In addition, `@(Maybe z)` also brings `z` into scope. Although g4 no longer uses a pattern type signature, it accomplishes the same end result, as the right-hand side `Nothing @z` will typecheck successfully.

## 6.4.9 Type families

### TypeFamilies

#### Implies

*MonoLocalBinds* (page 580), *KindSignatures* (page 564),  
*ExplicitNamespaces* (page 364)

#### Implied by

*TypeFamilyDependencies* (page 402)

#### Since

6.8.1

Allow use and definition of indexed type and data families.

Indexed type families form an extension to facilitate type-level programming. Type families are a generalisation of associated data types [AssocDataTypes2005] and associated type synonyms [AssocTypeSyn2005]. Type families themselves are described in Schrijvers 2008 [TypeFamilies2008]. Type families essentially provide type-indexed data types and named functions on types, which are useful for generic programming and highly parameterised library interfaces as well as interfaces with enhanced static information, much like dependent

types. They might also be regarded as an alternative to functional dependencies, but provide a more functional style of type-level programming than the relational style of functional dependencies.

Indexed type families, or type families for short, are type constructors that represent sets of types. Set members are denoted by supplying the type family constructor with type parameters, which are called type indices. The difference between vanilla parametrised type constructors and family constructors is much like between parametrically polymorphic functions and (ad-hoc polymorphic) methods of type classes. Parametric polymorphic functions behave the same at all type instances, whereas class methods can change their behaviour in dependence on the class type parameters. Similarly, vanilla type constructors imply the same data representation for all type instances, but family constructors can have varying representation types for varying type indices.

Indexed type families come in three flavours: data families, open type synonym families, and closed type synonym families. They are the indexed family variants of algebraic data types and type synonyms, respectively. The instances of data families can be data types and newtypes.

Type families are enabled by the language extension *TypeFamilies* (page 384). Additional information on the use of type families in GHC is available on [the Haskell wiki page on type families](#).

#### 6.4.9.1 Data families

Data families appear in two flavours: (1) they can be defined on the toplevel or (2) they can appear inside type classes (in which case they are known as associated types). The former is the more general variant, as it lacks the requirement for the type-indices to coincide with the class parameters. However, the latter can lead to more clearly structured code and compiler warnings if some type instances were - possibly accidentally - omitted. In the following, we always discuss the general toplevel form first and then cover the additional constraints placed on associated types.

##### Data family declarations

Indexed data families are introduced by a signature, such as

```
data family GMap k :: Type -> Type
```

The special family distinguishes family from standard data declarations. The result kind annotation is optional and, as usual, defaults to `Type` if omitted. An example is

```
data family Array e
```

Named arguments can also be given explicit kind signatures if needed. Just as with *GADT declarations* (page 380) named arguments are entirely optional, so that we can declare `Array` alternatively with

```
data family Array :: Type -> Type
```

Unlike with ordinary data definitions, the result kind of a data family does not need to be `Type`. It can alternatively be:

- Of the form `TYPE r` for some `r` (see *Representation polymorphism* (page 430)). For example:

```
data family DF1 :: TYPE IntRep
data family DF2 (r :: RuntimeRep) :: TYPE r
data family DF3 :: Type -> TYPE WordRep
```

- A bare kind variable (with *PolyKinds* (page 411) enabled). For example:

```
data family DF4 :: k
data family DF5 (a :: k) :: k
data family DF6 :: (k -> Type) -> k
```

Data instances' kinds must end in `Type`, however. This restriction is slightly relaxed when the *UnliftedNewtypes* (page 613) extension is enabled, as it permits a newtype instance's kind to end in `TYPE r` for some `r`.

## Data instance declarations

Instance declarations of data and newtype families are very similar to standard data and newtype declarations. The only two differences are that the keyword `data` or `newtype` is followed by `instance` and that some or all of the type arguments can be non-variable types, but may not contain forall types or type synonym families. However, data families are generally allowed in type parameters, and type synonyms are allowed as long as they are fully applied and expand to a type that is itself admissible - exactly as this is required for occurrences of type synonyms in class instance parameters. For example, the `Either` instance for `GMap` is

```
data instance GMap (Either a b) v = GMapEither (GMap a v) (GMap b v)
```

In this example, the declaration has only one variant. In general, it can be any number.

When *ExplicitForAll* (page 560) is enabled, type and kind variables used on the left hand side can be explicitly bound. For example:

```
data instance forall a (b :: Proxy a). F (Proxy b) = FProxy Bool
```

When an explicit `forall` is present, *all* type and kind variables mentioned which are not already in scope must be bound by the `forall`:

```
data instance forall (a :: k). F a = F0otherwise -- rejected: k not in scope
data instance forall k (a :: k). F a = F0otherwise -- accepted
```

When the flag *-Wunused-type-patterns* (page 117) is enabled, type variables that are mentioned in the patterns on the left hand side, but not used on the right hand side are reported. Variables that occur multiple times on the left hand side are also considered used. To suppress the warnings, unused variables should be either replaced or prefixed with underscores. Type variables starting with an underscore (`_x`) are otherwise treated as ordinary type variables.

This resembles the wildcards that can be used in *Partial Type Signatures* (page 574). However, there are some differences. No error messages reporting the inferred types are generated, nor does the extension *PartialTypeSignatures* (page 574) have any effect.

A type or kind variable explicitly bound using *ExplicitForAll* (page 560) but not used on the left hand side will generate an error, not a warning.

Data and newtype instance declarations are only permitted when an appropriate family declaration is in scope - just as a class instance declaration requires the class declaration to be visible. Moreover, each instance declaration has to conform to the kind determined by its

family declaration. This implies that the number of parameters of an instance declaration matches the arity determined by the kind of the family.

A data family instance declaration can use the full expressiveness of ordinary data or newtype declarations:

- Although, a data family is *introduced* with the keyword “data”, a data family *instance* can use either data or newtype. For example:

```
data family T a
data instance T Int = T1 Int | T2 Bool
newtype instance T Char = TC Bool
```

- A data instance can use GADT syntax for the data constructors, and indeed can define a GADT. For example:

```
data family G a b
data instance G [a] b where
  G1 :: c -> G [Int] b
  G2 :: G [a] Bool
```

- You can use a deriving clause on a data instance or newtype instance declaration.

Even if data families are defined as toplevel declarations, functions that perform different computations for different family instances may still need to be defined as methods of type classes. In particular, the following is not possible:

```
data family T a
data instance T Int = A
data instance T Char = B
foo :: T a -> Int
foo A = 1
foo B = 2
```

Instead, you would have to write foo as a class operation, thus:

```
class Foo a where
  foo :: T a -> Int
instance Foo Int where
  foo A = 1
instance Foo Char where
  foo B = 2
```

Given the functionality provided by GADTs (Generalised Algebraic Data Types), it might seem as if a definition, such as the above, should be feasible. However, type families - in contrast to GADTs - are *open*; i.e., new instances can always be added, possibly in other modules. Supporting pattern matching across different data instances would require a form of extensible case construct.

## Overlap of data instances

The instance declarations of a data family used in a single program may not overlap at all, independent of whether they are associated or not. In contrast to type class instances, this is not only a matter of consistency, but one of type safety.

### 6.4.9.2 Synonym families

Type families appear in three flavours: (1) they can be defined as open families on the toplevel, (2) they can be defined as closed families on the toplevel, or (3) they can appear inside type classes (in which case they are known as associated type synonyms). Toplevel families are more general, as they lack the requirement for the type-indexes to coincide with the class parameters. However, associated type synonyms can lead to more clearly structured code and compiler warnings if some type instances were - possibly accidentally - omitted. In the following, we always discuss the general toplevel forms first and then cover the additional constraints placed on associated types. Note that closed associated type synonyms do not exist.

## Type family declarations

Open indexed type families are introduced by a signature, such as

```
type family Elem c :: Type
```

The special family distinguishes family from standard type declarations. The result kind annotation is optional and, as usual, defaults to `Type` if omitted. An example is

```
type family Elem c
```

Parameters can also be given explicit kind signatures if needed. We call the number of parameters in a type family declaration, the family's arity, and all applications of a type family must be fully saturated with respect to that arity. This requirement is unlike ordinary type synonyms and it implies that the kind of a type family is not sufficient to determine a family's arity, and hence in general, also insufficient to determine whether a type family application is well formed. As an example, consider the following declaration:

```
type family F a b :: Type -> Type
-- F's arity is 2,
-- although its overall kind is Type -> Type -> Type -> Type
```

Given this declaration the following are examples of well-formed and malformed types:

```
F Char [Int]      -- OK!  Kind: Type -> Type
F Char [Int] Bool -- OK!  Kind: Type
F IO Bool         -- WRONG: kind mismatch in the first argument
F Bool           -- WRONG: unsaturated application
```

The result kind annotation is optional and defaults to `Type` (like argument kinds) if omitted. Polykinded type families can be declared using a parameter in the kind annotation:

```
type family F a :: k
```

In this case the kind parameter `k` is actually an implicit parameter of the type family.

At definition site, the arity determines what inputs can be matched on:

```
data PT (a :: Type)

type family F1 :: k -> Type
type instance F1 = PT
    -- OK, 'k' can be matched on.

type family F0 :: forall k. k -> Type
type instance F0 = PT
    -- Error:
    --   • Expected kind 'forall k. k -> Type',
    --     but 'PT' has kind 'Type -> Type'
    --   • In the type 'PT'
    --     In the type instance declaration for 'F0'
```

Both `F1` and `F0` have kind `forall k. k -> Type`, but their arity differs.

At use sites, the arity determines if the definition can be used in a higher-rank scenario:

```
type HRK (f :: forall k. k -> Type) = (f Int, f Maybe, f True)

type H1 = HRK F0 -- OK
type H2 = HRK F1
    -- Error:
    --   • Expected kind 'forall k. k -> Type',
    --     but 'F1' has kind 'k0 -> Type'
    --   • In the first argument of 'HRK', namely 'F1'
    --     In the type 'HRK F1'
    --     In the type declaration for 'H2'
```

This is a consequence of the requirement that all applications of a type family must be fully saturated with respect to their arity.

## Type instance declarations

Instance declarations of type families are very similar to standard type synonym declarations. The only two differences are that the keyword `type` is followed by `instance` and that some or all of the type arguments can be non-variable types, but may not contain `forall` types or type synonym families. However, data families are generally allowed, and type synonyms are allowed as long as they are fully applied and expand to a type that is admissible - these are the exact same requirements as for data instances. For example, the `[e]` instance for `Elem` is

```
type instance Elem [e] = e
```

Type arguments can be replaced with underscores (`_`) if the names of the arguments don't matter. This is the same as writing type variables with unique names. Unused type arguments can be replaced or prefixed with underscores to avoid warnings when the `-Wunused-type-patterns` (page 117) flag is enabled. The same rules apply as for [Data instance declarations](#) (page 386).

Also in the same way as [Data instance declarations](#) (page 386), when [ExplicitForAll](#) (page 560) is enabled, type and kind variables can be explicitly bound in a type instance

declaration.

Type family instance declarations are only legitimate when an appropriate family declaration is in scope - just like class instances require the class declaration to be visible. Moreover, each instance declaration has to conform to the kind determined by its family declaration, and the number of type parameters in an instance declaration must match the number of type parameters in the family declaration. Finally, the right-hand side of a type instance must be a monotype (i.e., it may not include forall) and after the expansion of all saturated vanilla type synonyms, no synonyms, except family synonyms may remain.

## Closed type families

A type family can also be declared with a where clause, defining the full set of equations for that family. For example:

```
type family F a where
  F Int  = Double
  F Bool = Char
  F a    = String
```

A closed type family's equations are tried in order, from top to bottom, when simplifying a type family application. In this example, we declare an instance for F such that F Int simplifies to Double, F Bool simplifies to Char, and for any other type a that is known not to be Int or Bool, F a simplifies to String. Note that GHC must be sure that a cannot unify with Int or Bool in that last case; if a programmer specifies just F a in their code, GHC will not be able to simplify the type. After all, a might later be instantiated with Int.

A closed type family's equations have the same restrictions and extensions as the equations for open type family instances. For instance, when [ExplicitForAll](#) (page 560) is enabled, type or kind variables used on the left hand side of an equation can be explicitly bound, such as in:

```
type family R a where
  forall t a. R (t a) = [a]
  forall a.   R a     = a
```

A closed type family may be declared with no equations. Such closed type families are opaque type-level definitions that will never reduce, are not necessarily injective (unlike empty data types), and cannot be given any instances. This is different from omitting the equations of a closed type family in a hs-boot file, which uses the syntax where ..., as in that case there may or may not be equations given in the hs file.

## Type family examples

Here are some examples of admissible and illegal type instances:

```
type family F a :: Type
type instance F [Int]    = Int    -- OK!
type instance F String   = Char   -- OK!
type instance F (F a)    = a      -- WRONG: type parameter mentions a type_
    ↪ family
type instance
  F (forall a. (a, b)) = b      -- WRONG: a forall type appears in a type_
```

(continues on next page)



(continued from previous page)

```

→parameter
type instance
  F Float = forall a.a          -- WRONG: right-hand side may not be a forall_
→type
type family H a where          -- OK!
  H Int   = Int
  H Bool  = Bool
  H a     = String
type instance H Char = Char    -- WRONG: cannot have instances of closed_
→family
type family K a where          -- OK!

type family G a b :: Type -> Type
type instance G Int      = (,)   -- WRONG: must be two type parameters
type instance G Int Char Float = Double -- WRONG: must be two type parameters

```

## Compatibility and apartness of type family equations

There must be some restrictions on the equations of type families, lest we define an ambiguous rewrite system. So, equations of open type families are restricted to be compatible. Two type patterns are compatible if

1. all corresponding types and implicit kinds in the patterns are apart, or
2. the two patterns unify producing a substitution, and the right-hand sides are equal under that substitution.

Two types are considered apart if, for all possible substitutions, the types cannot reduce to a common reduct.

The first clause of “compatible” is the more straightforward one. It says that the patterns of two distinct type family instances cannot overlap. For example, the following is disallowed:

```

type instance F Int = Bool
type instance F Int = Char

```

The second clause is a little more interesting. It says that two overlapping type family instances are allowed if the right-hand sides coincide in the region of overlap. Some examples help here:

```

type instance F (a, Int) = [a]
type instance F (Int, b) = [b]   -- overlap permitted

type instance G (a, Int) = [a]
type instance G (Char, a) = [a]  -- ILLEGAL overlap, as [Char] /= [Int]

```

Note that this compatibility condition is independent of whether the type family is associated or not, and it is not only a matter of consistency, but one of type safety.

For a polykinded type family, the kinds are checked for apartness just like types. For example, the following is accepted:

```
type family J a :: k
type instance J Int = Bool
type instance J Int = Maybe
```

These instances are compatible because they differ in their implicit kind parameter; the first uses `Type` while the second uses `Type -> Type`.

The definition for “compatible” uses a notion of “apart”, whose definition in turn relies on type family reduction. This condition of “apartness”, as stated, is impossible to check, so we use this conservative approximation: two types are considered to be apart when the two types cannot be unified, even by a potentially infinite unifier. Allowing the unifier to be infinite disallows the following pair of instances:

```
type instance H x    x = Int
type instance H [x] x = Bool
```

The type patterns in this pair equal if `x` is replaced by an infinite nesting of lists. Rejecting instances such as these is necessary for type soundness.

Compatibility also affects closed type families. When simplifying an application of a closed type family, GHC will select an equation only when it is sure that no incompatible previous equation will ever apply. Here are some examples:

```
type family F a where
  F Int = Bool
  F a   = Char

type family G a where
  G Int = Int
  G a   = a
```

In the definition for `F`, the two equations are incompatible – their patterns are not apart, and yet their right-hand sides do not coincide. Thus, before GHC selects the second equation, it must be sure that the first can never apply. So, the type `F a` does not simplify; only a type such as `F Double` will simplify to `Char`. In `G`, on the other hand, the two equations are compatible. Thus, GHC can ignore the first equation when looking at the second. So, `G a` will simplify to `a`.

Incompatibilities between closed type family equations can be displayed in `:info` (page 57) when `-fprint-axiom-incomps` (page 88) is enabled.

However see *Type, class and other declarations* (page 31) for the overlap rules in GHCi.

## Decidability of type synonym instances

In order to guarantee that type inference in the presence of type families is decidable, we need to place a number of additional restrictions on the formation of type instance declarations (c.f., Definition 5 (Relaxed Conditions) of “[Type Checking with Open Type Functions](#)”). Instance declarations have the general form

```
type instance F t1 .. tn = t
```

where we require that for every type family application `(G s1 .. sm)` in `t`,

1. `s1 .. sm` do not contain any type family constructors,

2. the total number of symbols (data type constructors and type variables) in  $s_1 \dots s_m$  is strictly smaller than in  $t_1 \dots t_n$ , and
3. for every type variable  $a$ ,  $a$  occurs in  $s_1 \dots s_m$  at most as often as in  $t_1 \dots t_n$ .

These restrictions are easily verified and ensure termination of type inference. However, they are not sufficient to guarantee completeness of type inference in the presence of, so called, “loopy equalities”, such as  $a \sim [F\ a]$ , where a recursive occurrence of a type variable is underneath a family application and data constructor application - see the above mentioned paper for details.

If the option *UndecidableInstances* (page 537) is passed to the compiler (see *Undecidable instances and loopy superclasses* (page 537)), the above restrictions are not enforced and it is on the programmer to ensure termination of the normalisation of type families during type inference.

## Reducing type family applications

### -ffamily-application-cache

The flag *-ffamily-application-cache* (page 393) (on by default) instructs GHC to use a cache when reducing type family applications. In most cases, this will speed up compilation. The use of this flag will not affect runtime behaviour.

When GHC encounters a type family application (like  $F\ Int\ a$ ) in a program, it must often reduce it in order to complete type checking. Here is a simple example:

```
type family F a where
  F Int           = Bool
  F (Maybe Double) = Char

g :: F Int -> Bool
g = not
```

Despite the fact that  $g$ 's type mentions  $F\ Int$ , GHC must recognize that  $g$ 's argument really has type  $Bool$ . This is done by *reducing*  $F\ Int$  to become  $Bool$ . Sometimes, there is not enough information to reduce a type family application; we say such an application is *stuck*. Continuing this example, an occurrence of  $F\ (Maybe\ a)$  (for some type variable  $a$ ) would be stuck, as no equation applies.

During type checking, GHC uses heuristics to determine which type family application to reduce next; there is no predictable ordering among different type family applications. The non-determinism rarely matters in practice. In most programs, type family reduction terminates, and so these choices are immaterial. However, if a type family application does not terminate, it is possible that type-checking may unpredictably diverge. (GHC will always take the same path for a given source program, but small changes in that source program may induce GHC to take a different path. Compiling a given, unchanged source program is still deterministic.)

In order to speed up type family reduction, GHC normally uses a cache, remembering what type family applications it has previously reduced. This feature can be disabled with *-fno-family-application-cache* (page ??).

### 6.4.9.3 Wildcards on the LHS of data and type family instances

When the name of a type argument of a data or type instance declaration doesn't matter, it can be replaced with an underscore (`_`). This is the same as writing a type variable with a unique name.

```
data family F a b :: Type
data instance F Int _ = Int
-- Equivalent to data instance F Int b = Int

type family T a :: Type
type instance T (a,_) = a
-- Equivalent to type instance T (a,b) = a
```

This use of underscore for wildcard in a type pattern is exactly like pattern matching in the term language, but is rather different to the use of a underscore in a partial type signature (see [Type Wildcards](#) (page 575)).

A type variable beginning with an underscore is not treated specially in a type or data instance declaration. For example:

```
data instance F Bool _a = _a -> Int
-- Equivalent to data instance F Bool a = a -> Int
```

Contrast this with the special treatment of named wildcards in type signatures ([Named Wildcards](#) (page 576)).

### 6.4.9.4 Associated data and type families

A data or type synonym family can be declared as part of a type class, thus:

```
class GMapKey k where
  data GMap k :: Type -> Type
  ...

class Collects ce where
  type Elem ce :: Type
  ...
```

When doing so, we (optionally) may drop the “family” keyword.

The type parameters must all be type variables, of course, and some (but not necessarily all) of them can be the class parameters. Each class parameter may only be used at most once per associated type, but some may be omitted and they may be in an order other than in the class head. Hence, the following contrived example is admissible:

```
class C a b c where
  type T c a x :: Type
```

Here `c` and `a` are class parameters, but the type is also indexed on a third parameter `x`.

## Associated instances

When an associated data or type synonym family instance is declared within a type class instance, we (optionally) may drop the instance keyword in the family instance:

```
instance (GMapKey a, GMapKey b) => GMapKey (Either a b) where
  data GMap (Either a b) v = GMapEither (GMap a v) (GMap b v)
  ...

instance Eq (Elem [e]) => Collects [e] where
  type Elem [e] = e
  ...
```

The data or type family instance for an associated type must follow the rule that the type indexes corresponding to class parameters must be precisely the same as types given in the instance head. For example:

```
class Collects ce where
  type Elem ce :: Type

instance Eq (Elem [e]) => Collects [e] where
  -- Choose one of the following alternatives:
  type Elem [e] = e           -- OK
  type Elem [x] = x           -- BAD; '[x]' is different to '[e]' from head
  type Elem x   = x           -- BAD; 'x' is different to '[e]'
  type Elem [Maybe x] = x    -- BAD: '[Maybe x]' is different to '[e]'
```

Note the following points:

- An instance for an associated family can only appear as part of an instance declarations of the class in which the family was declared, just as with the equations of the methods of a class.
- The type variables on the right hand side of the type family equation must, as usual, be explicitly bound by the left hand side. This restriction is relaxed for *kind* variables, however, as the right hand side is allowed to mention kind variables that are implicitly bound. For example, these are legitimate:

```
data family Nat :: k -> k -> Type
-- k is implicitly bound by an invisible kind pattern
newtype instance Nat :: (k -> Type) -> (k -> Type) -> Type where
  Nat :: (forall xx. f xx -> g xx) -> Nat f g

class Funct f where
  type Codomain f :: Type
  instance Funct ('KProxy :: KProxy o) where
    -- o is implicitly bound by the kind signature
    -- of the LHS type pattern ('KProxy)
    type Codomain 'KProxy = NatTr (Proxy :: o -> Type)
```

- The instance for an associated type can be omitted in class instances. In that case, unless there is a default instance (see [Associated type synonym defaults](#) (page 396)), the corresponding instance type is not inhabited; i.e., only diverging expressions, such as undefined, can assume the type.

- Although it is unusual, there (currently) can be *multiple* instances for an associated family in a single instance declaration. For example, this is legitimate:

```
instance GMapKey Flob where
  data GMap Flob [v] = G1 v
  data GMap Flob Int = G2 Int
  ...
```

Here we give two data instance declarations, one in which the last parameter is `[v]`, and one for which it is `Int`. Since you cannot give any *subsequent* instances for `(GMap Flob ...)`, this facility is most useful when the free indexed parameter is of a kind with a finite number of alternatives (unlike `Type`).

- When *ExplicitForAll* (page 560) is enabled, type and kind variables can be explicitly bound in associated data or type family instances in the same way (and with the same restrictions) as *Data instance declarations* (page 386) or *Type instance declarations* (page 389). For example, adapting the above, the following is accepted:

```
instance Eq (Elem [e]) => Collects [e] where
  type forall e. Elem [e] = e
```

### Associated type synonym defaults

It is possible for the class defining the associated type to specify a default for associated type instances. So for example, this is OK:

```
class IsBoolMap v where
  type Key v
  type instance Key v = Int

  lookupKey :: Key v -> v -> Maybe Bool

instance IsBoolMap [(Int, Bool)] where
  lookupKey = lookup
```

In an instance declaration for the class, if no explicit `type instance` declaration is given for the associated type, the default declaration is used instead, just as with default class methods.

Note the following points:

- The `instance` keyword is optional.
- There can be at most one default declaration for an associated type synonym.
- A default declaration is not permitted for an associated *data* type.
- The default declaration must mention only type *variables* on the left hand side, and type variables may not be repeated on the left-hand side. The right hand side must mention only type variables that are explicitly bound on the left hand side. This restriction is relaxed for *kind* variables, however, as the right hand side is allowed to mention kind variables that are implicitly bound on the left hand side.

Like with *Associated instances* (page 395), it is possible to explicitly bind type and kind variables in default declarations with a `forall` by using the *ExplicitForAll* (page 560) language extension.

- Unlike the associated type family declaration itself, the type variables of the default instance are independent of those of the parent class.

Here are some examples:

```
class C (a :: Type) where
  type F1 a :: Type
  type instance F1 a = [a]      -- OK
  type instance F1 a = a->a    -- BAD; only one default instance is allowed

  type F2 b a                  -- OK; note the family has more type
                                --      variables than the class
  type instance F2 c d = c->d  -- OK; you don't have to use 'a' in the type_
                                --      instance

  type F3 a
  type F3 [b] = b              -- BAD; only type variables allowed on the
                                --      LHS, and the argument to F3 is
                                --      instantiated to [b], which is not
                                --      a bare type variable

  type F4 x y
  type F4 x x = x              -- BAD; the type variable x is repeated on
                                --      the LHS

  type F5 a
  type F5 b = a                -- BAD; 'a' is not in scope in the RHS

  type F6 a :: [k]
  type F6 a = ('[] :: [x])    -- OK; the kind variable x is implicitly
                                --      bound by an invisible kind pattern
                                --      on the LHS

  type F7 a
  type F7 a =
    Proxy ('[] :: [x])        -- BAD; the kind variable x is not bound,
                                --      even by an invisible kind pattern

  type F8 (x :: a) :: [a]
  type F8 x = ('[] :: [a])    -- OK; the kind variable a is implicitly
                                --      bound by the kind signature of the
                                --      LHS type pattern

  type F9 (a :: k)
  type F9 a = Maybe a         -- BAD; the kind variable k is
                                --      instantiated to Type, which is not
                                --      a bare kind variable

  type F10 (a :: j) (b :: k)
  type F10 (a :: z) (b :: z)
    = Proxy a                 -- BAD; the kind variable z is repeated,
                                --      as both j and k are instantiated to z

  type F11 a b
```

(continues on next page)

(continued from previous page)

```

type forall a b. F11 a b = a -- OK; LHS type variables can be
                               -- explicitly bound with 'forall'

type F12 (a :: k)
type F12 @k a = Proxy a      -- OK; visible kind application syntax is
                               -- permitted in default declarations

```

## Scoping of class parameters

The visibility of class parameters in the right-hand side of associated family instances depends *solely* on the parameters of the family. As an example, consider the simple class declaration

```

class C a b where
  data T a

```

Only one of the two class parameters is a parameter to the data family. Hence, the following instance declaration is invalid:

```

instance C [c] d where
  data T [c] = MkT (c, d) -- WRONG!! 'd' is not in scope

```

Here, the right-hand side of the data instance mentions the type variable `d` that does not occur in its left-hand side. We cannot admit such data instances as they would compromise type safety.

Bear in mind that it is also possible for the *right*-hand side of an associated family instance to contain *kind* parameters (by using the *PolyKinds* (page 411) extension). For instance, this class and instance are perfectly admissible:

```

class C k where
  type T :: k

instance C (Maybe a) where
  type T = (Nothing :: Maybe a)

```

Here, although the right-hand side `(Nothing :: Maybe a)` mentions a kind variable `a` which does not occur on the left-hand side, this is acceptable, because `a` is *implicitly* bound by `T`'s kind pattern.

A kind variable can also be bound implicitly in a LHS type pattern, as in this example:

```

class C a where
  type T (x :: a) :: [a]

instance C (Maybe a) where
  type T x = ('[] :: [Maybe a])

```

In `('[] :: [Maybe a])`, the kind variable `a` is implicitly bound by the kind signature of the LHS type pattern `x`.



## Instance contexts and associated type and data instances

Associated type and data instance declarations do not inherit any context specified on the enclosing instance. For type instance declarations, it is unclear what the context would mean. For data instance declarations, it is unlikely a user would want the context repeated for every data constructor. The only place where the context might likely be useful is in a deriving clause of an associated data instance. However, even here, the role of the outer instance context is murky. So, for clarity, we just stick to the rule above: the enclosing instance context is ignored. If you need to use a non-trivial context on a derived instance, use a *standalone deriving* (page 487) clause (at the top level).

### 6.4.9.5 Import and export

The rules for export lists (Haskell Report [Section 5.2](#)) need adjustment for type families:

- The form `T(..)`, where `T` is a data family, names the family `T` and all the in-scope constructors (whether in scope qualified or unqualified) that are data instances of `T`.
- The form `T(.., ci, .., fj, ..)`, where `T` is a data family, names `T` and the specified constructors `ci` and fields `fj` as usual. The constructors and field names must belong to some data instance of `T`, but are not required to belong to the *same* instance.
- The form `C(..)`, where `C` is a class, names the class `C` and all its methods *and associated types*.
- The form `C(.., mi, .., type Tj, ..)`, where `C` is a class, names the class `C`, and the specified methods `mi` and associated types `Tj`. The types need a keyword “type” to distinguish them from data constructors.
- Whenever there is no export list and a data instance is defined, the corresponding data family type constructor is exported along with the new data constructors, regardless of whether the data family is defined locally or in another module.

## Examples

Recall our running `GMapKey` class example:

```
class GMapKey k where
  data GMap k :: Type -> Type
  insert :: GMap k v -> k -> v -> GMap k v
  lookup :: GMap k v -> k -> Maybe v
  empty  :: GMap k v

instance (GMapKey a, GMapKey b) => GMapKey (Either a b) where
  data GMap (Either a b) v = GMapEither (GMap a v) (GMap b v)
  ...method declarations...
```

Here are some export lists and their meaning:

- `module GMap( GMapKey )`

Exports just the class name.

- `module GMap( GMapKey(..) )`

Exports the class, the associated type `GMap` and the member functions `empty`, `lookup`, and `insert`. The data constructors of `GMap` (in this case `GMapEither`) are not exported.

- `module GMap( GMapKey( type GMap, empty, lookup, insert ) )`

Same as the previous item. Note the “type” keyword.

- `module GMap( GMapKey(..), GMap(..) )`

Same as previous item, but also exports all the data constructors for `GMap`, namely `GMapEither`.

- `module GMap ( GMapKey( empty, lookup, insert), GMap(..) )`

Same as previous item.

- `module GMap ( GMapKey, empty, lookup, insert, GMap(..) )`

Same as previous item.

Two things to watch out for:

- You cannot write `GMapKey( type GMap(..) )` — i.e., sub-component specifications cannot be nested. To specify `GMap`’s data constructors, you have to list it separately.
- Consider this example:

```
module X where
  data family D

module Y where
  import X
  data instance D Int = D1 | D2
```

Module `Y` exports all the entities defined in `Y`, namely the data constructors `D1` and `D2`, and *implicitly* the data family `D`, even though it’s defined in `X`. This means you can write `import Y( D(D1,D2) )` *without* giving an explicit export list like this:

```
    module Y( D(..) ) where ...
or  module Y( module Y, D ) where ...
```

## Instances

Family instances are implicitly exported, just like class instances. However, this applies only to the heads of instances, not to the data constructors an instance defines.

#### 6.4.9.6 Type families and instance declarations

Type families require us to extend the rules for the form of instance heads, which are given in *Relaxed rules for the instance head* (page 533). Specifically:

- Data type families may appear in an instance head
- Type synonym families may not appear (at all) in an instance head

The reason for the latter restriction is that there is no way to check for instance matching. Consider

```
type family F a
type instance F Bool = Int

class C a

instance C Int
instance C (F a)
```

Now a constraint `(C (F Bool))` would match both instances. The situation is especially bad because the type instance for `F Bool` might be in another module, or even in a module that is not yet written.

However, type class instances of instances of data families can be defined much like any other data type. For example, we can say

```
data instance T Int = T1 Int | T2 Bool
instance Eq (T Int) where
  (T1 i) == (T1 j) = i==j
  (T2 i) == (T2 j) = i==j
  _      == _      = False
```

Note that class instances are always for particular *instances* of a data family and never for an entire family as a whole. This is for essentially the same reasons that we cannot define a toplevel function that performs pattern matching on the data constructors of *different* instances of a single type family. It would require a form of extensible case construct.

Data instance declarations can also have deriving clauses. For example, we can write

```
data GMap () v = GMapUnit (Maybe v)
               deriving Show
```

which implicitly defines an instance of the form

```
instance Show v => Show (GMap () v) where ...
```

### 6.4.9.7 Injective type families

#### TypeFamilyDependencies

##### Implies

[TypeFamilies](#) (page 384)

##### Since

8.0.1

Allow functional dependency annotations on type families. This allows one to define injective type families.

Starting with GHC 8.0 type families can be annotated with injectivity information. This information is then used by GHC during type checking to resolve type ambiguities in situations where a type variable appears only under type family applications. Consider this contrived example:

```
type family Id a
type instance Id Int = Int
type instance Id Bool = Bool

id :: Id t -> Id t
id x = x
```

Here the definition of `id` will be rejected because type variable `t` appears only under type family applications and is thus ambiguous. But this code will be accepted if we tell GHC that `Id` is injective, which means it will be possible to infer `t` at call sites from the type of the argument:

```
type family Id a = r | r -> a
```

Injective type families are enabled with `-XTypeFamilyDependencies` language extension. This extension implies `-XTypeFamilies`.

For full details on injective type families refer to the Haskell Symposium 2015 paper [Injective type families for Haskell](#).

#### Syntax of injectivity annotation

The injectivity annotation is added after the type family head and consists of two parts:

- a type variable that names the result of a type family. Syntax: `= tyvar` or `= (tyvar :: kind)`. The type variable must be fresh.
- an injectivity annotation of the form `| A -> B`, where `A` is the result type variable (see previous bullet) and `B` is a list of argument type and kind variables in which type family is injective. It is possible to omit some variables if the type family is not injective in them.

Examples:

```
type family Id a = result | result -> a where
type family F a b c = d | d -> a c b
type family G (a :: k) b c = foo | foo -> k b where
```

For open and closed type families it is OK to name the result but skip the injectivity annotation. This is not the case for associated type synonyms, where the named result without injectivity annotation will be interpreted as associated type synonym default.

## Verifying the injectivity annotation against type family equations

Once the user declares type family to be injective GHC must verify that this declaration is correct, i.e., that type family equations don't violate the injectivity annotation. A general idea is that if at least one equation (bullets (1), (2) and (3) below) or a pair of equations (bullets (4) and (5) below) violates the injectivity annotation then a type family is not injective in a way the user claims and an error is reported. In the bullets below *RHS* refers to the right-hand side of the type family equation being checked for injectivity. *LHS* refers to the arguments of that type family equation. Below are the rules followed when checking injectivity of a type family:

1. If a RHS of a type family equation is a type family application GHC reports that the type family is not injective.
2. If a RHS of a type family equation is a bare type variable we require that all LHS variables (including implicit kind variables) are also bare. In other words, this has to be a sole equation of that type family and it has to cover all possible patterns. If the patterns are not covering GHC reports that the type family is not injective.
3. If a LHS type variable that is declared as injective is not mentioned on injective position in the RHS GHC reports that the type family is not injective. Injective position means either argument to a type constructor or injective argument to a type family. Type inference can potentially loop when looking under injective type families in the RHS, so this requires [UndecidableInstances](#) (page 537); GHC suggests enabling the flag when it is necessary.
4. *Open type families* Open type families are typechecked incrementally. This means that when a module is imported type family instances contained in that module are checked against instances present in already imported modules.

A pair of an open type family equations is checked by attempting to unify their RHSs. If the RHSs don't unify this pair does not violate injectivity annotation. If unification succeeds with a substitution then LHSs of unified equations must be identical under that substitution. If they are not identical then GHC reports that the type family is not injective.

5. In a *closed type family* all equations are ordered and in one place. Equations are also checked pair-wise but this time an equation has to be paired with all the preceding equations. Of course a single-equation closed type family is trivially injective (unless (1), (2) or (3) above holds).

When checking a pair of closed type family equations GHC tried to unify their RHSs. If they don't unify this pair of equations does not violate injectivity annotation. If the RHSs can be unified under some substitution (possibly empty) then either the LHSs unify under the same substitution or the LHS of the latter equation is subsumed by earlier equations. If neither condition is met GHC reports that a type family is not injective.

Note that for the purpose of injectivity check in bullets (4) and (5) GHC uses a special variant of unification algorithm that treats type family applications as possibly unifying with anything.

## 6.4.10 Datatype promotion

### DataKinds

#### Since

7.4.1

#### Status

Included in *GHC2024* (page 314)

Allow promotion of data types to kind level.

This section describes *data type promotion*, an extension to the kind system that complements kind polymorphism. It is enabled by *DataKinds* (page 404), and described in more detail in the paper *Giving Haskell a Promotion*, which appeared at TLDI 2012. See also *TypeData* (page 410) for a more fine-grained alternative.

### 6.4.10.1 Motivation

Standard Haskell has a rich type language. Types classify terms and serve to avoid many common programming mistakes. The kind language, however, is relatively simple, distinguishing only regular types (kind `Type`) and type constructors (e.g. kind `Type -> Type -> Type`). In particular when using advanced type system features, such as type families (*Type families* (page 384)) or GADTs (*Generalised Algebraic Data Types (GADTs)* (page 380)), this simple kind system is insufficient, and fails to prevent simple errors. Consider the example of type-level natural numbers, and length-indexed vectors:

```
data Ze
data Su n

data Vec :: Type -> Type -> Type where
  Nil  :: Vec a Ze
  Cons :: a -> Vec a n -> Vec a (Su n)
```

The kind of `Vec` is `Type -> Type -> Type`. This means that, e.g., `Vec Int Char` is a well-kinded type, even though this is not what we intend when defining length-indexed vectors.

With *DataKinds* (page 404), the example above can then be rewritten to:

```
data Nat = Ze | Su Nat

data Vec :: Type -> Nat -> Type where
  Nil  :: Vec a Ze
  Cons :: a -> Vec a n -> Vec a (Su n)
```

With the improved kind of `Vec`, things like `Vec Int Char` are now ill-kinded, and GHC will report an error.

### 6.4.10.2 Overview

With *DataKinds* (page 404), GHC automatically promotes every datatype to be a kind and its (value) constructors to be type constructors. The following types

```
data Nat = Zero | Succ Nat

data List a = Nil | Cons a (List a)

data Pair a b = MkPair a b

data Sum a b = L a | R b
```

give rise to the following kinds and type constructors:

```
Nat :: Type
Zero :: Nat
Succ :: Nat -> Nat

List :: Type -> Type
Nil  :: forall k. List k
Cons :: forall k. k -> List k -> List k

Pair  :: Type -> Type -> Type
MkPair :: forall k1 k2. k1 -> k2 -> Pair k1 k2

Sum :: Type -> Type -> Type
L  :: k1 -> Sum k1 k2
R  :: k2 -> Sum k1 k2
```

Virtually all data constructors, even those with rich kinds, can be promoted. There are only a couple of exceptions to this rule:

- Data family instance constructors cannot be promoted at the moment. GHC's type theory just isn't up to the task of promoting data families, which requires full dependent types.
- Data constructors with contexts cannot be promoted. For example:

```
data Foo :: Type -> Type where
  MkFoo :: Show a => Foo a    -- not promotable
```

The following kinds and promoted data constructors can be used even when *DataKinds* (page 404) is not enabled:

- Type
- TYPE (see *Representation polymorphism* (page 430))
- Constraint (see *The Constraint kind* (page 553))
- CONSTRAINT
- Multiplicity and its promoted data constructors (see *LinearTypes* (page 458))
- LiftedRep (see *Representation polymorphism* (page 430))
- RuntimeRep and its promoted data constructors (see *Representation polymorphism* (page 430))

- Levity and its promoted data constructors (see [Representation polymorphism](#) (page 430))
- VecCount and its promoted data constructors
- VecElem and its promoted data constructors

It is also possible to use kinds declared with type data (see [TypeData](#) (page 410)) without enabling [DataKinds](#) (page 404).

### 6.4.10.3 Distinguishing between types and constructors

Consider

```
data P = MkP      -- 1
data Prom = P     -- 2
```

The name `P` on the type level will refer to the type `P` (which has a constructor `MkP`) rather than the promoted data constructor `P` of kind `Prom`. To refer to the latter, prefix it with a single quote mark: `'P`.

This syntax can be used even if there is no ambiguity (i.e. there's no type `P` in scope).

GHC supports [-Wunticked-promoted-constructors](#) (page 115) that warns whenever a promoted data constructor is written without a quote mark. As of GHC 9.4, this warning is no longer enabled by [-Wall](#) (page 97); we no longer recommend quote marks as a preferred default (see [#20531](#)).

Just as in the case of Template Haskell ([Syntax](#) (page 582)), GHC gets confused if you put a quote mark before a data constructor whose second character is a quote mark. In this case, just put a space between the promotion quote and the data constructor:

```
data T = A'
type S = 'A'    -- ERROR: looks like a character
type R = ' A'   -- OK: promoted `A`
```

### 6.4.10.4 Type-level literals

[DataKinds](#) (page 404) enables the use of numeric and string literals at the type level. For more information, see [Type-Level Literals](#) (page 433).

### 6.4.10.5 Promoted list and tuple types

With [DataKinds](#) (page 404), Haskell's list and tuple types are natively promoted to kinds, and enjoy the same convenient syntax at the type level, albeit prefixed with a quote:

```
data HList :: [Type] -> Type where
  HNil  :: HList '[]
  HCons :: a -> HList t -> HList (a ': t)

data Tuple :: (Type,Type) -> Type where
  Tuple :: a -> b -> Tuple '(a,b)
```

(continues on next page)



(continued from previous page)

```
foo0 :: HList '[]
foo0 = HNil

foo1 :: HList '[Int]
foo1 = HCons (3::Int) HNil

foo2 :: HList [Int, Bool]
foo2 = ...
```

For type-level lists of *two or more elements*, such as the signature of `foo2` above, the quote may be omitted because the meaning is unambiguous. But for lists of one or zero elements (as in `foo0` and `foo1`), the quote is required, because the types `[]` and `[Int]` have existing meanings in Haskell.

**Note:** The declaration for `HCons` also requires [TypeOperators](#) (page 368) because of infix type operator `(':)`

#### 6.4.10.6 Promoting existential data constructors

Note that we do promote existential data constructors that are otherwise suitable. For example, consider the following:

```
data Ex :: Type where
  MkEx :: forall a. a -> Ex
```

Both the type `Ex` and the data constructor `MkEx` get promoted, with the polymorphic kind `'MkEx :: forall k. k -> Ex`. Somewhat surprisingly, you can write a type family to extract the member of a type-level existential:

```
type family UnEx (ex :: Ex) :: k
type instance UnEx (MkEx x) = x
```

At first blush, `UnEx` seems poorly-kinded. The return kind `k` is not mentioned in the arguments, and thus it would seem that an instance would have to return a member of `k` *for any* `k`. However, this is not the case. The type family `UnEx` is a kind-indexed type family. The return kind `k` is an implicit parameter to `UnEx`. The elaborated definitions are as follows (where implicit parameters are denoted by braces):

```
type family UnEx {k :: Type} (ex :: Ex) :: k
type instance UnEx {k} (MkEx @k x) = x
```

Thus, the instance triggers only when the implicit parameter to `UnEx` matches the implicit parameter to `MkEx`. Because `k` is actually a parameter to `UnEx`, the kind is not escaping the existential, and the above code is valid.

See also [#7347](#).

### 6.4.10.7 DataKinds and type synonyms

The *DataKinds* (page 404) extension interacts with type synonyms in the following ways:

1. In a *type* context: *DataKinds* (page 404) is not required to use a type synonym that expands to a type that would otherwise require the extension. For example:

```
{-# LANGUAGE DataKinds #-}
module A where

    type MyTrue = 'True

{-# LANGUAGE NoDataKinds #-}
module B where

    import A
    import Data.Proxy

    f :: Proxy MyTrue
    f = Proxy
```

GHC will accept the type signature for `f` even though *DataKinds* (page 404) is not enabled, as the promoted data constructor `True` is tucked underneath the `MyTrue` type synonym. If the user had written `Proxy 'True` directly, however, then *DataKinds* (page 404) would be required.

2. In a *kind* context: *DataKinds* (page 404) applies to all types mentioned in the kind, including the expansions of type synonyms. For instance, given this module:

```
module C where

    type MyType = Type
    type MySymbol = Symbol
```

We would accept or reject the following definitions in this module, which makes use of *Standalone kind signatures and polymorphic recursion* (page 417):

```
{-# LANGUAGE NoDataKinds #-}
module D where

    import C

    -- ACCEPTED: The kind only mentions Type, which doesn't require
    -- DataKinds
    type D1 :: Type -> Type
    data D1 a

    -- REJECTED: The kind mentions Symbol, which requires DataKinds to use
    -- in
    -- a kind position
    data D2 :: Symbol -> Type
    data D2 a

    -- ACCEPTED: The kind mentions a type synonym MyType that expands to
    -- Type, which doesn't require DataKinds
```

(continues on next page)

(continued from previous page)

```
data D3 :: MyType -> Type
data D3 a

-- REJECTED: The kind mentions a type synonym MySymbol that expands to
-- Symbol, which requires DataKinds to use in a kind position
data D4 :: MySymbol -> Type
data D4 a
```

### 6.4.11 Unique syntax for type-level lists and tuples

#### ListTuplePuns

Since  
9.10.1

Accept bracket syntax to denote type constructors, using single quotes to disambiguate data constructors.

The previously defined mechanism for specifying data constructors with bracket syntax and single quotes is governed by this extension, which is enabled by default.

With `NoListTuplePuns`, brackets are unambiguously parsed as data constructors, while the single quote is not accepted as a prefix for them anymore. Type constructors cannot be expressed with brackets anymore; instead, new data type declarations in regular syntax have been added to `ghc-prim`:

```
data List a = [] | a : List a
data Unit = ()
data Tuple2 a b = (a, b)
data Tuple2# a b = (# a, b #)
data Sum2# a b = (# a | #) | (# | b #)
class (a, b) => CTuple2 a b
instance (c1, c2) => CTuple2 c1 c2
```

`CTuple2` is a constraint tuple, which historically only concerns declarations like:

```
type C = (Eq Int, Ord String)
```

These are distinct from the usual specification of multiple constraints on functions or instances with parentheses, since those are treated specially by GHC.

When the extension is disabled, any occurrence of special syntax in types will be treated as the data constructor, so a type of `(Int, String)` has kind `Tuple2 Type Type`, corresponding to the type `'(Int, String)` with kind `(Type, Type)` when `ListTuplePuns` is enabled.

The explicit disambiguation syntax using single quotes is invalid syntax when the extension is disabled.

The earlier example would need to be rewritten like this:

```
data HList :: List Type -> Type where
  HNil :: HList []
  HCons :: a -> HList t -> HList (a : t)
```

(continues on next page)

(continued from previous page)

```

data Tuple :: Tuple2 Type Type -> Type where
  Tuple :: a -> b -> Tuple2 a b

foo0 :: HList []
foo0 = HNil

foo1 :: HList [Int]
foo1 = HCons (3 :: Int) HNil

foo2 :: HList [Int, Bool]
foo2 = ...

```

Constraint tuples may be mixed with conventional syntax:

```

f ::
  Monad m =>
  CTuple2 (Monad m) (Monad m) =>
  (Monad m, CTuple2 (Monad m) (Monad m)) =>
  m Int
f = pure 5

```

The new type constructors are exported only from the library `ghc-experimental`, by the modules `Data.Tuple.Experimental`, `Data.Sum.Experimental` and `Prelude.Experimental`.

Please refer to [GHC Proposal #475](#) for the full specification of effects and interactions.

## 6.4.12 Type-level data declarations

### TypeData

Since  
9.6.1

Allow type data declarations, which define constructors at the type level.

This extension facilitates type-level (compile-time) programming by allowing a type-level counterpart of data declarations, such as this definition of type-level natural numbers:

```
type data Nat = Zero | Succ Nat
```

This is similar to the corresponding `data` declaration, except that the constructors `Zero` and `Succ` it introduces belong to the type constructor namespace, so they can be used in types, such as the type of length-indexed vectors:

```

data Vec :: Type -> Nat -> Type where
  Nil  :: Vec a Zero
  Cons :: a -> Vec a n -> Vec a (Succ n)

```

*TypeData* (page 410) is a more fine-grained alternative to the *DataKinds* (page 404) extension, which defines *all* the constructors in *all* data declarations as both data constructors and type constructors.

A type data declaration has the same syntax as a data declaration, either an ordinary algebraic data type or a GADT, prefixed with the keyword `type`, except that it may not contain a

datatype context (even with [DatatypeContexts](#) (page 367)), labelled fields, strictness flags, or a deriving clause.

The only constraints permitted in the types of constructors are equality constraints, e.g.:

```
type data P :: Type -> Type -> Type where
  MkP :: (a ~ Natural, b ~~ Char) => P a b
```

Because type data declarations introduce type constructors, they do not permit constructors with the same names as types, so the following declaration is invalid:

```
type data T = T      // Invalid
```

The compiler will reject this declaration, because the type constructor `T` is defined twice (as the datatype being defined and as a type constructor).

The main type constructor of a type data declaration can be defined recursively, as in the `Nat` example above, but its constructors may not be used in types within the same mutually recursive group of declarations, so the following is forbidden:

```
type data T f = K (f (K Int)) // Invalid
```

### 6.4.13 Kind polymorphism

#### TypeInType

##### Implies

[PolyKinds](#) (page 411), [DataKinds](#) (page 404), [KindSignatures](#) (page 564)

##### Since

8.0.1

##### Status

Deprecated

The extension [TypeInType](#) (page 411) is now deprecated: its sole effect is to switch on [PolyKinds](#) (page 411) (and hence [KindSignatures](#) (page 564)) and [DataKinds](#) (page 404).

#### PolyKinds

##### Implies

[KindSignatures](#) (page 564)

##### Since

7.4.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow kind polymorphic types.

This section describes GHC's kind system, as it appears in version 8.0 and beyond. The kind system as described here is always in effect, with or without extensions, although it is a conservative extension beyond standard Haskell. The extensions above simply enable syntax and tweak the inference algorithm to allow users to take advantage of the extra expressiveness of GHC's kind system.

### 6.4.13.1 Overview of kind polymorphism

Consider inferring the kind for

```
data App f a = MkApp (f a)
```

In Haskell 98, the inferred kind for `App` is `(Type -> Type) -> Type -> Type`. But this is overly specific, because another suitable Haskell 98 kind for `App` is `((Type -> Type) -> Type) -> (Type -> Type) -> Type`, where the kind assigned to `a` is `Type -> Type`. Indeed, without kind signatures ([KindSignatures](#) (page 564)), it is necessary to use a dummy constructor to get a Haskell compiler to infer the second kind. With kind polymorphism ([PolyKinds](#) (page 411)), GHC infers the kind for all `k`. `(k -> Type) -> k -> Type` for `App`, which is its most general kind.

Thus, the chief benefit of kind polymorphism is that we can now infer these most general kinds and use `App` at a variety of kinds:

```
App Maybe Int    -- `k` is instantiated to Type

data T a = MkT (a Int)    -- `a` is inferred to have kind (Type -> Type)
App T Maybe      -- `k` is instantiated to (Type -> Type)
```

### 6.4.13.2 Overview of Type-in-Type

GHC 8 extends the idea of kind polymorphism by declaring that types and kinds are indeed one and the same. Nothing within GHC distinguishes between types and kinds. Another way of thinking about this is that the type `Bool` and the “promoted kind” `Bool` are actually identical. (Note that term `True` and the type `'True` are still distinct, because the former can be used in expressions and the latter in types.) This lack of distinction between types and kinds is a hallmark of dependently typed languages. Full dependently typed languages also remove the difference between expressions and types, but doing that in GHC is a story for another day.

One simplification allowed by combining types and kinds is that the type of `Type` is just `Type`. It is true that the `Type :: Type` axiom can lead to non-termination, but this is not a problem in GHC, as we already have other means of non-terminating programs in both types and expressions. This decision (among many, many others) *does* mean that despite the expressiveness of GHC’s type system, a “proof” you write in Haskell is not an irrefutable mathematical proof. GHC promises only partial correctness, that if your programs compile and run to completion, their results indeed have the types assigned. It makes no claim about programs that do not finish in a finite amount of time.

To learn more about this decision and the design of GHC under the hood please see the [paper](#) introducing this kind system to GHC/Haskell.

### 6.4.13.3 Principles of kind inference

Generally speaking, when [PolyKinds](#) (page 411) is on, GHC tries to infer the most general kind for a declaration. In many cases (for example, in a datatype declaration) the definition has a right-hand side to inform kind inference. But that is not always the case. Consider

```
type family F a
```

Type family declarations have no right-hand side, but GHC must still infer a kind for `F`. Since there are no constraints, it could infer `F :: forall k1 k2. k1 -> k2`, but that seems *too*

polymorphic. So GHC defaults those entirely-unconstrained kind variables to `Type` and we get `F :: Type -> Type`. You can still declare `F` to be kind-polymorphic using kind signatures:

```
type family F1 a           -- F1 :: Type -> Type
type family F2 (a :: k)    -- F2 :: forall k. k -> Type
type family F3 a :: k      -- F3 :: forall k. Type -> k
type family F4 (a :: k1) :: k2 -- F4 :: forall k1 k2. k1 -> k2
```

The general principle is this:

- When there is a right-hand side, GHC infers the most polymorphic kind consistent with the right-hand side. Examples: ordinary data type and GADT declarations, class declarations. In the case of a class declaration the role of “right hand side” is played by the class method signatures.
- When there is no right hand side, GHC defaults argument and result kinds to `Type`, except when directed otherwise by a kind signature. Examples: data and open type family declarations.

This rule has occasionally-surprising consequences (see [#10132](#)).

```
class C a where           -- Class declarations are generalised
                          -- so C :: forall k. k -> Constraint
  data D1 a               -- No right hand side for these two family
  type F1 a               -- declarations, but the class forces (a :: k)
                          -- so D1, F1 :: forall k. k -> Type

data D2 a                -- No right-hand side so D2 :: Type -> Type
type F2 a                -- No right-hand side so F2 :: Type -> Type
```

The kind-polymorphism from the class declaration makes `D1` kind-polymorphic, but not so `D2`; and similarly `F1`, `F2`.

#### 6.4.13.4 Kind inference in type signatures

When kind-checking a type, GHC considers only what is written in that type when figuring out how to generalise the type's kind.

For example, consider these definitions (with [ScopedTypeVariables](#) (page 565)):

```
data Proxy a              -- Proxy :: forall k. k -> Type
p :: forall a. Proxy a
p = Proxy :: Proxy (a :: Type)
```

GHC reports an error, saying that the kind of `a` should be a kind variable `k`, not `Type`. This is because, by looking at the type signature `forall a. Proxy a`, GHC assumes `a`'s kind should be generalised, not restricted to be `Type`. The function definition is then rejected for being more specific than its type signature.

### 6.4.13.5 Explicit kind quantification

Enabled by *PolyKinds* (page 411), GHC supports explicit kind quantification, as in these examples:

```
data Proxy :: forall k. k -> Type
f :: (forall k (a :: k). Proxy a -> ()) -> Int
```

Note that the second example has a `forall` that binds both a kind `k` and a type variable `a` of kind `k`. In general, there is no limit to how deeply nested this sort of dependency can work. However, the dependency must be well-scoped: `forall (a :: k) k. ...` is an error.

### 6.4.13.6 Inferring the order of variables in a type/class declaration

It is possible to get intricate dependencies among the type variables introduced in a type or class declaration. Here is an example:

```
data T a (b :: k) c = MkT (a c)
```

After analysing this declaration, GHC will discover that `a` and `c` can be kind-polymorphic, with `a :: k2 -> Type` and `c :: k2`. We thus infer the following kind:

```
T :: forall {k2 :: Type} (k :: Type). (k2 -> Type) -> k -> k2 -> Type
```

Note that `k2` is placed *before* `k`, and that `k` is placed *before* `a`. Also, note that `k2` is written here in braces. As explained with *TypeApplications* (page 435) (*Inferred vs. specified type variables* (page 435)), type and kind variables that GHC generalises over, but not written in the original program, are not available for visible type application. (These are called *inferred variables*.) Such variables are written in braces.

The general principle is this:

- Variables not available for type application come first.
- Then come variables the user has written, implicitly brought into scope in a type variable's kind.
- Lastly come the normal type variables of a declaration.
- Variables not given an explicit ordering by the user are sorted according to *ScopedSort* (*Ordering of specified variables* (page 436)).

With the `T` example above, we could bind `k` *after* `a`; doing so would not violate dependency concerns. However, it would violate our general principle, and so `k` comes first.

Sometimes, this ordering does not respect dependency. For example:

```
data T2 k (a :: k) (c :: Proxy '[a, b])
```

It must be that `a` and `b` have the same kind. Note also that `b` is implicitly declared in `c`'s kind. Thus, according to our general principle, `b` must come *before* `k`. However, `b` *depends on* `k`. We thus reject `T2` with a suitable error message.

In associated types, we order the type variables as if the type family was a top-level declaration, ignoring the visibilities of the class's type variable binders. Here is an example:

```
class C (a :: k) b where
  type F (c :: j) (d :: Proxy m) a b
```



We infer these kinds:

```
C :: forall {k1 :: Type} (k :: Type). k -> k1 -> Constraint
F :: forall {k1 :: Type} {k2 :: Type} {k3 :: Type} j (m :: k1).
  j -> Proxy m -> k2 -> k3 -> Type
```

Note that the kind of `a` is specified in the kind of `C` but inferred in the kind of `F`.

The “general principle” described here is meant to make all this more predictable for users. It would not be hard to extend GHC to relax this principle. If you should want a change here, consider writing a [proposal](#) to do so.

#### 6.4.13.7 Complete user-supplied kind signatures and polymorphic recursion

##### CUSKs

###### Since

8.10.1

###### Status

Included in *Haskell98* (page 316), *Haskell2010* (page 315)

NB! This is a legacy feature, see [StandaloneKindSignatures](#) (page 417) for the modern replacement.

Just as in type inference, kind inference for recursive types can only use *monomorphic* recursion. Consider this (contrived) example:

```
data T m a = MkT (m a) (T Maybe (m a))
-- GHC infers kind T :: (Type -> Type) -> Type -> Type
```

The recursive use of `T` forced the second argument to have kind `Type`. However, just as in type inference, you can achieve polymorphic recursion by giving a *complete user-supplied kind signature* (or CUSK) for `T`. A CUSK is present when all argument kinds and the result kind are known, without any need for inference. For example:

```
data T (m :: k -> Type) :: k -> Type where
  MkT :: m a -> T Maybe (m a) -> T m a
```

The complete user-supplied kind signature specifies the polymorphic kind for `T`, and this signature is used for all the calls to `T` including the recursive ones. In particular, the recursive use of `T` is at kind `Type`.

What exactly is considered to be a “complete user-supplied kind signature” for a type constructor? These are the forms:

- For a datatype, every type variable must be annotated with a kind. In a GADT-style declaration, there may also be a kind signature (with a top-level `::` in the header), but the presence or absence of this annotation does not affect whether or not the declaration has a complete signature.

```
data T1 :: (k -> Type) -> k -> Type      where ...
-- Yes; T1 :: forall k. (k->Type) -> k -> Type

data T2 (a :: k -> Type) :: k -> Type    where ...
-- Yes; T2 :: forall k. (k->Type) -> k -> Type
```

(continues on next page)

(continued from previous page)

```

data T3 (a :: k -> Type) (b :: k) :: Type where ...
-- Yes; T3 :: forall k. (k->Type) -> k -> Type

data T4 (a :: k -> Type) (b :: k)      where ...
-- Yes; T4 :: forall k. (k->Type) -> k -> Type

data T5 a (b :: k) :: Type            where ...
-- No; kind is inferred

data T6 a b                          where ...
-- No; kind is inferred

```

- For a datatype with a top-level `::`: all kind variables introduced after the `::` must be explicitly quantified.

```

data T1 :: k -> Type                -- No CUSK: `k` is not explicitly
--quantified
data T2 :: forall k. k -> Type      -- CUSK: `k` is bound explicitly
data T3 :: forall (k :: Type). k -> Type -- still a CUSK

```

- For a newtype, the rules are the same as they are for a data type unless *UnliftedNewtypes* (page 613) is enabled. With *UnliftedNewtypes* (page 613), the type constructor only has a CUSK if a kind signature is present. As with a datatype with a top-level `::`, all kind variables introduced after the `::` must be explicitly quantified

```

{-# LANGUAGE UnliftedNewtypes #-}
newtype N1 where                -- No; missing kind signature
newtype N2 :: TYPE IntRep where -- Yes; kind signature present
newtype N3 (a :: Type) where    -- No; missing kind signature
newtype N4 :: k -> Type where    -- No; `k` is not explicitly quantified
newtype N5 :: forall (k :: Type). k -> Type where -- Yes; good signature

```

- For a class, every type variable must be annotated with a kind.
- For a type synonym, every type variable and the result type must all be annotated with kinds:

```

type S1 (a :: k) = (a :: k)      -- Yes S1 :: forall k. k -> k
type S2 (a :: k) = a             -- No kind is inferred
type S3 (a :: k) = Proxy a       -- No kind is inferred

```

Note that in S2 and S3, the kind of the right-hand side is rather apparent, but it is still not considered to have a complete signature – no inference can be done before detecting the signature.

- An un-associated open type or data family declaration *always* has a CUSK; un-annotated type variables default to kind `Type`:

```

data family D1 a                -- D1 :: Type -> Type
data family D2 (a :: k)         -- D2 :: forall k. k -> Type
data family D3 (a :: k) :: Type -- D3 :: forall k. k -> Type
type family S1 a :: k -> Type   -- S1 :: forall k. Type -> k -> Type

```

- An associated type or data family declaration has a CUSK precisely if its enclosing class has a CUSK.

```
class C a where           -- no CUSK
  type AT a b             -- no CUSK, b is defaulted

class D (a :: k) where    -- yes CUSK
  type AT2 a b            -- yes CUSK, b is defaulted
```

- A closed type family has a complete signature when all of its type variables are annotated and a return kind (with a top-level ::) is supplied.

It is possible to write a datatype that syntactically has a CUSK (according to the rules above) but actually requires some inference. As a very contrived example, consider

```
data Proxy a              -- Proxy :: forall k. k -> Type
data X (a :: Proxy k)
```

According to the rules above X has a CUSK. Yet, the kind of k is undetermined. It is thus quantified over, giving X the kind `forall k1 (k :: k1). Proxy k -> Type`.

The detection of CUSKs is enabled by the `CUSKs` (page 415) flag, which is switched off by default in GHC2021 and on in Haskell98 and Haskell2010. This extension is scheduled for deprecation to be replaced with `StandaloneKindSignatures` (page 417).

#### 6.4.13.8 Standalone kind signatures and polymorphic recursion

##### StandaloneKindSignatures

###### Implies

`NoCUSKs` (page 415)

###### Since

8.10.1

###### Status

Included in `GHC2024` (page 314), `GHC2021` (page 314)

Just as in type inference, kind inference for recursive types can only use *monomorphic* recursion. Consider this (contrived) example:

```
data T m a = MkT (m a) (T Maybe (m a))
-- GHC infers kind T :: (Type -> Type) -> Type -> Type
```

The recursive use of T forced the second argument to have kind `Type`. However, just as in type inference, you can achieve polymorphic recursion by giving a *standalone kind signature* for T:

```
type T :: (k -> Type) -> k -> Type
data T m a = MkT (m a) (T Maybe (m a))
```

The standalone kind signature specifies the polymorphic kind for T, and this signature is used for all the calls to T including the recursive ones. In particular, the recursive use of T is at kind `Type`.

While a standalone kind signature determines the kind of a type constructor, it does not determine its arity. This is of particular importance for type families and type synonyms, as they

cannot be partially applied. See [Type family declarations](#) (page 388) for more information about arity.

The arity can be specified using explicit binders and inline kind annotations:

```
-- arity F0 = 0
type F0 :: forall k. k -> Type
type family F0 :: forall k. k -> Type

-- arity F1 = 1
type F1 :: forall k. k -> Type
type family F1 :: k -> Type

-- arity F2 = 2
type F2 :: forall k. k -> Type
type family F2 a :: Type
```

In absence of an inline kind annotation, the inferred arity includes all explicitly bound parameters and all immediately following invisible parameters:

```
-- arity FD1 = 1
type FD1 :: forall k. k -> Type
type FD1

-- arity FD2 = 2
type FD2 :: forall k. k -> Type
type FD2 a
```

Note that F0, F1, F2, FD1, and FD2 all have identical standalone kind signatures. The arity is inferred from the type family header.

The kind variables bound by an outermost `forall` in a standalone kind signature scope only over the kind in that signature. Unlike term-level type signatures (see [Declaration type signatures](#) (page 567)), the outermost kind variables do *not* scope over the corresponding declaration. For example, given this class declaration:

```
class C (a :: k) where
  m :: Proxy k -> Proxy a -> String
```

The following would *not* be an equivalent definition of C:

```
type C :: forall k. k -> Constraint
class C a where
  m :: Proxy k -> Proxy a -> String
```

Because the `k` from the standalone kind signature does not scope over C's definition, the `k` in `m`'s type signature is no longer the kind of `a`, but rather a completely distinct kind. It's as if you had written this:

```
type C :: forall k. k -> Constraint
class C (a :: kindOfA) where
  m :: forall k. Proxy k -> Proxy (a :: kindOfA) -> String
```

To avoid this issue, C's definition must be given an inline kind annotation like so:

```

type C :: forall k. k -> Constraint
class C (a :: k) where
  m :: Proxy k -> Proxy a -> String

```

#### 6.4.13.9 Standalone kind signatures and declaration headers

GHC requires that in the presence of a standalone kind signature, data declarations must bind all their parameters. For example:

```

type Prox1 :: k -> Type
data Prox1 a = MkProx1
  -- OK.

type Prox2 :: k -> Type
data Prox2 = MkProx2
  -- Error:
  --   • Expected a type, but found something with kind 'k -> Type'
  --   • In the data type declaration for 'Prox2'

```

GADT-style data declarations may either bind their parameters or use an inline signature in addition to the standalone kind signature:

```

type GProx1 :: k -> Type
data GProx1 a where MkGProx1 :: GProx1 a
  -- OK.

type GProx2 :: k -> Type
data GProx2 where MkGProx2 :: GProx2 a
  -- Error:
  --   • Expected a type, but found something with kind 'k -> Type'
  --   • In the data type declaration for 'GProx2'

type GProx3 :: k -> Type
data GProx3 :: k -> Type where MkGProx3 :: GProx3 a
  -- OK.

type GProx4 :: k1 -> Type
data GProx4 :: k2 -> Type where MkGProx4 :: GProx4 a
  -- OK.

```

Note that variables in a kind signature must stand for variables, not arbitrary types. For example, the following is rejected:

```

type GProx5 :: k -> Type
data GProx5 :: w where MkGProx5 :: GProx5 a
  -- Error:
  --   • Couldn't match expected kind 'w' with actual kind 'k -> Type'
  --   • In the data type declaration for 'GProx5'

```

Classes are subject to the same rules:

```
type C1 :: Type -> Constraint
class C1 a
  -- OK.

type C2 :: Type -> Constraint
class C2
  -- Error:
  --   • Couldn't match expected kind 'Constraint'
  --     with actual kind 'Type -> Constraint'
  --   • In the class declaration for 'C2'
```

For type families, the number of parameters in the kind signature takes on additional meaning: it specifies the arity of the type family, i.e. how many arguments the type family requires before reducing. Any type family instances must then provide the same number of arguments. For example:

```
type F1 :: Type -> Type
type family F1 where
  F1 = Maybe
  -- OK.

type F2 :: Type -> Type
type family F2 where
  F2 () = Bool
  F2 a = Maybe a
  -- Error:
  --   • Number of parameters must match family declaration; expected 0
  --   • In the type family declaration for 'F2'

type F3 :: Type -> Type
type family F3 a where
  F3 () = Bool
  F3 a = Maybe a
  -- OK.
```

Data families are tricky territory. Their headers are exempt from this rule, but their instances are not:

```
type T :: k -> Type
data family T
  -- OK.

data instance T Int = MkT1
  -- OK.

data instance T = MkT3
  -- Error:
  --   • Expecting one more argument to 'T'
  --     Expected a type, but 'T' has kind 'k0 -> Type'
  --   • In the data instance declaration for 'T'
```

This also applies to GADT-style data instances:

```
data instance T (a :: Nat) where MkN4 :: T 4
                                MKN9 :: T 9
-- OK.

data instance T :: Symbol -> Type where MkSN :: T "Neptune"
                                MksJ :: T "Jupiter"
-- OK.

data instance T where MkT4 :: T x
-- Error:
--   • Expecting one more argument to 'T'
--   • Expected a type, but 'T' has kind 'k0 -> Type'
--   • In the data instance declaration for 'T'
```

#### 6.4.13.10 Kind inference in data type declarations

Consider the declaration

```
data T1 f a = MkT1 (f a)
data T2 f a where
  MkT2 :: f a -> T f a
```

In both cases GHC looks at the data constructor declarations to give constraints on the kind of `T`, yielding

```
T1, T2 :: forall k. (k -> Type) -> k -> Type
```

Consider the type

```
type G :: forall k. k -> Type
data G (a :: k) where
  GInt    :: G Int
  GMaybe :: G Maybe
```

This datatype `G` is GADT-like in both its kind and its type. Suppose you have `g :: G a`, where `a :: k`. Then pattern matching to discover that `g` is in fact `GMaybe` tells you both that `k ~ (Type -> Type)` and `a ~ Maybe`. The definition for `G` requires that [PolyKinds](#) (page 411) be in effect, but pattern-matching on `G` requires no extension beyond [GADTs](#) (page 380). That this works is actually a straightforward extension of regular GADTs and a consequence of the fact that kinds and types are the same.

Note that the datatype `G` is used at different kinds in its body, and therefore that kind-indexed GADTs use a form of polymorphic recursion. It is thus only possible to use this feature if you have provided a complete user-supplied kind signature (CUSK) for the datatype ([Complete user-supplied kind signatures and polymorphic recursion](#) (page 415)), or a standalone kind signature ([Standalone kind signatures and polymorphic recursion](#) (page 417)); in the case of `G` we both. If you wish to see the kind indexing explicitly, you can do so by enabling [-fprint-explicit-kinds](#) (page 88) and querying `G` with GHCi's `:info` (page 57) command:

```
> :set -fprint-explicit-kinds
> :info G
type role G nominal nominal
type G :: forall k. k -> Type
```

(continues on next page)

(continued from previous page)

```
data G @k a where
  GInt   :: G @Type Int
  GMaybe :: G @(Type -> Type) Maybe
```

where you can see the GADT-like nature of the two constructors.

#### 6.4.13.11 Kind inference for data/newtype instance declarations

Consider these declarations

```
data family T :: forall k. (k -> Type) -> k -> Type

data instance T p q where
  MkT :: forall r. r Int -> T r Int
```

Here `T` has an invisible kind argument; and perhaps it is instantiated to `Type` in the instance, thus:

```
data instance T @Type (p :: Type -> Type) (q :: Type) where
  MkT :: forall r. r Int -> T r Int
```

Or perhaps we intended the specialisation to be in the GADT data constructor, thus:

```
data instance T @k (p :: k -> Type) (q :: k) where
  MkT :: forall r. r Int -> T @Type r Int
```

It gets more complicated if there are multiple constructors. In general, there is no principled way to tell which type specialisation comes from the data instance, and which from the individual GADT data constructors.

So GHC implements this rule: in data/newtype instance declarations (unlike ordinary data/newtype declarations) we do *not* look at the constructor declarations when inferring the shape of the instance header. The principle is that *the instantiation of the data instance should be apparent from the header alone*. This principle makes the program easier to understand, and avoids the swamp of complexity indicated above.

#### 6.4.13.12 Kind inference in class instance declarations

Consider the following example of a poly-kinded class and an instance for it:

```
class C a where
  type F a

instance C b where
  type F b = b -> b
```

In the class declaration, nothing constrains the kind of the type `a`, so it becomes a poly-kinded type variable (`a :: k`). Yet, in the instance declaration, the right-hand side of the associated type instance `b -> b` says that `b` must be of kind `Type`. GHC could theoretically propagate this information back into the instance head, and make that instance declaration apply only to type of kind `Type`, as opposed to types of any kind. However, GHC does *not* do this.



In short: GHC does *not* propagate kind information from the members of a class instance declaration into the instance declaration head.

This lack of kind inference is simply an engineering problem within GHC, but getting it to work would make a substantial change to the inference infrastructure, and it's not clear the payoff is worth it. If you want to restrict *b*'s kind in the instance above, just use a kind signature in the instance head.

#### 6.4.13.13 Kind inference in type synonyms and type family instances

Consider the scoping rules for type synonyms and type family instances, such as these:

```
type      TS a (b :: k) = <rhs>
type instance TF a (b :: k) = <rhs>
```

The basic principle is that all variables mentioned on the right hand side <rhs> must be bound on the left hand side:

```
type TS a (b :: k) = (k, a, Proxy b)    -- accepted
type TS a (b :: k) = (k, a, Proxy b, z) -- rejected: z not in scope
```

But there is one exception: free variables mentioned in the outermost kind signature on the right hand side are quantified implicitly. Thus, in the following example the variables *a*, *b*, and *k* are all in scope on the right hand side of *S*:

```
type S a b = <rhs> :: k -> k
```

The reason for this exception is that there may be no other way to bind *k*. For example, suppose we wanted *S* to have the following kind with an *invisible* parameter *k*:

```
S :: forall k. Type -> Type -> k -> k
```

In this case, we could not simply bind *k* on the left-hand side, as *k* would become a *visible* parameter:

```
type S k a b = <rhs> :: k -> k
S :: forall k -> Type -> Type -> k -> k
```

Note that we only look at the *outermost* kind signature to decide which variables to quantify implicitly. As a counter-example, consider *M1*:

```
type M1 = Just (Nothing :: Maybe k)    -- rejected: k not in scope
```

Here, the kind signature is hidden inside *Just*, and there is no outermost kind signature. We can fix this example by providing an outermost kind signature:

```
type M2 = Just (Nothing :: Maybe k) :: Maybe (Maybe k)
```

Here, *k* is brought into scope by `:: Maybe (Maybe k)`.

A kind signature is considered to be outermost regardless of redundant parentheses:

```
type P =      Nothing :: Maybe a    -- accepted
type P = (((Nothing :: Maybe a))) -- accepted
```

Closed type family instances are subject to the same rules:

```

type family F where
  F = Nothing :: Maybe k           -- accepted

type family F where
  F = Just (Nothing :: Maybe k)    -- rejected: k not in scope

type family F where
  F = Just (Nothing :: Maybe k) :: Maybe (Maybe k) -- accepted

type family F :: Maybe (Maybe k) where
  F = Just (Nothing :: Maybe k)    -- rejected: k not in scope

type F :: forall k. Maybe (Maybe k)
type family F @k where
  F @k = Just (Nothing :: Maybe k) -- accepted

-- CUSKs version (Legacy)
type family F :: Maybe (Maybe k) where
  F @k = Just (Nothing :: Maybe k) -- accepted

```

Kind variables can also be quantified in *visible* positions. Consider the following two examples:

```

data ProxyKInvis (a :: k)
data ProxyKVis k (a :: k)

```

In the first example, the kind variable *k* is an *invisible* argument to `ProxyKInvis`. In other words, a user does not need to instantiate *k* explicitly, as kind inference automatically determines what *k* should be. For instance, in `ProxyKInvis True`, *k* is inferred to be `Bool`. This is reflected in the kind of `ProxyKInvis`:

```
ProxyKInvis :: forall k. k -> Type
```

In the second example, *k* is a *visible* argument to `ProxyKVis`. That is to say, *k* is an argument that users must provide explicitly when applying `ProxyKVis`. For example, `ProxyKVis Bool True` is a well formed type.

What is the kind of `ProxyKVis`? One might say `forall k. Type -> k -> Type`, but this isn't quite right, since this would allow incorrect things like `ProxyKVis Bool Int`, which should be rejected due to the fact that `Int` is not of kind `Bool`. The key observation is that the kind of the second argument *depends* on the first argument. GHC indicates this dependency in the syntax that it gives for the kind of `ProxyKVis`:

```
ProxyKVis :: forall k -> k -> Type
```

This kind is similar to the kind of `ProxyKInvis`, but with a key difference: the type variables quantified by the `forall` are followed by an arrow (`->`), not a dot (`.`). This is a visible, dependent quantifier. It is visible in that the user must pass in a type for *k* explicitly, and it is dependent in the sense that *k* appears later in the kind of `ProxyKVis`. As a counterpart, the *k* binder in `forall k. k -> Type` can be thought of as an *invisible*, dependent quantifier.

GHC permits writing kinds with this syntax, provided that the `ExplicitForAll` and `PolyKinds` language extensions are enabled. Just like the invisible `forall`, one can put explicit kind signatures on visibly bound kind variables, so the following is syntactically valid:

```
ProxyKVis :: forall (k :: Type) -> k -> Type
```

Currently, the ability to write visible, dependent quantifiers is limited to kinds. Consequently, visible dependent quantifiers are rejected in any context that is unambiguously the type of a term. They are also rejected in the types of data constructors.

#### 6.4.13.14 Kind inference in closed type families

Although all open type families are considered to have a complete user-supplied kind signature (*Complete user-supplied kind signatures and polymorphic recursion* (page 415)), we can relax this condition for closed type families, where we have equations on which to perform kind inference. GHC will infer kinds for the arguments and result types of a closed type family.

GHC supports *kind-indexed* type families, where the family matches both on the kind and type. GHC will *not* infer this behaviour without a complete user-supplied kind signature or standalone kind signature (see *Standalone kind signatures and polymorphic recursion* (page 417)), because doing so would sometimes infer non-principal types. Indeed, we can see kind-indexing as a form of polymorphic recursion, where a type is used at a kind other than its most general in its own definition.

For example:

```
type family F1 a where
  F1 True  = False
  F1 False = True
  F1 x     = x
-- F1 fails to compile: kind-indexing is not inferred

type family F2 (a :: k) where
  F2 True  = False
  F2 False = True
  F2 x     = x
-- F2 fails to compile: no complete signature

type F3 :: k -> k
type family F3 a where
  F3 True  = False
  F3 False = True
  F3 x     = x

-- CUSKs version (legacy)
type family F4 (a :: k) :: k where
  F4 True  = False
  F4 False = True
  F4 x     = x
-- OK
```

### 6.4.13.15 Higher-rank kinds

In concert with [RankNTypes](#) (page 451), GHC supports higher-rank kinds. Here is an example:

```
-- Heterogeneous propositional equality
data (a :: k1) :~~: (b :: k2) where
  HRefl :: a :~~: a

class HTestEquality (t :: forall k. k -> Type) where
  hTestEquality :: forall k1 k2 (a :: k1) (b :: k2). t a -> t b -> Maybe (a :~
  <-> b)
```

Note that `hTestEquality` takes two arguments where the type variable `t` is applied to types of different kinds. That type variable must then be polykinded. Accordingly, the kind of `HTestEquality` (the class) is `(forall k. k -> Type) -> Constraint`, a higher-rank kind.

A big difference with higher-rank kinds as compared with higher-rank types is that `forall`s in kinds *cannot* be moved. This is best illustrated by example. Suppose we want to have an instance of `HTestEquality` for `(:~~:)`.

```
instance HTestEquality ((:~~:) a) where
  hTestEquality HRefl HRefl = Just HRefl
```

With the declaration of `(:~~:)` above, it gets kind `forall k1 k2. k1 -> k2 -> Type`. Thus, the type `(:~~:) a` has kind `k2 -> Type` for some `k2`. GHC cannot then *regeneralize* this kind to become `forall k2. k2 -> Type` as desired. Thus, the instance is rejected as ill-kinded.

To allow for such an instance, we would have to define `(:~~:)` as follows:

```
data (:~~:) :: forall k1. k1 -> forall k2. k2 -> Type where
  HRefl :: a :~~: a
```

In this redefinition, we give an explicit kind for `(:~~:)`, deferring the choice of `k2` until after the first argument (`a`) has been given. With this declaration for `(:~~:)`, the instance for `HTestEquality` is accepted.

### 6.4.13.16 The kind Type

#### StarIsType

##### Since

8.6.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314), [Haskell2010](#) (page 315), [Haskell98](#) (page 316)

Treat the unqualified uses of the `*` type operator as nullary and desugar to `Data.Kind.Type`.

The kind `Type` (imported from `Data.Kind`) classifies ordinary types. With [StarIsType](#) (page 426) (currently enabled by default), `*` is desugared to `Type`, but using this legacy syntax is not recommended due to conflicts with [TypeOperators](#) (page 368). This also applies to `★`, the Unicode variant of `*`.

#### 6.4.13.17 Inferring dependency in datatype declarations

If a type variable `a` in a datatype, class, or type family declaration depends on another such variable `k` in the same declaration, two properties must hold:

- `a` must appear after `k` in the declaration, and
- `k` must appear explicitly in the kind of *some* type variable in that declaration.

The first bullet simply means that the dependency must be well-scoped. The second bullet concerns GHC's ability to infer dependency. Inferring this dependency is difficult, and GHC currently requires the dependency to be made explicit, meaning that `k` must appear in the kind of a type variable, making it obvious to GHC that dependency is intended. For example:

```
data Proxy k (a :: k)           -- OK: dependency is "obvious"
data Proxy2 k a = P (Proxy k a) -- ERROR: dependency is unclear
```

In the second declaration, GHC cannot immediately tell that `k` should be a dependent variable, and so the declaration is rejected.

It is conceivable that this restriction will be relaxed in the future, but it is (at the time of writing) unclear if the difficulties around this scenario are theoretical (inferring this dependency would mean our type system does not have principal types) or merely practical (inferring this dependency is hard, given GHC's implementation). So, GHC takes the easy way out and requires a little help from the user.

#### 6.4.13.18 Inferring dependency in user-written forall's

A programmer may use `forall` in a type to introduce new quantified type variables. These variables may depend on each other, even in the same `forall`. However, GHC requires that the dependency be inferrable from the body of the `forall`. Here are some examples:

```
data Proxy k (a :: k) = MkProxy    -- just to use below

f :: forall k a. Proxy k a         -- This is just fine. We see that (a :: k).
f = undefined

g :: Proxy k a -> ()               -- This is to use below.
g = undefined

data Sing a
h :: forall k a. Sing k -> Sing a -> () -- No obvious relationship between k,
    ↪ and a
h _ _ = g (MkProxy :: Proxy k a) -- This fails. We didn't know that a should
    ↪ have kind k.
```

Note that in the last example, it's impossible to learn that `a` depends on `k` in the body of the `forall` (that is, the `Sing k -> Sing a -> ()`). And so GHC rejects the program.

#### 6.4.13.19 Kind defaulting without PolyKinds

Without *PolyKinds* (page 411), GHC refuses to generalise over kind variables. It thus defaults kind variables to `Type` when possible; when this is not possible, an error is issued.

Here is an example of this in action:

```
{-# LANGUAGE PolyKinds #-}
import Data.Kind (Type)
data Proxy a = P    -- inferred kind: Proxy :: k -> Type
data Compose f g x = MkCompose (f (g x))
    -- inferred kind: Compose :: (b -> Type) -> (a -> b) -> a -> Type

-- separate module having imported the first
{-# LANGUAGE NoPolyKinds, DataKinds #-}
z = Proxy :: Proxy MkCompose
```

In the last line, we use the promoted constructor `MkCompose`, which has kind

```
forall (a :: Type) (b :: Type) (f :: b -> Type) (g :: a -> b) (x :: a).
  f (g x) -> Compose f g x
```

Now we must infer a type for `z`. To do so without generalising over kind variables, we must default the kind variables of `MkCompose`. We can easily default `a` and `b` to `Type`, but `f` and `g` would be ill-kinded if defaulted. The definition for `z` is thus an error.

#### 6.4.13.20 Pretty-printing in the presence of kind polymorphism

With kind polymorphism, there is quite a bit going on behind the scenes that may be invisible to a Haskell programmer. GHC supports several flags that control how types are printed in error messages and at the GHCi prompt. See the *discussion of type pretty-printing options* (page 87) for further details. If you are using kind polymorphism and are confused as to why GHC is rejecting (or accepting) your program, we encourage you to turn on these flags, especially *-fprint-explicit-kinds* (page 88).

#### 6.4.13.21 Datatype return kinds

With *KindSignatures* (page 564), we can give the kind of a datatype written in GADT-syntax (see *GADTSyntax* (page 374)). For example:

```
data T :: Type -> Type where ...
```

There are a number of restrictions around these *return kinds*. The text below considers *UnliftedNewtypes* (page 613) and data families (enabled by *TypeFamilies* (page 384)). The discussion also assumes familiarity with *representation polymorphism* (page 430).

1. `data` and `data instance` declarations must have return kinds that end in `TYPE` `LiftedRep`. (Recall that `Type` is just a synonym for `TYPE LiftedRep`.) By “end in”, we refer to the kind left over after all arguments (introduced either by `forall` or `->`) are stripped off and type synonyms expanded. Note that no type family expansion is done when performing this check.
2. If *UnliftedNewtypes* (page 613) is enabled, then `newtype` and `newtype instance` declarations must have return kinds that end in `TYPE rep` for some `rep`. The `rep` may mention

type families, but the `TYPE` must be apparent without type family expansion. (Type synonym expansion is acceptable.)

If `UnliftedNewtypes` (page 613) is not enabled, then `newtype` and `newtype` instance declarations have the same restrictions as data declarations.

3. A data or newtype instance actually can have *two* return kinds. The first is the kind derived by applying the data family to the patterns provided in the instance declaration. The second is given by a kind annotation. Both return kinds must satisfy the restrictions above.

Examples:

```
data T1 :: Type           -- good: Type expands to TYPE LiftedRep
data T2 :: TYPE LiftedRep -- good
data T3 :: forall k. k -> Type -> Type -- good: arguments are dropped

type LR = LiftedRep
data T3 :: TYPE LR        -- good: we look through type synonyms

type family F a where
  F Int = LiftedRep

data T4 :: TYPE (F Int)    -- bad: we do not look through type families

type family G a where
  G Int = Type

data T5 :: G Int          -- bad: we do not look through type families

-- assume -XUnliftedNewtypes
newtype T6 :: Type where ... -- good
newtype T7 :: TYPE (F Int) where ... -- good
newtype T8 :: G Int where ... -- bad

data family DF a :: Type
data instance DF Int :: Type -- good
data instance DF Bool :: TYPE LiftedRep -- good
data instance DF Char :: G Int -- bad

data family DF2 k :: k -- good
data family DF2 Type -- good
data family DF2 Bool -- bad
data family DF2 (G Int) -- bad for 2 reasons:
                        -- a type family can't be in a_
                        -- pattern, and
                        -- the kind fails the restrictions_
                        -- here
```

### 6.4.14 Representation polymorphism

In order to allow full flexibility in how kinds are used, it is necessary to use the kind system to differentiate between boxed, lifted types (normal, everyday types like `Int` and `[Bool]`) and unboxed, primitive types (*Unboxed types and primitive operations* (page 609)) like `Int#`. We thus have so-called representation polymorphism.

Here are the key definitions, all available from `GHC.Exts`:

```
TYPE :: RuntimeRep -> Type    -- highly magical, built into GHC

data Levity = Lifted          -- for things like `Int`
            | Unlifted        -- for things like `Array#`

data RuntimeRep = BoxedRep Levity -- for anything represented by a GC-
    --managed pointer
            | IntRep           -- for `Int#`
            | TupleRep [RuntimeRep] -- unboxed tuples, indexed by the
    --representations of the elements
            | SumRep [RuntimeRep]   -- unboxed sums, indexed by the
    --representations of the disjuncts
            | ...

type LiftedRep = BoxedRep Lifted

type Type = TYPE LiftedRep    -- Type is just an ordinary type synonym
```

The idea is that we have a new fundamental type constant `TYPE`, which is parameterised by a `RuntimeRep`. We thus get `Int# :: TYPE IntRep` and `Bool :: TYPE LiftedRep`. Anything with a type of the form `TYPE x` can appear to either side of a function arrow `->`. We can thus say that `->` has type `TYPE r1 -> TYPE r2 -> TYPE LiftedRep`. The result is always lifted because all functions are lifted in GHC.

#### 6.4.14.1 Levity polymorphism

A special case of representation polymorphism is levity polymorphism, where we abstract over a variable of kind `Levity`, such as:

```
example :: forall (l :: Levity) (a :: TYPE (BoxedRep l)). (Int -> a) -> a
example f = f 42
```

With *UnliftedDatatypes* (page 615), we can even declare levity-polymorphic data types:

```
type PEither :: Type -> Type -> TYPE (BoxedRep l)
data PEither l r = PLeft l | PRight r
```



#### 6.4.14.2 No representation-polymorphic variables or arguments

If GHC didn't have to compile programs that run in the real world, that would be the end of the story. But representation polymorphism can cause quite a bit of trouble for GHC's code generator. Consider

```
bad :: forall (r1 :: RuntimeRep) (r2 :: RuntimeRep)
      (a :: TYPE r1) (b :: TYPE r2).
      (a -> b) -> a -> b
bad f x = f x
```

This seems like a generalisation of the standard \$ operator. If we think about compiling this to runnable code, though, problems appear. In particular, when we call `bad`, we must somehow pass `x` into `bad`. How wide (that is, how many bits) is `x`? Is it a pointer? What kind of register (floating-point or integral) should `x` go in? It's all impossible to say, because `x`'s type, `a :: TYPE r1` is representation-polymorphic. We thus forbid such constructions, via the following straightforward rule:

No variable may have a representation-polymorphic type.

This eliminates `bad` because the variable `x` would have a representation-polymorphic type.

However, not all is lost. We can still do this:

```
($) :: forall r (a :: Type) (b :: TYPE r).
      (a -> b) -> a -> b
f $ x = f x
```

Here, only `b` is representation-polymorphic. There are no variables with a representation-polymorphic type. And the code generator has no trouble with this. Indeed, this is the true type of GHC's \$ operator, slightly more general than the Haskell 98 version.

Because the code generator must store and move arguments as well as variables, the logic above applies equally well to function arguments, which may not be representation-polymorphic.

#### 6.4.14.3 Representation-polymorphic bottoms

We can use representation polymorphism to good effect with error and undefined, whose types are given here:

```
undefined :: forall (r :: RuntimeRep) (a :: TYPE r).
      HasCallStack => a
error :: forall (r :: RuntimeRep) (a :: TYPE r).
      HasCallStack => String -> a
```

These functions do not bind a representation-polymorphic variable, and so are accepted. Their polymorphism allows users to use these to conveniently stub out functions that return unboxed types.

#### 6.4.14.4 Inference and defaulting

GHC does not infer representation-polymorphic types. If the representation of a variable is not specified, it will be assumed to be `LiftedRep`. For example, if you write `f a b = a b`, the inferred type of `f` will be

```
f :: forall {a :: Type} {b :: Type}. (a -> b) -> a -> b
```

even though

```
f :: forall {rep} {a :: Type} {b :: TYPE rep}. (a -> b) -> a -> b
```

would also be legal, as described above.

Likewise, in a user-written signature `f :: forall a b. (a -> b) -> a -> b` GHC will assume that both `a` and `b` have kind `Type`. To use a different representation, you have to specify the kinds of `a` and `b`.

During type inference, GHC does not quantify over variables of kind `RuntimeRep` nor `Levity`. Instead, they are defaulted to `LiftedRep` and `Lifted` respectively. Likewise, `Multiplicity` variables (*Linear types* (page 458)) are defaulted to `Many`.

#### 6.4.14.5 Printing representation-polymorphic types

##### **-fprint-explicit-runtime-reps**

Print `RuntimeRep` and `Levity` parameters as they appear; otherwise, they are defaulted to `LiftedRep` and `Lifted`, respectively.

Most GHC users will not need to worry about representation polymorphism or unboxed types. For these users, seeing the representation polymorphism in the type of `$` is unhelpful. And thus, by default, it is suppressed, by supposing all type variables of type `RuntimeRep` to be `LiftedRep` when printing, and printing `TYPE LiftedRep` as `Type` (or `*` when *StarIsType* (page 426) is on).

Should you wish to see representation polymorphism in your types, enable the flag *-fprint-explicit-runtime-reps* (page 432). For example,

```
ghci> :t ($)
($) :: (a -> b) -> a -> b
ghci> :set -fprint-explicit-runtime-reps
ghci> :t ($)
($)
  :: forall (r :: GHC.Types.RuntimeRep) a (b :: TYPE r).
    (a -> b) -> a -> b
```

### 6.4.15 Type-Level Literals

GHC supports numeric, string, and character literals at the type level, giving convenient access to a large number of predefined type-level constants. Numeric literals are of kind `Natural`, string literals are of kind `Symbol`, and character literals are of kind `Char`. This feature is enabled by the *DataKinds* (page 404) language extension.

The kinds of the literals and all other low-level operations for this feature are defined in modules `GHC.TypeLits` and `GHC.TypeNats`. Note that these modules define some type-level operators that clash with their value-level counterparts (e.g. `(+)`). Import and export declarations referring to these operators require an explicit namespace annotation (see *Explicit namespaces in import/export* (page 364)).

Here is an example of using type-level numeric literals to provide a safe interface to a low-level function:

```
import GHC.TypeLits
import Data.Word
import Foreign

newtype ArrPtr (n :: Natural) a = ArrPtr (Ptr a)

clearPage :: ArrPtr 4096 Word8 -> IO ()
clearPage (ArrPtr p) = ...
```

Also type-level naturals could be promoted from the `Natural` data type using *DataKinds*, for example:

```
data Point = MkPoint Natural Natural
type MyCoordinates = MkPoint 95 101
```

Here is an example of using type-level string literals to simulate simple record operations:

```
data Label (l :: Symbol) = Get

class Has a l b | a l -> b where
  from :: a -> Label l -> b

data Point = Point Int Int deriving Show

instance Has Point "x" Int where from (Point x _) _ = x
instance Has Point "y" Int where from (Point _ y) _ = y

example = from (Point 1 2) (Get :: Label "x")
```

### 6.4.15.1 Runtime Values for Type-Level Literals

Sometimes it is useful to access the value-level literal associated with a type-level literal. This is done with the functions `natVal` and `symbolVal`. For example:

```
GHC.TypeLits> natVal (Proxy :: Proxy 2)
2
```

These functions are overloaded because they need to return a different result, depending on the type at which they are instantiated.

```
natVal :: KnownNat n => proxy n -> Natural -- from GHC.TypeNats
natVal :: KnownNat n => proxy n -> Integer -- from GHC.TypeLits

-- instance KnownNat 0
-- instance KnownNat 1
-- instance KnownNat 2
-- ...
```

GHC discharges the constraint as soon as it knows what concrete type-level literal is being used in the program. Note that this works only for *literals* and not arbitrary type expressions. For example, a constraint of the form `KnownNat (a + b)` will *not* be simplified to `(KnownNat a, KnownNat b)`; instead, GHC will keep the constraint as is, until it can simplify `a + b` to a constant value.

It is also possible to convert a run-time integer or string value to the corresponding type-level literal. Of course, the resulting type literal will be unknown at compile-time, so it is hidden in an existential type. The conversion may be performed using `someNatVal` for integers and `someSymbolVal` for strings:

```
someNatVal :: Natural -> Maybe SomeNat -- from GHC.TypeNats
someNatVal :: Integer -> Maybe SomeNat -- from GHC.TypeLits

SomeNat    :: KnownNat n => Proxy n -> SomeNat
```

The operations on strings are similar.

### 6.4.15.2 Computing With Type-Level Naturals

GHC 7.8 can evaluate arithmetic expressions involving type-level natural numbers. Such expressions may be constructed using the type-families `(+)`, `(*)`, `(^)` for addition, multiplication, and exponentiation. Numbers may be compared using `(<=?)`, which returns a promoted boolean value, or `(<=)`, which compares numbers as a constraint. For example:

```
GHC.TypeLits> natVal (Proxy :: Proxy (2 + 3))
5
```

At present, GHC is quite limited in its reasoning about arithmetic: it will only evaluate the arithmetic type functions and compare the results—in the same way that it does for any other type function. In particular, it does not know more general facts about arithmetic, such as the commutativity and associativity of `(+)`, for example.

However, it is possible to perform a bit of “backwards” evaluation. For example, here is how we could get GHC to compute arbitrary logarithms at the type level:

```
lg :: Proxy base -> Proxy (base ^ pow) -> Proxy pow
lg _ _ = Proxy

GHC.TypeLits> natVal (lg (Proxy :: Proxy 2) (Proxy :: Proxy 8))
3
```

## 6.4.16 Visible type application

### TypeApplications

#### Since

8.0.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow the use of type application syntax.

The [TypeApplications](#) (page 435) extension allows you to use *visible type application* in expressions. Here is an example: `show (read @Int "5")`. The `@Int` is the visible type application; it specifies the value of the type variable in `read`'s type.

A visible type application is preceded with an `@` sign. (To disambiguate the syntax, the `@` must be preceded with a non-identifier letter, usually a space. For example, `read@Int 5` would not parse.) It can be used whenever the full polymorphic type of the function is known. If the function is an identifier (the common case), its type is considered known only when the identifier has been given a type signature. If the identifier does not have a type signature, visible type application cannot be used.

GHC also permits visible kind application, where users can declare the kind arguments to be instantiated in kind-polymorphic cases. Its usage parallels visible type application in the term level, as specified above.

In addition to visible type application in terms and types, the type application syntax can be used in patterns matching a data constructor to bind type variables in that constructor's type.

### 6.4.16.1 Inferred vs. specified type variables

GHC tracks a distinction between what we call *inferred* and *specified* type variables. Only specified type variables are available for instantiation with visible type application. An example illustrates this well:

```
f :: (Eq b, Eq a) => a -> b -> Bool
f x y = (x == x) && (y == y)

g x y = (x == x) && (y == y)
```

The functions `f` and `g` have the same body, but only `f` is given a type signature. When GHC is figuring out how to process a visible type application, it must know what variable to instantiate. It thus must be able to provide an ordering to the type variables in a function's type.

If the user has supplied a type signature, as in `f`, then this is easy: we just take the ordering from the type signature, going left to right and using the first occurrence of a variable to choose its position within the ordering. Thus, the variables in `f` will be `b`, then `a`.

In contrast, there is no reliable way to do this for `g`; we will not know whether `Eq a` or `Eq b` will be listed first in the constraint in `g`'s type. In order to have visible type application be robust between releases of GHC, we thus forbid its use with `g`.

We say that the type variables in `f` are *specified*, while those in `g` are *inferred*. The general rule is this: if the user has written a type variable in the source program, it is *specified*; if not, it is *inferred*.

This rule applies in datatype declarations, too. For example, if we have data `Proxy a = Proxy` (and [PolyKinds](#) (page 411) is enabled), then `a` will be assigned kind `k`, where `k` is a fresh kind variable. Because `k` was not written by the user, it will be unavailable for type application in the type of the constructor `Proxy`; only the `a` will be available.

Inferred variables are printed in braces. Thus, the type of the data constructor `Proxy` from the previous example is `forall {k} (a :: k). Proxy a`. We can observe this behavior in a GHCi session:

```
> :set -XTypeApplications -fprint-explicit-foralls
> let myLength1 :: Foldable f => f a -> Int; myLength1 = length
> :type myLength1
myLength1 :: forall (f :: * -> *) a. Foldable f => f a -> Int
> let myLength2 = length
> :type myLength2
myLength2 :: forall {t :: * -> *} {a}. Foldable t => t a -> Int
> :type myLength2 @[]

<interactive>:1:1: error:
  • Cannot apply expression of type 't0 a0 -> Int'
    to a visible type argument '[]'
  • In the expression: myLength2 @[]
```

Notice that since `myLength1` was defined with an explicit type signature, `:type` (page 64) reports that all of its type variables are available for type application. On the other hand, `myLength2` was not given a type signature. As a result, all of its type variables are surrounded with braces, and trying to use visible type application with `myLength2` fails.

#### 6.4.16.2 Ordering of specified variables

In the simple case of the previous section, we can say that specified variables appear in left-to-right order. However, not all cases are so simple. Here are the rules in the subtler cases:

- If an identifier's type has a `forall`, then the order of type variables as written in the `forall` is retained.
- If any of the variables depend on other variables (that is, if some of the variables are *kind* variables), the variables are reordered so that kind variables come before type variables, preserving the left-to-right order as much as possible. That is, GHC performs a stable topological sort on the variables. Example:

```
h :: Proxy (a :: (j, k)) -> Proxy (b :: Proxy a) -> ()
-- as if h :: forall j k a b. ...
```

In this example, `a` depends on `j` and `k`, and `b` depends on `a`. Even though `a` appears lexically before `j` and `k`, `j` and `k` are quantified first, because `a` depends on `j` and `k`. Note further that `j` and `k` are not reordered with respect to each other, even though doing so would not violate dependency conditions.

A “stable topological sort” here, we mean that we perform this algorithm (which we call *ScopedSort*):

- Work left-to-right through the input list of type variables, with a cursor.
- If variable *v* at the cursor is depended on by any earlier variable *w*, move *v* immediately before the leftmost such *w*.
- Class methods’ type arguments include the class type variables, followed by any variables an individual method is polymorphic in. So, class `Monad m` where `return :: a -> m a` means that `return`’s type arguments are *m*, *a*.
- With the *RankNTypes* (page 451) extension (*Lexically scoped type variables* (page 565)), it is possible to declare type arguments somewhere other than the beginning of a type. For example, we can have `pair :: forall a. a -> forall b. b -> (a, b)` and then say `pair @Bool True @Char` which would have type `Char -> (Bool, Char)`.
- Partial type signatures (*Partial Type Signatures* (page 574)) work nicely with visible type application. If you want to specify only the second type argument to `wurble`, then you can say `wurble @_ @Int`. The first argument is a wildcard, just like in a partial type signature. However, if used in a visible type application/visible kind application, it is *not* necessary to specify *PartialTypeSignatures* (page 574) and your code will not generate a warning informing you of the omitted type.

The section in this manual on kind polymorphism describes how variables in type and class declarations are ordered (*Inferring the order of variables in a type/class declaration* (page 414)).

#### 6.4.16.3 Manually defining inferred variables

Since the 9.0.1 release, GHC permits labelling the user-written type or kind variables as *inferred*, in contrast to the default of *specified*. By writing the type variable binder in braces as `{tyvar}` or `{tyvar :: kind}`, the new variable will be classified as inferred, not specified. Doing so gives the programmer control over which variables can be manually instantiated and which can’t. Note that the braces do not influence scoping: variables in braces are still brought into scope just the same. Consider for example:

```
myConst :: forall {a} b. a -> b -> a
myConst x _ = x
```

In this example, despite both variables appearing in a type signature, *a* is an inferred variable while *b* is specified. This means that the expression `myConst @Int` has type `forall {a}. a -> Int -> a`.

The braces are allowed in the following places:

- In the type signatures of functions, variables, class methods, as well as type annotations on expressions. Consider the example above.
- In data constructor declarations, using the GADT syntax. Consider:

```
data T a where MkT :: forall {k} (a :: k). Proxy a -> T a
```

The constructor `MkT` defined in this example is kind polymorphic, which is emphasized to the reader by explicitly abstracting over the *k* variable. As this variable is marked as inferred, it can not be manually instantiated.

- In existential variable quantifications, e.g.:

```
data HList = HNil
           | forall {a}. HCons a HList
```

- In pattern synonym signatures. Consider for instance:

```
data T a where MkT :: forall a b. a -> b -> T a

pattern Pat :: forall {c}. () => forall {d}. c -> d -> T c
pattern Pat x y = MkT x y
```

Note that in this example, *a* is a universal variable in the data type *T*, where *b* is existential. When writing the pattern synonym, both types are allowed to be specified or inferred.

- On the right-hand side of a type synonym, e.g.:

```
type Foo = forall a {b}. Either a b
```

- In type signatures on variables bound in RULES, e.g.:

```
{-# RULES "parametricity" forall (f :: forall {a}. a -> a). map f = id #-}
```

The braces are *not* allowed in the following places:

- In visible dependent quantifiers. Consider:

```
data T :: forall {k} -> k -> Type
```

This example is rejected, as a visible argument should by definition be explicitly applied. Making them inferred (and thus not applicable) would be conflicting.

- In SPECIALISE pragmas or in instance declaration heads, e.g.:

```
instance forall {a}. Eq (Maybe a) where ...
```

The reason for this is, essentially, that none of these define a new construct. This means that no new type is being defined where specificity could play a role.

- On the left-hand sides of type declarations, such as classes, data types, etc.

Note that while specified and inferred type variables have different properties vis-à-vis visible type application, they do not otherwise affect GHC's notion of equality over types. For example, given the following definitions:

```
id1 :: forall a. a -> a
id1 x = x

id2 :: forall {a}. a -> a
id2 x = x

app1 :: (forall a. a -> a) -> b -> b
app1 g x = g x

app2 :: (forall {a}. a -> a) -> b -> b
app2 g x = g x
```



GHC will deem all of `app1 id1`, `app1 id2`, `app2 id1`, and `app2 id2` to be well typed.

### 6.4.17 Type abstractions

#### TypeAbstractions

**Since**  
9.8.1

**Status**  
Experimental

Allow the use of type abstraction syntax.

The *TypeAbstractions* (page 439) extension provides a way to explicitly bind scoped type or kind variables using the `@a` syntax. The feature is only partially implemented, and this text covers only the implemented parts, whereas the full specification can be found in GHC Proposals [#448](#) and [#425](#).

#### 6.4.17.1 Type Abstractions in Patterns

**Since:** GHC 9.2

The type abstraction syntax can be used in patterns that match a data constructor. The syntax can't be used with record patterns or infix patterns. This is useful in particular to bind existential type variables associated with a GADT data constructor as in the following example:

```
{-# LANGUAGE AllowAmbiguousTypes #-}
{-# LANGUAGE GADTs #-}
{-# LANGUAGE RankNTypes #-}
{-# LANGUAGE TypeApplications #-}
import Data.Proxy

data Foo where
  Foo :: forall a. (Show a, Num a) => Foo

test :: Foo -> String
test x = case x of
  Foo @t -> show @t 0

main :: IO ()
main = print $ test (Foo @Float)
```

In this example, the case in `test` is binding an existential variable introduced by `Foo` that otherwise could not be named and used.

It's possible to bind variables to any part of the type arguments to a constructor; there is no need for them to be existential. In addition, it's possible to “match” against part of the type argument using type constructors.

For a somewhat-contrived example:

```
foo :: (Num a) => Maybe [a] -> String
foo (Nothing @[t]) = show (0 :: t)
foo (Just @[t] xs) = show (sum xs :: t)
```

Here, we're binding the type variable `t` to be the type of the elements of the list type which is itself the argument to `Maybe`.

The order of the type arguments specified by the type applications in a pattern is the same as that for an expression: either the order as given by the user in an explicit `forall` in the definition of the data constructor, or if that is not present, the order in which the type variables appear in its type signature from left to right.

For example if we have the following declaration in GADT syntax:

```
data Foo :: * -> * where
  A :: forall s t. [(t,s)] -> Foo (t,s)
  B :: (t,s) -> Foo (t,s)
```

Then the type arguments to `A` will match first `s` and then `t`, while the type arguments to `B` will match first `t` and then `s`.

Type arguments appearing in patterns can influence the inferred type of a definition:

```
foo (Nothing @Int) = 0
foo (Just x) = x
```

will have inferred type:

```
foo :: Maybe Int -> Int
```

which is more restricted than what it would be without the application:

```
foo :: Num a => Maybe a -> a
```

For more information and detail regarding type applications in patterns, see the paper [Type variables in patterns](#) by Eisenberg, Breitner and Peyton Jones. Relative to that paper, the implementation in GHC for now at least makes one additional conservative restriction, that type variables occurring in patterns must not already be in scope, and so are always new variables that only bind whatever type is matched, rather than ever referring to a variable from an outer scope. Type wildcards `_` may be used in any place where no new variable needs binding.

#### 6.4.17.2 Type Abstractions in Functions

**Since:** GHC 9.10

Type abstraction syntax can be used in lambdas and function left-hand sides to bring into scope type variables associated with invisible `forall`. For example:

```
id :: forall a. a -> a
id @t x = x :: t
```

Here type variables `t` and `a` stand for the same type, i.e. the first and only type argument of `id`. In a call `id @Int` we have `a = Int`, `t = Int`. The difference is that `a` is in scope in the type signature, while `t` is in scope in the function equation.

The scope of `a` can be extended to cover the function equation as well by enabling [ScopedTypeVariables](#) (page 565). Using a separate binder like `@t` is the modern and more flexible alternative for that, capable of handling higher-rank scenarios (see the `higherRank` example below).

When multiple variables are bound with @-binders, they are matched left-to-right with the corresponding forall-bound variables in the type signature:

```
const :: forall a. forall b. a -> b -> a
const @ta @tb x = x
```

In this example, @ta corresponds to forall a. and @tb to forall b.. It is also possible to use @-binders in combination with implicit quantification (i.e. no explicit forall in the signature):

```
const :: a -> b -> a
const @ta @tb x = x
```

In such cases, type variables in the signature are considered to be quantified with an implicit forall in the order in which they appear in the signature, c.f. [TypeApplications](#) (page 435).

It is not possible to match against a specific type (such as Maybe or Int) in an @-binder. The binder must be irrefutable, i.e. it may take one of the following forms:

- type variable pattern @a
- type variable pattern with a kind annotation @(f :: Type -> Type)
- wildcard @\_, with or without a kind annotation

The main advantage to using @-binders over [ScopedTypeVariables](#) (page 565) is the ability to use them in lambdas passed to higher-rank functions:

```
higherRank :: (forall a. (Num a, Bounded a) => a -> a) -> (Int8, Int16)
higherRank f = (f 42, f 42)

ex :: (Int8, Int16)
ex = higherRank (\ @a x -> maxBound @a - x )
      -- @a-binder in a lambda pattern in an argument
      -- to a higher-order function
```

At the moment, an @-binder is valid only in a limited set of circumstances:

- In a function left-hand side, where the function must have an explicit type signature:

```
f1 :: forall a. a -> forall b. b -> (a, b)
f1 @a x @b y = (x :: a, y :: b)      -- OK
```

It would be illegal to omit the type signature for f, nor is it possible to move the binder to a lambda on the RHS:

```
f2 :: forall a. a -> forall b. b -> (a, b)
f2 = \ @a x @b y -> (x :: a, y :: b)  -- ILLEGAL
```

- In a lambda annotated with an inline type signature:

```
f3 = (\ @a x @b y -> (x :: a, y :: b) )      -- OK
      :: forall a. a -> forall b. b -> (a, b)
```

- In a lambda used as an argument to a higher-rank function or data constructor:

```
h :: (forall a. a -> forall b. b -> (a, b)) -> (Int, Bool)
h = ...
```

(continues on next page)

(continued from previous page)

```
f4 = h (\ @a x @b y -> (x :: a, y :: b))    -- OK
```

- In a lambda used as a field of a data structure (e.g. a list item), whose type is impredicative (see *ImpredicativeTypes* (page 457)):

```
f5 :: [forall a. a -> a -> a]
f5 = [ \ @a x _ -> x :: a,
      \ @a _ y -> y :: a ]
```

- In a lambda of multiple arguments, where the first argument is visible, and only if *DeepSubsumption* (page 454) is off:

```
{-# LANGUAGE NoDeepSubsumption #-}
f6 :: () -> forall a. a -> (a, a)
f6 = \ _ @a x -> (x :: a, x)    -- OK
```

### 6.4.17.3 Invisible Binders in Type Declarations

**Since:** GHC 9.8

#### Syntax

The type abstraction syntax can be used in type declaration headers, including `type`, `data`, `newtype`, `class`, `type family`, and `data family` declarations. Here are a few examples:

```
type C :: forall k. k -> Constraint
class C @k a where ...
      ^^

type D :: forall k j. k -> j -> Type
data D @k @j (a :: k) (b :: j) = ...
      ^^ ^^

type F :: forall p q. p -> q -> (p, q)
type family F @p @q a b where ...
              ^^ ^^
```

Just as ordinary type parameters, invisible type variable binders may have kind annotations:

```
type F :: forall p q. p -> q -> (p, q)
type family F @(p :: Type) @(q :: Type) (a :: p) (b :: q) where ...
```

## Scope

The @k-binders scope over the body of the declaration and can be used to bring implicit type or kind variables into scope. Consider:

```
type C :: forall i. (i -> i -> i) -> Constraint
class C @i a where
  p :: P a i
```

Without the @i binder in C @i a, the i in P a i would no longer refer to the class variable i and would be implicitly quantified in the method signature instead.

## Type checking

Invisible type variable binders require either a standalone kind signature or a complete user-supplied kind.

If a standalone kind signature is given, GHC will match up @k-binders with the corresponding forall k. quantifiers in the signature:

```
type B :: forall k. k -> forall j. j -> Type
data B @k (a :: k) @j (b :: j)
```

Quantifier-binder pairs of B	
forall k.	@k
k ->	(a :: k)
forall j.	@j
j ->	(b :: j)

The matching is done left-to-right. Consider:

```
type S :: forall a b. a -> b -> Type
type S @k x y = ...
```

In this example, @k is matched with forall a., not forall b.:

Quantifier-binder pairs of S	
forall a.	@k
forall b.	
a ->	x
b ->	y

When a standalone kind signature is absent but the definition has a complete user-supplied kind (and the *CUSKs* (page 415) extension is enabled), a @k-binder gives rise to a forall k. quantifier in the inferred kind signature. The inferred forall k. does not float to the left; the order of quantifiers continues to match the order of binders in the header:

```
-- Inferred kind: forall k. k -> forall j. j -> Type
data B @(k :: Type) (a :: k) @(j :: Type) (b :: j)
```

## 6.4.18 Required type arguments

### RequiredTypeArguments

**Since**  
9.10.1

**Status**  
Experimental

Allow visible dependent quantification `forall x ->` in types of terms.

**This feature is only partially implemented in GHC.** In this section we describe the implemented subset, while the full specification can be found in [GHC Proposal #281](#).

The *RequiredTypeArguments* (page 444) extension enables the use of visible dependent quantification in types of terms:

```
id      :: forall a.   a -> a      -- invisible dependent quantification
id_vdq  :: forall a -> a -> a      -- visible dependent quantification
```

The arrow in `forall a ->` is part of the syntax and not a function arrow, just like the dot in `forall a.` is not a type operator.

The choice between `forall a.` and `forall a ->` does not have any effect on program execution. Both quantifiers introduce type variables, which are erased during compilation. Rather, the main difference is in the syntax used at call sites:

```
x1 = id      True      -- invisible forall, the type argument is inferred by
    ↳GHC
x2 = id @Bool True      -- invisible forall, the type argument is supplied by
    ↳the programmer

x3 = id_vdq _    True  -- visible forall, the type argument is inferred by
    ↳GHC
x4 = id_vdq Bool True  -- visible forall, the type argument is supplied by
    ↳the programmer
```

### 6.4.18.1 Terminology: Dependent quantifier

Both `forall a.` and `forall a ->` are said to be “dependent” because the result type depends on the supplied type argument:

```
id @Integer :: Integer -> Integer
id @String  :: String  -> String

id_vdq Integer :: Integer -> Integer
id_vdq String  :: String  -> String
```

Notice how the RHS of the signature is influenced by the LHS.

This is in contrast to the function arrow `->`, which is a non-dependent quantifier:

```
putStrLn "Hello" :: IO ()
putStrLn "World" :: IO ()
```

The type of `putStrLn` is `String -> IO ()`. No matter what string we pass as input, the result type `IO ()` does not depend on it.

This notion of dependence is weaker than the one used in dependently-typed languages (see [Relation to  \$\Pi\$ -types](#) (page 450)).

#### 6.4.18.2 Terminology: Visible quantifier

We say that `forall a.` is an *invisible* quantifier and `forall a ->` is a *visible* quantifier. This notion of “visibility” is unrelated to implicit quantification, which happens when the quantifier is omitted:

```
id      ::      a -> a      -- implicit quantification, invisible forall
id      :: forall a.      a -> a      -- explicit quantification, invisible forall
id_vdq  :: forall a -> a -> a      -- explicit quantification, visible forall
```

The property of “visibility” actually describes whether the corresponding type argument is visible at the definition site and at call sites:

```
-- Invisible quantification
id :: forall a. a -> a
id x = x                -- defn site: `a` is not mentioned
call_id = id True       -- call site: `a` is invisibly instantiated to `Bool`

-- Visible quantification
id_vdq :: forall a -> a -> a
id_vdq t x = x          -- defn site: `a` is visibly bound to `t`
call_id_vdq = id_vdq Bool True -- call site: `a` is visibly instantiated to `Bool`
```

In the equation for `id` there is just one binder on the LHS, `x`, and it corresponds to the value argument, not to the type argument. Compare that with the definition of `id_vdq`:

```
id_vdq :: forall a -> a -> a
id_vdq t x = x
```

This time we have two binders on the LHS:

- `t`, corresponding to `forall a ->` in the signature
- `x`, corresponding to `a ->` in the signature

The bound `t` can be used in subsequent patterns, as well as on the right-hand side of the equation:

```
id_vdq :: forall a -> a -> a
id_vdq t (x :: t) = x :: t
--      ↑      ↑      ↑
--    bound  used  used
```

We use the terms “visible type argument” and “required type argument” interchangeably.

### 6.4.18.3 Relation to TypeApplications

*RequiredTypeArguments* (page 444) are similar to *TypeApplications* (page 435) in that we pass a type to a function as an explicit argument. The difference is that type applications are optional: it is up to the caller whether to write `id @Bool True` or `id True`. By default, the compiler infers that the type variable is instantiated to `Bool`. The existence of a type argument is not reflected syntactically in the expression, it is invisible unless we use a *visibility override*, i.e. `@`.

Required type arguments are compulsory. They must appear syntactically at call sites:

```
x1 = id_vdq Bool True    -- OK
x2 = id_vdq      True    -- not OK
```

You may use an underscore to infer a required type argument:

```
x3 = id_vdq _ True      -- OK
```

That is, it is mostly a matter of syntax whether to use `forall a. with type applications` or `forall a ->`. One advantage of required type arguments is that they are never ambiguous. Consider the type of `Foreign.Storable.sizeOf`:

```
sizeOf :: forall a. Storable a => a -> Int
```

The value parameter is not actually used, its only purpose is to drive type inference. At call sites, one might write `sizeOf (undefined :: Bool)` or `sizeOf @Bool undefined`. Either way, the `undefined` is entirely superfluous and exists only to avoid an ambiguous type variable.

With *RequiredTypeArguments* (page 444), we can imagine a slightly different API:

```
sizeOf :: forall a -> Storable a => Int
```

If `sizeOf` had this type, we could write `sizeOf Bool` without passing a dummy value.

Required type arguments are erased during compilation. While the source program appears to bind and pass required type arguments alongside value arguments, the compiled program does not. There is no runtime overhead associated with required type arguments relative to the usual, invisible type arguments.

### 6.4.18.4 Relation to ExplicitNamespaces

A required type argument is syntactically indistinguishable from a value argument. In a function call `f arg1 arg2 arg3`, it is impossible to tell, without looking at the type of `f`, which of the three arguments are required type arguments, if any.

At the same time, one of the design goals of GHC is to be able to perform name resolution (find the binding sites of identifiers) without involving the type system. Consider:

```
data Ty = Int | Double | String deriving Show
main = print Int
```

In this example, there are two constructors named `Int` in scope:

- The **type constructor** `Int` of kind `Type` (imported from `Prelude`)
- The **data constructor** `Int` of type `Ty` (defined locally)



How does the compiler or someone reading the code know that `print Int` is supposed to refer to the data constructor, not the type constructor? In GHC, this is resolved as follows. Each identifier is said to occur either in **type syntax** or **term syntax**, depending on the surrounding syntactic context:

```
-- Examples of X in type syntax
type T = X      -- RHS of a type synonym
data D = MkD X  -- field of a data constructor declaration
a :: X          -- RHS of a type signature
b = f (c :: X)  -- RHS of a type signature (in expressions)
f (x :: X) = x  -- RHS of a type signature (in patterns)

-- Examples of X in term syntax
c X = a         -- LHS of a function equation
c a = X         -- RHS of a function equation
```

One could imagine the entire program “zoned” into type syntax and term syntax, each zone having its own rules for name resolution:

- In type syntax, type constructors take precedence over data constructors.
- In term syntax, data constructors take precedence over type constructors.

This means that in the `print Int` example, the data constructor is selected solely based on the fact that the `Int` occurs in term syntax. This is firmly determined before GHC attempts to type-check the expression, so the type of `print` does not influence which of the two `Ints` is passed to it.

This may not be the desired behavior in a required type argument. Consider:

```
vshow :: forall a -> Show a => a -> String
vshow t x = show (x :: t)

s1 = vshow Int 42      -- "42"
s2 = vshow Double 42  -- "42.0"
```

The function calls `vshow Int 42` and `vshow Double 42` are written in *term* syntax, while the intended referents of `Int` and `Double` are the respective *type* constructors. As long as there are no data constructors named `Int` or `Double` in scope, the example works as intended. However, if such clashing constructor names are introduced, they may disrupt name resolution:

```
data Ty = Int | Double | String

vshow :: forall a -> Show a => a -> String
vshow t x = show (x :: t)

s1 = vshow Int 42      -- error: Expected a type, but 'Int' has kind 'Ty'
s2 = vshow Double 42   -- error: Expected a type, but 'Double' has kind
--> 'Ty'
```

In this example the intent was to refer to `Int` and `Double` as types, but the names were resolved in favor of data constructors, resulting in type errors.

The example can be fixed with the help of [ExplicitNamespaces](#) (page 364), which allows embedding type syntax into term syntax using the `type` keyword:

```
s1 = vshow (type Int)    42
s2 = vshow (type Double) 42
```

A similar problem occurs with list and tuple syntax. In type syntax, `[a]` is the type of a list, i.e. `Data.List.List a`. In term syntax, `[a]` is a singleton list, i.e. `a : []`. A naive attempt to use the list type as a required type argument will result in a type error:

```
s3 = vshow [Int] [1,2,3] -- error: Expected a type, but '[Int]' has kind
    ↪ '[Type]'
```

The problem is that GHC assumes `[Int]` to stand for `Int : []` instead of the intended `Data.List.List Int`. This, too, can be solved using the type keyword:

```
s3 = vshow (type [Int]) [1,2,3]
```

Since the type keyword is merely a namespace disambiguation mechanism, it need not apply to the entire type argument. Using it to disambiguate only a part of the type argument is also valid:

```
f :: forall a -> ... -- `f` is a function that expects a required type
    ↪ argument

r1 = f (type (Either () Int)) -- `type` applied to the entire type
    ↪ argument
r2 = f (Either (type ()) Int) -- `type` applied to one part of it
r3 = f (Either (type ()) (type Int)) -- `type` applied to multiple parts
```

That is, the expression `Either (type ()) (type Int)` does *not* indicate that `Either` is applied to two type arguments; rather, the entire expression is a single type argument and `type` is used to disambiguate parts of it.

Outside a required type argument, it is illegal to use `type`:

```
r4 = type Int -- illegal use of 'type'
```

Finally, there are types that require the type keyword only due to limitations of the current implementation:

```
a1 = f (type (Int -> Bool)) -- function type
a2 = f (type (Read T => T)) -- constrained type
a3 = f (type (forall a. a)) -- universally quantified
    ↪ type
a4 = f (type (forall a. Read a => String -> a)) -- a combination of the
    ↪ above
```

This restriction will be relaxed in a future release of GHC.

### 6.4.18.5 Effect on implicit quantification

Implicit quantification is said to occur when GHC inserts an implicit `forall` to bind type variables:

```
const :: a -> b -> a      -- implicit quantification
const :: forall a b. a -> b -> a  -- explicit quantification
```

Normally, implicit quantification is unaffected by term variables in scope:

```
f a = ...  -- the LHS binds `a`
  where const :: a -> b -> a
           -- implicit quantification over `a` takes place
           -- despite the `a` bound on the LHS of `f`
```

When [RequiredTypeArguments](#) (page 444) is in effect, names bound in term syntax are not implicitly quantified. This allows us to accept the following example:

```
readshow :: forall a -> (Read a, Show a) => String -> String
readshow t s = show (read s :: t)

s1 = readshow Int    "42"      -- "42"
s2 = readshow Double "42"      -- "42.0"
```

Note how `t` is bound on the LHS of a function equation (term syntax), and then used in a type annotation (type syntax). Under the usual rules for implicit quantification, the `t` would have been implicitly quantified:

```
-- RequiredTypeArguments
readshow t s = show (read s :: t)  -- the `t` is captured
--      ↑                ↑
--      bound            used

-- NoRequiredTypeArguments
readshow t s = show (read s :: t)  -- the `t` is implicitly quantified as
-- follows:
readshow t s = show (read s :: forall t. t)
--      ↑                ↑  ↑
--      bound            bound used
```

On the one hand, taking the current scope into account allows us to accept programs like the one above. On the other hand, some existing programs will no longer compile:

```
a = 42
f :: a -> a  -- RequiredTypeArguments: the top-level `a` is captured
```

Because of that, merely enabling [RequiredTypeArguments](#) (page 444) might lead to type errors of this form:

```
Term variable 'a' cannot be used here
(term variables cannot be promoted)
```

There are two possible ways to fix this error:

```
a = 42
f1 :: b -> b           -- (1) use a different variable name
f2 :: forall a. a -> a -- (2) use an explicit forall
```

If you are converting a large codebase to be compatible with [RequiredTypeArguments](#) (page 444), consider using [-Wterm-variable-capture](#) (page 124) during the migration. It is a warning that detects instances of implicit quantification incompatible with [RequiredTypeArguments](#) (page 444):

```
The type variable 'a' is implicitly quantified,
even though another variable of the same name is in scope:
'a' defined at ...
```

#### 6.4.18.6 Relation to $\Pi$ -types

Both `forall a.` and `forall a ->` are dependent quantifiers in the narrow sense defined in [Terminology: Dependent quantifier](#) (page 444). However, neither of them constitutes a dependent function type ( $\Pi$ -type) that might be familiar to users coming from dependently-typed languages or proof assistants.

- Haskell has always had functions whose result *value* depends on the argument *value*:

```
not True = False  -- argument value: True; result value: False
(*2) 5    = 10    -- argument value: 5; result value: 10
```

This captures the usual idea of a function, denoted `a -> b`.

- Haskell also has functions whose result *type* depends on the argument *type*:

```
id    @Int  :: Int  -> Int    -- argument type: Int; result type: Int  ->
  -> Int
id_vdq Bool :: Bool -> Bool    -- argument type: Bool; result type: Bool ->
  -> Bool
```

This captures the idea of parametric polymorphism, denoted `forall a. b` or `forall a -> b`.

- Furthermore, Haskell has functions whose result *value* depends on the argument *type*:

```
maxBound @Int8  = 127  -- argument type: Int8; result value: 127
maxBound @Int16 = 32767 -- argument type: Int16; result value: 32767
```

This captures the idea of ad-hoc (class-based) polymorphism, denoted `C a => b`.

- However, Haskell does **not** have direct support for functions whose result *type* depends on the argument *value*. In the literature, these are often called “dependent functions”, or “ $\Pi$ -types”.

Consider:

```
type F :: Bool -> Bool
type family F b where
  F True  = ...
  F False = ...
```

(continues on next page)

(continued from previous page)

```
f :: Bool -> Bool
f True  = ...
f False = ...
```

In this example, we define a type family `F` to pattern-match on `b` at the type level; and a function `f` to pattern-match on `b` at the term level. However, it is impossible to quantify over `b` in such a way that both `F` and `f` could be applied to it:

```
defun :: forall (b :: Bool) -> F b  -- Allowed
defun b = ... (f b) ...           -- Not allowed
```

It is illegal to pass `b` to `f` because `b` does not exist at runtime. Types and type arguments are erased before runtime.

The [RequiredTypeArguments](#) (page 444) extension does not add dependent functions, which would be a much bigger step. Rather [RequiredTypeArguments](#) (page 444) just makes it possible for the type arguments of a function to be compulsory.

## 6.4.19 Arbitrary-rank polymorphism

### RankNTypes

#### Implies

[ExplicitForAll](#) (page 560)

#### Since

6.8.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow types of arbitrary rank.

### Rank2Types

#### Since

6.8.1

#### Status

Deprecated

A deprecated alias of [RankNTypes](#) (page 451).

GHC's type system supports *arbitrary-rank* explicit universal quantification in types. For example, all the following types are legal:

```
f1 :: forall a b. a -> b -> a
g1 :: forall a b. (Ord a, Eq b) => a -> b -> a

f2 :: (forall a. a->a) -> Int -> Int
g2 :: (forall a. Eq a => [a] -> a -> Bool) -> Int -> Int

f3 :: ((forall a. a->a) -> Int) -> Bool -> Bool
```

Here, `f1` and `g1` are rank-1 types, and can be written in standard Haskell (e.g. `f1 :: a->b->a`). The `forall` makes explicit the universal quantification that is implicitly added by Haskell.

The functions `f2` and `g2` have rank-2 types; the `forall` is on the left of a function arrow. As `g2` shows, the polymorphic type on the left of the function arrow can be overloaded.

The function `f3` has a rank-3 type; it has rank-2 types on the left of a function arrow.

The language option [RankNTypes](#) (page 451) (which implies [ExplicitForAll](#) (page 560)) enables higher-rank types. That is, you can nest `forall`s arbitrarily deep in function arrows. For example, a `forall`-type (also called a “type scheme”), including a type-class context, is legal:

- On the left or right of a function arrow.
- As the argument of a constructor, or type of a field, in a data type declaration. For example, any of the `f1`, `f2`, `f3`, `g1`, `g2` above would be valid field type signatures.
- As the type of an implicit parameter.
- In a pattern type signature (see [Lexically scoped type variables](#) (page 565)).

In particular, in data and newtype declarations the constructor arguments may be polymorphic types of any rank; see examples in [Examples](#) (page 452). Note that the declared types are nevertheless always monomorphic. This is important because by default GHC will not instantiate type variables to a polymorphic type ([Impredicative polymorphism](#) (page 457)).

Note that the [RankNTypes](#) (page 451) option is also required for any type with a `forall` or context to the right of an arrow. For example:

```
h1  :: Int -> (forall a. a -> a)
h1' :: forall a. Int -> (a -> a)

k1  :: Int -> Ord a => a -> a
k1' :: Ord a => Int -> a -> a
```

The function `h1` has a rank-1 type; it has the same behaviour as `h1'`, except with a different order of arguments. This matters if one were to specify the type explicitly using a visible type application (using [TypeApplications](#) (page 435)): we would write `h1 3 @Bool True` but `h1' @Bool 3 True`. Similarly, `k1` has a rank-1 type; it differs from `k1'` only in the order of arguments. As the types of `h1` and `k1` are not allowed in Haskell-98, we also require users to enable [RankNTypes](#) (page 451) to write them (which seems more sensible than inventing a separate extension just for this case).

The obsolete language option [Rank2Types](#) (page 451) is a synonym for [RankNTypes](#) (page 451). They used to specify finer distinctions that GHC no longer makes.

#### 6.4.19.1 Examples

These are examples of data and newtype declarations whose data constructors have polymorphic argument types:

```
data T a = T1 (forall b. b -> b -> b) a

data MonadT m = MkMonad { return :: forall a. a -> m a,
                          bind    :: forall a b. m a -> (a -> m b) -> m b
                          }

newtype Swizzle = MkSwizzle (forall a. Ord a => [a] -> [a])
```

The constructors have rank-2 types:

```

T1 :: forall a. (forall b. b -> b -> b) -> a -> T a

MkMonad :: forall m. (forall a. a -> m a)
              -> (forall a b. m a -> (a -> m b) -> m b)
              -> MonadT m

MkSwizzle :: (forall a. Ord a => [a] -> [a]) -> Swizzle

```

In earlier versions of GHC, it was possible to omit the `forall` in the type of the constructor if there was an explicit context. For example:

```

newtype Swizzle' = MkSwizzle' (Ord a => [a] -> [a])

```

Since GHC 8.0 declarations such as `MkSwizzle'` will cause an out-of-scope error.

You construct values of types `T1`, `MonadT`, `Swizzle` by applying the constructor to suitable values, just as usual. For example,

```

a1 :: T Int
a1 = T1 (\x y->x) 3

a2, a3 :: Swizzle
a2 = MkSwizzle sort
a3 = MkSwizzle reverse

a4 :: MonadT Maybe
a4 = let r x = Just x
      b m k = case m of
        Just y -> k y
        Nothing -> Nothing
      in
      MkMonad r b

mkTs :: (forall b. b -> b -> b) -> a -> a -> [T a]
mkTs f x y = [T1 f x, T1 f y]

```

The type of the argument can, as usual, be more general than the type required, as (`MkSwizzle reverse`) shows. (`reverse` does not need the `Ord` constraint.)

When you use pattern matching, the bound variables may now have polymorphic types. For example:

```

f :: T a -> a -> (a, Char)
f (T1 w k) x = (w k x, w 'c' 'd')

g :: (Ord a, Ord b) => Swizzle -> [a] -> (a -> b) -> [b]
g (MkSwizzle s) xs f = s (map f (s xs))

h :: MonadT m -> [m a] -> m [a]
h m [] = return m []
h m (x:xs) = bind m x           $ \y ->
              bind m (h m xs)   $ \ys ->
              return m (y:ys)

```

In the function `h` we use the record selectors `return` and `bind` to extract the polymorphic bind

and return functions from the `MonadT` data structure, rather than using pattern matching.

#### 6.4.19.2 Subsumption

Suppose:

```
f1 :: (forall a b. Int -> a -> b -> b) -> Bool
g1 :: forall x y. Int -> y -> x -> x

f2 :: (forall a. (Eq a, Show a) => a -> a) -> Bool
g2 :: forall x. (Show x, Eq x) => x -> x
```

then `f1 g1` and `f2 g2` are both well typed, despite the different order of type variables and constraints. What happens is that the argument is instantiated, and then re-generalised to match the type expected by the function.

But this instantiation and re-generalisation happens only at the top level of a type. In particular, none of this happens if the `forall`s are underneath an arrow. For example:

```
f3 :: (Int -> forall a b. a -> b -> b) -> Bool
g3a :: Int -> forall x y. x -> y -> y
g3b :: forall x. Int -> forall y. x -> y -> y
g3c :: Int -> forall x y. y -> x -> x

f4 :: (Int -> forall a. (Eq a, Show a) => a -> a) -> Bool
g4 :: Int -> forall x. (Show x, Eq x) => x -> x -> Bool
```

Then the application `f3 g3a` is well-typed, because `g3a` has a type that matches the type expected by `f3`. But `f3 g3b` is not well typed, because the `forall`s are in different places. Nor is `f3 g3c`, where the `forall`s are in the same place but the variables are in a different order. Similarly `f4 g4` is not well typed, because the constraints appear in a different order.

These examples can be made to typecheck by eta-expansion. For example `f3 (\x -> g3b x)` is well typed, and similarly `f3 (\x -> g3c x)` and `f4 (\x -> g4 x)`.

A similar phenomenon occurs for operator sections. For example, `(\`g3a\` "hello")` is not well typed, but it can be made to typecheck by eta expanding it to `\x -> x \`g3a\` "hello"`.

#### DeepSubsumption

##### Since

9.2.4

Relax the simple subsumption rules, implicitly inserting eta-expansions when matching up function types with different quantification structures.

The *DeepSubsumption* (page 454) extension relaxes the aforementioned requirement that `forall`s must appear in the same place. GHC will instead automatically rewrite expressions like `f x` of type `ty1 -> ty2` to become `(\ (y :: ty1) -> f x y)`; this is called eta-expansion. See Section 4.6 of *Practical type inference for arbitrary-rank types*, where this process is called “deep skolemisation”.

Note that these eta-expansions may silently change the semantics of the user's program:

```
h1 :: Int -> forall a. a -> a
h1 = undefined
```

(continues on next page)



(continued from previous page)

```
h2 :: forall b. Int -> b -> b
h2 = h1
```

With *DeepSubsumption* (page 454), GHC will accept these definitions, inserting an implicit eta-expansion:

```
h2 = \ i -> h1 i
```

This means that `h2 `seq` ()` will not crash, even though `h1 `seq` ()` does crash.

Historical note: Deep skolemisation was initially removed from the language by [GHC Proposal #287](#), but was re-introduced as part of the *DeepSubsumption* (page 454) extension following [GHC Proposal #511](#).

### 6.4.19.3 Type inference

In general, type inference for arbitrary-rank types is undecidable. GHC uses an algorithm proposed by Odersky and Laufer (“Putting type annotations to work”, POPL’96) to get a decidable algorithm by requiring some help from the programmer. We do not yet have a formal specification of “some help” but the rule is this:

For a lambda-bound or case-bound variable, *x*, either the programmer provides an explicit polymorphic type for *x*, or GHC’s type inference will assume that *x*’s type has no forall in it.

What does it mean to “provide” an explicit type for *x*? You can do that by giving a type signature for *x* directly, using a pattern type signature (*Lexically scoped type variables* (page 565)), thus:

```
\ f :: (forall a. a->a) -> (f True, f 'c')
```

Alternatively, you can give a type signature to the enclosing context, which GHC can “push down” to find the type for the variable:

```
(\ f -> (f True, f 'c')) :: (forall a. a->a) -> (Bool, Char)
```

Here the type signature on the expression can be pushed inwards to give a type signature for *f*. Similarly, and more commonly, one can give a type signature for the function itself:

```
h :: (forall a. a->a) -> (Bool, Char)
h f = (f True, f 'c')
```

You don’t need to give a type signature if the lambda bound variable is a constructor argument. Here is an example we saw earlier:

```
f :: T a -> a -> (a, Char)
f (T1 w k) x = (w k x, w 'c' 'd')
```

Here we do not need to give a type signature to *w*, because it is an argument of constructor *T1* and that tells GHC all it needs to know.

#### 6.4.19.4 Implicit quantification

GHC performs implicit quantification as follows. At the outermost level (only) of user-written types, if and only if there is no explicit `forall`, GHC finds all the type variables mentioned in the type that are not already in scope, and universally quantifies them. For example, the following pairs are equivalent:

```
f :: a -> a
f :: forall a. a -> a

g (x::a) = let
    h :: a -> b -> b
    h x y = y
    in ...
g (x::a) = let
    h :: forall b. a -> b -> b
    h x y = y
    in ...
```

Notice that GHC always adds implicit quantifiers *at the outermost level* of a user-written type; it does *not* find the inner-most possible quantification point. For example:

```
f :: (a -> a) -> Int
-- MEANS
f :: forall a. (a -> a) -> Int
-- NOT
f :: (forall a. a -> a) -> Int

g :: (Ord a => a -> a) -> Int
-- MEANS
g :: forall a. (Ord a => a -> a) -> Int
-- NOT
g :: (forall a. Ord a => a -> a) -> Int
```

If you want the latter type, you can write your `forall`s explicitly. Indeed, doing so is strongly advised for rank-2 types.

Sometimes there *is* no “outermost level”, in which case no implicit quantification happens:

```
data PackMap a b s t = PackMap (Monad f => (a -> f b) -> s -> f t)
```

This is rejected because there is no “outermost level” for the types on the RHS (it would obviously be terrible to add extra parameters to `PackMap`), so no implicit quantification happens, and the declaration is rejected (with “`f` is out of scope”). Solution: use an explicit `forall`:

```
data PackMap a b s t = PackMap (forall f. Monad f => (a -> f b) -> s -> f t)
```

## 6.4.20 Impredicative polymorphism

### ImpredicativeTypes

#### Implies

[RankNTypes](#) (page 451)

#### Since

9.2.1 (unreliable in 6.10 - 9.0)

Allow impredicative polymorphic types.

In general, GHC will only instantiate a polymorphic function at a monomorphic type (one with no forall's). For example,

```
runST :: (forall s. ST s a) -> a
id :: forall b. b -> b

foo = id runST    -- Rejected
```

The definition of `foo` is rejected because one would have to instantiate `id`'s type with `b := (forall s. ST s a) -> a`, and that is not allowed. Instantiating polymorphic type variables with polymorphic types is called *impredicative polymorphism*.

GHC has robust support for *impredicative polymorphism*, enabled with [ImpredicativeTypes](#) (page 457), using the so-called Quick Look inference algorithm. It is described in the paper [A quick look at impredicativity](#) (Serrano et al, ICFP 2020).

Switching on [ImpredicativeTypes](#) (page 457)

- Switches on [RankNTypes](#) (page 451)
- Allows user-written types to have forall's under type constructors, not just under arrows. For example `f :: Maybe (forall a. [a] -> [a])` is a legal type signature.
- Allows polymorphic types in Visible Type Application (when [TypeApplications](#) (page 435) is enabled). For example, you can write `reverse @(forall b. b->b) xs`. Using VTA with a polymorphic type argument is useful in cases when Quick Look cannot infer the correct instantiation.
- Switches on the Quick Look type inference algorithm, as described in the paper. This allows the compiler to infer impredicative instantiations of polymorphic functions in many cases. For example, `reverse xs` will typecheck even if `xs :: [forall a. a->a]`, by instantiating `reverse` at type `forall a. a->a`.

Note that the treatment of type-class constraints and implicit parameters remains entirely monomorphic, even with [ImpredicativeTypes](#). Specifically:

- You cannot apply a type class to a polymorphic type. This is illegal: `f :: C (forall a. a->a) => [a] -> [a]`
- You cannot give an instance declaration with a polymorphic argument. This is illegal: `instance C (forall a. a->a)`
- An implicit parameter cannot have a polymorphic type: `g :: (?x :: forall a. a->a) => [a] -> [a]`

For many years GHC has a special case for the function `($)`, that allows it to typecheck an application like `runST $ (do { ... })`, even though that instantiation may be impredicative. This special case remains: even without [ImpredicativeTypes](#) (page 457) GHC switches on Quick Look for applications of `($)`.

This flag was available in earlier versions of GHC (6.10.1 - 9.0), but the behavior was unpredictable and not officially supported.

### 6.4.21 Linear types

#### LinearTypes

**Implies**

[MonoLocalBinds](#) (page 580)

**Since**

9.0.1

**Status**

Experimental

Enable the linear arrow `a %1 -> b` and the multiplicity-polymorphic arrow `a %m -> b`.

**This extension is currently considered experimental, expect bugs, warts, and bad error messages; everything down to the syntax is subject to change.** See, in particular, [Limitations](#) (page 462) below. We encourage you to experiment with this extension and report issues in the [GHC bug tracker](#), adding the tag `LinearTypes`.

A function `f` is linear if: when its result is consumed *exactly once*, then its argument is consumed *exactly once*. Intuitively, it means that in every branch of the definition of `f`, its argument `x` must be used exactly once. Which can be done by

- Returning `x` unmodified
- Passing `x` to a *linear* function
- Pattern-matching on `x` and using each argument exactly once in the same fashion.
- Calling it as a function and using the result exactly once in the same fashion.

With `-XLinearTypes`, you can write `f :: a %1 -> b` to mean that `f` is a linear function from `a` to `b`. If [UnicodeSyntax](#) (page 320) is enabled, the `%1 ->` arrow can be written as `~>`.

To allow uniform handling of linear `a %1 -> b` and unrestricted `a -> b` functions, there is a new function type `a %m -> b`. Here, `m` is a type of new kind `Multiplicity`. We have:

```
data Multiplicity = One | Many -- Defined in GHC.Types

type a %1 -> b = a %One -> b
type a -> b = a %Many -> b
```

(See [Datatype promotion](#) (page 404)).

We say that a variable whose multiplicity constraint is `Many` is *unrestricted*.

The multiplicity-polymorphic arrow `a %m -> b` is available in a prefix version as `GHC.Exts.FUN m a b`, which can be applied partially. See, however [Limitations](#) (page 462).

Linear and multiplicity-polymorphic arrows are *always declared*, never inferred. That is, if you don't give an appropriate type signature to a function, it will be inferred as being a regular function of type `a -> b`. The same principle holds for representation polymorphism (see [Inference and defaulting](#) (page 432)).

### 6.4.21.1 Expressions

When defining a function either as a lambda `\x -> u` or with equations `f x = u`, the multiplicity of the variable `x` will be inferred from the context. For equations, the context will typically be a type signature. For instance here is a linear function

```
f :: (a -> b) %1 -> a -> b
f g x = g x
```

In this example, `g` must be used linearly while `x` is unrestricted.

### Bindings

Let and where bindings can be linear as well, the multiplicity of bindings is typically inferred

```
f :: A %1 -> B
g :: B %1 -> C

h :: A %1 -> C
h x = g y
  where
    y = f x
```

If you don't want, or aren't able, to rely on inference, let and where bindings can be annotated with a multiplicity

```
f :: A %1 -> B
g :: B %1 -> C

h :: A %1 -> C
h x = g y
  where
    %1 y = f x
```

The precise rules are, that you can annotate a binding with a multiplicity if:

- The binding is not top-level
- The binding is non-recursive
- The binding is a pattern binding (including a simple variable) `p=e` (you can't write `let %1 f x = u`, instead write `let %1 f = \x -> u`)
- Either `p` is strict (see *infra*) or `p` is a variable. In particular neither `x@y` nor `(x)` are covered by "is a variable"

When there's no multiplicity annotation, the multiplicity is inferred as follows:

- Toplevel bindings are inferred as having multiplicity `Many`
- Recursive bindings are inferred as having multiplicity `Many`
- Lazy non-variable pattern bindings are inferred as having multiplicity `Many` (note that in let- and where-bindings, patterns are lazy by default, so that `let (x,y) = rhs` always have multiplicity `Many`, whereas `let !(x,y) = rhs` can have multiplicity `1`).
- In all other cases, including function bindings `let f x1...xn = rhs`, the multiplicity is inferred from the term.

When `-XMonoLocalBinds` is off, the following also holds:

- Multiplicity-annotated non-variable pattern-bindings (such as `let %1 !(x,y) = rhs`) are never generalised.
- Non-variable pattern bindings which are inferred as polymorphic or qualified are inferred as having multiplicity `Many`.

## Strict patterns

GHC considers that non-variable lazy patterns consume the scrutinee with multiplicity `Many`. In practice, a pattern is strict (hence can be linear) if (otherwise the pattern is lazy):

- The pattern is a case alternative and isn't annotated with a `~`
- The pattern is a let-binding, and is annotated with a `!`
- The pattern is a let-binding, `Strict` (page 597) is on, and isn't annotated with a `~`
- The pattern is nested inside a strict pattern

Here are some examples of the impact on linear typing:

Without `-XStrict`:

```
-- good
let %1 x = u in ...

-- good
let %1 !x = u in ...

-- bad
let %1 (x, y) = u in ...

-- good
let %Many (x, y) = u in ...

-- good
let %1 !(x, y) = u in ...

-- good
let %1 (! (x, y)) = u in ...

-- inferred unrestricted
let (x, y) = u in ...

-- can be inferred linear
case u of (x, y) -> ...

-- inferred unrestricted
case u of ~(x, y) -> ...
```

**With `-XStrict`:**

- good `let %1 x = u in ...`
- good `let %1 !x = u in ...`
- good `let %1 (x, y) = u in ...`

- bad `let %1 ~(x, y) = u in ...`
- good `let %Many ~(x, y) = u in ...`
- can be inferred linear `let (x, y) = u in ...`
- inferred unrestricted `let ~(x, y) = u in ...`

#### 6.4.21.2 Data types

By default, all fields in algebraic data types are linear (even if `-XLinearTypes` is not turned on). Given

```
data T1 a = MkT1 a
```

the value `MkT1 x` can be constructed and deconstructed in a linear context:

```
construct :: a %1 -> T1 a
construct x = MkT1 x

deconstruct :: T1 a %1 -> a
deconstruct (MkT1 x) = x  -- must consume `x` exactly once
```

When used as a value, `MkT1` is given a multiplicity-polymorphic type: `MkT1 :: forall {m} a. a %m -> T1 a`. This makes it possible to use `MkT1` in higher order functions. The additional multiplicity argument `m` is marked as inferred (see *Inferred vs. specified type variables* (page 435)), so that there is no conflict with visible type application. When displaying types, unless `-XLinearTypes` is enabled, multiplicity polymorphic functions are printed as regular functions (see *Printing multiplicity-polymorphic types* (page 462)); therefore constructors appear to have regular function types.

```
mkList :: [a] -> [T1 a]
mkList xs = map MkT1 xs
```

Hence the linearity of type constructors is invisible when `-XLinearTypes` is off.

Whether a data constructor field is linear or not can be customized using the GADT syntax. Given

```
data T2 a b c where
  MkT2 :: a -> b %1 -> c %1 -> T2 a b c  -- Note unrestricted arrow in the ↪
  ↪ first argument
```

the value `MkT2 x y z` can be constructed only if `x` is unrestricted. On the other hand, a linear function which is matching on `MkT2 x y z` must consume `y` and `z` exactly once, but there is no restriction on `x`.

It is also possible to define a multiplicity-polymorphic field:

```
data T3 a m where
  MkT3 :: a %m -> T3 a m
```

While linear fields are generalized (`MkT1 :: forall {m} a. a %m -> T1 a` in the previous example), multiplicity-polymorphic fields are not; it is not possible to directly use `MkT3` as a function `a -> T3 a One`.

If [LinearTypes](#) (page 458) is disabled, all fields are considered to be linear fields, including GADT fields defined with the `->` arrow.

In a newtype declaration, the field must be linear. Attempting to write an unrestricted newtype constructor with GADT syntax results in an error.

#### 6.4.21.3 Printing multiplicity-polymorphic types

If [LinearTypes](#) (page 458) is disabled, multiplicity variables in types are defaulted to `Many` when printing, in the same manner as described in [Printing representation-polymorphic types](#) (page 432). In other words, without [LinearTypes](#) (page 458), multiplicity-polymorphic functions `a %m -> b` are printed as normal Haskell2010 functions `a -> b`. This allows existing libraries to be generalized to linear types in a backwards-compatible manner; the general types are visible only if the user has enabled [LinearTypes](#) (page 458). (Note that a library can declare a linear function in the contravariant position, i.e. take a linear function as an argument. In this case, linearity cannot be hidden; it is an essential part of the exposed interface.)

#### 6.4.21.4 Limitations

Linear types are still considered experimental and come with several limitations. If you have read the full design in the proposal (see [Design and further reading](#) (page 462) below), here is a run down of the missing pieces.

- Multiplicity polymorphism is incomplete and experimental. You may have success using it, or you may not. Expect it to be really unreliable. (Multiplicity multiplication is not supported yet.)
- There is currently no support for multiplicity annotations on function arguments such as `\(%p x :: a) -> ...`, only on let-bound variables.
- A case expression may consume its scrutinee `One` time, or `Many` times. But the inference is still experimental, and may over-eagerly guess that it ought to consume the scrutinee `Many` times.
- There is no support for linear pattern synonyms.
- `@`-patterns and view patterns are not linear.
- The projection function for a record with a single linear field should be multiplicity-polymorphic; currently it's unrestricted.
- Attempting to use of linear types in Template Haskell will probably not work.

#### 6.4.21.5 Design and further reading

- The design for this extension is described in details in the [Linear types proposal](#)
- This extension has been originally conceived of in the paper [Linear Haskell: practical linearity in a higher-order polymorphic language](#) (POPL 2018)
- There is a [wiki page dedicated to the linear types extension](#)



### 6.4.22 Custom compile-time errors

When designing embedded domain specific languages in Haskell, it is useful to have something like error at the type level. In this way, the EDSL designer may show a type error that is specific to the DSL, rather than the standard GHC type error.

For example, consider a type class that is not intended to be used with functions, but the user accidentally used it at a function type, perhaps because they missed an argument to some function. Then, instead of getting the standard GHC message about a missing instance, it would be nicer to emit a more friendly message specific to the EDSL. Similarly, the reduction of a type-level function may get stuck due to an error, at which point it would be nice to report an EDSL specific error, rather than a generic error about an ambiguous type.

To solve this, GHC provides a single type-level function,

```
type family TypeError (msg :: ErrorMessage) :: k
```

along with a small type-level language (via *DataKinds* (page 404)) for constructing pretty-printed error messages,

```
-- ErrorMessage is intended to be used as a kind
data ErrorMessage =
    Text Symbol                -- Show this text as is
  | forall t. ShowType t      -- Pretty print a type
  | ErrorMessage :<: ErrorMessage -- Put two chunks of error message
  --next to each other
  | ErrorMessage :$: ErrorMessage -- Put two chunks of error message
  --above each other
```

in the `GHC.TypeLits` module.

For instance, we might use this interface to provide a more useful error message for applications of `show` on unsaturated functions like this,

```
{-# LANGUAGE DataKinds #-}
{-# LANGUAGE TypeOperators #-}
{-# LANGUAGE UndecidableInstances #-}

import GHC.TypeLits

instance TypeError (Text "Cannot 'Show' functions." :$:
                    Text "Perhaps there is a missing argument?")
    => Show (a -> b) where
    showsPrec = error "unreachable"

main = print negate
```

Which will produce the following compile-time error,

```
Test.hs:12:8: error:
• Cannot 'Show' functions.
  Perhaps there is a missing argument?
• In the expression: print negate
  In an equation for 'main': main = print negate
```

### 6.4.23 Deferring type errors to runtime

Since GHC 7.6.1.

While developing, sometimes it is desirable to allow compilation to succeed even if there are type errors in the code. Consider the following case:

```
module Main where

a :: Int
a = 'a'

main = print "b"
```

Even though `a` is ill-typed, it is not used in the end, so if all that we're interested in is `main` it can be useful to be able to ignore the problems in `a`.

For more motivation and details please refer to the [Wiki](#) page or the [original paper](#).

#### 6.4.23.1 Enabling deferring of type errors

The flag `-fdefer-type-errors` (page 464) controls whether type errors are deferred to run-time. Type errors will still be emitted as warnings, but will not prevent compilation. You can use `-Wno-deferred-type-errors` (page ??) to suppress these warnings.

This flag implies the `-fdefer-typed-holes` (page 464) and `-fdefer-out-of-scope-variables` (page 465) flags, which enables this behaviour for *Typed Holes* (page 347) and variables. Should you so wish, it is possible to enable `-fdefer-type-errors` (page 464) without enabling `-fdefer-typed-holes` (page 464) or `-fdefer-out-of-scope-variables` (page 465), by explicitly specifying `-fno-defer-typed-holes` (page 464) or `-fno-defer-out-of-scope-variables` (page 465) on the command-line after the `-fdefer-type-errors` (page 464) flag.

##### **-fdefer-type-errors**

**Since**  
7.6

**Implies**  
`-fdefer-typed-holes` (page 464), `-fdefer-out-of-scope-variables`  
(page 465)

Defer as many type errors as possible until runtime. At compile time you get a warning (instead of an error). At runtime, if you use a value that depends on a type error, you get a runtime error; but you can run any type-correct parts of your code just fine. See also `-Wdeferred-type-errors` (page 100).

##### **-fdefer-typed-holes**

**Since**  
7.10

Defer typed holes errors (errors about names with a leading underscore (e.g., `"_"`, `"_foo"`, `"_bar"`)) until runtime. This will turn the errors produced by *typed holes* (page 347) into warnings. Using a value that depends on a typed hole produces a runtime error, the same as `-fdefer-type-errors` (page 464) (which implies this option). See *Typed Holes* (page 347).

Implied by `-fdefer-type-errors` (page 464). See also `-Wtyped-holes` (page 99).

**-fdefer-out-of-scope-variables**

Since  
8.0

Defer variable out-of-scope errors (errors about names without a leading underscore) until runtime. This will turn variable-out-of-scope errors into warnings. Using a value that depends on an out-of-scope variable produces a runtime error, the same as *-fdefer-type-errors* (page 464) (which implies this option). See *Typed Holes* (page 347).

Implied by *-fdefer-type-errors* (page 464). See also *-wdeferred-out-of-scope-variables* (page 100).

At runtime, whenever a term containing a type error would need to be evaluated, the error is converted into a runtime exception of type `TypeError`. Note that type errors are deferred as much as possible during runtime, but invalid coercions are never performed, even when they would ultimately result in a value of the correct type. For example, given the following code:

```
x :: Int
x = 0

y :: Char
y = x

z :: Int
z = y
```

evaluating `z` will result in a runtime `TypeError`.

**6.4.23.2 Deferred type errors in GHCi**

The flag *-fdefer-type-errors* (page 464) works in GHCi as well, with one exception: for “naked” expressions typed at the prompt, type errors don’t get delayed, so for example:

```
Prelude> fst (True, 1 == 'a')

<interactive>:2:12:
  No instance for (Num Char) arising from the literal `1'
  Possible fix: add an instance declaration for (Num Char)
  In the first argument of `(==)', namely `1'
  In the expression: 1 == 'a'
  In the first argument of `fst', namely `(True, 1 == 'a')'
```

Otherwise, in the common case of a simple type error such as typing `reverse True` at the prompt, you would get a warning and then an immediately-following type error when the expression is evaluated.

This exception doesn’t apply to statements, as the following example demonstrates:

```
Prelude> let x = (True, 1 == 'a')

<interactive>:3:16: Warning:
  No instance for (Num Char) arising from the literal `1'
  Possible fix: add an instance declaration for (Num Char)
```

(continues on next page)

(continued from previous page)

```
In the first argument of `(==)', namely `1'
In the expression: 1 == 'a'
In the expression: (True, 1 == 'a')
Prelude> fst x
True
```

### 6.4.23.3 Limitations of deferred type errors

The errors that can be deferred are:

- Out of scope term variables
- Equality constraints; e.g. `ord True` gives rise to an insoluble equality constraint `Char ~ Bool`, which can be deferred.
- Type-class and implicit-parameter constraints

All other type errors are reported immediately, and cannot be deferred; for example, an ill-kinded type signature, an instance declaration that is non-terminating or ill-formed, a type-family instance that does not obey the declared injectivity constraints, etc etc.

In a few cases, some constraints cannot be deferred. Specifically:

- Kind errors in a type or kind signature, partial type signatures, or pattern signature. e.g.

```
f :: Int Bool -> Char
```

This type signature contains a kind error which cannot be deferred.

- Type equalities under a forall (c.f. [#14605](#)).
- Kind errors in a visible type application. e.g.

```
reverse @Maybe xs
```

- Kind errors in a default declaration. e.g.

```
default( Double, Int Int )
```

- Errors involving linear types (c.f. [#20083](#)). e.g.

```
f :: a %1 -> a
f _ = ()
```

- Illegal representation polymorphism, e.g.

```
f :: forall rep (a :: TYPE rep). a -> a
f a = a
```

## 6.4.24 Roles

Using *GeneralizedNewtypeDeriving* (page 499) (*Generalised derived instances for newtypes* (page 499)), a programmer can take existing instances of classes and “lift” these into instances of that class for a newtype. However, this is not always safe. For example, consider the following:

```
newtype Age = MkAge { unAge :: Int }

type family Inspect x
type instance Inspect Age = Int
type instance Inspect Int = Bool

class BadIdea a where
  bad :: a -> Inspect a

instance BadIdea Int where
  bad = (> 0)

deriving instance BadIdea Age    -- not allowed!
```

If the derived instance were allowed, what would the type of its method `bad` be? It would seem to be `Age -> Inspect Age`, which is equivalent to `Age -> Int`, according to the type family `Inspect`. Yet, if we simply adapt the implementation from the instance for `Int`, the implementation for `bad` produces a `Bool`, and we have trouble.

The way to identify such situations is to have *roles* assigned to type variables of datatypes, classes, and type synonyms.

Roles as implemented in GHC are a from a simplified version of the work described in *Generative type abstraction and type-level computation*, published at POPL 2011.

### 6.4.24.1 Nominal, Representational, and Phantom

The goal of the roles system is to track when two types have the same underlying representation. In the example above, `Age` and `Int` have the same representation. But, the corresponding instances of `BadIdea` would *not* have the same representation, because the types of the implementations of `bad` would be different.

Suppose we have two uses of a type constructor, each applied to the same parameters except for one difference. (For example, `T Age Bool c` and `T Int Bool c` for some type `T`.) The role of a type parameter says what we need to know about the two differing type arguments in order to know that the two outer types have the same representation (in the example, what must be true about `Age` and `Int` in order to show that `T Age Bool c` has the same representation as `T Int Bool c`).

GHC supports three different roles for type parameters: nominal, representational, and phantom. If a type parameter has a nominal role, then the two types that differ must not actually differ at all: they must be identical (after type family reduction). If a type parameter has a representational role, then the two types must have the same representation. (If `T`'s first parameter's role is representational, then `T Age Bool c` and `T Int Bool c` would have the same representation, because `Age` and `Int` have the same representation.) If a type parameter has a phantom role, then we need no further information.

Here are some examples:

```
data Simple a = MkSimple a           -- a has role representational

type family F
type instance F Int = Bool
type instance F Age = Char

data Complex a = MkComplex (F a)     -- a has role nominal

data Phant a = MkPhant Bool          -- a has role phantom
```

The type `Simple` has its parameter at role `representational`, which is generally the most common case. `Simple Age` would have the same representation as `Simple Int`. The type `Complex`, on the other hand, has its parameter at role `nominal`, because `Complex Age` and `Complex Int` are *not* the same. Lastly, `Phant Age` and `Phant Bool` have the same representation, even though `Age` and `Bool` are unrelated.

#### 6.4.24.2 Role inference

What role should a given type parameter have? GHC performs role inference to determine the correct role for every parameter. It starts with a few base facts: `(->)` has two `representational` parameters; `(~)` has two `nominal` parameters; all type families' parameters are `nominal`; and all GADT-like parameters are `nominal`. Then, these facts are propagated to all places where these types are used. The default role for datatypes and synonyms is `phantom`; the default role for classes is `nominal`. Thus, for datatypes and synonyms, any parameters unused in the right-hand side (or used only in other types in `phantom` positions) will be `phantom`. Whenever a parameter is used in a `representational` position (that is, used as a type argument to a constructor whose corresponding variable is at role `representational`), we raise its role from `phantom` to `representational`. Similarly, when a parameter is used in a `nominal` position, its role is upgraded to `nominal`. We never downgrade a role from `nominal` to `phantom` or `representational`, or from `representational` to `phantom`. In this way, we infer the most-general role for each parameter.

Classes have their roles default to `nominal` to promote coherence of class instances. If a `C Int` were stored in a datatype, it would be quite bad if that were somehow changed into a `C Age` somewhere, especially if another `C Age` had been declared!

There is one particularly tricky case that should be explained:

```
data Tricky a b = MkTricky (a b)
```

What should `Tricky`'s roles be? At first blush, it would seem that both `a` and `b` should be at role `representational`, since both are used in the right-hand side and neither is involved in a type family. However, this would be wrong, as the following example shows:

```
data Nom a = MkNom (F a)  -- type family F from example above
```

Is `Tricky Nom Age` representationally equal to `Tricky Nom Int`? No! The former stores a `Char` and the latter stores a `Bool`. The solution to this is to require all parameters to type variables to have role `nominal`. Thus, GHC would infer role `representational` for `a` but role `nominal` for `b`.

### 6.4.24.3 Role annotations

#### RoleAnnotations

##### Since

7.8.1

##### Status

Included in [GHC2024](#) (page 314)

Allow role annotation syntax.

Sometimes the programmer wants to constrain the inference process. For example, we can consider a type `Set a` that represents a set of data, ordered according to `a`'s `Ord` instance. While it would generally be type-safe to consider `a` to be at role representational, it is possible that a newtype and its base type have *different* orderings encoded in their respective `Ord` instances. This would lead to misbehavior at runtime. So, the author of the `Set` datatype would like its parameter to be at role nominal. This would be done with a declaration

```
type role Set nominal
```

Role annotations can also be used should a programmer wish to write a class with a representational (or phantom) role. However, as a class with non-nominal roles can quickly lead to class instance incoherence, it is necessary to also specify [IncoherentInstances](#) (page 538) to allow non-nominal roles for classes.

The other place where role annotations may be necessary are in `hs-boot` files ([How to compile mutually recursive modules](#) (page 247)), where the right-hand sides of definitions can be omitted. As usual, the types/classes declared in an `hs-boot` file must match up with the definitions in the `hs` file, including down to the roles. The default role for datatypes is representational in `hs-boot` files, corresponding to the common use case.

Role annotations are allowed on data, newtype, and class declarations. A role annotation declaration starts with `type role` and is followed by one role listing for each parameter of the type. (This parameter count includes parameters implicitly specified by a kind signature in a GADT-style data or newtype declaration.) Each role listing is a role (nominal, representational, or phantom) or a `_`. Using a `_` says that GHC should infer that role. The role annotation may go anywhere in the same module as the datatype or class definition (much like a value-level type signature). Here are some examples:

```
type role T1 _ phantom
data T1 a b = MkT1 a      -- b is not used; annotation is fine but unnecessary

type role T2 _ phantom
data T2 a b = MkT2 b      -- ERROR: b is used and cannot be phantom

type role T3 _ nominal
data T3 a b = MkT3 a      -- OK: nominal is higher than necessary, but safe

type role T4 nominal
data T4 a = MkT4 (a Int)  -- OK, but nominal is higher than necessary

type role C representational _ -- OK, with -XIncoherentInstances
class C a b where ...      -- OK, b will get a nominal role

type role X nominal
```

(continues on next page)

(continued from previous page)

```
type X a = ...           -- ERROR: role annotations not allowed for type_
↳synonyms
```

## 6.5 Records

### 6.5.1 Record field name resolution

A record field name *x* can be used in four contexts:

1. In a record *construction*: `C{ x = 3 }`
2. In a record *update*: `r{ x = 4 }`
3. In a record *pattern match*: `case r of C{ x = value } -> ...`
4. As a standalone record *selector*: `x r`

In these four cases, here are the rules for field name resolution:

1. An unqualified name “*x*” is unambiguous *if and only if* there is just one “*x*” in scope unqualified.
2. A qualified name “*M.x*” is unambiguous *if and only if* there is just one “*M.x*” in scope.

Those rules are amended by the following extensions:

- [DisambiguateRecordFields](#) (page 473): In record construction and pattern matching (`C{ x = ...}`), an unqualified field name *x* is unambiguous if and only if the data constructor (*C*) has a field *x*, and that field is in scope unqualified, or qualified as *Q.x*, regardless of *Q*. Similarly, in record construction and pattern matching, a qualified field name *M.x* is unambiguous if and only if the data constructor (*C*) has a field *x*, and that field is in scope qualified as *M.x*.

In record updates (`r{ x = 3 }`), the field name *x* is unambiguous if and only if there is just one field name *x* in scope unqualified. Similarly, the record update with a qualified field `r{ M.x = 3 }` is unambiguous if just one field name is in scope as *M.x*. In both cases, non-field names are ignored.

- [DuplicateRecordFields](#) (page 475): This extension allows record updates if exactly one type has all the fields being updated, even if they are individually ambiguous according to the two rules for field name resolution above.

For example:

```
data S = MkS1 { x :: Int, y :: Bool }
        | MkS2 { x :: Int }

data T = MkT1 { x :: Int, z :: Bool }
        | MkT2 { z :: Bool }

f r = r{ x=3, y=True }
```

The only data type that has both *x* and *y* as fields is *S*, so the field names *x* and *y* refer unambiguously to data type *S*.

- [NoFieldSelectors](#) (page 476): This extension being enabled means that field selector names in scope will be ignored in an expression context.



For example:

```
data T = MkT { x :: Int }

x :: String
x = "Hello"

f = x
```

With `NoFieldSelectors` the `x` in `f`'s right hand side refers to the `x :: String`, not to the field `x`.

## 6.5.2 Traditional record syntax

### NoTraditionalRecordSyntax

Since  
7.4.1

Disallow use of record syntax.

Traditional record syntax, such as `C {f = x}`, is enabled by default. To disable it, you can use the [NoTraditionalRecordSyntax](#) (page 471) extension.

Under [NoTraditionalRecordSyntax](#) (page 471), it is not permitted to define a record datatype or use record syntax in an expression. For example, the following all require [TraditionalRecordSyntax](#) (page 471):

```
data T = MkT { foo :: Int }  -- record datatype definition

x = MkT { foo = 3 }         -- construction

y = x { foo = 3 }           -- update

f (MkT { foo = i }) = i     -- pattern matching
```

However, if a field selector function is in scope, it may be used normally. (This arises if a module using [NoTraditionalRecordSyntax](#) (page 471) imports a module that defined a record with [TraditionalRecordSyntax](#) (page 471) enabled). If you wish to suppress field selector functions, use the [NoFieldSelectors](#) (page 476) extension.

## 6.5.3 Field selectors and TypeApplications

Field selectors can be used in conjunction with [TypeApplications](#) (page 435), as described in [Visible type application](#) (page 435). The type of a field selector is constructed by using the surrounding definition as context. This section provides a specification for how this construction works. We will explain it by considering three different forms of field selector, each of which is a minor variation of the same general theme.

### 6.5.3.1 Field selectors for Haskell98-style data constructors

Consider the following example:

```
data T a b = MkT { unT :: forall e. Either e a }
```

This data type uses a Haskell98-style declaration. The only part of this data type that is not Haskell98 code is `unT`, whose type uses higher-rank polymorphism (*Arbitrary-rank polymorphism* (page 451)). To construct the type of the `unT` field selector, we will assemble the following:

1. The type variables quantified by the data type head (`forall a b. <...>`).
2. The return type of the data constructor (`<...> T a b -> <...>`). By virtue of this being a Haskell98-style declaration, the order of type variables in the return type will always coincide with the order in which they are quantified.
3. The type of the field (`<...> forall e. Either e a`).

The final type of `unT` is therefore `forall a b. T a b -> forall e. Either e a`. As a result, one way to use `unT` with *TypeApplications* (page 435) is `unT @Int @Bool (MkT (Right 1)) @Char`.

### 6.5.3.2 Field selectors for GADT constructors

Field selectors for GADT constructors (*Declaring data types with explicit constructor signatures* (page 374)) are slightly more involved. Consider the following example:

```
data G a b where
  MkG :: forall x n a. (Eq a, Show n)
    => { unG1 :: forall e. Either e (a, x), unG2 :: n } -> G a (Maybe x)
```

The `MkG` GADT constructor has two records, `unG1` and `unG2`. However, only `unG1` can be used as a top-level field selector. `unG2` cannot because it is a “hidden” selector (see *Record Constructors* (page 372)); its type mentions a free variable `n` that does not appear in the result type `G a (Maybe x)`. On the other hand, the only free type variables in the type of `unG1` are `a` and `x`, so `unG1` is fine to use as a top-level function.

To construct the type of the `unG1` field selector, we will assemble the following:

1. The subset of type variables quantified by the GADT constructor that are mentioned in the return type. Note that the order of these variables follows the same principles as in *Ordering of specified variables* (page 436). If the constructor explicitly quantifies its type variables at the beginning of the type, then the field selector type will quantify them in the same order (modulo any variables that are dropped due to not being mentioned in the return type). If the constructor implicitly quantifies its type variables, then the field selector type will quantify them in the left-to-right order that they appear in the field itself.

In this example, `MkG` explicitly quantifies `forall x n a.`, and of those type variables, `a` and `x` are mentioned in the return type. Therefore, the type of `unG1` starts as `forall x a. <...>`. If `MkG` had not used an explicit `forall`, then they would have instead been ordered as `forall a x. <...>`, since `a` appears to the left of `x` in the field type.

2. The GADT return type (`<...> G a (Maybe x) -> ...`).
3. The type of the field (`<...> -> forall e. Either e (a, x)`).

The final type of `unG1` is therefore `forall x a. G a (Maybe x) -> forall e. Either e (a, x)`. As a result, one way to use `unG1` with [TypeApplications](#) (page 435) is `unG1 @Int @Bool (MkG (Right (True, 42)) ()) @Char`.

### 6.5.3.3 Field selectors for pattern synonyms

Certain record pattern synonyms ([Record Pattern Synonyms](#) (page 516)) can give rise to top-level field selectors. Consider the following example:

```
pattern P :: forall a. Read a
    => forall n. (Eq a, Show n)
    => (forall e. Either e (a, Bool)) -> n -> G a (Maybe Bool)
pattern P {unP1, unP2} = MkG unP1 unP2
```

We can only make field selectors for pattern synonym records that do not mention any existential type variables whatsoever in their types, per [Record Pattern Synonyms](#) (page 516). (This is a stronger requirement than for GADT records, whose types can mention existential type variables provided that they are also mentioned in the return type.) We can see that `unP2` cannot be used as a top-level field selector since its type has a free type variable `n`, which is existential. `unP1` is fine, on the other hand, as its type only has one free variable, the universal type variable `a`.

To construct the type of the `unP1` field selector, we will assemble the following:

1. The universal type variables (`forall a. <...>`).
2. The required constraints (`<...> Read a => <...>`).
3. The pattern synonym return type (`<...> G a (Maybe Bool) -> <...>`).
4. The type of the field (`<...> -> forall e. Either e (a, Bool)`).

The final type of `unP1` is therefore `forall a. Read a => G a (Maybe Bool) -> forall e. Either e (a, Bool)`. As a result, one way to use `unP1` with [TypeApplications](#) (page 435) is `unP1 @Double (MkG (Right (4.5, True)) ()) @Char`.

## 6.5.4 Record field disambiguation

### DisambiguateRecordFields

#### Since

6.8.1

#### Implied by

[RecordWildCards](#) (page 479), [DuplicateRecordFields](#) (page 475)

#### Status

Included in [GHC2024](#) (page 314)

Allow the compiler to automatically choose between identically-named record fields (if the choice is unambiguous).

In record construction and record pattern matching it is entirely unambiguous which field is referred to, even if there are two different data types in scope with a common field name. For example:

```

module M where
  data S = MkS { x :: Int, y :: Bool }

module Foo where
  import M

  data T = MkT { x :: Int }

  ok1 (MkS { x = n }) = n+1    -- Unambiguous
  ok2 n = MkT { x = n+1 }    -- Unambiguous

  bad1 k = k { x = 3 }        -- Ambiguous
  bad2 k = x k                -- Ambiguous

```

Even though there are two `x`'s in scope, it is clear that the `x` in the pattern in the definition of `ok1` can only mean the field `x` from type `S`. Similarly for the function `ok2`. However, in the record update in `bad1` and the record selection in `bad2` it is not clear which of the two types is intended.

Haskell 98 regards all four as ambiguous, but with the [DisambiguateRecordFields](#) (page 473) extension, GHC will accept the former two. The rules are precisely the same as those for instance declarations in Haskell 98, where the method names on the left-hand side of the method bindings in an instance declaration refer unambiguously to the method of that class (provided they are in scope at all), even if there are other variables in scope with the same name. This reduces the clutter of qualified names when you import two records from different modules that use the same field name.

Since version 9.2.1, record fields in updates are disambiguated by ignoring non-field names in scope. For example, the following is accepted under [DisambiguateRecordFields](#) (page 473):

```

module Bar where
  import M    -- imports the field x

  x = ()

  e r = r { x = 0 }    -- unambiguously refers to the field

```

Some details:

- Field disambiguation can be combined with punning (see [Record puns](#) (page 478)). For example:

```

module Foo where
  import M
  x=True
  ok3 (MkS { x }) = x+1    -- Uses both disambiguation and punning

```

- With [DisambiguateRecordFields](#) (page 473) you can use *unqualified* field names even if the corresponding selector is only in scope *qualified*. For example, assuming the same module `M` as in our earlier example, this is legal:

```

module Foo where
  import qualified M    -- Note qualified

  ok4 (M.MkS { x = n }) = n+1    -- Unambiguous

```

Since the constructor `MkS` is only in scope qualified, you must name it `M.MkS`, but the field `x` does not need to be qualified even though `M.x` is in scope but `x` is not (In effect, it is qualified by the constructor).

## 6.5.5 Duplicate record fields

### DuplicateRecordFields

#### Implies

[DisambiguateRecordFields](#) (page 473)

#### Since

8.0.1

Allow definition of record types with identically-named fields.

Going beyond [DisambiguateRecordFields](#) (page 473) (see [Record field disambiguation](#) (page 473)), the [DuplicateRecordFields](#) (page 475) extension allows multiple datatypes to be declared using the same field names in a single module. For example, it allows this:

```
module M where
  data S = MkS { x :: Int }
  data T = MkT { x :: Bool }
```

Uses of fields that are always unambiguous because they mention the constructor, including construction and pattern-matching, may freely use duplicated field names. For example, the following are permitted (just as with [DisambiguateRecordFields](#) (page 473)):

```
s = MkS { x = 3 }

f (MkT { x = b }) = b
```

While [DuplicateRecordFields](#) (page 475) permits multiple fields with the same name in a single module, it does not permit a field and a normal value binding to have the same name. For that, use [NoFieldSelectors](#) (page 476).

As of GHC 9.4.1, selector names have to be entirely unambiguous (under the usual name resolution rules), while for record updates, there must be at most one datatype that has all the field names being updated.

#### 6.5.5.1 Import and export of record fields

When [DuplicateRecordFields](#) (page 475) is enabled, an ambiguous field must be exported as part of its datatype, rather than at the top level. For example, the following is legal:

```
module M
  ( S(x)
  , T(..)
  ) where

data S = MkS { x :: Int }

data T = MkT { x :: Bool }
```

However, this would not be permitted, because `x` is ambiguous:

```
module M (x) where ...
```

For import statements, it is possible to import multiple fields with the same name, as well as importing individual fields as part of their datatypes. For example, the following imports are allowed:

```
import M (S(x))      -- imports the type S and the 'x' field of S (but not
↳the field of T)
import M (x)         -- imports both 'x' fields
import M hiding (S(x)) -- imports everything except the type S and its 'x'
↳field
import M hiding (x)   -- imports everything except the two 'x' fields
```

## 6.5.6 Field selectors

### FieldSelectors

#### Since

9.2.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314), [Haskell2010](#) (page 315), [Haskell98](#) (page 316)

Make [record field selector functions](#) visible in expressions.

By default, the [FieldSelectors](#) (page 476) extension is enabled, so defining a record datatype brings a selector function into scope for each field in the record. [NoFieldSelectors](#) (page 476) negates this feature, making it possible to:

- declare a top-level binding with the same name as a field, and
- refer to this top-level binding unambiguously in expressions.

Field labels are still usable within record construction, updates and pattern matching.

For example, given a datatype definition

```
data Foo = MkFoo { bar :: Int, baz :: String }
```

The following will be available:

1. the type constructor `Foo`;
2. the data constructor `MkFoo`;
3. the fields `bar` and `baz` for record construction, update, and pattern matching; and
4. the selector functions `bar :: Foo -> Int` and `baz :: Foo -> String`.

If the [NoFieldSelectors](#) (page 476) extension is enabled at the datatype definition site, items (1), (2), and (3) will still be available, but (4) will not. Correspondingly, it is permitted to define a top-level binding with the same name as a field, and using this name in an expression unambiguously refers to the non-field. For example, the following is permitted:

```
data Foo = MkFoo { bar :: Int, baz :: String }
bar = () -- does not conflict with `bar` field
baz = bar -- unambiguously refers to `bar` the unit value, not the field
```

If you have multiple datatypes with the same field name, you need to enable *DuplicateRecordFields* (page 475) to allow them to be declared simultaneously. It is never permitted for a single module to define multiple top-level bindings with the same name.

The *DisambiguateRecordFields* (page 473) extension (implied by *DuplicateRecordFields* (page 475)) is useful in conjunction with *NoFieldSelectors* (page 476), because it excludes non-fields from consideration when resolving field names in record construction, update and pattern matching.

#### 6.5.6.1 Import and export of selector functions

Under *FieldSelectors* (page 476), these modules are equivalent:

```
module A (Foo(MkFoo, bar, baz)) where
  data Foo = MkFoo { bar :: Int, baz :: Int }

module B (Foo(MkFoo, bar), baz) where
  data Foo = MkFoo { bar :: Int, baz :: Int }
```

Under *NoFieldSelectors* (page 476), these two export statements are now different. The first one will export the field `baz`, but not the top-level binding `baz`, while the second one would export the top-level binding `baz` (if one were defined), but not the field `baz`.

Because of this change, using *NoFieldSelectors* (page 476) and writing out selector functions explicitly is different to using *FieldSelectors* (page 476): in the former case the fields and functions must be exported separately. For example, here the selector functions are not exported:

```
{-# LANGUAGE NoFieldSelectors #-}
module M (Foo(MkFoo, bar, baz)) where
  data Foo = MkFoo { bar :: Int, baz :: Int }

  bar (MkFoo x _) = x
  baz (MkFoo _ x) = x
```

whereas here the selector functions are exported:

```
{-# LANGUAGE FieldSelectors #-}
module M (Foo(MkFoo, bar, baz)) where
  data Foo = MkFoo { bar :: Int, baz :: Int }
```

Wildcard exports will export the field labels, but will not export a top-level binding that happens to have the same name. In the examples above, exporting `Foo(..)` is (still) equivalent to exporting `Foo(MkFoo, bar, baz)`.

## 6.5.7 Record puns

### NamedFieldPuns

**Since**  
6.10.1

**Status**  
Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow use of record puns.

Record puns are enabled by the language extension [NamedFieldPuns](#) (page 478).

When using records, it is common to write a pattern that binds a variable with the same name as a record field, such as:

```
data C = C {a :: Int}
f (C {a = a}) = a
```

Record punning permits the variable name to be elided, so one can simply write

```
f (C {a}) = a
```

to mean the same pattern as above. That is, in a record pattern, the pattern `a` expands into the pattern `a = a` for the same name `a`.

Note that:

- Record punning can also be used in an expression, writing, for example,

```
let a = 1 in C {a}
```

instead of

```
let a = 1 in C {a = a}
```

The expansion is purely syntactic, so the expanded right-hand side expression refers to the nearest enclosing variable that is spelled the same as the field name.

- Puns and other patterns can be mixed in the same record:

```
data C = C {a :: Int, b :: Int}
f (C {a, b = 4}) = a
```

- Puns can be used wherever record patterns occur (e.g. in `let` bindings or at the top-level).
- A pun on a qualified field name is expanded by stripping off the module qualifier. For example:

```
f (C {M.a}) = a
```

means

```
f (M.C {M.a = a}) = a
```

(This is useful if the field selector `a` for constructor `M.C` is only in scope in qualified form.)



## 6.5.8 Record wildcards

### RecordWildCards

#### Implies

[DisambiguateRecordFields](#) (page 473).

#### Since

6.8.1

Allow the use of wildcards in record construction and pattern matching.

Record wildcards are enabled by the language extension [RecordWildCards](#) (page 479). This extension implies [DisambiguateRecordFields](#) (page 473).

For records with many fields, it can be tiresome to write out each field individually in a record pattern, as in

```
data C = C {a :: Int, b :: Int, c :: Int, d :: Int}
f (C {a = 1, b = b, c = c, d = d}) = b + c + d
```

Record wildcard syntax permits a “.” in a record pattern, where each elided field *f* is replaced by the pattern *f* = *f*. For example, the above pattern can be written as

```
f (C {a = 1, ..}) = b + c + d
```

More details:

- Record wildcards in patterns can be mixed with other patterns, including puns ([Record puns](#) (page 478)); for example, in a pattern (C {a = 1, b, ..}). Additionally, record wildcards can be used wherever record patterns occur, including in let bindings and at the top-level. For example, the top-level binding

```
C {a = 1, ..} = e
```

defines *b*, *c*, and *d*.

- Record wildcards can also be used in an expression, when constructing a record. For example,

```
let {a = 1; b = 2; c = 3; d = 4} in C {..}
```

in place of

```
let {a = 1; b = 2; c = 3; d = 4} in C {a=a, b=b, c=c, d=d}
```

The expansion is purely syntactic, so the record wildcard expression refers to the nearest enclosing variables that are spelled the same as the omitted field names.

- For both pattern and expression wildcards, the “.” expands to the missing *in-scope* record fields. Specifically the expansion of “C {..}” includes *f* if and only if:
  - f* is a record field of constructor *C*.
  - The record field *f* is in scope somehow (either qualified or unqualified).

These rules restrict record wildcards to the situations in which the user could have written the expanded version. For example

```

module M where
  data R = R { a,b,c :: Int }
  module X where
    import M( R(R,a,c) )
    f a b = R { .. }

```

The `R{..}` expands to `R{a=a}`, omitting `b` since the record field is not in scope, and omitting `c` since the variable `c` is not in scope (apart from the binding of the record selector `c`, of course).

- When record wildcards are used in record construction, a field `f` is initialised only if `f` is in scope, and is not imported or bound at top level. For example, `f` can be bound by an enclosing pattern match or `let/where`-binding. For example

```

module M where
  import A( a )

  data R = R { a,b,c,d :: Int }

  c = 3 :: Int

  f b = R { .. }  -- Expands to R { b = b, d = d }
  where
    d = b+1

```

Here, `a` is imported, and `c` is bound at top level, so neither contribute to the expansion of the `".."`. The motivation here is that it should be easy for the reader to figure out what the `".."` expands to.

- Record wildcards cannot be used (a) in a record update construct, and (b) for data constructors that are not declared with record fields. For example:

```

f x = x { v=True, .. }  -- Illegal (a)

data T = MkT Int Bool
g = MkT { .. }          -- Illegal (b)
h (MkT { .. }) = True   -- Illegal (b)

```

### 6.5.9 Record field selector polymorphism

The module `GHC.Records` defines the following:

```

class HasField (x :: k) r a | x r -> a where
  getField :: r -> a

```

A `HasField x r a` constraint represents the fact that `x` is a field of type `a` belonging to a record type `r`. The `getField` method gives the record selector function.

This allows definitions that are polymorphic over record types with a specified field. For example, the following works with any record type that has a field name `:: String`:

```

foo :: HasField "name" r String => r -> String
foo r = reverse (getField @"name" r)

```

`HasField` is a magic built-in typeclass (similar to `Coercible`, for example). It is given special treatment by the constraint solver (see [Solving `HasField` constraints](#) (page 481)). Users may define their own instances of `HasField` also (see [Virtual record fields](#) (page 482)).

### 6.5.9.1 Solving `HasField` constraints

If the constraint solver encounters a constraint `HasField x r a` where `r` is a concrete datatype with a field `x` in scope, it will automatically solve the constraint using the field selector as the dictionary, unifying `a` with the type of the field if necessary. This happens irrespective of which extensions are enabled.

For example, if the following datatype is in scope

```
data Person = Person { name :: String }
```

the end result is rather like having an instance

```
instance HasField "name" Person String where
  getField = name
```

except that this instance is not actually generated anywhere, rather the constraint is solved directly by the constraint solver.

A field must be in scope for the corresponding `HasField` constraint to be solved. This retains the existing representation hiding mechanism, whereby a module may choose not to export a field, preventing client modules from accessing or updating it directly.

Solving `HasField` constraints depends on the field selector functions that are generated for each datatype definition:

- If a record field does not have a selector function because its type would allow an existential variable to escape, the corresponding `HasField` constraint will not be solved. For example,

```
{-# LANGUAGE ExistentialQuantification #-}
data Exists t = forall x . MkExists { unExists :: t x }
```

does not give rise to a selector `unExists :: Exists t -> t x` and we will not solve `HasField "unExists" (Exists t) a` automatically.

- If a record field has a polymorphic type (and hence the selector function is higher-rank), the corresponding `HasField` constraint will not be solved, because doing so would violate the functional dependency on `HasField` and/or require impredicativity. For example,

```
{-# LANGUAGE RankNTypes #-}
data Higher = MkHigher { unHigher :: forall t . t -> t }
```

gives rise to a selector `unHigher :: Higher -> (forall t . t -> t)` but does not lead to solution of the constraint `HasField "unHigher" Higher a`.

- A record GADT may have a restricted type for a selector function, which may lead to additional unification when solving `HasField` constraints. For example,

```
{-# LANGUAGE GADTs #-}
data Gadt t where
  MkGadt :: { unGadt :: Maybe v } -> Gadt [v]
```

gives rise to a selector `unGadt :: Gadt [v] -> Maybe v`, so the solver will reduce the constraint `HasField "unGadt" (Gadt t) b` by unifying `t ~ [v]` and `b ~ Maybe v` for some fresh metavariable `v`, rather as if we had an instance

```
instance (t ~ [v], b ~ Maybe v) => HasField "unGadt" (Gadt t) b
```

- If a record type has an old-fashioned datatype context, the `HasField` constraint will be reduced to solving the constraints from the context. For example,

```
{-# LANGUAGE DatatypeContexts #-}
data Eq a => Silly a = MkSilly { unSilly :: a }
```

gives rise to a selector `unSilly :: Eq a => Silly a -> a`, so the solver will reduce the constraint `HasField "unSilly" (Silly a) b` to `Eq a` (and unify `a` with `b`), rather as if we had an instance

```
instance (Eq a, a ~ b) => HasField "unSilly" (Silly a) b
```

See *Overloaded record dot* (page 483) for an application of solving `HasField` constraints to implementing “record dot syntax”.

### 6.5.9.2 Virtual record fields

Users may define their own instances of `HasField`, provided they do not conflict with the built-in constraint solving behaviour. This allows “virtual” record fields to be defined for datatypes that do not otherwise have them.

For example, this instance would make the `name` field of `Person` accessible using `#fullname` as well:

```
instance HasField "fullname" Person String where
  getField = name
```

More substantially, an anonymous records library could provide `HasField` instances for its anonymous records, and thus be compatible with the polymorphic record selectors introduced by this proposal. For example, something like this makes it possible to use `getField` to access `Record` values with the appropriate string in the type-level list of fields:

```
data Record (xs :: [(k, Type)]) where
  Nil  :: Record '[]
  Cons :: Proxy x -> a -> Record xs -> Record ('(x, a) ': xs)

instance HasField x (Record ('(x, a) ': xs)) a where
  getField (Cons _ v _) = v
instance HasField x (Record xs) a => HasField x (Record ('(y, b) ': xs)) a
  where
    getField (Cons _ _ r) = getField @x r

r :: Record ['("name", String)]
r = Cons Proxy "R" Nil

x = getField @"name" r
```

Since representations such as this can support field labels with kinds other than `Symbol`, the `HasField` class is poly-kinded (even though the built-in constraint solving works only at kind

Symbol). In particular, this allows users to declare scoped field labels such as in the following example:

```
data PersonFields = Name

s :: Record '[ '(Name, String) ]
s = Cons Proxy "S" Nil

y = getField @Name s
```

In order to avoid conflicting with the built-in constraint solving, the following user-defined `HasField` instances are prohibited (in addition to the usual rules, such as the prohibition on type families appearing in instance heads):

- `HasField _ r _` where `r` is a variable;
- `HasField _ (T ...) _` if `T` is a data family (because it might have fields introduced later, using data instance declarations);
- `HasField x (T ...) _` if `x` is a variable and `T` has any fields at all (but this instance is permitted if `T` has no fields);
- `HasField "foo" (T ...) _` if `T` has a field `foo` (but this instance is permitted if it does not).

If a field has a higher-rank or existential type, the corresponding `HasField` constraint will not be solved automatically (as described above), but in the interests of simplicity we do not permit users to define their own instances either. If a field is not in scope, the corresponding instance is still prohibited, to avoid conflicts in downstream modules.

### 6.5.10 Overloaded record dot

#### OverloadedRecordDot

Since  
9.2.0

Provides record `'.'` syntax e.g. `x.foo`

When `OverloadedRecordDot` is enabled one can write `a.b` to mean the `b` field of the `a` record expression.

Example:

```
{-# LANGUAGE OverloadedRecordDot #-}
{-# LANGUAGE DuplicateRecordFields #-}

data Person = Person { name :: String }
data Company = Company { name :: String, owner :: Person }

main = do
  let c = Company { name = "Acme Corp.",
                    , owner = Person { name = "Wile E. Coyote" } }
  print $ c.name ++ " is run by " ++ c.owner.name
```

You may also write `(.b)` to mean a function that “projects the `b` field from its argument”. For example, `(.b) a` means the same thing as `a.b`.

`OverloadedRecordDot` is normally implemented by desugaring `record .` expressions to `GHC.Records.getField` expressions. By enabling `OverloadedRecordDot` and `RebindableSyntax` together it is possible to desugar `.` expressions into your own `getField` implementations.

When considering `a.b`, the `b` field that is meant is determined by solving `HasField` constraints. See [Solving HasField constraints](#) (page 481).

### 6.5.11 Overloaded record update

#### OverloadedRecordUpdate

Since  
9.2.0

Provides record `.` syntax in record updates e.g. `x{foo.bar = 1}`.

**EXPERIMENTAL** *This design of this extension may well change in the future. It would be inadvisable to start using this extension for long-lived libraries just yet.*

It's usual (but not required) that this extension be used in conjunction with [Overloaded record dot](#) (page 483).

Example:

```
{-# LANGUAGE AllowAmbiguousTypes, FunctionalDependencies, ScopedTypeVariables,
  ↳ PolyKinds, TypeApplications, DataKinds, FlexibleInstances #-}
{-# LANGUAGE NamedFieldPuns, RecordWildCards #-}
{-# LANGUAGE OverloadedRecordDot, OverloadedRecordUpdate, RebindableSyntax #-}

import Prelude

class HasField x r a | x r -> a where
  hasField :: r -> (a -> r, a)

getField :: forall x r a . HasField x r a => r -> a
getField = snd . hasField @x -- Note: a.x = is getField @"x" a.
setField :: forall x r a . HasField x r a => r -> a -> r
setField = fst . hasField @x -- Note : a{x = b} is setField @"x" a b.

data Person = Person { name :: String } deriving Show
instance HasField "name" Person String where
  hasField r = (\x -> case r of Person { .. } -> Person { name = x, .. },
  ↳ name r)

data Company = Company { company :: String, owner :: Person } deriving Show
instance HasField "company" Company String where
  hasField r = (\x -> case r of Company { .. } -> Company { company = x, ..
  ↳ }, company r)
instance HasField "owner" Company Person where
  hasField r = (\x -> case r of Company { .. } -> Company { owner = x, .. },
  ↳ owner r)

main = do
  let c = Company {company = "Acme Corp.", owner = Person { name = "Wile E.
  ↳ Coyote" }}
```

(continues on next page)

(continued from previous page)

```

-- Top-level update
print $ c{company = "Acme United"} -- Company {company = "Acme United",
↪owner = Person {name = "Wile E. Coyote"}}

-- Nested update
print $ c{owner.name = "Walter C. Johnsen"} -- Company {company = "Acme
↪Corp.", owner = Person {name = "Walter C. Johnsen"}}

-- Punned update
let name = "Walter C. Johnsen"
print $ c{owner.name} -- Company {company = "Acme Corp.", owner = Person
↪{name = "Walter C. Johnsen"}}

```

`OverloadedRecordUpdate` works by desugaring record `.` update expressions to expressions involving the functions `setField` and `getField`. Note that all record updates will be desugared to `setField` expressions whether they use `.` notation or not.

At this time, `RebindableSyntax` must be enabled when `OverloadedRecordUpdate` is and users are required to provide definitions for `getField` and `setField`. We anticipate this restriction to be lifted in a future release of GHC with builtin support for `setField`.

## 6.6 Deriving mechanism

Haskell 98 allows the programmer to add a deriving clause to a data type declaration, to generate a standard instance declaration for specified class. GHC extends this mechanism along several axes:

- The derivation mechanism can be used separately from the data type declaration, using the *standalone deriving mechanism* (page 487).
- In Haskell 98, the only derivable classes are `Eq`, `Ord`, `Enum`, `Ix`, `Bounded`, `Read`, and `Show`. *Various language extensions* (page 489) extend this list.
- Besides the stock approach to deriving instances by generating all method definitions, GHC supports two additional deriving strategies, which can derive arbitrary classes:
  - *Generalised newtype deriving* (page 499) for newtypes and
  - *deriving any class* (page 504) using an empty instance declaration.

The user can optionally declare the desired *deriving strategy* (page 507), especially if the compiler chooses the wrong one *by default* (page 508).

## 6.6.1 Deriving instances for empty data types

### EmptyDataDeriving

#### Since

8.4.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314), [Haskell2010](#) (page 315)

Allow deriving instances of standard type classes for empty data types.

One can write data types with no constructors using the [EmptyDataDecls](#) (page 366) flag (see [Data types with no constructors](#) (page 366)), which is on by default in Haskell 2010. What is not on by default is the ability to derive type class instances for these types. This ability is enabled through use of the [EmptyDataDeriving](#) (page 486) flag. For instance, this lets one write:

```
data Empty deriving (Eq, Ord, Read, Show)
```

This would generate the following instances:

```
instance Eq Empty where
  _ == _ = True

instance Ord Empty where
  compare _ _ = EQ

instance Read Empty where
  readPrec = pfail

instance Show Empty where
  showsPrec _ x = case x of {}
```

The [EmptyDataDeriving](#) (page 486) flag is only required to enable deriving of these four “standard” type classes (which are mentioned in the Haskell Report). Other extensions to the deriving mechanism, which are explained below in greater detail, do not require [EmptyDataDeriving](#) (page 486) to be used in conjunction with empty data types. These include:

- [StandaloneDeriving](#) (page 487) (see [Stand-alone deriving declarations](#) (page 487))
- Type classes which require their own extensions to be enabled to be derived, such as [DeriveFunctor](#) (page 489) (see [Deriving instances of extra classes \(Data, etc.\)](#) (page 489))
- [DeriveAnyClass](#) (page 504) (see [Deriving any other class](#) (page 504))



## 6.6.2 Inferred context for deriving clauses

The Haskell Report is vague about exactly when a deriving clause is legal. For example:

```
data T0 f a = MkT0 a      deriving( Eq )
data T1 f a = MkT1 (f a)  deriving( Eq )
data T2 f a = MkT2 (f (f a)) deriving( Eq )
```

The natural generated Eq code would result in these instance declarations:

```
instance Eq a      => Eq (T0 f a) where ...
instance Eq (f a)  => Eq (T1 f a) where ...
instance Eq (f (f a)) => Eq (T2 f a) where ...
```

The first of these is obviously fine. The second is still fine, although less obviously. The third is not Haskell 98, and risks losing termination of instances.

GHC takes a conservative position: it accepts the first two, but not the third. The rule is this: each constraint in the inferred instance context must consist only of type variables, with no repetitions.

This rule is applied regardless of flags. If you want a more exotic context, you can write it yourself, using the *standalone deriving mechanism* (page ??).

## 6.6.3 Stand-alone deriving declarations

### StandaloneDeriving

#### Since

6.8.1

#### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow the use of stand-alone deriving declarations.

GHC allows stand-alone deriving declarations, enabled by *StandaloneDeriving* (page 487):

```
data Foo a = Bar a | Baz String

deriving instance Eq a => Eq (Foo a)
```

The syntax is identical to that of an ordinary instance declaration apart from (a) the keyword *deriving*, and (b) the absence of the *where* part.

However, standalone deriving differs from a deriving clause in a number of important ways:

- The standalone deriving declaration does not need to be in the same module as the data type declaration. (But be aware of the dangers of orphan instances (*Orphan modules and instance declarations* (page 258)).
- In most cases, you must supply an explicit context (in the example the context is (Eq a)), exactly as you would in an ordinary instance declaration. (In contrast, in a deriving clause attached to a data type declaration, the context is inferred.)

The exception to this rule is that the context of a standalone deriving declaration can infer its context when a single, extra-wildcards constraint is used as the context, such as in:

```
deriving instance _ => Eq (Foo a)
```

This is essentially the same as if you had written `deriving Eq` after the declaration for `data Foo a`. Using this feature requires the use of [PartialTypeSignatures](#) (page 574) ([Partial Type Signatures](#) (page 574)).

- Unlike a deriving declaration attached to a data declaration, the instance can be more specific than the data type (assuming you also use [FlexibleInstances](#) (page 533), [Instance termination rules](#) (page 535)). Consider for example

```
data Foo a = Bar a | Baz String

deriving instance Eq a => Eq (Foo [a])
deriving instance Eq a => Eq (Foo (Maybe a))
```

This will generate a derived instance for `(Foo [a])` and `(Foo (Maybe a))`, but other types such as `(Foo (Int, Bool))` will not be an instance of `Eq`.

- Unlike a deriving declaration attached to a data declaration, GHC does not restrict the form of the data type. Instead, GHC simply generates the appropriate boilerplate code for the specified class, and typechecks it. If there is a type error, it is your problem. (GHC will show you the offending code if it has a type error.)

The merit of this is that you can derive instances for GADTs and other exotic data types, providing only that the boilerplate code does indeed typecheck. For example:

```
data T a where
  T1 :: T Int
  T2 :: T Bool

deriving instance Show (T a)
```

In this example, you cannot say `... deriving( Show )` on the data type declaration for `T`, because `T` is a GADT, but you *can* generate the instance declaration using stand-alone deriving.

The down-side is that, if the boilerplate code fails to typecheck, you will get an error message about that code, which you did not write. Whereas, with a deriving clause the side-conditions are necessarily more conservative, but any error message may be more comprehensible.

- Under most circumstances, you cannot use standalone deriving to create an instance for a data type whose constructors are not all in scope. This is because the derived instance would generate code that uses the constructors behind the scenes, which would break abstraction.

The one exception to this rule is [DeriveAnyClass](#) (page 504), since deriving an instance via [DeriveAnyClass](#) (page 504) simply generates an empty instance declaration, which does not require the use of any constructors. See the [deriving any class](#) (page ??) section for more details.

In other ways, however, a standalone deriving obeys the same rules as ordinary deriving:

- A deriving instance declaration must obey the same rules concerning form and termination as ordinary instance declarations, controlled by the same flags; see [Instance declarations and resolution](#) (page 532).

- The stand-alone syntax is generalised for newtypes in exactly the same way that ordinary deriving clauses are generalised (*Generalised derived instances for newtypes* (page 499)). For example:

```
newtype Foo a = MkFoo (State Int a)

deriving instance MonadState Int Foo
```

GHC always treats the *last* parameter of the instance (Foo in this example) as the type whose instance is being derived.

### 6.6.4 Deriving instances of extra classes (Data, etc.)

Haskell 98 allows the programmer to add “`deriving( Eq, Ord )`” to a data type declaration, to generate a standard instance declaration for classes specified in the deriving clause. In Haskell 98, the only classes that may appear in the deriving clause are the standard classes Eq, Ord, Enum, Ix, Bounded, Read, and Show.

GHC extends this list with several more classes that may be automatically derived:

- With *DeriveGeneric* (page 655), you can derive instances of the classes Generic and Generic1, defined in GHC.Generics. You can use these to define generic functions, as described in *Generic programming* (page 653).
- With *DeriveFunctor* (page 489), you can derive instances of the class Functor, defined in GHC.Base.
- With *DeriveDataTypeeable* (page 496), you can derive instances of the class Data, defined in Data.Data.
- With *DeriveFoldable* (page 493), you can derive instances of the class Foldable, defined in Data.Foldable.
- With *DeriveTraversable* (page 495), you can derive instances of the class Traversable, defined in Data.Traversable. Since the Traversable instance dictates the instances of Functor and Foldable, you’ll probably want to derive them too, so *DeriveTraversable* (page 495) implies *DeriveFunctor* (page 489) and *DeriveFoldable* (page 493).
- With *DeriveLift* (page 497), you can derive instances of the class Lift, defined in the Language.Haskell.TH.Syntax module of the template-haskell package.

You can also use a standalone deriving declaration instead (see *Stand-alone deriving declarations* (page 487)).

In each case the appropriate class must be in scope before it can be mentioned in the deriving clause.

#### 6.6.4.1 Deriving Functor instances

##### DeriveFunctor

**Implied by**  
*DeriveTraversable* (page 495)

**Since**  
7.10.1

### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow automatic deriving of instances for the Functor typeclass.

With *DeriveFunctor* (page 489), one can derive Functor instances for data types of kind `Type -> Type`. For example, this declaration:

```
data Example a = Ex a Char (Example a) (Example Char)
  deriving Functor
```

would generate the following instance:

```
instance Functor Example where
  fmap f (Ex a1 a2 a3 a4) = Ex (f a1) a2 (fmap f a3) a4
```

The basic algorithm for *DeriveFunctor* (page 489) walks the arguments of each constructor of a data type, applying a mapping function depending on the type of each argument. If a plain type variable is found that is syntactically equivalent to the last type parameter of the data type (`a` in the above example), then we apply the function `f` directly to it. If a type is encountered that is not syntactically equivalent to the last type parameter *but does mention* the last type parameter somewhere in it, then a recursive call to `fmap` is made. If a type is found which doesn't mention the last type parameter at all, then it is left alone.

The second of those cases, in which a type is unequal to the type parameter but does contain the type parameter, can be surprisingly tricky. For example, the following example compiles:

```
newtype Right a = Right (Either Int a) deriving Functor
```

Modifying the code slightly, however, produces code which will not compile:

```
newtype Wrong a = Wrong (Either a Int) deriving Functor
```

The difference involves the placement of the last type parameter, `a`. In the `Right` case, `a` occurs within the type `Either Int a`, and moreover, it appears as the last type argument of `Either`. In the `Wrong` case, however, `a` is not the last type argument to `Either`; rather, `Int` is.

This distinction is important because of the way *DeriveFunctor* (page 489) works. The derived `Functor Right` instance would be:

```
instance Functor Right where
  fmap f (Right a) = Right (fmap f a)
```

Given a value of type `Right a`, GHC must produce a value of type `Right b`. Since the argument to the `Right` constructor has type `Either Int a`, the code recursively calls `fmap` on it to produce a value of type `Either Int b`, which is used in turn to construct a final value of type `Right b`.

The generated code for the `Functor Wrong` instance would look exactly the same, except with `Wrong` replacing every occurrence of `Right`. The problem is now that `fmap` is being applied recursively to a value of type `Either a Int`. This cannot possibly produce a value of type `Either b Int`, as `fmap` can only change the last type parameter! This causes the generated code to be ill-typed.

As a general rule, if a data type has a derived `Functor` instance and its last type parameter occurs on the right-hand side of the data declaration, then either it must (1) occur bare (e.g., `newtype Id a = Id a`), or (2) occur as the last argument of a type constructor (as in `Right` above).

There are two exceptions to this rule:

1. Tuple types. When a non-unit tuple is used on the right-hand side of a data declaration, *DeriveFunctor* (page 489) treats it as a product of distinct types. In other words, the following code:

```
newtype Triple a = Triple (a, Int, [a]) deriving Functor
```

Would result in a generated Functor instance like so:

```
instance Functor Triple where
  fmap f (Triple a) =
    Triple (case a of
      (a1, a2, a3) -> (f a1, a2, fmap f a3))
```

That is, *DeriveFunctor* (page 489) pattern-matches its way into tuples and maps over each type that constitutes the tuple. The generated code is reminiscent of what would be generated from data Triple a = Triple a Int [a], except with extra machinery to handle the tuple.

2. Function types. The last type parameter can appear anywhere in a function type as long as it occurs in a *covariant* position. To illustrate what this means, consider the following three examples:

```
newtype CovFun1 a = CovFun1 (Int -> a) deriving Functor
newtype CovFun2 a = CovFun2 ((a -> Int) -> a) deriving Functor
newtype CovFun3 a = CovFun3 (((Int -> a) -> Int) -> a) deriving Functor
```

All three of these examples would compile without issue. On the other hand:

```
newtype ContraFun1 a = ContraFun1 (a -> Int) deriving Functor
newtype ContraFun2 a = ContraFun2 ((Int -> a) -> Int) deriving Functor
newtype ContraFun3 a = ContraFun3 (((a -> Int) -> a) -> Int) deriving
→ Functor
```

While these examples look similar, none of them would successfully compile. This is because all occurrences of the last type parameter *a* occur in *contravariant* positions, not covariant ones.

Intuitively, a covariant type is *produced*, and a contravariant type is *consumed*. Most types in Haskell are covariant, but the function type is special in that the lefthand side of a function arrow reverses variance. If a function type *a -> b* appears in a covariant position (e.g., CovFun1 above), then *a* is in a contravariant position and *b* is in a covariant position. Similarly, if *a -> b* appears in a contravariant position (e.g., CovFun2 above), then *a* is in a covariant position and *b* is in a contravariant position.

To see why a data type with a contravariant occurrence of its last type parameter cannot have a derived Functor instance, let's suppose that a Functor ContraFun1 instance exists. The implementation would look something like this:

```
instance Functor ContraFun1 where
  fmap f (ContraFun g) = ContraFun (\x -> _)
```

We have *f* :: *a* -> *b*, *g* :: *a* -> Int, and *x* :: *b*. Using these, we must somehow fill in the hole (denoted with an underscore) with a value of type Int. What are our options?

We could try applying *g* to *x*. This won't work though, as *g* expects an argument of type

a, and  $x :: b$ . Even worse, we can't turn  $x$  into something of type  $a$ , since  $f$  also needs an argument of type  $a$ ! In short, there's no good way to make this work.

On the other hand, a derived Functor instances for the CovFuns are within the realm of possibility:

```
instance Functor CovFun1 where
  fmap f (CovFun1 g) = CovFun1 (\x -> f (g x))

instance Functor CovFun2 where
  fmap f (CovFun2 g) = CovFun2 (\h -> f (g (\x -> h (f x))))

instance Functor CovFun3 where
  fmap f (CovFun3 g) = CovFun3 (\h -> f (g (\k -> h (\x -> f (k x)))))
```

There are some other scenarios in which a derived Functor instance will fail to compile:

1. A data type has no type parameters (e.g., `data Nothing = Nothing`).
2. A data type's last type variable is used in a *DatatypeContexts* (page 367) constraint (e.g., `data Ord a => 0 a = 0 a`).
3. A data type's last type variable is used in an *ExistentialQuantification* (page 370) constraint, or is refined in a GADT. For example,

```
data T a b where
  T4 :: Ord b => b -> T a b
  T5 :: b -> T b b
  T6 :: T a (b,b)

deriving instance Functor (T a)
```

would not compile successfully due to the way in which  $b$  is constrained.

When the last type parameter has a phantom role (see *Roles* (page 467)), the derived Functor instance will not be produced using the usual algorithm. Instead, the entire value will be coerced.

```
data Phantom a = Z | S (Phantom a) deriving Functor
```

will produce the following instance:

```
instance Functor Phantom where
  fmap _ = coerce
```

When a type has no constructors, the derived Functor instance will simply force the (bottom) value of the argument using *EmptyCase* (page 343).

```
data V a deriving Functor
type role V nominal
```

will produce

```
instance Functor V where
  fmap _ z = case z of
```

### 6.6.4.2 Deriving Foldable instances

#### DeriveFoldable

##### Implied by

[DeriveTraversable](#) (page 495)

##### Since

7.10.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow automatic deriving of instances for the `Foldable` typeclass.

With [DeriveFoldable](#) (page 493), one can derive `Foldable` instances for data types of kind `Type -> Type`. For example, this declaration:

```
data Example a = Ex a Char (Example a) (Example Char)
  deriving Foldable
```

would generate the following instance:

```
instance Foldable Example where
  foldr f z (Ex a1 a2 a3 a4) = f a1 (foldr f z a3)
  foldMap f (Ex a1 a2 a3 a4) = mappend (f a1) (foldMap f a3)
```

The algorithm for [DeriveFoldable](#) (page 493) is adapted from the [DeriveFunctor](#) (page 489) algorithm, but it generates definitions for `foldMap`, `foldr`, and `null` instead of `fmap`. In addition, [DeriveFoldable](#) (page 493) filters out all constructor arguments on the RHS expression whose types do not mention the last type parameter, since those arguments do not need to be folded over.

When the type parameter has a phantom role (see [Roles](#) (page 467)), [DeriveFoldable](#) (page 493) derives a trivial instance. For example, this declaration:

```
data Phantom a = Z | S (Phantom a)
```

will generate the following instance.

```
instance Foldable Phantom where
  foldMap _ _ = mempty
```

Similarly, when the type has no constructors, [DeriveFoldable](#) (page 493) will derive a trivial instance:

```
data V a deriving Foldable
type role V nominal
```

will generate the following.

```
instance Foldable V where
  foldMap _ _ = mempty
```

Here are the differences between the generated code for `Functor` and `Foldable`:

#. When a bare type variable `a` is encountered, [DeriveFunctor](#) (page 489) would generate `f a` for an `fmap` definition. [DeriveFoldable](#) (page 493) would generate `f a z` for `foldr`, `f a` for `foldMap`, and `False` for `null`.

1. When a type that is not syntactically equivalent to `a`, but which does contain `a`, is encountered, *DeriveFunctor* (page 489) recursively calls `fmap` on it. Similarly, *DeriveFoldable* (page 493) would recursively call `foldr` and `foldMap`. Depending on the context, `null` may recursively call `null` or `all null`. For example, given

```
data F a = F (P a)
data G a = G (P (a, Int))
data H a = H (P (Q a))
```

Foldable deriving will produce

```
null (F x) = null x
null (G x) = null x
null (H x) = all null x
```

2. *DeriveFunctor* (page 489) puts everything back together again at the end by invoking the constructor. *DeriveFoldable* (page 493), however, builds up a value of some type. For `foldr`, this is accomplished by chaining applications of `f` and recursive `foldr` calls on the state value `z`. For `foldMap`, this happens by combining all values with `mappend`. For `null`, the values are usually combined with `&&`. However, if any of the values is known to be `False`, all the rest will be dropped. For example,

```
data SnocList a = Nil | Snoc (SnocList a) a
```

will not produce

```
null (Snoc xs _) = null xs && False
```

(which would walk the whole list), but rather

```
null (Snoc _ _) = False
```

There are some other differences regarding what data types can have derived Foldable instances:

1. Data types containing function types on the right-hand side cannot have derived Foldable instances.
2. Foldable instances can be derived for data types in which the last type parameter is existentially constrained or refined in a GADT. For example, this data type:

```
data E a where
  E1 :: (a ~ Int) => a   -> E a
  E2 ::                Int -> E Int
  E3 :: (a ~ Int) => a   -> E Int
  E4 :: (a ~ Int) => Int -> E a

deriving instance Foldable E
```

would have the following generated Foldable instance:

```
instance Foldable E where
  foldr f z (E1 e) = f e z
  foldr f z (E2 e) = z
  foldr f z (E3 e) = z
  foldr f z (E4 e) = z
```

(continues on next page)



(continued from previous page)

```
foldMap f (E1 e) = f e
foldMap f (E2 e) = mempty
foldMap f (E3 e) = mempty
foldMap f (E4 e) = mempty
```

Notice how every constructor of `E` utilizes some sort of existential quantification, but only the argument of `E1` is actually “folded over”. This is because we make a deliberate choice to only fold over universally polymorphic types that are syntactically equivalent to the last type parameter. In particular:

- We don’t fold over the arguments of `E1` or `E4` because even though  $(a \sim \text{Int})$ , `Int` is not syntactically equivalent to `a`.
- We don’t fold over the argument of `E3` because `a` is not universally polymorphic. The `a` in `E3` is (implicitly) existentially quantified, so it is not the same as the last type parameter of `E`.

#### 6.6.4.3 Deriving Traversable instances

##### DeriveTraversable

###### Implies

[DeriveFoldable](#) (page 493), [DeriveFunctor](#) (page 489)

###### Implied by

[GHC2021](#) (page 314)

###### Since

7.10.1

Allow automatic deriving of instances for the `Traversable` typeclass.

With [DeriveTraversable](#) (page 495), one can derive `Traversable` instances for data types of kind `Type -> Type`. For example, this declaration:

```
data Example a = Ex a Char (Example a) (Example Char)
  deriving (Functor, Foldable, Traversable)
```

would generate the following `Traversable` instance:

```
instance Traversable Example where
  traverse f (Ex a1 a2 a3 a4)
    = fmap (\b1 b3 -> Ex b1 a2 b3 a4) (f a1) <*> traverse f a3
```

The algorithm for [DeriveTraversable](#) (page 495) is adapted from the [DeriveFunctor](#) (page 489) algorithm, but it generates a definition for `traverse` instead of `fmap`. In addition, [DeriveTraversable](#) (page 495) filters out all constructor arguments on the RHS expression whose types do not mention the last type parameter, since those arguments do not produce any effects in a traversal.

When the type parameter has a phantom role (see [Roles](#) (page 467)), [DeriveTraversable](#) (page 495) coerces its argument. For example, this declaration:

```
data Phantom a = Z | S (Phantom a) deriving Traversable
```

will generate the following instance:

```
instance Traversable Phantom where
  traverse _ z = pure (coerce z)
```

When the type has no constructors, *DeriveTraversable* (page 495) will derive the laziest instance it can.

```
data V a deriving Traversable
type role V nominal
```

will generate the following, using *EmptyCase* (page 343):

```
instance Traversable V where
  traverse _ z = pure (case z of)
```

Here are the differences between the generated code in each extension:

1. When a bare type variable *a* is encountered, both *DeriveFunctor* (page 489) and *DeriveTraversable* (page 495) would generate *f a* for an *fmap* and *traverse* definition, respectively.
2. When a type that is not syntactically equivalent to *a*, but which does contain *a*, is encountered, *DeriveFunctor* (page 489) recursively calls *fmap* on it. Similarly, *DeriveTraversable* (page 495) would recursively call *traverse*.
3. *DeriveFunctor* (page 489) puts everything back together again at the end by invoking the constructor. *DeriveTraversable* (page 495) does something similar, but it works in an Applicative context by chaining everything together with (*<\*>*).

Unlike *DeriveFunctor* (page 489), *DeriveTraversable* (page 495) cannot be used on data types containing a function type on the right-hand side.

For a full specification of the algorithms used in *DeriveFunctor* (page 489), *DeriveFoldable* (page 493), and *DeriveTraversable* (page 495), see [this wiki page](#).

#### 6.6.4.4 Deriving Data instances

##### DeriveDataTypeable

**Since**  
6.8.1

**Status**  
Included in *GHC2024* (page 314), *GHC2021* (page 314)

Enable automatic deriving of instances for the *Data* typeclass

#### 6.6.4.5 Deriving Typeable instances

The class `Typeable` is very special:

- `Typeable` is kind-polymorphic (see [Kind polymorphism](#) (page 411)).
- GHC has a custom solver for discharging constraints that involve class `Typeable`, and handwritten instances are forbidden. This ensures that the programmer cannot subvert the type system by writing bogus instances.
- Derived instances of `Typeable` may be declared if the [DeriveDataTypeable](#) (page 496) extension is enabled, but they are ignored, and they may be reported as an error in a later version of the compiler.
- The rules for solving `Typeable` constraints are as follows:
  - A concrete type constructor applied to some types.

```
instance (Typeable t1, ..., Typeable t_n) =>
  Typeable (T t1 .. t_n)
```

This rule works for any concrete type constructor, including type constructors with polymorphic kinds. The only restriction is that if the type constructor has a polymorphic kind, then it has to be applied to all of its kinds parameters, and these kinds need to be concrete (i.e., they cannot mention kind variables).

- A type variable applied to some types:

```
instance (Typeable f, Typeable t1, ..., Typeable t_n) =>
  Typeable (f t1 .. t_n)
```

- A concrete type literal.:

```
instance Typeable 0           -- Type natural literals
instance Typeable "Hello"    -- Type-level symbols
```

#### 6.6.4.6 Deriving Lift instances

##### DeriveLift

**Since**  
8.0.1

**Status**  
Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Enable automatic deriving of instances for the `Lift` typeclass for Template Haskell.

The class `Lift`, unlike other derivable classes, lives in `template-haskell` instead of `base`. Having a data type be an instance of `Lift` permits its values to be promoted to Template Haskell expressions (of type `ExpQ` and `Code Q a`), which can then be spliced into Haskell source code.

Here is an example of how one can derive `Lift`:

```
{-# LANGUAGE DeriveLift #-}
module Bar where
```

(continues on next page)

(continued from previous page)

```

import Language.Haskell.TH.Syntax

data Foo a = Foo a | a ^: a deriving Lift

{-
instance (Lift a) => Lift (Foo a) where
    lift (Foo a) = [| Foo a |]
    lift ((: ^:) u v) = [| (: ^:) u v |]

    liftTyped (Foo a) = [| | Foo a | |]
    liftTyped ((: ^:) u v) = [| | (: ^:) u v | |]
-}

-----
{-# LANGUAGE TemplateHaskell #-}
module Baz where

import Bar
import Language.Haskell.TH.Lift

foo :: Foo String
foo = $(lift $ Foo "foo")

fooExp :: Lift a => Foo a -> Q Exp
fooExp f = [| f |]

```

Note that the `Lift` typeclass takes advantage of *Representation polymorphism* (page 430) in order to support instances involving unboxed types. This means *DeriveLift* (page 497) also works for these types:

```

{-# LANGUAGE DeriveLift, MagicHash #-}
module Unboxed where

import GHC.Exts
import Language.Haskell.TH.Syntax

data IntHash = IntHash Int# deriving Lift

{-
instance Lift IntHash where
    lift (IntHash i) = [| IntHash i |]
    liftTyped (IntHash i) = [| | IntHash i | |]
-}

```

## 6.6.5 Generalised derived instances for newtypes

**GeneralisedNewtypeDeriving**

**GeneralizedNewtypeDeriving**

### Since

6.8.1. British spelling since 8.6.1.

### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Enable GHC's cunning generalised deriving mechanism for newtypes

When you define an abstract type using `newtype`, you may want the new type to inherit some instances from its representation. In Haskell 98, you can inherit instances of `Eq`, `Ord`, `Enum` and `Bounded` by deriving them, but for any other classes you have to write an explicit instance declaration. For example, if you define

```
newtype Dollars = Dollars Int
```

and you want to use arithmetic on `Dollars`, you have to explicitly define an instance of `Num`:

```
instance Num Dollars where  
  Dollars a + Dollars b = Dollars (a+b)  
  ...
```

All the instance does is apply and remove the `newtype` constructor. It is particularly galling that, since the constructor doesn't appear at run-time, this instance declaration defines a dictionary which is *wholly equivalent* to the `Int` dictionary, only slower!

[DerivingVia](#) (page 508) (see [Deriving via](#) (page 508)) is a generalization of this idea.

### 6.6.5.1 Generalising the deriving clause

GHC now permits such instances to be derived instead, using the extension [GeneralizedNewtypeDeriving](#) (page 499), so one can write

```
newtype Dollars = Dollars { getDollars :: Int } deriving (Eq,Show,Num)
```

and the implementation uses the *same* `Num` dictionary for `Dollars` as for `Int`. In other words, GHC will generate something that resembles the following code

```
instance Num Int => Num Dollars
```

and then attempt to simplify the `Num Int` context as much as possible. GHC knows that there is a `Num Int` instance in scope, so it is able to discharge the `Num Int` constraint, leaving the code that GHC actually generates

```
instance Num Dollars
```

One can think of this instance being implemented with the same code as the `Num Int` instance, but with `Dollars` and `getDollars` added wherever necessary in order to make it typecheck. (In practice, GHC uses a somewhat different approach to code generation. See the [A more precise specification](#) (page 501) section below for more details.)

We can also derive instances of constructor classes in a similar way. For example, suppose we have implemented state and failure monad transformers, such that

```
instance Monad m => Monad (State s m)
instance Monad m => Monad (Failure m)
```

In Haskell 98, we can define a parsing monad by

```
type Parser tok m a = State [tok] (Failure m) a
```

which is automatically a monad thanks to the instance declarations above. With the extension, we can make the parser type abstract, without needing to write an instance of class `Monad`, via

```
newtype Parser tok m a = Parser (State [tok] (Failure m) a)
                           deriving Monad
```

In this case the derived instance declaration is of the form

```
instance Monad (State [tok] (Failure m)) => Monad (Parser tok m)
```

Notice that, since `Monad` is a constructor class, the instance is a *partial application* of the newtype, not the entire left hand side. We can imagine that the type declaration is “eta-converted” to generate the context of the instance declaration.

We can even derive instances of multi-parameter classes, provided the newtype is the last class parameter. In this case, a “partial application” of the class appears in the deriving clause. For example, given the class

```
class StateMonad s m | m -> s where ...
instance Monad m => StateMonad s (State s m) where ...
```

then we can derive an instance of `StateMonad` for `Parser` by

```
newtype Parser tok m a = Parser (State [tok] (Failure m) a)
                           deriving (Monad, StateMonad [tok])
```

The derived instance is obtained by completing the application of the class to the new type:

```
instance StateMonad [tok] (State [tok] (Failure m)) =>
  StateMonad [tok] (Parser tok m)
```

As a result of this extension, all derived instances in newtype declarations are treated uniformly (and implemented just by reusing the dictionary for the representation type), *except* `Show` and `Read`, which really behave differently for the newtype and its representation.

---

**Note:** It is sometimes necessary to enable additional language extensions when deriving instances via *GeneralizedNewtypeDeriving* (page 499). For instance, consider a simple class and instance using *UnboxedTuples* (page 611) syntax:

```
{-# LANGUAGE UnboxedTuples #-}

module Lib where

class AClass a where
  aMethod :: a -> (# Int, a #)
```

(continues on next page)

(continued from previous page)

```
instance ACClass Int where
  aMethod x = (# x, x #)
```

The following will fail with an “Illegal unboxed tuple” error, since the derived instance produced by the compiler makes use of unboxed tuple syntax,

```
{-# LANGUAGE GeneralizedNewtypeDeriving #-}

import Lib

newtype Int' = Int' Int
  deriving (ACClass)
```

However, enabling the *UnboxedTuples* (page 611) extension allows the module to compile. Similar errors may occur with a variety of extensions, including:

- *UnboxedTuples* (page 611)
- *PolyKinds* (page 411)
- *MultiParamTypeClasses* (page 522)
- *FlexibleContexts* (page 552)

### 6.6.5.2 A more precise specification

A derived instance is derived only for declarations of these forms (after expansion of any type synonyms)

```
newtype T v1..vn = MkT (t vk+1..vn) deriving (C t1..tj)
newtype instance T s1..sk vk+1..vn = MkT (t vk+1..vn) deriving (C t1..tj)
```

where

- $v1..vn$  are type variables, and  $t, s1..sk, t1..tj$  are types.
- The  $(C\ t1..tj)$  is a partial applications of the class  $C$ , where the arity of  $C$  is exactly  $j+1$ . That is,  $C$  lacks exactly one type argument.
- $k$  is chosen so that  $C\ t1..tj\ (T\ v1..vk)$  is well-kinded. (Or, in the case of a data instance, so that  $C\ t1..tj\ (T\ s1..sk)$  is well kinded.)
- The type  $t$  is an arbitrary type.
- The type variables  $vk+1..vn$  do not occur in the types  $t, s1..sk$ , or  $t1..tj$ .
- $C$  is not `Read`, `Show`, `Typeable`, or `Data`. These classes should not “look through” the type or its constructor. You can still derive these classes for a `newtype`, but it happens in the usual way, not via this new mechanism. Confer with *Default deriving strategy* (page 508).
- It is safe to coerce each of the methods of  $C$ . That is, the missing last argument to  $C$  is not used at a nominal role in any of the  $C$ ’s methods. (See *Roles* (page 467).)
- $C$  is allowed to have associated type families, provided they meet the requirements laid out in the section on *GND and associated types* (page 502).

Then the derived instance declaration is of the form

```
instance C t1..tj t => C t1..tj (T v1...vk)
```

Note that if `C` does not contain any class methods, the instance context is wholly unnecessary, and as such GHC will instead generate:

```
instance C t1..tj (T v1..vk)
```

As an example which does *not* work, consider

```
newtype NonMonad m s = NonMonad (State s m s) deriving Monad
```

Here we cannot derive the instance

```
instance Monad (State s m) => Monad (NonMonad m)
```

because the type variable `s` occurs in `State s m`, and so cannot be “eta-converted” away. It is a good thing that this deriving clause is rejected, because `NonMonad m` is not, in fact, a monad — for the same reason. Try defining `>=>` with the correct type: you won’t be able to.

Notice also that the *order* of class parameters becomes important, since we can only derive instances for the last one. If the `StateMonad` class above were instead defined as

```
class StateMonad m s | m -> s where ...
```

then we would not have been able to derive an instance for the `Parser` type above. We hypothesise that multi-parameter classes usually have one “main” parameter for which deriving new instances is most interesting.

Lastly, all of this applies only for classes other than `Read`, `Show`, `Typeable`, and `Data`, for which the stock derivation applies (section 4.3.3. of the Haskell Report). (For the standard classes `Eq`, `Ord`, `Ix`, and `Bounded` it is immaterial whether the stock method is used or the one described here.)

### 6.6.5.3 Associated type families

*GeneralizedNewtypeDeriving* (page 499) also works for some type classes with associated type families. Here is an example:

```
class HasRing a where
  type Ring a

newtype L1Norm a = L1Norm a
  deriving HasRing
```

The derived `HasRing` instance would look like

```
instance HasRing (L1Norm a) where
  type Ring (L1Norm a) = Ring a
```

To be precise, if the class being derived is of the form

```
class C c_1 c_2 ... c_m where
  type T1 t1_1 t1_2 ... t1_n
  ...
  type Tk tk_1 tk_2 ... tk_p
```



and the newtype is of the form

```
newtype N n_1 n_2 ... n_q = MkN <rep-type>
```

then you can derive a `C c_1 c_2 ... c_{m-1}` instance for `N n_1 n_2 ... n_q`, provided that:

- The type parameter `c_m` occurs once in each of the type variables of `T1` through `Tk`. Imagine a class where this condition didn't hold. For example:

```
class Bad a b where
  type B a

instance Bad Int a where
  type B Int = Char

newtype Foo a = Foo a
  deriving (Bad Int)
```

For the derived `Bad Int` instance, GHC would need to generate something like this:

```
instance Bad Int (Foo a) where
  type B Int = B ???
```

Now we're stuck, since we have no way to refer to `a` on the right-hand side of the `B` family instance, so this instance doesn't really make sense in a *GeneralizedNewtypeDeriving* (page 499) setting.

- `C` does not have any associated data families (only type families). To see why data families are forbidden, imagine the following scenario:

```
class Ex a where
  data D a

instance Ex Int where
  data D Int = DInt Bool

newtype Age = MkAge Int deriving Ex
```

For the derived `Ex` instance, GHC would need to generate something like this:

```
instance Ex Age where
  data D Age = ???
```

But it is not clear what GHC would fill in for `???`, as each data family instance must generate fresh data constructors.

If both of these conditions are met, GHC will generate this instance:

```
instance C c_1 c_2 ... c_{m-1} <rep-type> =>
  C c_1 c_2 ... c_{m-1} (N n_1 n_2 ... n_q) where
  type T1 t1_1 t1_2 ... (N n_1 n_2 ... n_q) ... t1_n
    = T1 t1_1 t1_2 ... <rep-type> ... t1_n
  ...
  type Tk tk_1 tk_2 ... (N n_1 n_2 ... n_q) ... tk_p
    = Tk tk_1 tk_2 ... <rep-type> ... tk_p
```

Again, if `C` contains no class methods, the instance context will be redundant, so GHC will instead generate instance `C c_1 c_2 ... c_(m-1) (N n_1 n_2 ... n_q)`.

Beware that in some cases, you may need to enable the [UndecidableInstances](#) (page 537) extension in order to use this feature. Here's a pathological case that illustrates why this might happen:

```
class C a where
  type T a

newtype Loop = MkLoop Loop
  deriving C
```

This will generate the derived instance:

```
instance C Loop where
  type T Loop = T Loop
```

Here, it is evident that attempting to use the type `T Loop` will throw the typechecker into an infinite loop, as its definition recurses endlessly. In other cases, you might need to enable [UndecidableInstances](#) (page 537) even if the generated code won't put the typechecker into a loop. For example:

```
instance C Int where
  type C Int = Int

newtype MyInt = MyInt Int
  deriving C
```

This will generate the derived instance:

```
instance C MyInt where
  type T MyInt = T Int
```

Although typechecking `T MyInt` will terminate, GHC's termination checker isn't sophisticated enough to determine this, so you'll need to enable [UndecidableInstances](#) (page 537) in order to use this derived instance. If you do go down this route, make sure you can convince yourself that all of the type family instances you're deriving will eventually terminate if used!

Note that [DerivingVia](#) (page 508) (see [Deriving via](#) (page 508)) uses essentially the same specification to derive instances of associated type families as well (except that it uses the `via` type instead of the underlying `rep-type` of a newtype).

## 6.6.6 Deriving any other class

### DeriveAnyClass

Since  
7.10.1

Allow use of any typeclass in deriving clauses.

With [DeriveAnyClass](#) (page 504) you can derive any other class. The compiler will simply generate an instance declaration with no explicitly-defined methods. This is mostly useful in classes whose *minimal set* (page ??) is empty, and especially when writing *generic functions* (page ??).

As an example, consider a simple pretty-printer class `SPretty`, which outputs pretty strings:

```
{-# LANGUAGE DefaultSignatures, DeriveAnyClass #-}

class SPretty a where
  sPpr :: a -> String
  default sPpr :: Show a => a -> String
  sPpr = show
```

If a user does not provide a manual implementation for `sPpr`, then it will default to `show`. Now we can leverage the [DeriveAnyClass](#) (page 504) extension to easily implement a `SPretty` instance for a new data type:

```
data Foo = Foo deriving (Show, SPretty)
```

The above code is equivalent to:

```
data Foo = Foo deriving Show
instance SPretty Foo
```

That is, an `SPretty Foo` instance will be created with empty implementations for all methods. Since we are using [DefaultSignatures](#) (page 524) in this example, a default implementation of `sPpr` is filled in automatically.

Note the following details

- In case you try to derive some class on a newtype, and [GeneralizedNewtypeDeriving](#) (page 499) is also on, [DeriveAnyClass](#) (page 504) takes precedence.
- The instance context is determined by the type signatures of the derived class's methods. For instance, if the class is:

```
class Foo a where
  bar :: a -> String
  default bar :: Show a => a -> String
  bar = show

  baz :: a -> a -> Bool
  default baz :: Ord a => a -> a -> Bool
  baz x y = compare x y == EQ
```

And you attempt to derive it using [DeriveAnyClass](#) (page 504):

```
instance Eq a => Eq (Option a) where ...
instance Ord a => Ord (Option a) where ...
instance Show a => Show (Option a) where ...

data Option a = None | Some a deriving Foo
```

Then the derived `Foo` instance will be:

```
instance (Show a, Ord a) => Foo (Option a)
```

Since the default type signatures for `bar` and `baz` require `Show a` and `Ord a` constraints, respectively.

Constraints on the non-default type signatures can play a role in inferring the instance context as well. For example, if you have this class:

```
class HigherEq f where
  (==#) :: f a -> f a -> Bool
  default (==#) :: Eq (f a) => f a -> f a -> Bool
  x ==# y = (x == y)
```

And you tried to derive an instance for it:

```
instance Eq a => Eq (Option a) where ...
data Option a = None | Some a deriving HigherEq
```

Then it will fail with an error to the effect of:

```
No instance for (Eq a)
  arising from the 'deriving' clause of a data type declaration
```

That is because we require an `Eq (Option a)` instance from the default type signature for `(==#)`, which in turn requires an `Eq a` instance, which we don't have in scope. But if you tweak the definition of `HigherEq` slightly:

```
class HigherEq f where
  (==#) :: Eq a => f a -> f a -> Bool
  default (==#) :: Eq (f a) => f a -> f a -> Bool
  x ==# y = (x == y)
```

Then it becomes possible to derive a `HigherEq Option` instance. Note that the only difference is that now the non-default type signature for `(==#)` brings in an `Eq a` constraint. Constraints from non-default type signatures never appear in the derived instance context itself, but they can be used to discharge obligations that are demanded by the default type signatures. In the example above, the default type signature demanded an `Eq a` instance, and the non-default signature was able to satisfy that request, so the derived instance is simply:

```
instance HigherEq Option
```

- *DeriveAnyClass* (page 504) can be used with partially applied classes, such as

```
data T a = MKT a deriving( D Int )
```

which generates

```
instance D Int a => D Int (T a) where {}
```

- *DeriveAnyClass* (page 504) can be used to fill in default instances for associated type families:

```
{-# LANGUAGE DeriveAnyClass, TypeFamilies #-}

class Sizable a where
  type Size a
  type Size a = Int

data Bar = Bar deriving Sizable
```

(continues on next page)

(continued from previous page)

```
doubleBarSize :: Size Bar -> Size Bar
doubleBarSize s = 2*s
```

The deriving( Sizable ) is equivalent to saying

```
instance Sizeable Bar where {}
```

and then the normal rules for filling in associated types from the default will apply, making Size Bar equal to Int.

## 6.6.7 Deriving strategies

### DerivingStrategies

#### Since

8.2.1

#### Status

Included in *GHC2024* (page 314)

Allow multiple deriving, each optionally qualified with a *strategy*.

In most scenarios, every deriving statement generates a typeclass instance in an unambiguous fashion. There is a corner case, however, where simultaneously enabling both the *GeneralizedNewtypeDeriving* (page 499) and *DeriveAnyClass* (page 504) extensions can make deriving become ambiguous. Consider the following example

```
{-# LANGUAGE DeriveAnyClass, GeneralizedNewtypeDeriving #-}
newtype Foo = MkFoo Bar deriving C
```

One could either pick the *DeriveAnyClass* approach to deriving C or the *GeneralizedNewtypeDeriving* approach to deriving C, both of which would be equally as valid. GHC defaults to favoring *DeriveAnyClass* in such a dispute, but this is not a satisfying solution, since that leaves users unable to use both language extensions in a single module.

To make this more robust, GHC has a notion of deriving strategies, which allow the user to explicitly request which approach to use when deriving an instance. To enable this feature, one must enable the *DerivingStrategies* (page 507) language extension. A deriving strategy can be specified in a deriving clause

```
newtype Foo = MkFoo Bar
  deriving newtype C
```

Or in a standalone deriving declaration

```
deriving anyclass instance C Foo
```

*DerivingStrategies* (page 507) also allows the use of multiple deriving clauses per data declaration so that a user can derive some instance with one deriving strategy and other instances with another deriving strategy. For example

```
newtype Baz = Baz Quux
deriving    (Eq, Ord)
deriving stock (Read, Show)
deriving newtype (Num, Floating)
deriving anyclass C
```

Currently, the deriving strategies are:

- **stock**: Have GHC implement a “standard” instance for a data type, if possible (e.g., Eq, Ord, Generic, Data, Functor, etc.)
- **anyclass**: Use [DeriveAnyClass](#) (page 504) (see [Deriving any other class](#) (page 504))
- **newtype**: Use [GeneralizedNewtypeDeriving](#) (page 499) (see [Generalised derived instances for newtypes](#) (page 499))
- **via**: Use [DerivingVia](#) (page 508) (see [Deriving via](#) (page 508))

### 6.6.7.1 Default deriving strategy

If an explicit deriving strategy is not given, multiple strategies may apply. In that case, GHC chooses the strategy as follows:

1. Stock type classes, i.e. those specified in the report and those enabled by [language extensions](#) (page 489), are derived using the stock strategy, with the following exception:
  - For newtypes, Eq, Ord, Ix and Bounded are always derived using the newtype strategy, even without GeneralizedNewtypeDeriving enabled. (There should be no observable difference to instances derived using the stock strategy.)
  - Also for newtypes, Functor, Foldable and Enum are derived using the newtype strategy if GeneralizedNewtypeDeriving is enabled and the derivation succeeds.
2. For any other type class:
  1. When [DeriveAnyClass](#) (page 504) is enabled, use anyclass.
  2. When [GeneralizedNewtypeDeriving](#) (page 499) is enabled and we are deriving for a newtype, then use newtype.

If both rules apply to a deriving clause, then anyclass is used and the user is warned about the ambiguity. The warning can be avoided by explicitly stating the desired deriving strategy.

### 6.6.8 Deriving via

#### DerivingVia

##### Implies

[DerivingStrategies](#) (page 507)

##### Since

8.6.1

This allows deriving a class instance for a type by specifying another type that is already an instance of that class. This only makes sense if the methods have identical runtime representations, in the sense that coerce (see The Coercible constraint) can convert the existing

implementation into the desired implementation. The generated code will be rejected with a type error otherwise.

*DerivingVia* (page 508) is indicated by the use of the `via` deriving strategy. `via` requires specifying another type (the `via` type) to coerce through. For example, this code:

```
{-# LANGUAGE DerivingVia #-}

import Numeric

newtype Hex a = Hex a

instance (Integral a, Show a) => Show (Hex a) where
    show (Hex a) = "0x" ++ showHex a ""

newtype Unicode = U Int
    deriving Show
    via (Hex Int)

-- >>> euroSign
-- 0x20ac
euroSign :: Unicode
euroSign = U 0x20ac
```

Generates the following instance

```
instance Show Unicode where
    show :: Unicode -> String
    show = Data.Coerce.coerce
        @(Hex Int -> String)
        @(Unicode -> String)
    show
```

This extension generalizes *GeneralizedNewtypeDeriving* (page 499). To derive `Num Unicode` with GND (deriving `newtype Num`) it must reuse the `Num Int` instance. With *DerivingVia*, we can explicitly specify the representation type `Int`:

```
newtype Unicode = U Int
    deriving Num
    via Int

    deriving Show
    via (Hex Int)

euroSign :: Unicode
euroSign = 0x20ac
```

Code duplication is common in instance declarations. A familiar pattern is lifting operations over an `Applicative` functor. Instead of having catch-all instances for `f a` which overlap with all other such instances, like so:

```
instance (Applicative f, Semigroup a) => Semigroup (f a) ..
instance (Applicative f, Monoid a) => Monoid (f a) ..
```

We can instead create a newtype `App` (where `App f a` and `f a` are represented the same in

memory) and use *DerivingVia* (page 508) to explicitly enable uses of this pattern:

```
{-# LANGUAGE DerivingVia, DeriveFunctor, GeneralizedNewtypeDeriving #-}

import Control.Applicative

newtype App f a = App (f a) deriving newtype (Functor, Applicative)

instance (Applicative f, Semigroup a) => Semigroup (App f a) where
  (<*) = liftA2 (<*)

instance (Applicative f, Monoid a) => Monoid (App f a) where
  mempty = pure mempty

data Pair a = MkPair a a
  deriving stock
  deriving (Semigroup, Monoid)
    via (App Pair a)

instance Applicative Pair where
  pure a = MkPair a a

  MkPair f g <*> MkPair a b = MkPair (f a) (g b)
```

Note that the *via* type does not have to be a newtype. The only restriction is that it is coercible with the original data type. This means there can be arbitrary nesting of newtypes, as in the following example:

```
newtype Kleisli m a b = Kleisli (a -> m b)
  deriving (Semigroup, Monoid)
    via (a -> App m b)
```

Here we make use of the `Monoid ((->) a)` instance.

When used in combination with *StandaloneDeriving* (page 487) we swap the order for the instance we base our derivation on and the instance we define e.g.:

```
deriving via (a -> App m b) instance Monoid (Kleisli m a b)
```

## 6.7 Patterns

### 6.7.1 Pattern guards

#### NoPatternGuards

Since

6.8.1

Status

Included in *Haskell198* (page 316)

Disable `pattern guards`.



## 6.7.2 View patterns

### ViewPatterns

Since  
6.10.1

Allow use of view pattern syntax.

View patterns are enabled by the language extension [ViewPatterns](#) (page 511). More information and examples of view patterns can be found on the [Wiki page](#).

View patterns are somewhat like pattern guards that can be nested inside of other patterns. They are a convenient way of pattern-matching against values of abstract types. For example, in a programming language implementation, we might represent the syntax of the types of the language as follows:

```
type Typ

data TypView = Unit
              | Arrow Typ Typ

view :: Typ -> TypView

-- additional operations for constructing Typ's ...
```

The representation of `Typ` is held abstract, permitting implementations to use a fancy representation (e.g., hash-consing to manage sharing). Without view patterns, using this signature is a little inconvenient:

```
size :: Typ -> Integer
size t = case view t of
  Unit -> 1
  Arrow t1 t2 -> size t1 + size t2
```

It is necessary to iterate the case, rather than using an equational function definition. And the situation is even worse when the matching against `t` is buried deep inside another pattern.

View patterns permit calling the view function inside the pattern and matching against the result:

```
size (view -> Unit) = 1
size (view -> Arrow t1 t2) = size t1 + size t2
```

That is, we add a new form of pattern, written `(expression) -> (pattern)` that means “apply the expression to whatever we’re trying to match against, and then match the result of that application against the pattern”. The expression can be any Haskell expression of function type, and view patterns can be used wherever patterns are used.

The semantics of a pattern `( (exp) -> (pat) )` are as follows:

- Scoping: The variables bound by the view pattern are the variables bound by `(pat)`.

Any variables in `(exp)` are bound occurrences, but variables bound “to the left” in a pattern are in scope. This feature permits, for example, one argument to a function to be used in the view of another argument. For example, the function `clunky` from [Pattern guards](#) (page 510) can be written using view patterns as follows:

```
clunky env (lookup env -> Just val1) (lookup env -> Just val2) = val1 +
  ↪ val2
...other equations for clunky...
```

More precisely, the scoping rules are:

- In a single pattern, variables bound by patterns to the left of a view pattern expression are in scope. For example:

```
example :: Maybe ((String -> Integer,Integer), String) -> Bool
example (Just ((f,_), f -> 4)) = True
```

Additionally, in function definitions, variables bound by matching earlier carried arguments may be used in view pattern expressions in later arguments:

```
example :: (String -> Integer) -> String -> Bool
example f (f -> 4) = True
```

That is, the scoping is the same as it would be if the carried arguments were collected into a tuple.

- In mutually recursive bindings, such as `let`, where, or the top level, view patterns in one declaration may not mention variables bound by other declarations. That is, each declaration must be self-contained. For example, the following program is not allowed:

```
let {(x -> y) = e1 ;
     (y -> x) = e2 } in x
```

(For some amplification on this design choice see [#4061](#).)

- Typing: If  $\langle \text{exp} \rangle$  has type  $\langle T1 \rangle \rightarrow \langle T2 \rangle$  and  $\langle \text{pat} \rangle$  matches a  $\langle T2 \rangle$ , then the whole view pattern matches a  $\langle T1 \rangle$ .
- Matching: To the equations in Section 3.17.3 of the [Haskell 98 Report](#), add the following:

```
case v of { (e -> p) -> e1 ; _ -> e2 }
=
case (e v) of { p -> e1 ; _ -> e2 }
```

That is, to match a variable  $\langle v \rangle$  against a pattern  $(\langle \text{exp} \rangle \rightarrow \langle \text{pat} \rangle)$ , evaluate  $(\langle \text{exp} \rangle \langle v \rangle)$  and match the result against  $\langle \text{pat} \rangle$ .

- Efficiency: When the same view function is applied in multiple branches of a function definition or a case expression (e.g., in `size` above), GHC makes an attempt to collect these applications into a single nested case expression, so that the view function is only applied once. Pattern compilation in GHC follows the matrix algorithm described in Chapter 4 of [The Implementation of Functional Programming Languages](#). When the top rows of the first column of a matrix are all view patterns with the “same” expression, these patterns are transformed into a single nested case. This includes, for example, adjacent view patterns that line up in a tuple, as in

```
f ((view -> A, p1), p2) = e1
f ((view -> B, p3), p4) = e2
```

The current notion of when two view pattern expressions are “the same” is very restricted: it is not even full syntactic equality. However, it does include variables, literals,

applications, and tuples; e.g., two instances of `view` (`"hi"`, `"there"`) will be collected. However, the current implementation does not compare up to alpha-equivalence, so two instances of `(x, view x -> y)` will not be coalesced.

### 6.7.3 n+k patterns

#### NPlusKPatterns

##### Since

6.12.1

##### Status

Included in *Haskell98* (page 316)

Enable use of n+k patterns.

### 6.7.4 Pattern synonyms

#### PatternSynonyms

##### Since

7.8.1

Allow the definition of pattern synonyms.

Pattern synonyms are enabled by the language extension *PatternSynonyms* (page 513), which is required for defining them, but *not* for using them. More information and examples of pattern synonyms can be found on the [Wiki page](#).

Pattern synonyms enable giving names to parametrized pattern schemes. They can also be thought of as abstract constructors that don't have a bearing on data representation. For example, in a programming language implementation, we might represent types of the language as follows:

```
data Type = App String [Type]
```

Here are some examples of using said representation. Consider a few types of the Type universe encoded like this:

```
App "->" [t1, t2]      -- t1 -> t2
App "Int" []           -- Int
App "Maybe" [App "Int" []] -- Maybe Int
```

This representation is very generic in that no types are given special treatment. However, some functions might need to handle some known types specially, for example the following two functions collect all argument types of (nested) arrow types, and recognize the `Int` type, respectively:

```
collectArgs :: Type -> [Type]
collectArgs (App "->" [t1, t2]) = t1 : collectArgs t2
collectArgs _                    = []

isInt :: Type -> Bool
isInt (App "Int" []) = True
isInt _              = False
```

Matching on `App` directly is both hard to read and error prone to write. And the situation is even worse when the matching is nested:

```
isIntEndo :: Type -> Bool
isIntEndo (App "->" [App "Int" [], App "Int" []]) = True
isIntEndo _ = False
```

Pattern synonyms permit abstracting from the representation to expose matchers that behave in a constructor-like manner with respect to pattern matching. We can create pattern synonyms for the known types we care about, without committing the representation to them (note that these don't have to be defined in the same module as the `Type` type):

```
pattern Arrow t1 t2 = App "->" [t1, t2]
pattern Int         = App "Int"  []
pattern Maybe t     = App "Maybe" [t]
```

Which enables us to rewrite our functions in a much cleaner style:

```
collectArgs :: Type -> [Type]
collectArgs (Arrow t1 t2) = t1 : collectArgs t2
collectArgs _             = []

isInt :: Type -> Bool
isInt Int = True
isInt _   = False

isIntEndo :: Type -> Bool
isIntEndo (Arrow Int Int) = True
isIntEndo _               = False
```

In general there are three kinds of pattern synonyms. Unidirectional, bidirectional and explicitly bidirectional. The examples given so far are examples of bidirectional pattern synonyms. A bidirectional synonym behaves the same as an ordinary data constructor. We can use it in a pattern context to deconstruct values and in an expression context to construct values. For example, we can construct the value *intEndo* using the pattern synonyms *Arrow* and *Int* as defined previously.

```
intEndo :: Type
intEndo = Arrow Int Int
```

This example is equivalent to the much more complicated construction if we had directly used the *Type* constructors.

```
intEndo :: Type
intEndo = App "->" [App "Int" [], App "Int" []]
```

Unidirectional synonyms can only be used in a pattern context and are defined as follows:

```
pattern Head x <- x:xs
```

In this case, `Head x` cannot be used in expressions, only patterns, since it wouldn't specify a value for the `xs` on the right-hand side. However, we can define an explicitly bidirectional pattern synonym by separately specifying how to construct and deconstruct a type. The syntax for doing this is as follows:

```
pattern HeadC x <- x:xs where
  HeadC x = [x]
```

We can then use `HeadC` in both expression and pattern contexts. In a pattern context it will match the head of any list with length at least one. In an expression context it will construct a singleton list.

Explicitly bidirectional pattern synonyms offer greater flexibility than implicitly bidirectional ones in terms of the syntax that is permitted. For instance, the following is not a legal implicitly bidirectional pattern synonym:

```
pattern StrictJust a = Just !a
```

This is illegal because the use of *BangPatterns* (page 595) on the right-hand sides prevents it from being a well formed expression. However, constructing a strict pattern synonym is quite possible with an explicitly bidirectional pattern synonym:

```
pattern StrictJust a <- Just !a where
  StrictJust !a = Just a
```

Constructing an explicitly bidirectional pattern synonym also:

- can create different data constructors from the underlying data type, not just the one appearing in the pattern match;
- can call any functions or conditional logic, especially validation, of course providing it constructs a result of the right type;
- can use guards on the lhs of the `=`;
- can have multiple equations.

For example:

```
data PosNeg = Pos Int | Neg Int
pattern Smarter{ nonneg } <- Pos nonneg where
  Smarter x = if x >= 0 then (Pos x) else (Neg x)
```

Or using guards:

```
pattern Smarter{ nonneg } <- Pos nonneg where
  Smarter x | x >= 0 = (Pos x)
            | otherwise = (Neg x)
```

There is an extensive Haskell folk art of *smart constructors*, essentially functions that wrap validation around a constructor, and avoid exposing its representation. The downside is that the underlying constructor can't be used as a matcher. Pattern synonyms can be used as genuinely smart constructors, for both validation and matching.

The table below summarises where each kind of pattern synonym can be used.

Context	Unidirectional	Bidirectional	Explicitly Bidirectional
Pattern	Yes	Yes	Yes
Expression	No	Yes (Inferred)	Yes (Explicit)

### 6.7.4.1 Record Pattern Synonyms

It is also possible to define pattern synonyms which behave just like record constructors. The syntax for doing this is as follows:

```
pattern Point :: Int -> Int -> (Int, Int)
pattern Point{x, y} = (x, y)
```

The idea is that we can then use `Point` just as if we had defined a new datatype `MyPoint` with two fields `x` and `y`.

```
data MyPoint = Point { x :: Int, y :: Int }
```

Whilst a normal pattern synonym can be used in two ways, there are then seven ways in which to use `Point`. Precisely the ways in which a normal record constructor can be used.

Usage	Example
As a constructor	<code>zero = Point 0 0</code>
As a constructor with record syntax	<code>zero = Point { x = 0, y = 0 }</code>
In a pattern context	<code>isZero (Point 0 0) = True</code>
In a pattern context with record syntax	<code>isZero (Point { x = 0, y = 0 }) = True</code>
In a pattern context with field puns	<code>getX (Point {x}) = x</code>
In a record update	<code>(0, 0) { x = 1 } == (1,0)</code>
Using record selectors	<code>x (0,0) == 0</code>

For a unidirectional record pattern synonym we define record selectors but do not allow record updates or construction.

The syntax and semantics of pattern synonyms are elaborated in the following subsections. There are also lots more details in the [paper](#).

See the [Wiki page](#) for more details.

### 6.7.4.2 Syntax and scoping of pattern synonyms

A pattern synonym declaration can be either unidirectional, bidirectional or explicitly bidirectional. The syntax for unidirectional pattern synonyms is:

```
pattern pat_lhs <- pat
```

the syntax for bidirectional pattern synonyms is:

```
pattern pat_lhs = pat
```

and the syntax for explicitly bidirectional pattern synonyms is:

```
pattern pat_lhs <- pat where
  pat_lhs = expr                -- lhs restricted, see below
```

We can define either prefix, infix or record pattern synonyms by modifying the form of `pat_lhs`. The syntax for these is as follows:

Prefix	Name args
Infix	arg1 `Name` arg2 or arg1 op arg2
Record	Name{arg1,arg2,...,argn}

The *pat lhs* for explicitly bidirectional construction cannot use Record syntax. (Because the rhs *expr* might be constructing different data constructors.) It can use guards with multiple equations.

Pattern synonym declarations can only occur in the top level of a module. In particular, they are not allowed as local definitions.

The variables in the left-hand side of the definition are bound by the pattern on the right-hand side. For bidirectional pattern synonyms, all the variables of the right-hand side must also occur on the left-hand side; also, wildcard patterns and view patterns are not allowed. For unidirectional and explicitly bidirectional pattern synonyms, there is no restriction on the right-hand side pattern.

Pattern synonyms cannot be defined recursively.

*COMPLETE pragmas* (page 676) can be specified in order to tell the pattern match exhaustiveness checker that a set of pattern synonyms is complete.

#### 6.7.4.3 Import and export of pattern synonyms

The name of the pattern synonym is in the same namespace as proper data constructors. Like normal data constructors, pattern synonyms can be imported and exported through association with a type constructor or independently.

To export them on their own, in an export or import specification, you must prefix pattern names with the pattern keyword, e.g.:

```
module Example (pattern Zero) where

data MyNum = MkNum Int

pattern Zero :: MyNum
pattern Zero = MkNum 0
```

Without the pattern prefix, Zero would be interpreted as a type constructor in the export list.

You may also use the pattern keyword in an import/export specification to import or export an ordinary data constructor. For example:

```
import Data.Maybe( pattern Just )
```

would bring into scope the data constructor Just from the Maybe type, without also bringing the type constructor Maybe into scope.

As of GHC 8.0.1 you may also “bundle” pattern synonyms with an exported type constructor, making that pattern appear as a data constructor of that type. To bundle a pattern synonym, we list the pattern synonym in the export list of a module which exports the type constructor. For example, to bundle Zero with MyNum we could write the following:

```
module Example ( MyNum(Zero) ) where
```

If a module was then to import `MyNum` from `Example`, it would also import the pattern synonym `Zero`.

It is also possible to use the special token `..` in an export list to mean all currently bundled constructors. For example, we could write:

```
module Example ( MyNum(.., Zero) ) where
```

in which case, `Example` would export the type constructor `MyNum` with the data constructor `MkNum` and also the pattern synonym `Zero`.

Bundled pattern synonyms are type checked to ensure that they are of the same type as the type constructor which they are bundled with. A pattern synonym `P` can not be bundled with a type constructor `T` if `P`'s type is visibly incompatible with `T`.

A module which imports `MyNum(..)` from `Example` and then re-exports `MyNum(..)` will also export any pattern synonyms bundled with `MyNum` in `Example`. A more complete specification can be found on the [wiki](#).

#### 6.7.4.4 Typing of pattern synonyms

Given a pattern synonym definition of the form

```
pattern P var1 var2 ... varN <- pat
```

it is assigned a *pattern type* of the form

```
pattern P :: CReq => CProv => t1 -> t2 -> ... -> tN -> t
```

where `<CReq>` and `<CProv>` are type contexts, and `<t1>`, `<t2>`, ..., `<tN>` and `<t>` are types. Notice the unusual form of the type, with two contexts `<CReq>` and `<CProv>`:

- `<CReq>` are the constraints *required* to match the pattern.
- `<CProv>` are the constraints *made available (provided)* by a successful pattern match.

For example, consider

```
data T a where
  MkT :: (Show b) => a -> b -> T a

f1 :: (Num a, Eq a) => T a -> String
f1 (MkT 42 x) = show x

pattern ExNumPat :: (Num a, Eq a) => (Show b) => b -> T a
pattern ExNumPat x = MkT 42 x

f2 :: (Eq a, Num a) => T a -> String
f2 (ExNumPat x) = show x
```

Here `f1` does not use pattern synonyms. To match against the numeric pattern `42` *requires* the caller to satisfy the constraints `(Num a, Eq a)`, so they appear in `f1`'s type. The call to `show` generates a `(Show b)` constraint, where `b` is an existentially type variable bound by the pattern match on `MkT`. But the same pattern match also *provides* the constraint `(Show b)` (see `MkT`'s type), and so all is well.

Exactly the same reasoning applies to `ExNumPat`: matching against `ExNumPat` *requires* the constraints `(Num a, Eq a)`, and *provides* the constraint `(Show b)`.



Note also the following points

- In the common case where CProv is empty, (i.e., `()`), it can be omitted altogether in the above pattern type signature for P.
- However, if CProv is non-empty, while CReq is, the above pattern type signature for P must be specified as

```
P :: () => CProv => t1 -> t2 -> .. -> tN -> t
```

- The GHCi `:info` (page 57) command shows pattern types in this format.
- You may specify an explicit *pattern signature*, as we did for ExNumPat above, to specify the type of a pattern, just as you can for a function. As usual, the type signature can be less polymorphic than the inferred type. For example

```
-- Inferred type would be 'a -> [a]'  
pattern SinglePair :: (a, a) -> [(a, a)]  
pattern SinglePair x = [x]
```

Just like signatures on value-level bindings, pattern synonym signatures can apply to more than one pattern. For instance,

```
pattern Left', Right' :: a -> Either a a  
pattern Left' x = Left x  
pattern Right' x = Right x
```

- The rules for lexically-scoped type variables (see *Lexically scoped type variables* (page 565)) apply to pattern-synonym signatures. As those rules specify, only the type variables from an explicit, syntactically-visible outer *forall* (the universals) scope over the definition of the pattern synonym; the existentials, bound by the inner *forall*, do not. For example

```
data T a where  
  MkT :: Bool -> b -> (b->Int) -> a -> T a  
  
pattern P :: forall a. forall b. b -> (b->Int) -> a -> T a  
pattern P x y v <- MkT True x y (v::a)
```

Here the universal type variable *a* scopes over the definition of *P*, but the existential *b* does not. (c.f. discussion on [#14998](#).)

- For a bidirectional pattern synonym, a use of the pattern synonym as an expression has the type

```
(CReq, CProv) => t1 -> t2 -> ... -> tN -> t
```

So in the previous example, when used in an expression, ExNumPat has type

```
ExNumPat :: (Num a, Eq a, Show b) => b -> T t
```

Notice that this is a tiny bit more restrictive than the expression `MkT 42 x` which would not require `(Eq a)`.

- Consider these two pattern synonyms:

```

data S a where
  S1 :: Bool -> S Bool

pattern P1 :: Bool -> Maybe Bool
pattern P1 b = Just b

pattern P2 :: () => (b ~ Bool) => Bool -> S b
pattern P2 b = S1 b

f :: Maybe a -> String
f (P1 x) = "no no no"      -- Type-incorrect

g :: S a -> String
g (P2 b) = "yes yes yes"  -- Fine

```

Pattern P1 can only match against a value of type `Maybe Bool`, so function `f` is rejected because the type signature is `Maybe a`. (To see this, imagine expanding the pattern synonym.)

On the other hand, function `g` works fine, because matching against P2 (which wraps the GADT `S`) provides the local equality (`a ~ Bool`). If you were to give an explicit pattern signature `P2 :: Bool -> S Bool`, then P2 would become less polymorphic, and would behave exactly like P1 so that `g` would then be rejected.

In short, if you want GADT-like behaviour for pattern synonyms, then (unlike concrete data constructors like `S1`) you must write its type with explicit provided equalities. For a concrete data constructor like `S1` you can write its type signature as either `S1 :: Bool -> S Bool` or `S1 :: (b ~ Bool) => Bool -> S b`; the two are equivalent. Not so for pattern synonyms: the two forms are different, in order to distinguish the two cases above. (See [#9953](#) for discussion of this choice.)

#### 6.7.4.5 Matching of pattern synonyms

A pattern synonym occurrence in a pattern is evaluated by first matching against the pattern synonym itself, and then on the argument patterns.

More precisely, the semantics of pattern matching is given in [Section 3.17 of the Haskell 2010 report](#). To the informal semantics in [Section 3.17.2](#) we add this extra rule:

- If the pattern is a constructor pattern (`P p1 ... pn`), where `P` is a pattern synonym defined by `P x1 ... xn = p` or `P x1 ... xn <- p`, then:
  - (a) Match the value `v` against `p`. If this match fails or diverges, so does the whole (pattern synonym) match. Otherwise the match against `p` must bind the variables `x1 ... xn`; let them be bound to values `v1 ... vn`.
  - (b) Match `v1` against `p1`, `v2` against `p2` and so on. If any of these matches fail or diverge, so does the whole match.
  - (c) If all the matches against the `pi` succeed, the match succeeds, binding the variables bound by the `pi`. (The `xi` are not bound; they remain local to the pattern synonym declaration.)

For example, in the following program, `f` and `f'` are equivalent:

```
pattern Pair x y <- [x, y]

f (Pair True True) = True
f _                = False

f' [x, y] | True <- x, True <- y = True
f' _                               = False
```

Note that the strictness of `f` differs from that of `g` defined below:

```
g [True, True] = True
g _            = False

*Main> f (False:undefined)
*** Exception: Prelude.undefined
*Main> g (False:undefined)
False
```

#### 6.7.4.6 Pragmas for pattern synonyms

The *INLINABLE pragma* (page 669), *INLINE pragma* (page 666) and *NOINLINE pragma* (page 669) are supported for pattern synonyms as of GHC 9.2. For example:

```
pattern InlinablePattern x = [x]
{-# INLINABLE InlinablePattern #-}
pattern InlinedPattern x = [x]
{-# INLINE InlinedPattern #-}
pattern NonInlinedPattern x = [x]
{-# NOINLINE NonInlinedPattern #-}
```

As with other *INLINABLE*, *INLINE* and *NOINLINE* pragmas, it's possible to specify to which phase the pragma applies:

```
pattern Q x = [x]
{-# NOINLINE[1] Q #-}
```

The pragmas are applied both when the pattern is used as a matcher, and as a data constructor. For explicitly bidirectional pattern synonyms, the pragma must be at top level, not nested in the `where` clause. For example, this won't compile:

```
pattern HeadC x <- x:xs where
  HeadC x = [x]
  {-# INLINE HeadC #-}
```

but this will:

```
pattern HeadC x <- x:xs where
  HeadC x = [x]
  {-# INLINE HeadC #-}
```

When no pragma is provided for a pattern, the inlining decision is made by GHC's own inlining heuristics.

## 6.8 Class and instances declarations

This section documents GHC's type-class extensions. There's lots of background in the paper [Type classes: exploring the design space](#) (Simon Peyton Jones, Mark Jones, Erik Meijer).

### 6.8.1 Multi-parameter type classes

#### MultiParamTypeClasses

**Implies**

[ConstrainedClassMethods](#) (page 523)

**Implied by**

[FunctionalDependencies](#) (page 528)

**Since**

6.8.1

**Status**

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow the definition of typeclasses with more than one parameter.

Multi-parameter type classes are permitted, with extension [MultiParamTypeClasses](#) (page 522). For example:

```
class Collection c a where
  union :: c a -> c a -> c a
  ...etc.
```

### 6.8.2 Undecidable (or recursive) superclasses

#### UndecidableSuperClasses

**Since**

8.0.1

Allow all superclass constraints, including those that may result in non-termination of the typechecker.

The language extension [UndecidableSuperClasses](#) (page 522) allows much more flexible constraints in superclasses.

A class cannot generally have itself as a superclass. So this is illegal

```
class C a => D a where ...
class D a => C a where ...
```

GHC implements this test conservatively when type functions, or type variables, are involved. For example

```
type family F a :: Constraint
class F a => C a where ...
```

GHC will complain about this, because you might later add

```
type instance F Int = C Int
```

and now we'd be in a superclass loop. Here's an example involving a type variable

```
class f (C f) => C f
class c      => Id c
```

If we expanded the superclasses of `C Id` we'd get first `Id (C Id)` and thence `C Id` again.

But superclass constraints like these are sometimes useful, and the conservative check is annoying where no actual recursion is involved.

Moreover genuinely-recursive superclasses are sometimes useful. Here's a real-life example ([#10318](#))

```
class (Frac (Frac a) ~ Frac a,
      Fractional (Frac a),
      IntegralDomain (Frac a))
  => IntegralDomain a where
  type Frac a :: Type
```

Here the superclass cycle does terminate but it's not entirely straightforward to see that it does.

With the language extension [UndecidableSuperClasses](#) (page 522) GHC lifts all restrictions on superclass constraints. If there really *is* a loop, GHC will only expand it to finite depth.

### 6.8.3 Constrained class method types

#### ConstrainedClassMethods

##### Since

6.8.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

##### Implied by

[MultiParamTypeClasses](#) (page 522)

Allows the definition of further constraints on individual class methods.

Haskell 98 prohibits class method types to mention constraints on the class type variable, thus:

```
class Seq s a where
  fromList :: [a] -> s a
  elem     :: Eq a => a -> s a -> Bool
```

The type of `elem` is illegal in Haskell 98, because it contains the constraint `Eq a`, which constrains only the class type variable (in this case `a`). More precisely, a constraint in a class method signature is rejected if

- The constraint mentions at least one type variable. So this is allowed:

```
class C a where
  op1 :: HasCallStack => a -> a
  op2 :: (?x::Int) => Int -> a
```

- All of the type variables mentioned are bound by the class declaration, and none is locally quantified. Examples:

```
class C a where
  op3 :: Eq a => a -> a      -- Rejected: constrains class variable only
  op4 :: D b => a -> b      -- Accepted: constrains a locally-quantified
                           -- variable `b`
  op5 :: D (a,b) => a -> b -- Accepted: constrains a locally-quantified
                           -- variable `b`
```

GHC lifts this restriction with language extension [ConstrainedClassMethods](#) (page 523). The restriction is a pretty stupid one in the first place, so [ConstrainedClassMethods](#) (page 523) is implied by [MultiParamTypeClasses](#) (page 522).

## 6.8.4 Default method signatures

### DefaultSignatures

Since  
7.2.1

Allows the definition of default method signatures in class definitions.

Haskell 98 allows you to define a default implementation when declaring a class:

```
class Enum a where
  enum :: [a]
  enum = []
```

The type of the enum method is [a], and this is also the type of the default method. You can change the type of the default method by requiring a different context using the extension [DefaultSignatures](#) (page 524). For instance, if you have written a generic implementation of enumeration in a class GEnum with method genum, you can specify a default method that uses that generic implementation. But your default implementation can only be used if the constraints are satisfied, therefore you need to change the type of the default method

```
class Enum a where
  enum :: [a]
  default enum :: (Generic a, GEnum (Rep a)) => [a]
  enum = map to genum
```

We reuse the keyword default to signal that a signature applies to the default method only; when defining instances of the Enum class, the original type [a] of enum still applies. When giving an empty instance, however, the default implementation (map to genum) is filled-in, and type-checked with the type (Generic a, GEnum (Rep a)) => [a].

The type signature for a default method of a type class must take on the same form as the corresponding main method's type signature. Otherwise, the typechecker will reject that class's definition. By "take on the same form", we mean that the default type signature should differ from the main type signature only in their outermost contexts. Therefore, if you have a method bar:

```
class Foo a where
  bar :: forall b. C => a -> b -> b
```

Then a default method for `bar` must take on the form:

```
default bar :: forall b. C' => a -> b -> b
bar = ...
```

`C` is allowed to be different from `C'`, but the right-hand sides of the type signatures must coincide. We require this because when you declare an empty instance for a class that uses *DefaultSignatures* (page 524), GHC implicitly fills in the default implementation like this:

```
instance Foo Int where
  bar = default_bar
```

Where `default_bar` is a top-level function based on the default type signature and implementation for `bar`:

```
default_bar :: forall a b. (Foo a, C') => a -> b -> b
default_bar = ...
```

In order for this approach to work, the default type signature for `bar` should be the same as the non-default signature, modulo the outermost context (with some caveats—see *Detailed requirements for default type signatures* (page 525)). There is no obligation for `C` and `C'` to be the same, and indeed, the `Enum` example above relies on `enum`'s default type signature having a more specific context than the original type signature.

We use default signatures to simplify generic programming in GHC (*Generic programming* (page 653)).

### 6.8.5 Detailed requirements for default type signatures

The rest of this section gives further details about what constitutes valid default type signatures.

- Ignoring outermost contexts, a default type signature must match the original type signature according to *GHC's subsumption rules* (page 454). As a result, the order of type variables in the default signature is important. Recall the `Foo` example from the previous section:

```
class Foo a where
  bar :: forall b. C => a -> b -> b

  default bar :: forall b. C' => a -> b -> b
  bar = ...
```

This is legal because if you remove the outermost contexts `C` and `C'`, then the two type signatures are the same. It is not necessarily the case that the default signature has to be *exactly* the same, however. For instance, this would also be an acceptable default type signature, as it is alpha-equivalent to the original type signature:

```
default bar :: forall x. C' => a -> x -> x
```

On the other hand, this is *not* an acceptable default type signature, since the type variable `a` is in the wrong place:

```
default bar :: forall b. C' => b -> a -> b
```

- The only place where a default type signature is allowed to more precise than the original type signature is in the outermost context. For example, this would *not* be an acceptable default type signature, since we can't match the type variable `b` with the concrete type `Int`:

```
default bar :: C' => a -> Int -> Int
```

You can, however, use type equalities to achieve the same result:

```
default bar :: forall b. (C', b ~ Int) => a -> b -> b
```

- Because of *GHC's subsumption rules* (page 454) rules, there are relatively tight restrictions concerning nested or higher-rank forall's (see *Arbitrary-rank polymorphism* (page 451)). Consider this class:

```
class C x where
  m :: x -> forall a b. a -> b
```

GHC would *not* permit the following default type signature for `m`:

```
default m :: x -> forall b a. a -> b
```

This is because the default signature quantifies the nested forall's in a different order than the original type signature. In order for this to typecheck, the default signature must preserve the original order:

```
default m :: x -> forall a b. a -> b
```

Note that unlike nested or higher-rank forall's, outermost forall's have more flexibility in how they are ordered. As a result, GHC will permit the following:

```
class C' x where
  m'      :: forall a b. x -> a -> b
  default m' :: forall b a. x -> a -> b
  m' = ...
```

- Just as the order of nested or higher-rank forall's is restricted, a similar restriction applies to the order in which nested or higher-rank contexts appear. As a result, GHC will not permit the following:

```
class D a where
  n      :: a -> forall b. (Eq b, Show b) => b -> String
  default n :: a -> forall b. (Show b, Eq b) => b -> String
  n = ...
```

GHC will permit reordering constraints within an outermost context, however, as demonstrated by the fact that GHC accepts the following:

```
class D' a where
  n'      :: (Eq b, Show b) => a -> b -> String
  default n' :: (Show b, Eq b) => a -> b -> String
  n' = ...
```



- Because a default signature is only ever allowed to differ from its original type signature in the outermost context, not in nested or higher-rank contexts, there are certain defaults that cannot be written without reordering forall s. Consider this example:

```
class E a where
  p :: Int -> forall b. b -> String
```

Suppose one wishes to write a default signature for `p` where the context must mention both `a` and `b`. While the natural thing to do would be to write this default:

```
default p :: Int -> forall b. DefaultClass a b => b -> String
```

This will not typecheck, since the default type signature now differs from the original type signature in its use of nested contexts. The only way to make such a default signature work is to change the order in which `b` is quantified:

```
default p :: forall b. DefaultClass a b => Int -> b -> String
```

This works, but at the expense of changing `p`'s behavior with respect to *Visible type application* (page 435).

## 6.8.6 Nullary type classes

### NullaryTypeClasses

#### Since

7.8.1

#### Status

Deprecated

Allow use and definition of type classes with no parameters. This extension has been replaced by *MultiParamTypeClasses* (page 522).

Nullary (no parameter) type classes are enabled with *MultiParamTypeClasses* (page 522); historically, they were enabled with the (now deprecated) *NullaryTypeClasses* (page 527). Since there are no available parameters, there can be at most one instance of a nullary class. A nullary type class might be used to document some assumption in a type signature (such as reliance on the Riemann hypothesis) or add some globally configurable settings in a program. For example,

```
class RiemannHypothesis where
  assumeRH :: a -> a

-- Deterministic version of the Miller test
-- correctness depends on the generalised Riemann hypothesis
isPrime :: RiemannHypothesis => Integer -> Bool
isPrime n = assumeRH (...)
```

The type signature of `isPrime` informs users that its correctness depends on an unproven conjecture. If the function is used, the user has to acknowledge the dependence with:

```
instance RiemannHypothesis where
  assumeRH = id
```

## 6.8.7 Functional dependencies

### FunctionalDependencies

#### Implies

[MultiParamTypeClasses](#) (page 522)

#### Since

6.8.1

Allow use of functional dependencies in class declarations.

Functional dependencies are implemented as described by Mark Jones in [\[Jones2000\]](#).

Functional dependencies are introduced by a vertical bar in the syntax of a class declaration; e.g.

```
class (Monad m) => MonadState s m | m -> s where ...  
  
class Foo a b c | a b -> c where ...
```

More documentation can be found in the [Haskell Wiki](#).

#### 6.8.7.1 Rules for functional dependencies

In a class declaration, all of the class type variables must be reachable (in the sense mentioned in [Loosening restrictions on class contexts](#) (page 552)) from the free variables of each method type. For example:

```
class Coll s a where  
  empty  :: s  
  insert :: s -> a -> s
```

is not OK, because the type of `empty` doesn't mention `a`. Functional dependencies can make the type variable reachable:

```
class Coll s a | s -> a where  
  empty  :: s  
  insert :: s -> a -> s
```

Alternatively `Coll` might be rewritten

```
class Coll s a where  
  empty  :: s a  
  insert :: s a -> a -> s a
```

which makes the connection between the type of a collection of `a`'s (namely `(s a)`) and the element type `a`. Occasionally this really doesn't work, in which case you can split the class like this:

```
class CollE s where  
  empty  :: s  
  
class CollE s => Coll s a where  
  insert :: s -> a -> s
```

### 6.8.7.2 Background on functional dependencies

The following description of the motivation and use of functional dependencies is taken from the Hugs user manual, reproduced here (with minor changes) by kind permission of Mark Jones.

Consider the following class, intended as part of a library for collection types:

```
class Collects e ce where
  empty  :: ce
  insert :: e -> ce -> ce
  member :: e -> ce -> Bool
```

The type variable `e` used here represents the element type, while `ce` is the type of the container itself. Within this framework, we might want to define instances of this class for lists or characteristic functions (both of which can be used to represent collections of any equality type), bit sets (which can be used to represent collections of characters), or hash tables (which can be used to represent any collection whose elements have a hash function). Omitting standard implementation details, this would lead to the following declarations:

```
instance Eq e => Collects e [e] where ...
instance Eq e => Collects e (e -> Bool) where ...
instance Collects Char BitSet where ...
instance (Hashable e, Collects a ce)
  => Collects e (Array Int ce) where ...
```

All this looks quite promising; we have a class and a range of interesting implementations. Unfortunately, there are some serious problems with the class declaration. First, the `empty` function has an ambiguous type:

```
empty :: Collects e ce => ce
```

By “ambiguous” we mean that there is a type variable `e` that appears on the left of the `=>` symbol, but not on the right. The problem with this is that, according to the theoretical foundations of Haskell overloading, we cannot guarantee a well-defined semantics for any term with an ambiguous type.

We can sidestep this specific problem by removing the `empty` member from the class declaration. However, although the remaining members, `insert` and `member`, do not have ambiguous types, we still run into problems when we try to use them. For example, consider the following two functions:

```
f x y = insert x . insert y
g      = f True 'a'
```

for which GHC infers the following types:

```
f :: (Collects a c, Collects b c) => a -> b -> c -> c
g :: (Collects Bool c, Collects Char c) => c -> c
```

Notice that the type for `f` allows the two parameters `x` and `y` to be assigned different types, even though it attempts to insert each of the two values, one after the other, into the same collection. If we're trying to model collections that contain only one type of value, then this is clearly an inaccurate type. Worse still, the definition for `g` is accepted, without causing a type error. As a result, the error in this code will not be flagged at the point where it appears. Instead, it will show up only when we try to use `g`, which might even be in a different module.

## An attempt to use constructor classes

Faced with the problems described above, some Haskell programmers might be tempted to use something like the following version of the class declaration:

```
class Collects e c where
  empty  :: c e
  insert :: e -> c e -> c e
  member :: e -> c e -> Bool
```

The key difference here is that we abstract over the type constructor `c` that is used to form the collection type `c e`, and not over that collection type itself, represented by `ce` in the original class declaration. This avoids the immediate problems that we mentioned above: `empty` has type `Collects e c => c e`, which is not ambiguous.

The function `f` from the previous section has a more accurate type:

```
f :: (Collects e c) => e -> e -> c e -> c e
```

The function `g` from the previous section is now rejected with a type error as we would hope because the type of `f` does not allow the two arguments to have different types. This, then, is an example of a multiple parameter class that does actually work quite well in practice, without ambiguity problems. There is, however, a catch. This version of the `Collects` class is nowhere near as general as the original class seemed to be: only one of the four instances for `Collects` given above can be used with this version of `Collects` because only one of them—the instance for lists—has a collection type that can be written in the form `c e`, for some type constructor `c`, and element type `e`.

## Adding functional dependencies

To get a more useful version of the `Collects` class, GHC provides a mechanism that allows programmers to specify dependencies between the parameters of a multiple parameter class (For readers with an interest in theoretical foundations and previous work: The use of dependency information can be seen both as a generalisation of the proposal for “parametric type classes” that was put forward by Chen, Hudak, and Odersky, or as a special case of Mark Jones’s later framework for “improvement” of qualified types. The underlying ideas are also discussed in a more theoretical and abstract setting in a manuscript [Jones1999], where they are identified as one point in a general design space for systems of implicit parameterisation). To start with an abstract example, consider a declaration such as:

```
class C a b where ...
```

which tells us simply that `C` can be thought of as a binary relation on types (or type constructors, depending on the kinds of `a` and `b`). Extra clauses can be included in the definition of classes to add information about dependencies between parameters, as in the following examples:

```
class D a b | a -> b where ...
class E a b | a -> b, b -> a where ...
```

The notation `a -> b` used here between the `|` and `where` symbols — not to be confused with a function type — indicates that the `a` parameter uniquely determines the `b` parameter, and might be read as “`a` determines `b`.” Thus `D` is not just a relation, but actually a (partial) function.

Similarly, from the two dependencies that are included in the definition of `E`, we can see that `E` represents a (partial) one-to-one mapping between types.

More generally, dependencies take the form `x1 ... xn -> y1 ... ym`, where `x1, ..., xn`, and `y1, ..., ym` are type variables with  $n > 0$  and  $m \geq 0$ , meaning that the `y` parameters are uniquely determined by the `x` parameters. Spaces can be used as separators if more than one variable appears on any single side of a dependency, as in `t -> a b`. Note that a class may be annotated with multiple dependencies using commas as separators, as in the definition of `E` above. Some dependencies that we can write in this notation are redundant, and will be rejected because they don't serve any useful purpose, and may instead indicate an error in the program. Examples of dependencies like this include `a -> a`, `a -> a a`, `a ->`, etc. There can also be some redundancy if multiple dependencies are given, as in `a->b`, `b->c`, `a->c`, and in which some subset implies the remaining dependencies. Examples like this are not treated as errors. Note that dependencies appear only in class declarations, and not in any other part of the language. In particular, the syntax for instance declarations, class constraints, and types is completely unchanged.

By including dependencies in a class declaration, we provide a mechanism for the programmer to specify each multiple parameter class more precisely. The compiler, on the other hand, is responsible for ensuring that the set of instances that are in scope at any given point in the program is consistent with any declared dependencies. For example, the following pair of instance declarations cannot appear together in the same scope because they violate the dependency for `D`, even though either one on its own would be acceptable:

```
instance D Bool Int where ...
instance D Bool Char where ...
```

Note also that the following declaration is not allowed, even by itself:

```
instance D [a] b where ...
```

The problem here is that this instance would allow one particular choice of `[a]` to be associated with more than one choice for `b`, which contradicts the dependency specified in the definition of `D`. More generally, this means that, in any instance of the form:

```
instance D t s where ...
```

for some particular types `t` and `s`, the only variables that can appear in `s` are the ones that appear in `t`, and hence, if the type `t` is known, then `s` will be uniquely determined.

The benefit of including dependency information is that it allows us to define more general multiple parameter classes, without ambiguity problems, and with the benefit of more accurate types. To illustrate this, we return to the collection class example, and annotate the original definition of `Collects` with a simple dependency:

```
class Collects e ce | ce -> e where
  empty  :: ce
  insert :: e -> ce -> ce
  member :: e -> ce -> Bool
```

The dependency `ce -> e` here specifies that the type `e` of elements is uniquely determined by the type of the collection `ce`. Note that both parameters of `Collects` are of kind `Type`; there are no constructor classes here. Note too that all of the instances of `Collects` that we gave earlier can be used together with this new definition.

What about the ambiguity problems that we encountered with the original definition? The `empty` function still has type `Collects e ce => ce`, but it is no longer necessary to regard

that as an ambiguous type: Although the variable `e` does not appear on the right of the `=>` symbol, the dependency for class `Collects` tells us that it is uniquely determined by `ce`, which does appear on the right of the `=>` symbol. Hence the context in which `empty` is used can still give enough information to determine types for both `ce` and `e`, without ambiguity. More generally, we need only regard a type as ambiguous if it contains a variable on the left of the `=>` that is not uniquely determined (either directly or indirectly) by the variables on the right.

Dependencies also help to produce more accurate types for user defined functions, and hence to provide earlier detection of errors, and less cluttered types for programmers to work with. Recall the previous definition for a function `f`:

```
f x y = insert x y = insert x . insert y
```

for which we originally obtained a type:

```
f :: (Collects a c, Collects b c) => a -> b -> c -> c
```

Given the dependency information that we have for `Collects`, however, we can deduce that `a` and `b` must be equal because they both appear as the second parameter in a `Collects` constraint with the same first parameter `c`. Hence we can infer a shorter and more accurate type for `f`:

```
f :: (Collects a c) => a -> a -> c -> c
```

In a similar way, the earlier definition of `g` will now be flagged as a type error.

Although we have given only a few examples here, it should be clear that the addition of dependency information can help to make multiple parameter classes more useful in practice, avoiding ambiguity problems, and allowing more general sets of instance declarations.

### 6.8.8 Instance declarations and resolution

An instance declaration has the form

```
instance (assertion1, ..., assertionn) => class type1 ... typem where ...
```

The part before the `"=>"` is the *context*, while the part after the `"=>"` is the *head* of the instance declaration.

When GHC tries to resolve, say, the constraint `C Int Bool`, it tries to match every instance declaration against the constraint, by instantiating the head of the instance declaration. Consider these declarations:

```
instance context1 => C Int a    where ... -- (A)
instance context2 => C a      Bool where ... -- (B)
```

GHC's default behaviour is that *exactly one instance must match the constraint it is trying to resolve*. For example, the constraint `C Int Bool` matches instances (A) and (B), and hence would be rejected; while `C Int Char` matches only (A) and hence (A) is chosen.

Notice that

- When matching, GHC takes no account of the context of the instance declaration (context1 etc).
- It is fine for there to be a *potential* of overlap (by including both declarations (A) and (B), say); an error is only reported if a particular constraint matches more than one.

See also *Overlapping instances* (page 538) for flags that loosen the instance resolution rules.

### 6.8.8.1 Relaxed rules for the instance head

#### TypeSynonymInstances

**Implied by**

*FlexibleInstances* (page 533)

**Since**

6.8.1

**Status**

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow definition of type class instances for type synonyms.

#### FlexibleInstances

**Implies**

*TypeSynonymInstances* (page 533)

**Since**

6.8.1

**Status**

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow definition of type class instances with arbitrary nested types in the instance head.

In Haskell 98 the head of an instance declaration must be of the form `C (T a1 ... an)`, where `C` is the class, `T` is a data type constructor, and the `a1 ... an` are distinct type variables. In the case of multi-parameter type classes, this rule applies to each parameter of the instance head (Arguably it should be okay if just one has this form and the others are type variables, but that's the rules at the moment).

GHC relaxes this rule in two ways:

- With the *TypeSynonymInstances* (page 533) extension, instance heads may use type synonyms. As always, using a type synonym is just shorthand for writing the RHS of the type synonym definition. For example:

```
type Point a = (a,a)
instance C (Point a) where ...
```

is legal. The instance declaration is equivalent to

```
instance C (a,a) where ...
```

As always, type synonyms must be fully applied. You cannot, for example, write:

```
instance Monad Point where ...
```

- The *FlexibleInstances* (page 533) extension allows the head of the instance declaration to mention arbitrary nested types. For example, this becomes a legal instance declaration

```
instance C (Maybe Int) where ...
```

See also the *rules on overlap* (page 538).

The *FlexibleInstances* (page 533) extension implies *TypeSynonymInstances* (page 533).

However, the instance declaration must still conform to the rules for instance termination: see *Instance termination rules* (page 535).

### 6.8.8.2 Formal syntax for instance declaration types

The top of an instance declaration only permits very specific forms of types. To make more precise what forms of types are or are not permitted, we provide a BNF-style grammar for the tops of instance declarations below.

```
inst_top ::= 'instance' opt_forall opt_ctxt inst_head opt_where

opt_forall ::= <empty>
            | 'forall' tv_bndrs '.'

tv_bndrs ::= <empty>
            | tv_bndr tv_bndrs

tv_bndr  ::= tyvar
            | '(' tyvar ':' ctype ')'

opt_ctxt ::= <empty>
            | btype '=>'
            | '(' ctxt ')' '=>'

ctxt ::= ctype
      | ctype ',' ctxt

inst_head ::= '(' inst_head ')'
           | prefix_cls_tycon arg_types
           | arg_type infix_cls_tycon arg_type
           | '(' arg_type infix_cls_tycon arg_type ')' arg_types

arg_types ::= <empty>
           | arg_type arg_types

opt_where ::= <empty>
           | 'where'
```

Where:

- *btype* is a type that is not allowed to have an outermost *forall*/*=>* unless it is surrounded by parentheses. For example, *forall a. a* and *Eq a => a* are not legal *btypes*, but *(forall a. a)* and *(Eq a => a)* are legal.
- *ctype* is a *btype* that has no restrictions on an outermost *forall*/*=>*, so *forall a. a* and *Eq a => a* are legal *ctypes*.
- *arg\_type* is a type that is not allowed to have *foralls* or *=>s*
- *prefix\_cls\_tycon* is a class type constructor written prefix (e.g., *Show* or *(&&&)*), while *infix\_cls\_tycon* is a class type constructor written infix (e.g., *\`Show\`* or *&&&*).



This is a simplified grammar that does not fully delve into all of the implementation details of GHC's parser (such as the placement of Haddock comments), but it is sufficient to attain an understanding of what is syntactically allowed. Some further various observations about this grammar:

- Instance declarations are not allowed to be declared with nested forall's or =>s. For example, this would be rejected:

```
instance forall a. forall b. C (Either a b) where ...
```

As a result, `inst_top` puts all of its quantification and constraints up front with `opt_forall` and `opt_ctxt`.

- Furthermore, instance declarations types do not permit outermost parentheses that surround the `opt_forall` or `opt_ctxt`, if at least one of them are used. For example, `instance (forall a. C a)` would be rejected, since GHC would treat the `forall` as being nested.

Note that it is acceptable to use parentheses in a `inst_head`. For instance, `instance (C a)` is accepted, as is `instance forall a. (C a)`.

### 6.8.8.3 Instance termination rules

Regardless of *FlexibleInstances* (page 533) and *FlexibleContexts* (page 552), instance declarations must conform to some rules that ensure that instance resolution will terminate. The restrictions can be lifted with *UndecidableInstances* (page 537) (see *Undecidable instances and loopy superclasses* (page 537)).

The rules are these:

1. The Paterson Conditions: for each class constraint  $(C\ t_1 \dots t_n)$  in the context
  1. No type variable has more occurrences in the constraint than in the head
  2. The constraint has fewer constructors and variables (taken together and counting repetitions) than the head
  3. The constraint mentions no type functions. A type function application can in principle expand to a type of arbitrary size, and so are rejected out of hand

If these three conditions hold we say that the constraint  $(C\ t_1 \dots t_n)$  is **Paterson-smaller** than the instance head.

2. The Coverage Condition. For each functional dependency,  $\langle tvs \rangle_{\text{left}} \rightarrow \langle tvs \rangle_{\text{right}}$ , of the class, every type variable in  $S(\langle tvs \rangle_{\text{right}})$  must appear in  $S(\langle tvs \rangle_{\text{left}})$ , where  $S$  is the substitution mapping each type variable in the class declaration to the corresponding type in the instance head.

These restrictions ensure that instance resolution terminates: each reduction step makes the problem smaller by at least one constructor. You can find lots of background material about the reason for these restrictions in the paper *Understanding functional dependencies via Constraint Handling Rules*.

For example, these are okay:

```
instance C Int [a]           -- Multiple parameters
instance Eq (S [a])         -- Structured type in head

-- Repeated type variable in head
```

(continues on next page)

(continued from previous page)

```
instance C4 a a => C4 [a] [a]
instance Stateful (ST s) (MutVar s)

    -- Head can consist of type variables only
instance C a
instance (Eq a, Show b) => C2 a b

    -- Non-type variables in context
instance Show (s a) => Show (Sized s a)
instance C2 Int a => C3 Bool [a]
instance C2 Int a => C3 [a] b
```

But these are not:

```
    -- Context assertion no smaller than head
instance C a => C a where ...
    -- (C b b) has more occurrences of b than the head
instance C b b => Foo [b] where ...
```

The same restrictions apply to instances generated by deriving clauses. Thus the following is accepted:

```
data MinHeap h a = H a (h a)
    deriving (Show)
```

because the derived instance

```
instance (Show a, Show (h a)) => Show (MinHeap h a)
```

conforms to the above rules.

The restrictions on functional dependencies (*Functional dependencies* (page 528)) are particularly troublesome. It is tempting to introduce type variables in the context that do not appear in the head, something that is excluded by the normal rules. For example:

```
class HasConverter a b | a -> b where
    convert :: a -> b

data Foo a = MkFoo a

instance (HasConverter a b, Show b) => Show (Foo a) where
    show (MkFoo value) = show (convert value)
```

This is dangerous territory, however. Here, for example, is a program that would make the typechecker loop:

```
class D a
class F a b | a->b
instance F [a] [[a]]
instance (D c, F a c) => D [a]    -- 'c' is not mentioned in the head
```

Similarly, it can be tempting to lift the coverage condition:

```
class Mul a b c | a b -> c where
  (.*) :: a -> b -> c

instance Mul Int Int Int where (.*) = (*)
instance Mul Int Float Float where x .*. y = fromIntegral x * y
instance Mul a b c => Mul a [b] [c] where x .*. v = map (x.*) v
```

The third instance declaration does not obey the coverage condition; and indeed the (somewhat strange) definition:

```
f = \ b x y -> if b then x .*. [y] else y
```

makes instance inference go into a loop, because it requires the constraint `(Mul a [b] b)`.

#### 6.8.8.4 Undecidable instances and loopy superclasses

##### UndecidableInstances

Since  
6.8.1

Permit definition of instances which may lead to type-checker non-termination.

The *UndecidableInstances* (page 537) extension lifts the restrictions on on instance declarations described in *Instance termination rules* (page 535). The *UndecidableInstances* (page 537) extension also lifts some of the restrictions imposed on type family instances; see *Decidability of type synonym instances* (page 392).

With *UndecidableInstances* (page 537) it is possible to create a superclass cycle, which leads to the program failing to terminate. To avoid this, GHC imposes rules on the way in which superclass constraints are satisfied in an instance declaration. These rules apply even when *UndecidableInstances* (page 537) is enabled. Consider:

```
class C a => D a where ...

instance Wombat [b] => D [b] where ...
```

When typechecking this instance declaration, GHC must ensure that D's superclass, `(C [b])` is satisfied. We say that `(C [b])` is a **Wanted superclass constraint** of the instance declaration.

If there is an instance `blah => C [b]`, which is often the case, GHC can use the instance declaration and all is well. But suppose there is no such instance, so GHC can only satisfy the Wanted `(C [b])` from the context of the instance, namely the Given constraint `(Wombat [b])`. Perhaps the declaration of `Wombat` looks like this:

```
class C a => Wombat a
```

So the Given `(Wombat [b])` has a superclass `(C [b])`, and it looks as if we can satisfy the Wanted `(C [b])` constraint from this superclass of `Wombat`. But it turns out that allowing this can lead to subtle looping dictionaries, and GHC prevents it.

The rule is this: **a Wanted superclass constraint can only be satisfied in one of these three ways:**

1. *Directly from the context of the instance declaration.* For example, if the declaration looked like this:

```
instance (Wombat [b], C [b]) => D [b] where ...
```

we could satisfy the Wanted (C [b]) from the Given (C [b]).

2. *Using another instance declaration.* For example, if we had:

```
instance C b => C [b] where ...
```

we can satisfy the Wanted superclass constraint (C [b]) using this instance, reducing it to the Wanted constraint (C b) (which still has to be solved).

3. *Using the immediate superclass of a Given constraint X that is Paterson-smaller than the head of the instance declaration.* The rules for Paterson-smaller are precisely those described in [Instance termination rules](#) (page 535):

- No type variable can occur more often in X than in the instance head.
- X must have fewer type constructors and variables (taken together and counting repetitions) than the instance head.
- X must mention no type functions.

Rule (3) is the tricky one. Here is an example, taken from GHC's own source code:

```
class Ord r => UserOfRegs r a where ...
(i1) instance UserOfRegs r a => UserOfRegs r (Maybe a) where
(i2) instance (Ord r, UserOfRegs r CmmReg) => UserOfRegs r CmmExpr where
```

For (i1) we can get the (Ord r) superclass by selection from (UserOfRegs r a), since it (i.e. UserOfRegs r a) is Paterson-smaller than the head of the instance declaration, namely (UserOfRegs r (Maybe a)).

But for (i2) that isn't the case: (UserOfRegs r CmmReg) is not Paterson-smaller than the head of the instance (UserOfRegs r CmmExpr), so we can't use the superclasses of the former. Hence we must instead add an explicit, and perhaps surprising, (Ord r) argument to the instance declaration.

This fix, of simply adding an apparently-redundant constraint to the context of an instance declaration, is robust: it always fixes the problem. (We considered adding it automatically, but decided that it was better be explicit.)

Fixing this subtle superclass cycle has a long history; if you are interested, read [Note \[Recursive superclasses\]](#) and [Note \[Solving superclass constraints\]](#) in `GHC.Tc.TyCl.Instance`.

### 6.8.8.5 Overlapping instances

#### OverlappingInstances

**Since**

6.8.1

**Status**

Deprecated

Deprecated extension to weaken checks intended to ensure instance resolution termination.

## IncoherentInstances

### Since

6.8.1

### Status

Deprecated

Deprecated extension to weaken checks intended to ensure instance resolution termination.

In general, as discussed in [Instance declarations and resolution](#) (page 532), *GHC requires that it be unambiguous which instance declaration should be used to resolve a type-class constraint*. GHC also provides a way to loosen the instance resolution, by allowing more than one instance to match, *provided there is a most specific one*. Moreover, it can be loosened further, by allowing more than one instance to match irrespective of whether there is a most specific one. This section gives the details.

To control the choice of instance, it is possible to specify the overlap behavior for individual instances with a pragma, written immediately after the `instance` keyword. The pragma may be one of: `{-# OVERLAPPING #-}`, `{-# OVERLAPPABLE #-}`, `{-# OVERLAPS #-}`, or `{-# INCOHERENT #-}`.

The matching behaviour is also influenced by two module-level language extension flags: [OverlappingInstances](#) (page 538) and [IncoherentInstances](#) (page 538). These extensions are now deprecated (since GHC 7.10) in favour of the fine-grained per-instance pragmas.

A more precise specification is as follows. The willingness to be overlapped or incoherent is a property of the *instance declaration* itself, controlled as follows:

- An instance is *incoherent* if: it has an `INCOHERENT` pragma; or if the instance has no pragma and it appears in a module compiled with [IncoherentInstances](#) (page 538).
- An instance is *overlappable* if: it has an `OVERLAPPABLE` or `OVERLAPS` pragma; or if the instance has no pragma and it appears in a module compiled with [OverlappingInstances](#) (page 538); or if the instance is incoherent.
- An instance is *overlapping* if: it has an `OVERLAPPING` or `OVERLAPS` pragma; or if the instance has no pragma and it appears in a module compiled with [OverlappingInstances](#) (page 538); or if the instance is incoherent.

Now suppose that, in some client module, we are searching for an instance of the *target constraint* `(C ty1 .. tyn)`. The search works like this:

- Find all instances *I* that *match* the target constraint; that is, the target constraint is a substitution instance of *I*. These instance declarations are the *candidates*.
- If no candidates remain, the search fails
- Eliminate any candidate *IX* for which there is another candidate *IY* such that both of the following hold:
  - *IY* is strictly more specific than *IX*. That is, *IY* is a substitution instance of *IX* but not vice versa.
  - *IX* is *overlappable* or *IY* is *overlapping*. (This “or” design, rather than an “and” design, allows a client to deliberately override an instance from a library, without requiring a change to the library.)
- If all the remaining candidates are incoherent, the search succeeds, returning an arbitrary surviving candidate.
- If more than one non-incoherent candidate remains, the search fails.

- Otherwise there is exactly one non-incoherent candidate; call it the “prime candidate”.
- Now find all instances, or in-scope given constraints, that *unify* with the target constraint, but do not *match* it. Such non-candidate instances might match when the target constraint is further instantiated. If all of them are incoherent top-level instances, the search succeeds, returning the prime candidate. Otherwise the search fails.

Notice that these rules are not influenced by flag settings in the client module, where the instances are *used*. These rules make it possible for a library author to design a library that relies on overlapping instances without the client having to know.

Errors are reported *lazily* (when attempting to solve a constraint), rather than *eagerly* (when the instances themselves are defined). Consider, for example

```
instance C Int  b where ..
instance C a Bool where ..
```

These potentially overlap, but GHC will not complain about the instance declarations themselves, regardless of flag settings. If we later try to solve the constraint (C Int Char) then only the first instance matches, and all is well. Similarly with (C Bool Bool). But if we try to solve (C Int Bool), both instances match and an error is reported.

As a more substantial example of the rules in action, consider

```
instance {-# OVERLAPPABLE #-} context1 => C Int b      where ... -- (A)
instance {-# OVERLAPPABLE #-} context2 => C a Bool  where ... -- (B)
instance {-# OVERLAPPABLE #-} context3 => C a [b]    where ... -- (C)
instance {-# OVERLAPPING  #-} context4 => C Int [Int] where ... -- (D)
```

(These all need *FlexibleInstances* (page 533).) Now suppose that the type inference engine needs to solve the constraint C Int [Int]. This constraint matches instances (A), (C) and (D), but the last is more specific, and hence is chosen.

If (D) did not exist then (A) and (C) would still be matched, but neither is most specific. In that case, the program would be rejected, unless *IncoherentInstances* (page 538) is enabled, in which case it would be accepted and (A) or (C) would be chosen arbitrarily.

An instance declaration is *more specific* than another iff the head of former is a substitution instance of the latter. For example (D) is “more specific” than (C) because you can get from (C) to (D) by substituting a := Int and b := Int.

The final bullet (about unifying instances) makes GHC conservative about committing to an overlapping instance. For example:

```
f :: [b] -> [b]
f x = ...
```

Suppose that from the RHS of f we get the constraint C b [b]. But GHC does not commit to instance (C), because in a particular call of f, b might be instantiated to Int, in which case instance (D) would be more specific still. So GHC rejects the program.

If, however, you enable the extension *IncoherentInstances* (page 538) when compiling the module that contains (D), GHC will instead pick (C), without complaining about the problem of subsequent instantiations.

Notice that we gave a type signature to f, so GHC had to *check* that f has the specified type. Suppose instead we do not give a type signature, asking GHC to *infer* it instead. In this case, GHC will refrain from simplifying the constraint C Int [b] (for the same reason as before) but, rather than rejecting the program, it will infer the type

```
f :: C b [b] => [b] -> [b]
```

That postpones the question of which instance to pick to the call site for `f` by which time more is known about the type `b`. You will need the *FlexibleContexts* (page 552) extension.

Exactly the same situation can arise in instance declarations themselves. Suppose we have

```
class Foo a where
  f :: a -> a
instance Foo [b] where
  f x = ...
```

and, as before, the constraint `C Int [b]` arises from `f`'s right hand side. GHC will reject the instance, complaining as before that it does not know how to resolve the constraint `C Int [b]`, because it matches more than one instance declaration. The solution is to postpone the choice by adding the constraint to the context of the instance declaration, thus:

```
instance C Int [b] => Foo [b] where
  f x = ...
```

(You need *FlexibleContexts* (page 552) to do this.)

In the unification check in the final bullet, GHC also uses the “in-scope given constraints”. Consider for example

```
instance C a Int

g :: forall b c. C b Int => blah
g = ...needs (C c Int)...
```

Here GHC will not solve the constraint `(C c Int)` from the top-level instance, because a particular call of `g` might instantiate both `b` and `c` to the same type, which would allow the constraint to be solved in a different way. This latter restriction is principally to make the constraint-solver complete. (Interested folk can read Note [Instance and Given overlap] in `TcInteract`.) It is easy to avoid: in a type signature avoid a constraint that matches a top-level instance. The flag *-Wsimplifiable-class-constraints* (page 114) warns about such signatures.

**Warning:** Overlapping instances must be used with care. They can give rise to incoherence (i.e. different instance choices are made in different parts of the program) even without *IncoherentInstances* (page 538). Consider:

```
{-# LANGUAGE OverlappingInstances #-}
module Help where

  class MyShow a where
    myshow :: a -> String

  instance MyShow a => MyShow [a] where
    myshow xs = concatMap myshow xs

  showHelp :: MyShow a => [a] -> String
  showHelp xs = myshow xs

{-# LANGUAGE FlexibleInstances, OverlappingInstances #-}
```

```

module Main where
  import Help

  data T = MkT

  instance MyShow T where
    myshow x = "Used generic instance"

  instance MyShow [T] where
    myshow xs = "Used more specific instance"

  main = do { print (myshow [MkT]); print (showHelp [MkT]) }

```

In function `showHelp` GHC sees no overlapping instances, and so uses the `MyShow [a]` instance without complaint. In the call to `myshow` in `main`, GHC resolves the `MyShow [T]` constraint using the overlapping instance declaration in module `Main`. As a result, the program prints

```

"Used more specific instance"
"Used generic instance"

```

(An alternative possible behaviour, not currently implemented, would be to reject module `Help` on the grounds that a later instance declaration might overlap the local one.)

#### 6.8.8.6 Instance signatures: type signatures in instance declarations

##### InstanceSigs

###### Since

7.6.1

###### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow type signatures for members in instance definitions.

The *InstanceSigs* (page 542) extension allows users to give type signatures to the class methods in a class instance declaration. For example:

```

data T a = MkT a a
instance Eq a => Eq (T a) where
  (==) :: T a -> T a -> Bool    -- The instance signature
  (==) (MkT x1 x2) (MkTy y1 y2) = x1==y1 && x2==y2

```

Some details:

- The type signature in the instance declaration must be more polymorphic than (or the same as) the one in the class declaration, instantiated with the instance type. For example, this is fine:

```

instance Eq a => Eq (T a) where
  (==) :: forall b. b -> b -> Bool
  (==) x y = True

```

Here the signature in the instance declaration is more polymorphic than that required by the instantiated class method.



Note that, to check that the instance signature is more polymorphic, GHC performs a sub-type check, which can solve constraints using available top-level instances. This means that the following instance signature is accepted:

```
instance Eq (T Int) where
  (==) :: Eq Int => T Int -> T Int -> Bool
  (==) (MkT x1 _) (MkT y1 _) = x1 == y1
```

The `Eq Int` constraint in the instance signature will be solved by the top-level `Eq Int` instance, from which it follows that the instance signature is indeed as general as the instantiated class method type `T Int -> T Int -> Bool`.

- The code for the method in the instance declaration is typechecked against the type signature supplied in the instance declaration, as you would expect. So if the instance signature is more polymorphic than required, the code must be too.
- The instance signature is purely local to the class instance declaration. It only affects the typechecking of the method in the instance; it does not affect anything outside the class instance. In this way, it is similar to an inline type signature:

```
instance Eq a => Eq (T a) where
  (==) = (\ x y -> True) :: forall b. b -> b -> Bool
```

In particular, adding constraints such as *HasCallStack* to the instance signature will not have an effect; they need to be added to the class instead.

- One stylistic reason for wanting to write a type signature is simple documentation. Another is that you may want to bring scoped type variables into scope. For example:

```
class C a where
  foo :: b -> a -> (a, [b])

instance C a => C (T a) where
  foo :: forall b. b -> T a -> (T a, [b])
  foo x (T y) = (T y, xs)
    where
      xs :: [b]
      xs = [x,x,x]
```

Provided that you also specify *ScopedTypeVariables* (page 565) (*Lexically scoped type variables* (page 565)), the `forall b` scopes over the definition of `foo`, and in particular over the type signature for `xs`.

## 6.9 Literals

### 6.9.1 Negative literals

#### NegativeLiterals

Since

7.8.1

Enable negative numeric literals.

The literal `-123` is, according to Haskell98 and Haskell 2010, two tokens, a unary minus `(-)` and the number `123`, and is desugared as `negate (fromInteger 123)`. The language extension [NegativeLiterals](#) (page 543) causes it to be treated as a single token and desugared as `fromInteger (-123)`.

This can be useful when the positive and negative range of a numeric data type don't match up. For example, in 8-bit arithmetic `-128` is representable, but `+128` is not. So `negate (fromInteger 128)` will elicit an unexpected integer-literal-overflow message.

Whitespace can be inserted, as in `- 123`, to force interpretation as two tokens.

In 9.0, the behavior of this extension changed, and now we require that a negative literal must not be preceded by a closing token (see [GHC Proposal #229](#) for the definition of a closing token). In other words, we parse `f -123` as `f (-123)`, but `x-123` as `(-) x 123`. Before this amendment, [NegativeLiterals](#) (page 543) caused `x-123` to be parsed as `x(-123)`.

[NegativeLiterals](#) (page 543) is a subset of [LexicalNegation](#) (page 362). That is, enabling both of those extensions has the same effect as enabling [LexicalNegation](#) (page 362) alone.

## 6.9.2 Binary integer literals

### BinaryLiterals

**Since**

7.10.1

**Status**

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow the use of binary notation in integer literals.

Haskell 2010 and Haskell 98 allows for integer literals to be given in decimal, octal (prefixed by `0o` or `0O`), or hexadecimal notation (prefixed by `0x` or `0X`).

The language extension [BinaryLiterals](#) (page 544) adds support for expressing integer literals in binary notation with the prefix `0b` or `0B`. For instance, the binary integer literal `0b11001001` will be desugared into `fromInteger 201` when [BinaryLiterals](#) (page 544) is enabled.

## 6.9.3 Hexadecimal floating point literals

### HexFloatLiterals

**Since**

8.4.1

**Status**

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow writing floating point literals using hexadecimal notation.

The hexadecimal notation for floating point literals is useful when you need to specify floating point constants precisely, as the literal notation corresponds closely to the underlying bit-encoding of the number.

In this notation floating point numbers are written using hexadecimal digits, and so the digits are interpreted using base 16, rather than the usual 10. This means that digits left of the decimal point correspond to positive powers of 16, while the ones to the right correspond to negative ones.

You may also write an explicit exponent, which is similar to the exponent in decimal notation with the following differences:

- the exponent begins with `p` instead of `e`
- the exponent is written in base 10 (**not** 16)
- the base of the exponent is 2 (**not** 16).

In terms of the underlying bit encoding, each hexadecimal digit corresponds to 4 bits, and you may think of the exponent as “moving” the floating point by one bit left (negative) or right (positive). Here are some examples:

- `0x0.1` is the same as `1/16`
- `0x0.01` is the same as `1/256`
- `0xF.FF` is the same as `15 + 15/16 + 15/256`
- `0x0.1p4` is the same as `1`
- `0x0.1p-4` is the same as `1/256`
- `0x0.1p12` is the same as `256`

## 6.9.4 Fractional looking integer literals

### **NumDecimals**

#### **Since**

7.8.1

Allow the use of scientific notation style borrowed from floating-point literal syntax for integral types.

Haskell 2010 and Haskell 98 define floating literals with the syntax `1.2e6`, resembling scientific notation. These literals have the type `Fractional a => a`.

The language extension *NumDecimals* (page 545) allows you to also use the scientific notation and floating point literal syntax for instances of `Num`, and have values like `1.2e6 :: Num a => a` and `5e10 :: Num a => a`. This applies only to literals that really turn out to have integral values. For example `1.23e1 :: Fractional a => a` since `1.23e1 == 12.3`, however `1.23e2 :: Num a => a` as `1.23e2 == 123`.

Integral literals written using scientific notation will be desugared using `fromInteger`, whereas any literals which aren't integral will be desugared using `fromRational` as usual.

Note that regular floating point literals (without exponents) will also be desugared via `fromInteger` and assigned type `Num a => a` if they represent an integral value. For example `1.0 :: Num a => a`, but `1.1 :: Fractional a => a`.

## 6.9.5 Sized primitive literal syntax

### ExtendedLiterals

#### Since

9.8.1

Allows defining unboxed numeric primitive values through `#Type` suffixes on numeric literals e.g. `0xFF#Word8 :: Word8#`.

The *MagickHash* (page 321) extension enables some new literals, including `3# :: Int#`, `3## :: Word#`. This does not extend to all unboxed values. For example, there is no literal syntax for `Word8#`: you must write something such as `wordToWord8 (3## :: Word#) :: Word8#`.

*ExtendedLiterals* (page 546) enables further syntax for defining primitive numeric literals. Suffix any Haskell integer lexeme with a hash sign `#` followed by a primitive numeric type (without its hash suffix) to obtain a value of that type. For example, `0xFF#Word8 :: Word8#`. There must be no spaces between the parts of the literal.

The primitive numeric types allowed are:

- `Int8#`
- `Int16#`
- `Int32#`
- `Int64#`
- `Int#`
- `Word8#`
- `Word16#`
- `Word32#`
- `Word64#`
- `Word#`

All types permit any nonnegative Haskell integer lexeme, e.g. `70`, `0x2A`, `0o1276`, `0b1010` (with *BinaryLiterals* (page 544)). The signed `Int` types also permit negative integer lexemes. Defining a literal with a value that can't fit in its requested type will emit an overflow warning by default, the same as boxed numeric literals.

As with *MagickHash* (page 321), this extension does not bring anything into scope, nor change any semantics. The syntax only applies to numeric literals. You may want to import `GHC.Exts` (see *Unboxed types and primitive operations* (page 609)) to refer to the types of the literals you define.

## 6.9.6 Numeric underscores

### NumericUnderscores

#### Since

8.6.1

#### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow the use of underscores in numeric literals.

GHC allows for numeric literals to be given in decimal, octal, hexadecimal, binary, or float notation.

The language extension *NumericUnderscores* (page 546) adds support for expressing underscores in numeric literals. For instance, the numeric literal `1_000_000` will be parsed into `1000000` when *NumericUnderscores* (page 546) is enabled. That is, underscores in numeric literals are ignored when *NumericUnderscores* (page 546) is enabled. See also [#14473](#).

For example:

```
-- decimal
million    = 1_000_000
billion    = 1_000_000_000
lightspeed = 299_792_458
version    = 8_04_1
date       = 2017_12_31

-- hexadecimal
red_mask   = 0xff_00_00
size1G     = 0x3fff_ffff

-- binary
bit8th     = 0b01_0000_0000
packbits   = 0b1_11_01_0000_0_111
bigbits    = 0b1100_1011_1110_1111_0101_0011

-- float
pi         = 3.141_592_653_589_793
faraday    = 96_485.332_89
avogadro   = 6.022_140_857e+23

-- function
isUnderMillion = (< 1_000_000)

clip64M x
  | x > 0x3ff_ffff = 0x3ff_ffff
  | otherwise = x

test8bit x = (0b01_0000_0000 .&. x) /= 0
```

About validity:

```
x0 = 1_000_000    -- valid
x1 = 1__000000    -- valid
x2 = 1000000_     -- invalid
x3 = _1000000     -- invalid

e0 = 0.0001       -- valid
e1 = 0.000_1      -- valid
e2 = 0_.0001      -- invalid
e3 = _0.0001      -- invalid
e4 = 0._0001      -- invalid
e5 = 0.0001_      -- invalid

f0 = 1e+23        -- valid
```

(continues on next page)

(continued from previous page)

```

f1 = 1_e+23      -- valid
f2 = 1__e+23     -- valid
f3 = 1e_+23      -- invalid

g0 = 1e+23       -- valid
g1 = 1e+_23      -- invalid
g2 = 1e+23_      -- invalid

h0 = 0xffff      -- valid
h1 = 0xff_ff     -- valid
h2 = 0x_ffff     -- valid
h3 = 0x__ffff    -- valid
h4 = _0xffff     -- invalid

```

## 6.9.7 Overloaded string literals

### OverloadedStrings

Since  
6.8.1

Enable overloaded string literals (e.g. string literals desugared via the `IsString` class).

GHC supports *overloaded string literals*. Normally a string literal has type `String`, but with overloaded string literals enabled (with [OverloadedStrings](#) (page 548)) a string literal has type `(IsString a) => a`.

This means that the usual string syntax can be used, e.g., for `ByteString`, `Text`, and other variations of string like types. String literals behave very much like integer literals, i.e., they can be used in both expressions and patterns. If used in a pattern the literal will be replaced by an equality test, in the same way as an integer literal is.

The class `IsString` is defined as:

```

class IsString a where
  fromString :: String -> a

```

The only predefined instance is the obvious one to make strings work as usual:

```

instance IsString [Char] where
  fromString cs = cs

```

The class `IsString` is not in scope by default. If you want to mention it explicitly (for example, to give an instance declaration for it), you can import it from module `Data.String`.

Haskell's defaulting mechanism ([Haskell Report, Section 4.3.4](#)) is extended to cover string literals, when [OverloadedStrings](#) (page 548) is specified. Specifically:

- Each type in a default declaration must be an instance of `Num` or of `IsString`.
- If no default declaration is given, then it is just as if the module contained the declaration `default( Integer, Double, String)`.
- The standard defaulting rule is extended thus: defaulting applies when all the unresolved constraints involve standard classes or `IsString`; and at least one is a numeric class or `IsString`.

So, for example, the expression `length "foo"` will give rise to an ambiguous use of `IsString` `a0` which, because of the above rules, will default to `String`.

A small example:

```
module Main where

import Data.String( IsString(..) )

newtype MyString = MyString String deriving (Eq, Show)
instance IsString MyString where
    fromString = MyString

greet :: MyString -> MyString
greet "hello" = "world"
greet other = other

main = do
    print $ greet "hello"
    print $ greet "fool"
```

Note that deriving `Eq` is necessary for the pattern matching to work since it gets translated into an equality comparison.

## 6.9.8 Overloaded labels

### OverloadedLabels

Since  
8.0.1

Enable use of the `#foo` overloaded label syntax.

GHC supports *overloaded labels*, a form of identifier whose interpretation may depend both on its type and on its literal text. When the [OverloadedLabels](#) (page 549) extension is enabled, an overloaded label can be written with a prefix hash, for example `#foo`. The type of this expression is `IsLabel "foo" a => a`.

The class `IsLabel` is defined as:

```
class IsLabel (x :: Symbol) a where
    fromLabel :: a
```

This is rather similar to the class `IsString` (see [Overloaded string literals](#) (page 548)), but with an additional type parameter that makes the text of the label available as a type-level string (see [Type-Level Literals](#) (page 433)). Note that `fromLabel` had an extra `Proxy# x` argument in GHC 8.0, but this was removed in GHC 8.2 as a type application (see [Visible type application](#) (page 435)) can be used instead.

There are no predefined instances of this class. It is not in scope by default, but can be brought into scope by importing [GHC.OverloadedLabels](#). Unlike `IsString`, there are no special defaulting rules for `IsLabel`.

During typechecking, GHC will replace an occurrence of an overloaded label like `#foo` with `fromLabel @"foo"`. This will have some type `alpha` and require the solution of a class constraint `IsLabel "foo" alpha`.

The intention is for `IsLabel` to be used to support overloaded record fields and perhaps anonymous records. Thus, it may be given instances for base datatypes (in particular `(->)`) in the future.

If [RebindableSyntax](#) (page 339) is enabled, overloaded labels will be desugared using whatever `fromLabel` function is in scope, rather than always using `GHC.OverloadedLabels.fromLabel`.

When writing an overloaded label, there must be no space between the hash sign and the following identifier. The [MagicHash](#) (page 321) extension makes use of postfix hash signs; if [OverloadedLabels](#) (page 549) and [MagicHash](#) (page 321) are both enabled then `x#y` means `x# y`, but if only [OverloadedLabels](#) (page 549) is enabled then it means `x #y`. The [UnboxedTuples](#) (page 611) extension makes `#` a single lexeme, so when [UnboxedTuples](#) (page 611) is enabled you must write a space between an opening parenthesis and an overloaded label. To avoid confusion, you are strongly encouraged to put a space before the hash when using [OverloadedLabels](#) (page 549).

When using [OverloadedLabels](#) (page 549) (or other extensions that make use of hash signs) in a `.hsc` file (see [Writing Haskell interfaces to C code: hsc2hs](#) (page 761)), the hash signs must be doubled (write `##foo` instead of `#foo`) to avoid them being treated as `hsc2hs` directives.

Here is an extension of the record access example in [Type-Level Literals](#) (page 433) showing how an overloaded label can be used as a record selector:

```
{-# LANGUAGE DataKinds, KindSignatures, MultiParamTypeClasses,
      FunctionalDependencies, FlexibleInstances,
      OverloadedLabels, ScopedTypeVariables #-}

import GHC.OverloadedLabels (IsLabel(..))
import GHC.TypeLits (Symbol)

data Label (l :: Symbol) = Get

class Has a l b | a l -> b where
  from :: a -> Label l -> b

data Point = Point Int Int deriving Show

instance Has Point "x" Int where from (Point x _) _ = x
instance Has Point "y" Int where from (Point _ y) _ = y

instance Has a l b => IsLabel l (a -> b) where
  fromLabel x = from x (Get :: Label l)

example = #x (Point 1 2)
```

Since GHC 9.6, any non-empty double quoted string can be used as a label. The restriction that the label must be a valid identifier has also been lifted.

Examples of newly allowed syntax:

- Leading capital letters: `#Foo` equivalent to `getLabel @"Foo"`
- Numeric characters: `#3.14` equivalent to `getLabel @"3.14"`
- Arbitrary strings: `#"Hello, World!"` equivalent to `getLabel @"Hello, World!"`

Here is an example of the more permissive use of this extension, available since GHC 9.6:



```

{-# LANGUAGE DataKinds           #-}
{-# LANGUAGE MultiParamTypeClasses #-}
{-# LANGUAGE OverloadedLabels     #-}
{-# LANGUAGE MagicHash           #-}

import Data.Foldable (traverse_)
import Data.Proxy (Proxy(..))
import GHC.OverloadedLabels (IsLabel(..))
import GHC.TypeLits (KnownSymbol, symbolVal)
import GHC.Prim (Addr#)

instance KnownSymbol symbol => IsLabel symbol String where
    fromLabel = symbolVal (Proxy :: Proxy symbol)

(#) :: String -> Int -> String
(#) _ i = show i

f :: Addr# -> Int -> String
f _ i = show i

main :: IO ()
main = traverse_ putStrLn
    [ #a
    , #number17
    , #do
    , #type
    , #Foo
    , #3
    , #199.4
    , #17a23b
    , #f'a'
    , #'a'
    , #'
    , #'notTHSplice
    , #...
    , #привет
    , #□□□□□
    , #"3"
    , #":"
    , #"Foo"
    , #"The quick brown fox"
    , #"\\"
    , (++) #hello#world
    , (++) #"hello"#"world"
    , #"hello"# 1 -- equivalent to `(fromLabel @"hello") # 1`
    , f "hello"#2 -- equivalent to `f ("hello"# :: Addr#) 2`
    ]

```

See [GHC Proposal #170](#) for more details.

## 6.10 Constraints

### 6.10.1 Loosening restrictions on class contexts

#### FlexibleContexts

##### Since

6.8.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Remove the type-variable restriction on class contexts.

The [FlexibleContexts](#) (page 552) extension lifts the Haskell 98 restriction that the type-class constraints (anywhere they appear) must have the form *(class type-variable)* or *(class (type-variable type1 type2 ... typen))*. With [FlexibleContexts](#) (page 552) these type signatures are perfectly okay:

```
g :: Eq [a] => ...
g :: Ord (T a ()) => ...
```

This extension does not affect equality constraints in an instance context; they are permitted by [TypeFamilies](#) (page 384) or [GADTs](#) (page 380).

Note that [FlexibleContexts](#) (page 552) affects usages of class constraints, in type signatures and other contexts. In contrast, [FlexibleInstances](#) (page 533) loosens a similar restriction in place when declaring a new instance.

### 6.10.2 Equality constraints and Coercible constraint

#### 6.10.2.1 Equality constraints

A type context can include equality constraints of the form  $t1 \sim t2$ , which denote that the types  $t1$  and  $t2$  need to be the same. In the presence of type families, whether two types are equal cannot generally be decided locally. Hence, the contexts of function signatures may include equality constraints, as in the following example:

```
sumCollects :: (Collects c1, Collects c2, Elem c1 ~ Elem c2) => c1 -> c2 -> c2
```

where we require that the element type of  $c1$  and  $c2$  are the same. In general, the types  $t1$  and  $t2$  of an equality constraint may be arbitrary monotypes; i.e., they may not contain any quantifiers, independent of whether higher-rank types are otherwise enabled.

Equality constraints can also appear in class and instance contexts. The former enable a simple translation of programs using functional dependencies into programs using family synonyms instead. The general idea is to rewrite a class declaration of the form

```
class C a b | a -> b
```

to

```
class (F a ~ b) => C a b where
  type F a
```

That is, we represent every functional dependency (FD)  $a_1 \dots a_n \rightarrow b$  by an FD type family  $F\ a_1 \dots a_n$  and a superclass context equality  $F\ a_1 \dots a_n \sim b$ , essentially giving a name to the functional dependency. In class instances, we define the type instances of FD families in accordance with the class head. Method signatures are not affected by that process.

### 6.10.2.2 Heterogeneous equality

GHC also supports *kind-heterogeneous* equality, which relates two types of potentially different kinds. Heterogeneous equality is spelled `~~`. Here are the kinds of `~` and `~~` to better understand their difference:

```
(~)  :: forall k. k -> k -> Constraint
(~~) :: forall k1 k2. k1 -> k2 -> Constraint
```

Users will most likely want `~`, but `~~` is available if GHC cannot know, a priori, that the two types of interest have the same kind. Evidence that  $(a :: k_1) \sim (b :: k_2)$  tells GHC both that  $k_1$  and  $k_2$  are the same and that  $a$  and  $b$  are the same.

Because `~` is the more common equality relation, GHC prints out `~~` like `~` unless `-fprint-equality-relations` (page 89) is set.

### 6.10.2.3 Unlifted heterogeneous equality

Internal to GHC is yet a third equality relation (`~#`). It is heterogeneous (like `~~`) and is used only internally. It may appear in error messages and other output only when `-fprint-equality-relations` (page 89) is enabled.

### 6.10.2.4 The Coercible constraint

The constraint `Coercible t1 t2` is similar to  $t_1 \sim t_2$ , but denotes representational equality between  $t_1$  and  $t_2$  in the sense of Roles (*Roles* (page 467)). It is exported by `Data.Coerce`, which also contains the documentation. More details and discussion can be found in the paper “Safe Coercions”.

## 6.10.3 The Constraint kind

### ConstraintKinds

#### Since

7.4.1

#### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow types of kind `Constraint` to be used in contexts.

Normally, *constraints* (which appear in types to the left of the `=>` arrow) have a very restricted syntax. They can only be:

- Class constraints, e.g. `Show a`
- *Implicit parameter* (page 570) constraints, e.g. `?x::Int` (with the *ImplicitParams* (page 570) extension)

- *Equality constraints* (page 552), e.g. `a ~ Int` (with the *TypeFamilies* (page 384) or *GADTs* (page 380) extensions)

With the *ConstraintKinds* (page 553) extension, GHC becomes more liberal in what it accepts as constraints in your program. To be precise, with this flag any *type* of the new kind `Constraint` can be used as a constraint. The following things have kind `Constraint`:

- Anything which is already valid as a constraint without the flag: saturated applications to type classes, implicit parameter and equality constraints.
- Tuples, all of whose component types have kind `Constraint`. So for example the type `(Show a, Ord a)` is of kind `Constraint`.
- Anything whose form is not yet known, but the user has declared to have kind `Constraint` (for which they need to import it from `Data.Kind`). For example type `Foo (f :: Type -> Constraint) = forall b. f b => b -> b` is allowed.

Note, however, that the *TypeFamilies* (page 384) and *GADTs* (page 380) extensions also allow the manipulation of things with kind `Constraint`, without necessarily requiring the *ConstraintKinds* (page 553) extension:

```
-- With -XTypeFamilies -XNoConstraintKinds
type T :: Type -> (Type -> Constraint)
type family T a where
  T Int    = Num
  T Double = Floating

-- With -XGADTs -XNoConstraintKinds
type Dict :: Constraint -> Type
data Dict c where
  MkDict :: c => Dict c
```

With the *ConstraintKinds* (page 553) extension, constraints are just handled as types of a particular kind. This allows type constraint synonyms:

```
type Stringy a = (Read a, Show a)
foo :: Stringy a => a -> (String, String -> a)
foo x = (show x, read)
```

Presently, only standard constraints, tuples and type synonyms for those two sorts of constraint are permitted in instance contexts and superclasses (without extra flags). The reason is that permitting more general constraints can cause type checking to loop, as it would with these two programs:

```
type family Clsish u a
type instance Clsish () a = Cls a
class Clsish () a => Cls a where
```

```
class OkCls a where

type family OkClsish u a
type instance OkClsish () a = OkCls a
instance OkClsish () a => OkCls a where
```

You may write programs that use exotic sorts of constraints in instance contexts and superclasses, but to do so you must use *UndecidableInstances* (page 537) to signal that you don't mind if the type checker fails to terminate.

## 6.10.4 Quantified constraints

### QuantifiedConstraints

#### Implies

[ExplicitForAll](#) (page 560)

#### Since

8.6.1

Allow constraints to quantify over types.

The extension [QuantifiedConstraints](#) (page 555) introduces **quantified constraints**, which give a new level of expressiveness in constraints. For example, consider

```
data Rose f a = Branch a (f (Rose f a))

instance (Eq a, ???) => Eq (Rose f a)
  where
    (Branch x1 c1) == (Branch x2 c2)
      = x1==x2 && c1==c2
```

From the `x1==x2` we need `Eq a`, which is fine. From `c1==c2` we need `Eq (f (Rose f a))` which is *not* fine in Haskell today; we have no way to solve such a constraint.

[QuantifiedConstraints](#) (page 555) lets us write this

```
instance (Eq a, forall b. (Eq b) => Eq (f b))
  => Eq (Rose f a)
  where
    (Branch x1 c1) == (Branch x2 c2)
      = x1==x2 && c1==c2
```

Here, the quantified constraint `forall b. (Eq b) => Eq (f b)` behaves a bit like a local instance declaration, and makes the instance typeable.

The paper [Quantified class constraints](#) (by Bottu, Karachalias, Schrijvers, Oliveira, Wadler, Haskell Symposium 2017) describes this feature in technical detail, with examples, and so is a primary reference source for this feature.

#### 6.10.4.1 Motivation

Introducing quantified constraints offers two main benefits:

- Firstly, they enable terminating resolution where this was not possible before. Consider for instance the following instance declaration for the general rose datatype

```
data Rose f x = Rose x (f (Rose f x))

instance (Eq a, forall b. Eq b => Eq (f b)) => Eq (Rose f a) where
  (Rose x1 rs1) == (Rose x2 rs2) = x1 == x2 && rs1 == rs2
```

This extension allows us to write constraints of the form `forall b. Eq b => Eq (f b)`, which is needed to solve the `Eq (f (Rose f x))` constraint arising from the second usage of the `(==)` method.

- Secondly, quantified constraints allow for more concise and precise specifications. As an example, consider the MTL type class for monad transformers:

```
class Trans t where
  lift :: Monad m => m a -> (t m) a
```

The developer knows that a monad transformer takes a monad `m` into a new monad `t m`. But this property is not formally specified in the above declaration. This omission becomes an issue when defining monad transformer composition:

```
newtype (t1 * t2) m a = C { runC :: t1 (t2 m) a }

instance (Trans t1, Trans t2) => Trans (t1 * t2) where
  lift = C . lift . lift
```

The goal here is to lift from monad `m` to `t2 m` and then lift this again into `t1 (t2 m)`. However, this second lift can only be accepted when `(t2 m)` is a monad and there is no way of establishing that this fact universally holds.

Quantified constraints enable this property to be made explicit in the `Trans` class declaration:

```
class (forall m. Monad m => Monad (t m)) => Trans t where
  lift :: Monad m => m a -> (t m) a
```

This idea is very old; see Section 7 of [Derivable type classes](#).

#### 6.10.4.2 Syntax changes

[Haskell 2010](#) defines a context (the bit to the left of `=>` in a type) like this

```
context ::= class
          | ( class1, ..., classn )

class ::= qtycls tyvar
        | qtycls (tyvar atype1 ... atypen)
```

We extend `class` (warning: this is a rather confusingly named non-terminal symbol) with two extra forms, namely precisely what can appear in an instance declaration

```
class ::= ...
        | [context =>] qtycls inst
        | [context =>] tyvar inst
```

The definition of `inst` is unchanged from the Haskell Report (roughly, just a type). The `context =>` part is optional. That is the only syntactic change to the language.

Notes:

- Where GHC allows extensions in instance declarations we allow exactly the same extensions to this new form of `class`. Specifically, with [ExplicitForAll](#) (page 560) and [MultiParamTypeClasses](#) (page 522) the syntax becomes

```
class ::= ...
        | [forall tyvars .] [context =>] qtycls inst1 ... instn
        | [forall tyvars .] [context =>] tyvar inst1 ... instn
```

Note that an explicit `forall` is often absolutely essential. Consider the rose-tree example

```
instance (Eq a, forall b. Eq b => Eq (f b)) => Eq (Rose f a) where ...
```

Without the `forall b`, the type variable `b` would be quantified over the whole instance declaration, which is not what is intended.

- One of these new quantified constraints can appear anywhere that any other constraint can, not just in instance declarations. Notably, it can appear in a type signature for a value binding, data constructor, or expression. For example

```
f :: (Eq a, forall b. Eq b => Eq (f b)) => Rose f a -> Rose f a -> Bool
f t1 t2 = not (t1 == t2)
```

- The form with a type variable at the head allows this:

```
instance (forall xx. c (Free c xx)) => Monad (Free c) where
  Free f >=> g = f g
```

See [Iceland Jack's summary](#). The key point is that the bit to the right of the `=>` may be headed by a type *variable* (`c` in this case), rather than a class. It should not be one of the `forall'd` variables, though.

(NB: this goes beyond what is described in [the paper](#), but does not seem to introduce any new technical difficulties.)

### 6.10.4.3 Typing changes

See [the paper](#).

### 6.10.4.4 Superclasses

Suppose we have:

```
f :: forall m. (forall a. Ord a => Ord (m a)) => m Int -> Bool
f x = x == x
```

From the `x==x` we need an `Eq (m Int)` constraint, but the context only gives us a way to figure out `Ord (m a)` constraints. But from the given constraint `forall a. Ord a => Ord (m a)` we derive a second given constraint `forall a. Ord a => Eq (m a)`, and from that we can readily solve `Eq (m Int)`. This process is very similar to the way that superclasses already work: given an `Ord a` constraint we derive a second given `Eq a` constraint.

NB: This treatment of superclasses goes beyond [the paper](#), but is specifically desired by users.

### 6.10.4.5 Overlap

Quantified constraints can potentially lead to overlapping local axioms. Consider for instance the following example:

```
class A a where {}
class B a where {}
class C a where {}
class (A a => C a) => D a where {}
class (B a => C a) => E a where {}
```

(continues on next page)

(continued from previous page)

```
class C a => F a where {}
instance (B a, D a, E a) => F a where {}
```

When type checking the instance declaration for `F a`, we need to check that the superclass `C` of `F` holds. We thus try to entail the constraint `C a` under the theory containing:

- The instance axioms : `(B a, D a, E a) => F a`
- The local axioms from the instance context : `B a`, `D a` and `E a`
- The closure of the superclass relation over these local axioms : `A a => C a` and `B a => C a`

However, the `A a => C a` and `B a => C a` axioms both match the wanted constraint `C a`. There are several possible approaches for handling these overlapping local axioms:

- **Pick first.** We can simply select the **first matching axiom** we encounter. In the above example, this would be `A a => C a`. We'd then need to entail `A a`, for which we have no matching axioms available, causing the above program to be rejected.

But suppose we made a slight adjustment to the order of the instance context, putting `E a` before `D a`:

```
instance (B a, E a, D a) => F a where {}
```

The first matching axiom we encounter while entailing `C a`, is `B a => C a`. We have a local axiom `B a` available, so now the program is suddenly accepted. This behaviour, where the ordering of an instance context determines whether or not the program is accepted, seems rather confusing for the developer.

- **Reject if in doubt.** An alternative approach would be to check for overlapping axioms, when solving a constraint. When multiple matching axioms are discovered, we **reject the program**. This approach is a bit conservative, in that it may reject working programs. But it seems much more transparent towards the developer, who can be presented with a clear message, explaining why the program is rejected.
- **Backtracking.** Lastly, a simple form of **backtracking** could be introduced. We simply select the first matching axiom we encounter and when the entailment fails, we backtrack and look for other axioms that might match the wanted constraint.

This seems the most intuitive and transparent approach towards the developer, who no longer needs to concern himself with the fact that his code might contain overlapping axioms or with the ordering of his instance contexts. But backtracking would apply equally to ordinary instance selection (in the presence of overlapping instances), so it is a much more pervasive change, with substantial consequences for the type inference engine.

GHC adopts **Reject if in doubt** for now. We can see how painful it is in practice, and try something more ambitious if necessary.



#### 6.10.4.6 Instance lookup

In the light of the overlap decision, instance lookup works like this when trying to solve a class constraint  $C\ t$

1. First see if there is a given un-quantified constraint  $C\ t$ . If so, use it to solve the constraint.
2. If not, look at all the available given quantified constraints; if exactly one matches  $C\ t$ , choose it; if more than one matches, report an error.
3. If no quantified constraints match, look up in the global instances, as described in *Instance declarations and resolution* (page 532) and *Overlapping instances* (page 538).

#### 6.10.4.7 Termination

GHC uses the *Paterson Conditions* (page 535) to ensure that instance resolution terminates. How are those rules modified for quantified constraints? In two ways.

- Each quantified constraint, taken by itself, must satisfy the termination rules for an instance declaration.
- After “for each class constraint  $(C\ t_1 \dots t_n)$ ”, add “or each quantified constraint (forall as. context  $\Rightarrow C\ t_1 \dots t_n$ )”

Note that the second item only at the *head* of the quantified constraint, not its context. Reason: the head is the new goal that has to be solved if we use the instance declaration.

Of course, UndecidableInstances lifts the Paterson Conditions, as now.

#### 6.10.4.8 Coherence

Although quantified constraints are a little like local instance declarations, they differ in one big way: the local instances are written by the compiler, not the user, and hence cannot introduce incoherence. Consider

```
f :: (forall a. Eq a => Eq (f a)) => f b -> f Bool
f x = ...rhs...
```

In `...rhs...` there is, in effect a local instance for `Eq (f a)` for any `a`. But at a call site for `f` the compiler itself produces evidence to pass to `f`. For example, if we called `f Nothing`, then `f` is `Maybe` and the compiler must prove (at the call site) that `forall a. Eq a => Eq (Maybe a)` holds. It can do this easily, by appealing to the existing instance declaration for `Eq (Maybe a)`.

In short, quantified constraints do not introduce incoherence.

## 6.11 Type signatures

### 6.11.1 Explicit universal quantification (forall)

#### ExplicitForAll

**Implied by**

[ScopedTypeVariables](#) (page 565), [LiberalTypeSynonyms](#) (page 369),  
[RankNTypes](#) (page 451), [ExistentialQuantification](#) (page 370)

**Since**

6.12.1

**Status**

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow use of the `forall` keyword in places where universal quantification is implicit.

Haskell type signatures are implicitly quantified. When the language option [ExplicitForAll](#) (page 560) is used, the keyword `forall` allows us to say exactly what this means. For example:

```
g :: b -> b
```

means this:

```
g :: forall b. (b -> b)
```

The two are treated identically, except that the latter may bring type variables into scope (see [Lexically scoped type variables](#) (page 565)).

This extension also enables explicit quantification of type and kind variables in [Data instance declarations](#) (page 386), [Type instance declarations](#) (page 389), [Closed type families](#) (page 390), [Associated instances](#) (page 395), and [Rewrite rules](#) (page 645).

Notes:

- As well as in type signatures, you can also use an explicit `forall` in an instance declaration:

```
instance forall a. Eq a => Eq [a] where ...
```

Note that the use of `foralls` in instance declarations is somewhat restricted in comparison to other types. For example, instance declarations are not allowed to contain nested `foralls`. See [Formal syntax for instance declaration types](#) (page 534) for more information.

- If the [-Wunused-foralls](#) (page 118) flag is enabled, a warning will be emitted when you write a type variable in an explicit `forall` statement that is otherwise unused. For instance:

```
g :: forall a b. (b -> b)
```

would warn about the unused type variable `a`.

### 6.11.1.1 The forall-or-nothing rule

In certain forms of types, type variables obey what is known as the “forall-or-nothing” rule: if a type has an outermost, explicit, invisible forall, then all of the type variables in the type must be explicitly quantified. These two examples illustrate how the rule works:

```
f :: forall a b. a -> b -> b      -- OK, `a` and `b` are explicitly bound
g :: forall a. a -> forall b. b -> b -- OK, `a` and `b` are explicitly bound
h :: forall a. a -> b -> b      -- Rejected, `b` is not in scope
```

The type signatures for f, g, and h all begin with an outermost invisible forall, so every type variable in these signatures must be explicitly bound by a forall. Both f and g obey the forall-or-nothing rule, since they explicitly quantify a and b. On the other hand, h does not explicitly quantify b, so GHC will reject its type signature for being improperly scoped.

In places where the forall-or-nothing rule takes effect, if a type does *not* have an outermost invisible forall, then any type variables that are not explicitly bound by a forall become implicitly quantified. For example:

```
i :: a -> b -> b      -- `a` and `b` are implicitly quantified
j :: a -> forall b. b -> b -- `a` is implicitly quantified
k :: (forall a. a -> b -> b) -- `b` is implicitly quantified
type L :: forall a -> b -> b -- `b` is implicitly quantified
```

GHC will accept i, j, and k's type signatures, as well as L's kind signature. Note that:

- j's signature is accepted despite its mixture of implicit and explicit quantification. As long as a forall is not an outermost one, it is fine to use it among implicitly bound type variables.
- k's signature is accepted because the outermost parentheses imply that the forall is not an outermost forall. The forall-or-nothing rule is one of the few places in GHC where the presence or absence of parentheses can be semantically significant!
- L's signature begins with an outermost forall, but it is a *visible* forall, not an invisible forall, and therefore does not trigger the forall-or-nothing rule.

The forall-or-nothing rule takes effect in the following places:

- Type signature declarations for functions, values, and class methods
- Expression type annotations
- Instance declarations
- *Default method signatures* (page 524)
- Type signatures in a *SPECIALIZE pragma* (page 672) or *SPECIALIZE instance pragma* (page 675)
- *Standalone kind signatures and polymorphic recursion* (page 417)
- Type signatures for *Generalised Algebraic Data Types (GADTs)* (page 380) constructors
- Type signatures for *Pattern synonyms* (page 513)
- *Data instance declarations* (page 386), *Type instance declarations* (page 389), *Closed type families* (page 390), and *Associated instances* (page 395)
- *Rewrite rules* (page 645) in which the type variables are explicitly quantified

Notes:

- *Pattern type signatures* (page 568) are a notable example of a place where types do *not* obey the forall-or-nothing rule. For example, GHC will accept the following:

```
f (g :: forall a. a -> b) x = g x :: b
```

Furthermore, *Rewrite rules* (page 645) do not obey the forall-or-nothing rule when their type variables are not explicitly quantified:

```
{-# RULES "f" forall (g :: forall a. a -> b) x. f g x = g x :: b #-}
```

- GADT constructors are extra particular about their foralls. In addition to adhering to the forall-or-nothing rule, GADT constructors also forbid nested foralls. For example, GHC would reject the following GADT:

```
data T where
  MkT :: (forall a. a -> b -> T)
```

Because of the lack of an outermost forall in the type of MkT, the b would be implicitly quantified. In effect, it would be as if one had written `MkT :: forall b. (forall a. a -> b -> T)`, which contains nested foralls. See *Formal syntax for GADTs* (page 376).

## 6.11.2 Ambiguous types and the ambiguity check

### AllowAmbiguousTypes

Since  
7.8.1

Allow type signatures which appear that they would result in an unusable binding.

Each user-written type signature is subjected to an *ambiguity check*. The ambiguity check rejects functions that can never be called. For example:

```
f :: C a => Int
```

The idea is there can be no legal calls to f because every call will give rise to an ambiguous constraint. Indeed, the *only* purpose of the ambiguity check is to report functions that cannot possibly be called. We could soundly omit the ambiguity check on type signatures entirely, at the expense of delaying ambiguity errors to call sites. Indeed, the language extension *AllowAmbiguousTypes* (page 562) switches off the ambiguity check.

Ambiguity can be subtle. Consider this example which uses functional dependencies:

```
class D a b | a -> b where ..
h :: D Int b => Int
```

The Int may well fix b at the call site, so that signature should not be rejected. Moreover, the dependencies might be hidden. Consider

```
class X a b where ...
class D a b | a -> b where ...
instance D a b => X [a] b where ...
h :: X a b => a -> a
```

Here h's type looks ambiguous in b, but here's a legal call:

```
... (h [True]) ...
```

That gives rise to a  $(X \text{ [Bool] } \beta)$  constraint, and using the instance means we need  $(D \text{ Bool } \beta)$  and that fixes  $\beta$  via  $D$ 's fundep!

Behind all these special cases there is a simple guiding principle. Consider

```
f :: type
f = ...blah...

g :: type
g = f
```

You would think that the definition of  $g$  would surely typecheck! After all  $f$  has exactly the same type, and  $g=f$ . But in fact  $f$ 's type is instantiated and the instantiated constraints are solved against the constraints bound by  $g$ 's signature. So, in the case an ambiguous type, solving will fail. For example, consider the earlier definition  $f :: C \ a \Rightarrow Int$ :

```
f :: C a => Int
f = ...blah...

g :: C a => Int
g = f
```

In  $g$ 's definition, we'll instantiate to  $(C \ \alpha)$  and try to deduce  $(C \ \alpha)$  from  $(C \ a)$ , and fail.

So in fact we use this as our *definition* of ambiguity: a type  $ty$  is ambiguous if and only if  $((undefined :: ty) :: ty)$  would fail to typecheck. We use a very similar test for *inferred* types, to ensure that they too are unambiguous.

*Switching off the ambiguity check.* Even if a function has an ambiguous type according to the “guiding principle”, it is possible that the function is callable. For example:

```
class D a b where ...
instance D Bool b where ...

strange :: D a b => a -> a
strange = ...blah...

foo = strange True
```

Here  $strange$ 's type is ambiguous, but the call in  $foo$  is OK because it gives rise to a constraint  $(D \text{ Bool } \beta)$ , which is soluble by the  $(D \text{ Bool } b)$  instance.

Another way of getting rid of the ambiguity at the call site is to use the [TypeApplications](#) (page 435) extension to specify the types. For example:

```
class D a b where
  h :: b
instance D Int Int where ...

main = print (h @Int @Int)
```

Here  $a$  is ambiguous in the definition of  $D$  but later specified to be  $Int$  using type applications. [AllowAmbiguousTypes](#) (page 562) allows you to switch off the ambiguity check altogether.

Sometimes [AllowAmbiguousTypes](#) (page 562) does not mix well with [RankNTypes](#) (page 451). For example:

```
foo :: forall r. (forall i. (KnownNat i) => r) -> r
foo f = f @1

boo :: forall j. (KnownNat j) => Int
boo = ....

h :: Int
h = foo boo
```

This program will be rejected as ambiguous because GHC will not unify the type variables *j* and *i*.

Unlike the previous examples, it is not currently possible to resolve the ambiguity manually by using [TypeApplications](#) (page 435).

---

**Note:** *A historical note.* GHC used to impose some more restrictive and less principled conditions on type signatures. For type `forall tv1..tvn (c1, ..., cn) => type` GHC used to require

- a. that each universally quantified type variable *tv<sub>i</sub>* must be “reachable” from type, and
  - b. that every constraint *c<sub>i</sub>* mentions at least one of the universally quantified type variables *tv<sub>i</sub>*. These ad-hoc restrictions are completely subsumed by the new ambiguity check.
- 

### 6.11.3 Explicitly-kinded quantification

#### KindSignatures

##### Implied by

[TypeFamilies](#) (page 384), [PolyKinds](#) (page 411)

##### Since

6.8.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow explicit kind signatures on type variables.

Haskell infers the kind of each type variable. Sometimes it is nice to be able to give the kind explicitly as (machine-checked) documentation, just as it is nice to give a type signature for a function. On some occasions, it is essential to do so. For example, in his paper “Restricted Data Types in Haskell” (Haskell Workshop 1999) John Hughes had to define the data type:

```
data Set cxt a = Set [a]
               | Unused (cxt a -> ())
```

The only use for the `Unused` constructor was to force the correct kind for the type variable `cxt`.

GHC now instead allows you to specify the kind of a type variable directly, wherever a type variable is explicitly bound, with the extension [KindSignatures](#) (page 564).

This extension enables kind signatures in the following places:

- data declarations:

```
data Set (cxt :: Type -> Type) a = Set [a]
```

- newtype declarations:

```
newtype Set (cxt :: Type -> Type) a = Set [a]
```

- type declarations:

```
type T (f :: Type -> Type) = f Int
```

- class declarations:

```
class (Eq a) => C (f :: Type -> Type) a where ...
```

- forall's in type signatures:

```
f :: forall (cxt :: Type -> Type). Set cxt Int
```

The parentheses are required.

As part of the same extension, you can put kind annotations in types as well. Thus:

```
f :: (Int :: Type) -> Int
g :: forall a. a -> (a :: Type)
```

The syntax is

```
atype ::= '(' ctype '::' kind ')'
```

The parentheses are required.

## 6.11.4 Lexically scoped type variables

### ScopedTypeVariables

#### Implies

*ExplicitForAll* (page 560)

#### Since

6.8.1

#### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Enable lexical scoping of type variables explicitly introduced with `forall`.

---

**Tip:** *ScopedTypeVariables* (page 565) breaks GHC's usual rule that explicit `forall` is optional and doesn't affect semantics. For the *Declaration type signatures* (page 567) (or *Expression type signatures* (page 568)) examples in this section, the explicit `forall` is required. (If omitted, usually the program will not compile; in a few cases it will compile but the functions get a different signature.) To trigger those forms of *ScopedTypeVariables* (page 565), the `forall` must appear against the top-level signature (or outer expression) but *not* against nested signatures referring to the same type variables.

Explicit `forall` is not always required – see [pattern signature equivalent](#) (page 566) for the example in this section, or [Pattern type signatures](#) (page 568).

---

GHC supports *lexically scoped type variables*, without which some type signatures are simply impossible to write. For example:

```
f :: forall a. [a] -> [a]
f xs = ys ++ ys
  where
    ys :: [a]
    ys = reverse xs
```

The type signature for `f` brings the type variable `a` into scope, because of the explicit `forall` ([Declaration type signatures](#) (page 567)). The type variables bound by a `forall` scope over the entire definition of the accompanying value declaration. In this example, the type variable `a` scopes over the whole definition of `f`, including over the type signature for `ys`. In Haskell 98 it is not possible to declare a type for `ys`; a major benefit of scoped type variables is that it becomes possible to do so.

An equivalent form for that example, avoiding explicit `forall` uses [Pattern type signatures](#) (page 568):

```
f :: [a] -> [a]
f (xs :: [aa]) = xs ++ ys
  where
    ys :: [aa]
    ys = reverse xs
```

Unlike the `forall` form, type variable `a` from `f`'s signature is not scoped over `f`'s equation(s). Type variable `aa` bound by the pattern signature is scoped over the right-hand side of `f`'s equation. (Therefore there is no need to use a distinct type variable; using `a` would be equivalent.)

#### 6.11.4.1 Overview

The design follows the following principles

- A scoped type variable stands for a type *variable*, and not for a *type*. (This is a change from GHC's earlier design.)
- Furthermore, distinct lexical type variables stand for distinct type variables. This means that every programmer-written type signature (including one that contains free scoped type variables) denotes a *rigid* type; that is, the type is fully known to the type checker, and no inference is involved.
- Lexical type variables may be alpha-renamed freely, without changing the program.

A *lexically scoped type variable* can be bound by:

- A declaration type signature ([Declaration type signatures](#) (page 567))
- An expression type signature ([Expression type signatures](#) (page 568))
- A pattern type signature ([Pattern type signatures](#) (page 568))
- Class and instance declarations ([Class and instance declarations](#) (page 569))

In Haskell, a programmer-written type signature is implicitly quantified over its free type variables ([Section 4.1.2](#) of the Haskell Report). Lexically scoped type variables affect this



implicit quantification rules as follows: any type variable that is in scope is *not* universally quantified. For example, if type variable `a` is in scope, then

<code>(e :: a -&gt; a)</code>	means	<code>(e :: a -&gt; a)</code>
<code>(e :: b -&gt; b)</code>	means	<code>(e :: forall b. b-&gt;b)</code>
<code>(e :: a -&gt; b)</code>	means	<code>(e :: forall b. a-&gt;b)</code>

#### 6.11.4.2 Declaration type signatures

A declaration type signature that has *explicit* quantification (using `forall`) brings into scope the explicitly-quantified type variables, in the definition of the named function. For example:

```
f :: forall a. [a] -> [a]
f (x:xs) = xs ++ [ x :: a ]
```

The “`forall a`” brings “`a`” into scope in the definition of “`f`”.

This only happens if:

- The quantification in `f`'s type signature is explicit. For example:

```
g :: [a] -> [a]
g (x:xs) = xs ++ [ x :: a ]
```

This program will be rejected, because “`a`” does not scope over the definition of “`g`”, so “`x::a`” means “`x::forall a. a`” by Haskell’s usual implicit quantification rules.

- The type variable is quantified by the single, syntactically visible, outermost `forall` of the type signature. For example, GHC will reject all of the following examples:

```
f1 :: forall a. forall b. a -> [b] -> [b]
f1 _ (x:xs) = xs ++ [ x :: b ]

f2 :: forall a. a -> forall b. [b] -> [b]
f2 _ (x:xs) = xs ++ [ x :: b ]

type Foo = forall b. [b] -> [b]

f3 :: Foo
f3 (x:xs) = xs ++ [ x :: b ]
```

In `f1` and `f2`, the type variable `b` is not quantified by the outermost `forall`, so it is not in scope over the bodies of the functions. Neither is `b` in scope over the body of `f3`, as the `forall` is tucked underneath the `Foo` type synonym.

- The signature gives a type for a function binding or a bare variable binding, not a pattern binding. For example:

```
f1 :: forall a. [a] -> [a]
f1 (x:xs) = xs ++ [ x :: a ]    -- OK

f2 :: forall a. [a] -> [a]
f2 = \ (x:xs) -> xs ++ [ x :: a ]    -- OK
```

(continues on next page)

(continued from previous page)

```
f3 :: forall a. [a] -> [a]
Just f3 = Just (\(x:xs) -> xs ++ [ x :: a ])  -- Not OK!
```

`f1` is a function binding, and `f2` binds a bare variable; in both cases the type signature brings `a` into scope. However the binding for `f3` is a pattern binding, and so `f3` is a fresh variable brought into scope by the pattern, not connected with top level `f3`. Then type variable `a` is not in scope of the right-hand side of `Just f3 = ...`.

#### 6.11.4.3 Expression type signatures

An expression type signature that has *explicit* quantification (using `forall`) brings into scope the explicitly-quantified type variables, in the annotated expression. For example:

```
f = runST ( (op >=> \(x :: STRef s Int) -> g x) :: forall s. ST s Bool )
```

Here, the type signature `forall s. ST s Bool` brings the type variable `s` into scope, in the annotated expression `(op >=> \(x :: STRef s Int) -> g x)`.

#### 6.11.4.4 Pattern type signatures

A type signature may occur in any pattern; this is a *pattern type signature*. For example:

```
-- f and g assume that 'a' is already in scope
f = \(x::Int, y::a) -> x

g (x::a) = x

h ((x,y) :: (Int,Bool)) = (y,x)
```

In the case where all the type variables in the pattern type signature are already in scope (i.e. bound by the enclosing context), matters are simple: the signature simply constrains the type of the pattern in the obvious way.

Unlike expression and declaration type signatures, pattern type signatures are not implicitly generalised. The pattern in a *pattern binding* may only mention type variables that are already in scope. For example:

```
f :: forall a. [a] -> (Int, [a])
f xs = (n, zs)
  where
    (ys::[a], n) = (reverse xs, length xs) -- OK
    (zs::[a])   = xs ++ ys                -- OK

    Just (v::b) = ... -- Not OK; b is not in scope
```

Here, the pattern signatures for `ys` and `zs` are fine, but the one for `v` is not because `b` is not in scope.

However, in all patterns *other* than pattern bindings, a pattern type signature may mention a type variable that is not in scope; in this case, *the signature brings that type variable into scope*. For example:

```
-- same f and g as above, now assuming that 'a' is not already in scope
f = \(x::Int, y::a) -> x           -- 'a' is in scope on RHS of ->

g (x::a) = x :: a

hh (Just (v :: b)) = v :: b
```

The pattern type signature makes the type variable available on the right-hand side of the equation.

Bringing type variables into scope is particularly important for existential data constructors. For example:

```
data T = forall a. MkT [a]

k :: T -> T
k (MkT [t::a]) =
  MkT t3
  where
    (t3::[a]) = [t,t,t]
```

Here, the pattern type signature `[t::a]` mentions a lexical type variable that is not already in scope. Indeed, it *must not* already be in scope, because it is bound by the pattern match. The effect is to bring it into scope, standing for the existentially-bound type variable.

It does seem odd that the existentially-bound type variable *must not* be already in scope. Contrast that usually name-bindings merely shadow (make a ‘hole’) in a same-named outer variable’s scope. But we must have *some* way to bring such type variables into scope, else we could not name existentially-bound type variables in subsequent type signatures.

Compare the two (identical) definitions for examples `f`, `g`; they are both legal whether or not `a` is already in scope. They differ in that *if* `a` is already in scope, the signature constrains the pattern, rather than the pattern binding the variable.

#### 6.11.4.5 Class and instance declarations

*ScopedTypeVariables* (page 565) allow the type variables bound by the top of a class or instance declaration to scope over the methods defined in the where part. Unlike *Declaration type signatures* (page 567), type variables from class and instance declarations can be lexically scoped without an explicit `forall` (although you are allowed an explicit `forall` in an instance declaration; see *Explicit universal quantification (forall)* (page 560)). For example:

```
class C a where
  op :: [a] -> a

  op xs = let ys::[a]
           ys = reverse xs
           in
           head ys

instance C b => C [b] where
  op xs = reverse (head (xs :: [[b]]))

-- Alternatively, one could write the instance above as:
```

(continues on next page)

(continued from previous page)

```
instance forall b. C b => C [b] where
  op xs = reverse (head (xs :: [[b]]))
```

While *ScopedTypeVariables* (page 565) is required for type variables from the top of a class or instance declaration to scope over the /bodies/ of the methods, it is not required for the type variables to scope over the /type signatures/ of the methods. For example, the following will be accepted without explicitly enabling *ScopedTypeVariables* (page 565):

```
class D a where
  m :: a -> a

instance Num a => D [a] where
  m :: [a] -> [a]
  m x = map (*2) x
```

Note that writing `m :: [a] -> [a]` requires the use of the *InstanceSigs* (page 542) extension.

Similarly, *ScopedTypeVariables* (page 565) is not required for type variables from the top of the class or instance declaration to scope over associated type families, which only requires the *TypeFamilies* (page 384) extension. For instance, the following will be accepted without explicitly enabling *ScopedTypeVariables* (page 565):

```
class E a where
  type T a

instance E [a] where
  type T [a] = a
```

See *Scoping of class parameters* (page 398) for further information.

## 6.11.5 Implicit parameters

### ImplicitParams

Since  
6.8.1

Allow definition of functions expecting implicit parameters.

Implicit parameters are implemented as described in [Lewis2000] and enabled with the option *ImplicitParams* (page 570). (Most of the following, still rather incomplete, documentation is due to Jeff Lewis.)

A variable is called *dynamically bound* when it is bound by the calling context of a function and *statically bound* when bound by the callee's context. In Haskell, all variables are statically bound. Dynamic binding of variables is a notion that goes back to Lisp, but was later discarded in more modern incarnations, such as Scheme. Dynamic binding can be very confusing in an untyped language, and unfortunately, typed languages, in particular Hindley-Milner typed languages like Haskell, only support static scoping of variables.

However, by a simple extension to the type class system of Haskell, we can support dynamic binding. Basically, we express the use of a dynamically bound variable as a constraint on the type. These constraints lead to types of the form  $(?x::t') \Rightarrow t$ , which says "this function

uses a dynamically-bound variable `?x` of type `t'`. For example, the following expresses the type of a sort function, implicitly parameterised by a comparison function named `cmp`.

```
sort :: (?cmp :: a -> a -> Bool) => [a] -> [a]
```

The dynamic binding constraints are just a new form of predicate in the type class system.

An implicit parameter occurs in an expression using the special form `?x`, where `x` is any valid identifier (e.g. `ord ?x` is a valid expression). Use of this construct also introduces a new dynamic-binding constraint in the type of the expression. For example, the following definition shows how we can define an implicitly parameterised sort function in terms of an explicitly parameterised `sortBy` function:

```
sortBy :: (a -> a -> Bool) -> [a] -> [a]

sort    :: (?cmp :: a -> a -> Bool) => [a] -> [a]
sort    = sortBy ?cmp
```

### 6.11.5.1 Implicit-parameter type constraints

Dynamic binding constraints behave just like other type class constraints in that they are automatically propagated. Thus, when a function is used, its implicit parameters are inherited by the function that called it. For example, our `sort` function might be used to pick out the least value in a list:

```
least    :: (?cmp :: a -> a -> Bool) => [a] -> a
least xs = head (sort xs)
```

Without lifting a finger, the `?cmp` parameter is propagated to become a parameter of `least` as well. With explicit parameters, the default is that parameters must always be explicit propagated. With implicit parameters, the default is to always propagate them.

An implicit-parameter type constraint differs from other type class constraints in the following way: All uses of a particular implicit parameter must have the same type. This means that the type of `(?x, ?x)` is `(?x::a) => (a,a)`, and not `(?x::a, ?x::b) => (a, b)`, as would be the case for type class constraints.

You can't have an implicit parameter in the context of a class or instance declaration. For example, both these declarations are illegal:

```
class (?x::Int) => C a where ...
instance (?x::a) => Foo [a] where ...
```

Reason: exactly which implicit parameter you pick up depends on exactly where you invoke a function. But the “invocation” of instance declarations is done behind the scenes by the compiler, so it's hard to figure out exactly where it is done. Easiest thing is to outlaw the offending types.

Implicit-parameter constraints do not cause ambiguity. For example, consider:

```
f :: (?x :: [a]) => Int -> Int
f n = n + length ?x

g :: (Read a, Show a) => String -> String
g s = show (read s)
```

Here, `g` has an ambiguous type, and is rejected, but `f` is fine. The binding for `?x` at `f`'s call site is quite unambiguous, and fixes the type `a`.

### 6.11.5.2 Implicit-parameter bindings

An implicit parameter is *bound* using the standard `let` or `where` binding forms. For example, we define the `min` function by binding `cmp`.

```
min :: Ord a => [a] -> a
min = let ?cmp = (<=) in least
```

A group of implicit-parameter bindings may occur anywhere a normal group of Haskell bindings can occur, except at top level. That is, they can occur in a `let` (including in a list comprehension, or `do`-notation, or pattern guards), or a `where` clause. Note the following points:

- An implicit-parameter binding group must be a collection of simple bindings to implicit-style variables (no function-style bindings, and no type signatures); these bindings are neither polymorphic or recursive.
- You may not mix implicit-parameter bindings with ordinary bindings in a single `let` expression; use two nested `lets` instead. (In the case of `where` you are stuck, since you can't nest `where` clauses.)
- You may put multiple implicit-parameter bindings in a single binding group; but they are *not* treated as a mutually recursive group (as ordinary `let` bindings are). Instead they are treated as a non-recursive group, simultaneously binding all the implicit parameter. The bindings are not nested, and may be re-ordered without changing the meaning of the program. For example, consider:

```
f t = let { ?x = t; ?y = ?x+(1::Int) } in ?x + ?y
```

The use of `?x` in the binding for `?y` does not “see” the binding for `?x`, so the type of `f` is

```
f :: (?x::Int) => Int -> Int
```

### 6.11.5.3 Implicit parameters and polymorphic recursion

Consider these two definitions:

```
len1 :: [a] -> Int
len1 xs = let ?acc = 0 in len_acc1 xs

len_acc1 [] = ?acc
len_acc1 (x:xs) = let ?acc = ?acc + (1::Int) in len_acc1 xs

-----

len2 :: [a] -> Int
len2 xs = let ?acc = 0 in len_acc2 xs

len_acc2 :: (?acc :: Int) => [a] -> Int
len_acc2 [] = ?acc
len_acc2 (x:xs) = let ?acc = ?acc + (1::Int) in len_acc2 xs
```

The only difference between the two groups is that in the second group `len_acc` is given a type signature. In the former case, `len_acc1` is monomorphic in its own right-hand side, so the implicit parameter `?acc` is not passed to the recursive call. In the latter case, because `len_acc2` has a type signature, the recursive call is made to the *polymorphic* version, which takes `?acc` as an implicit parameter. So we get the following results in GHCi:

```
Prog> len1 "hello"
0
Prog> len2 "hello"
5
```

Adding a type signature dramatically changes the result! This is a rather counter-intuitive phenomenon, worth watching out for.

#### 6.11.5.4 Implicit parameters scoping guarantees

GHC always takes the most nested implicit parameter binding from the context to find the value. Consider the following code:

```
let ?f = 1 in let ?f = 2 in ?f
```

This expression will always return 2.

Another example of this rule is matching over constructors with constraints. For example:

```
data T where
  MkT :: (?f :: Int) => T

f :: T -> T -> Int
f MkT MkT = ?f
```

Here GHC will always take `?f` from the last match.

#### 6.11.5.5 Implicit parameters and monomorphism

GHC applies the dreaded Monomorphism Restriction (section 4.5.5 of the Haskell Report) to implicit parameters. For example, consider:

```
f :: Int -> Int
f v = let ?x = 0      in
      let y = ?x + v  in
      let ?x = 5      in
      y
```

Since the binding for `y` falls under the Monomorphism Restriction it is not generalised, so the type of `y` is simply `Int`, not `(?x :: Int) => Int`. Hence, `(f 9)` returns result 9. If you add a type signature for `y`, then `y` will get type `(?x :: Int) => Int`, so the occurrence of `y` in the body of the `let` will see the inner binding of `?x`, so `(f 9)` will return 14.

## 6.11.6 Partial Type Signatures

### PartialTypeSignatures

Since  
7.10.1

Type checker will allow inferred types for holes.

A partial type signature is a type signature containing special placeholders called *wildcards*. A wildcard is written as an underscore (e.g. “\_”) or, if *NamedWildCards* (page 576) is enabled, any identifier with a leading underscore (e.g. “\_foo”, “\_bar”). Partial type signatures are to type signatures what *Typed Holes* (page 347) are to expressions. During compilation these wildcards or holes will generate an error message that describes which type was inferred at the hole’s location, and information about the origin of any free type variables. GHC reports such error messages by default.

Unlike *Typed Holes* (page 347), which make the program incomplete and will generate errors when they are evaluated, this needn’t be the case for holes in type signatures. The type checker is capable (in most cases) of type-checking a binding with or without a type signature. A partial type signature bridges the gap between the two extremes, the programmer can choose which parts of a type to annotate and which to leave over to the type-checker to infer.

By default, the type-checker will report an error message for each hole in a partial type signature, informing the programmer of the inferred type. When the *PartialTypeSignatures* (page 574) extension is enabled, the type-checker will accept the inferred type for each hole, generating warnings instead of errors. Additionally, these warnings can be silenced with the *-Wno-partial-type-signatures* (page 100) flag.

However, because GHC must *infer* the type when part of a type is left out, it is unable to use polymorphic recursion. The same restriction takes place when the type signature is omitted completely.

A partial type signature also makes GHC generalise the binding even if *MonoLocalBinds* (page 580) is on; see *Let-generalisation* (page 580).

#### 6.11.6.1 Syntax

A (partial) type signature has the following form: forall a b .. . (C1, C2, ..) => tau. It consists of three parts:

- The type variables: a b ..
- The constraints: (C1, C2, ..)
- The (mono)type: tau

We distinguish three kinds of wildcards.



## Type Wildcards

Wildcards occurring within the monotype (tau) part of the type signature are *type wildcards* (“type” is often omitted as this is the default kind of wildcard). Type wildcards can be instantiated to any monotype like `Bool` or `Maybe [Bool]`, including functions and higher-kinded types like `(Int -> Bool)` or `Maybe`.

```
not' :: Bool -> _
not' x = not x
-- Inferred: Bool -> Bool

maybools :: _
maybools = Just [True]
-- Inferred: Maybe [Bool]

just1 :: _ Int
just1 = Just 1
-- Inferred: Maybe Int

filterInt :: _ -> _ -> [Int]
filterInt = filter -- has type forall a. (a -> Bool) -> [a] -> [a]
-- Inferred: (Int -> Bool) -> [Int] -> [Int]
```

For instance, the first wildcard in the type signature `not'` would produce the following error message:

```
Test.hs:4:17: error:
• Found type wildcard ‘_’ standing for ‘Bool’
  To use the inferred type, enable PartialTypeSignatures
• In the type signature:
    not' :: Bool -> _
• Relevant bindings include
    not' :: Bool -> Bool (bound at Test.hs:5:1)
```

When a wildcard is not instantiated to a monotype, it will be generalised over, i.e. replaced by a fresh type variable, e.g.

```
foo :: _ -> _
foo x = x
-- Inferred: forall t. t -> t

filter' :: _
filter' = filter -- has type forall a. (a -> Bool) -> [a] -> [a]
-- Inferred: (a -> Bool) -> [a] -> [a]
```

## Named Wildcards

### NamedWildCards

#### Since

7.10.1

#### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow naming of wildcards (e.g. `_x`) in type signatures.

Type wildcards can also be named by giving the underscore an identifier as suffix, i.e. `_a`. These are called *named wildcards*. All occurrences of the same named wildcard within one type signature will unify to the same type. For example:

```
f :: _x -> _x
f ('c', y) = ('d', error "Urk")
-- Inferred: forall t. (Char, t) -> (Char, t)
```

The named wildcard forces the argument and result types to be the same. Lacking a signature, GHC would have inferred `forall a b. (Char, a) -> (Char, b)`. A named wildcard can be mentioned in constraints, provided it also occurs in the monotype part of the type signature to make sure that it unifies with something:

```
somethingShowable :: Show _x => _x -> _
somethingShowable x = show x
-- Inferred type: Show a => a -> String

somethingShowable' :: Show _x => _x -> _
somethingShowable' x = show (not x)
-- Inferred type: Bool -> String
```

Besides an extra-constraints wildcard (see [Extra-Constraints Wildcard](#) (page 577)), only named wildcards can occur in the constraints, e.g. the `_x` in `Show _x`.

When [ScopedTypeVariables](#) (page 565) is on, the named wildcards of a function signature scope over the function body just like explicitly-`forall`'d type variables ([Lexically scoped type variables](#) (page 565)), even though there is no explicit `forall`. For example:

```
f :: _a -> _a
f x = let g :: _a -> _a
      g = ...
      in ...
```

Here the named wildcard `_a` scopes over the body of `f`, thereby binding the occurrences of `_a` in the signature of `g`. All four occurrences stand for the same type.

Named wildcards *should not be confused with type variables*. Even though syntactically similar, named wildcards can unify with monotypes as well as be generalised over (and behave as type variables).

In the first example above, `_x` is generalised over (and is effectively replaced by a fresh type variable `a`). In the second example, `_x` is unified with the `Bool` type, and as `Bool` implements the `Show` type class, the constraint `Show Bool` can be simplified away.

By default, GHC (as the Haskell 2010 standard prescribes) parses identifiers starting with an underscore in a type as type variables. To treat them as named wildcards, the

[NamedWildcard](#) (page 576) extension should be enabled. The example below demonstrated the effect.

```
foo :: _a -> _a
foo _ = False
```

Compiling this program without enabling [NamedWildcard](#) (page 576) produces the following error message complaining about the type variable `_a` no matching the actual type `Bool`.

```
Test.hs:5:9: error:
• Couldn't match expected type ‘_a’ with actual type ‘Bool’
  ‘_a’ is a rigid type variable bound by
    the type signature for:
      foo :: forall _a. _a -> _a
    at Test.hs:4:8
• In the expression: False
  In an equation for ‘foo’: foo _ = False
• Relevant bindings include foo :: _a -> _a (bound at Test.hs:5:1)
```

Compiling this program with [NamedWildcard](#) (page 576) (as well as [PartialTypeSignatures](#) (page 574)) enabled produces the following error message reporting the inferred type of the named wildcard `_a`.

```
Test.hs:4:8: warning: [-Wpartial-type-signatures]
• Found type wildcard ‘_a’ standing for ‘Bool’
• In the type signature:
  foo :: _a -> _a
• Relevant bindings include
  foo :: Bool -> Bool (bound at Test.hs:5:1)
```

## Extra-Constraints Wildcard

The third kind of wildcard is the *extra-constraints wildcard*. The presence of an extra-constraints wildcard indicates that an arbitrary number of extra constraints may be inferred during type checking and will be added to the type signature. In the example below, the extra-constraints wildcard is used to infer three extra constraints.

```
arbitCs :: _ => a -> String
arbitCs x = show (succ x) ++ show (x == x)
-- Inferred:
-- forall a. (Enum a, Eq a, Show a) => a -> String
-- Error:
Test.hs:5:12: error:
  Found constraint wildcard ‘_’ standing for ‘(Show a, Eq a, Enum a)’
  To use the inferred type, enable PartialTypeSignatures
  In the type signature:
    arbitCs :: _ => a -> String
```

An extra-constraints wildcard shouldn't prevent the programmer from already listing the constraints they know or want to annotate, e.g.

```
-- Also a correct partial type signature:
arbitCs' :: (Enum a, _) => a -> String
```

(continues on next page)

(continued from previous page)

```

arbitCs' x = arbitCs x
-- Inferred:
--   forall a. (Enum a, Show a, Eq a) => a -> String
-- Error:
Test.hs:9:22: error:
    Found constraint wildcard '_' standing for '()'
    To use the inferred type, enable PartialTypeSignatures
    In the type signature:
        arbitCs' :: (Enum a, _) => a -> String

```

An extra-constraints wildcard can also lead to zero extra constraints to be inferred, e.g.

```

noCs :: _ => String
noCs = "noCs"
-- Inferred: String
-- Error:
Test.hs:13:9: error:
    Found constraint wildcard '_' standing for '()'
    To use the inferred type, enable PartialTypeSignatures
    In the type signature:
        noCs :: _ => String

```

As a single extra-constraints wildcard is enough to infer any number of constraints, only one is allowed in a type signature and it should come last in the list of constraints.

Extra-constraints wildcards cannot be named.

#### 6.11.6.2 Where can they occur?

Partial type signatures are allowed for bindings, pattern and expression signatures, except that extra-constraints wildcards are not supported in pattern or expression signatures. In the following example a wildcard is used in each of the three possible contexts.

```

{-# LANGUAGE ScopedTypeVariables #-}
foo :: _
foo (x :: _) = (x :: _)
-- Inferred: forall w_. w_ -> w_

```

Anonymous and named wildcards *can* occur on the left hand side of a type or data instance declaration; see *Wildcards on the LHS of data and type family instances* (page 394).

Anonymous wildcards are also allowed in visible type applications/ visible kind applications (*Visible type application* (page 435)). If you want to specify only the second type argument to `wurble`, then you can say `wurble @_ @Int` where the first argument is a wildcard.

Standalone deriving declarations permit the use of a single, extra-constraints wildcard, like so:

```
deriving instance _ => Eq (Foo a)
```

This denotes a derived `Eq (Foo a)` instance where the context is inferred, in much the same way that ordinary deriving clauses do. Any other use of wildcards in a standalone deriving declaration is prohibited.

In all other contexts, type wildcards are disallowed, and a named wildcard is treated as an ordinary type variable. For example:

```
class C _ where ...           -- Illegal
instance Eq (T _)            -- Illegal (currently; would actually make sense)
instance Eq _a => Eq (T _a)  -- Perfectly fine, same as Eq a => Eq (T a)
```

Partial type signatures can also be used in *Template Haskell* (page 581) splices.

- Declaration splices: partial type signature are fully supported.

```
{-# LANGUAGE TemplateHaskell, NamedWildCards #-}
$( [d| foo :: _ => _a -> _a -> _
    foo x y = x == y|] )
```

- Expression splices: anonymous and named wildcards can be used in expression signatures. Extra-constraints wildcards are not supported, just like in regular expression signatures.

```
{-# LANGUAGE TemplateHaskell, NamedWildCards #-}
$( [e| foo = (Just True :: _m _) |] )
```

- Typed expression splices: the same wildcards as in (untyped) expression splices are supported.
- Pattern splices: anonymous and named wildcards can be used in pattern signatures. Note that *ScopedTypeVariables* (page 565) has to be enabled to allow pattern signatures. Extra-constraints wildcards are not supported, just like in regular pattern signatures.

```
{-# LANGUAGE TemplateHaskell, ScopedTypeVariables #-}
foo $( [p| (x :: _) |] ) = x
```

- Type splices: only anonymous wildcards are supported in type splices. Named and extra-constraints wildcards are not.

```
{-# LANGUAGE TemplateHaskell #-}
foo :: $( [t| _ |] ) -> a
foo x = x
```

## 6.12 Bindings and generalisation

### 6.12.1 Switching off the Monomorphism Restriction

#### NoMonomorphismRestriction

##### Default

on

##### Since

6.8.1

Prevents the compiler from applying the monomorphism restriction to bindings lacking explicit type signatures.

Haskell's monomorphism restriction (see [Section 4.5.5](#) of the Haskell Report) can be completely switched off by [NoMonomorphismRestriction](#) (page 579). Since GHC 7.8.1, the monomorphism restriction is switched off by default in GHCi's interactive options (see [Setting options for interactive evaluation only](#) (page 67)).

## 6.12.2 Let-generalisation

### MonoLocalBinds

**Implied by**

[TypeFamilies](#) (page 384), [GADTs](#) (page 380)

**Since**

6.12.1

**Status**

Included in [GHC2024](#) (page 314)

Infer less polymorphic types for local bindings by default.

An ML-style language usually generalises the type of any let-bound or where-bound variable, so that it is as polymorphic as possible. With the extension [MonoLocalBinds](#) (page 580) GHC implements a slightly more conservative policy, for reasons described in [Section 4.2 of OutsideIn\(X\): Modular type inference with local assumptions](#), and a [related blog post](#).

The extension [MonoLocalBinds](#) (page 580) is implied by [TypeFamilies](#) (page 384) and [GADTs](#) (page 380). You can switch it off again with [NoMonoLocalBinds](#) (page 580) but type inference becomes less predictable if you do so. (Read the paper!)

To a first approximation, with [MonoLocalBinds](#) (page 580) *top-level bindings are generalised, but local (i.e. nested) bindings are not*. The idea is that, at top level, the type environment has no free type variables, and so the difficulties described in these papers do not arise. But GHC implements a slightly more complicated rule because, for stylistic reasons, programmers sometimes write local bindings that make no use of local variables, so the binding could equally well be top-level. It seems reasonable to generalise these.

So here are the exact rules used by MonoLocalBinds. With MonoLocalBinds, a binding group will be *generalised* if and only if

- It is a top-level binding group, or
- Each of its free variables (excluding the variables bound by the group itself) is *closed* (see next bullet), or
- Any of its binders has a partial type signature (see Partial Type Signatures). Adding a partial type signature `f :: _`, (or, more generally, `f :: _ => _`) provides a per-binding way to ask GHC to perform let-generalisation, even though MonoLocalBinds is on.

Even if the binding is generalised, it may not be generalised over all its free type variables, either because it mentions locally-bound variables, or because of the Monomorphism Restriction (Haskell Report, Section 4.5.5)

*Closed variables.* The key idea is that: *if a variable is closed, then its type definitely has no free type variables*. A variable `f` is called *closed* if and only if

- The variable `f` is imported from another module, or
- The variable `f` is let-bound, and one of the following holds:
  - `f` has an explicit, complete (i.e. not partial) type signature that has no free type variables, or

- its binding group is generalised over all its free type variables, so that  $f$ 's type has no free type variables.

Note that a signature like  $f :: a \rightarrow a$  is equivalent to  $f :: \text{forall } a. a \rightarrow a$ , assuming  $a$  is not in scope. Hence  $f$  is closed, since it has a complete type signature with no free variables.

Example 1

```
g v = ...
  where
    f1 x = x+1
    f2 y = f1 (y*2)
```

$f1$  has free variable  $(+)$ , but it is imported and hence closed. So  $f1$ 's binding is generalised. As a result, its type  $f1 :: \text{forall } a. \text{Num } a \Rightarrow a \rightarrow a$  has no free type variables, so  $f1$  is closed. Hence  $f2$ 's binding is generalised (since its free variables,  $f1$  and  $(*)$  are both closed).

Example 2

```
f3 x = let g y = x+y in ....
```

The binding for  $g$  has a free variable  $x$  that is lambda-bound, and hence not closed. So  $g$ 's binding is not generalised.

*Top-level bindings.* The Monomorphism Restriction can cause even top-level bindings not to be generalised, and hence even the top-level type environment can have free type variables. However, top-level bindings are nevertheless always generalised. To see why, consider

```
module M( f ) where
  x = 5
  f v = (v,x)
```

The binding  $x=5$  falls under the Monomorphism Restriction, so that binding is not generalised, and hence  $f$ 's binding is not closed. If, as a result, we did not generalise  $f$ , we would end up exporting  $f :: \text{Any} \rightarrow (\text{Any}, \text{Integer})$ , defaulting  $x$ 's type to *Integer* and  $v$ 's type to *Any*. This is counter-intuitive and undesirable, so we always generalise top-level bindings.

## 6.13 Template Haskell

Template Haskell allows you to do compile-time meta-programming in Haskell. The background to the main technical innovations is discussed in “[Template Meta-programming for Haskell](#)” (Proc Haskell Workshop 2002).

The [Template Haskell](#) page on the GHC Wiki has a wealth of information. You may also consult the Haddock reference documentation [Language.Haskell.TH](#). Many changes to the original design are described in [Notes on Template Haskell version 2](#). Not all of these changes are in GHC, however.

The first example from that paper is set out below ([A Template Haskell Worked Example](#) (page 590)) as a worked example to help get you started.

The documentation here describes the realisation of Template Haskell in GHC. It is not detailed enough to understand Template Haskell; see the [Wiki page](#).

### 6.13.1 Syntax

#### TemplateHaskell

##### Implies

[TemplateHaskellQuotes](#) (page 582)

##### Since

6.0. Typed splices introduced in GHC 7.8.1.

Enable Template Haskell's splice and quotation syntax.

#### TemplateHaskellQuotes

##### Since

8.0.1

Enable only Template Haskell's quotation syntax.

Template Haskell has the following new syntactic constructions. You need to use the extension [TemplateHaskell](#) (page 582) to switch these syntactic extensions on. Alternatively, the [TemplateHaskellQuotes](#) (page 582) extension can be used to enable the quotation subset of Template Haskell (i.e. without top-level splices). The [TemplateHaskellQuotes](#) (page 582) extension is considered safe under [Safe Haskell](#) (page 633) while [TemplateHaskell](#) (page 582) is not.

- A splice is written `$x`, where `x` is an arbitrary expression. There must be no space between the “\$” and the expression. This use of “\$” overrides its meaning as an infix operator, just as “`M.x`” overrides the meaning of “`.`” as an infix operator. If you want the infix operator, put spaces around it.

A top-level splice can occur in place of

- an expression; the spliced expression must have type `Q Exp`
- a pattern; the spliced pattern must have type `Q Pat`
- a type; the spliced expression must have type `Q Type`
- a list of declarations at top level; the spliced expression must have type `Q [Dec]`

Inside a splice you can only call functions defined in imported modules, not functions defined elsewhere in the same module. Note that declaration splices are not allowed anywhere except at top level (outside any other declarations).

The `Q` monad is a monad defined in [Language.Haskell.TH.Syntax](#) which supports several useful operations during code generation such as reporting errors or looking up identifiers in the environment.

- A expression quotation is written in Oxford brackets, thus:
  - `[| ... |]`, or `[e| ... |]`, where the “...” is an expression; the quotation has type `Quote m => m Exp`.
  - `[d| ... |]`, where the “...” is a list of top-level declarations; the quotation has type `Quote m => m [Dec]`.
  - `[t| ... |]`, where the “...” is a type; the quotation has type `Quote m => m Type`.
  - `[p| ... |]`, where the “...” is a pattern; the quotation has type `Quote m => m Pat`.

The `Quote` type class ([Language.Haskell.TH.Syntax.Quote](#)) is the minimal interface necessary to implement the desugaring of quotations. The `Q` monad is an instance of `Quote` but contains many more operations which are not needed for defining quotations.



See *Where can they occur?* (page 578) for using partial type signatures in quotations.

- Splices can be nested inside quotation brackets. For example the fragment representing `1 + 2` can be constructed using nested splices:

```
oneC, twoC, plusC  :: Quote m => m Exp
oneC = [| 1 |]

twoC = [| 2 |]

plusC = [| $oneC + $twoC |]
```

- The precise type of a quotation depends on the types of the nested splices inside it:

```
-- Add a redundant constraint to demonstrate that constraints on the
-- monad used to build the representation are propagated when using
-- nested
-- splices.
f :: (Quote m, C m) => m Exp
f = [| 5 |]

-- f is used in a nested splice so the constraint on f, namely C, is
-- propagated
-- to a constraint on the whole representation.
g :: (Quote m, C m) => m Exp
g = [| $f + $f |]
```

Remember, a top-level splice still requires its argument to be of type `Q Exp`. So then splicing in `g` will cause `m` to be instantiated to `Q`:

```
h :: Int
h = $(g) -- m ~ Q
```

- A *typed* expression splice is written `$$x`, where `x` is an arbitrary expression.

A top-level typed expression splice can occur in place of an expression; the spliced expression must have type `Code Q a`

**NOTE:** Currently typed splices may inhibit the unused identifier warning for identifiers in scope. See [#16524](#).

- A *typed* expression quotation is written as `[| | ... |]`, or `[e| | ... |]`, where the “...” is an expression; if the “...” expression has type `a`, then the quotation has type `Quote m => Code m a`.

It is possible to extract a value of type `m Exp` from `Code m a` using the `unTypeCode :: Code m a -> m Exp` function.

- A quasi-quotation can appear in a pattern, type, expression, or declaration context and is also written in Oxford brackets:
  - `[varid| ... |]`, where the “...” is an arbitrary string; a full description of the quasi-quotation facility is given in *Template Haskell Quasi-quotation* (page 592).
- A name can be quoted with either one or two prefix single quotes:
  - `'f` has type `Name`, and names the function `f`. Similarly `'C` has type `Name` and names the data constructor `C`. In general `'(thing)` interprets `(thing)` in an expression context.

A name whose second character is a single quote cannot be quoted in exactly this way, because it will be parsed instead as a quoted character. For example, if the function is called `f'7` (which is a legal Haskell identifier), an attempt to quote it as `'f'7` would be parsed as the character literal `'f'` followed by the numeric literal `7`. As for promoted constructors ([Distinguishing between types and constructors](#) (page 406)), the workaround is to add a space between the quote and the name. The name of the function `f'7` is thus written `' f'7`.

- `'T` has type `Name`, and names the type constructor `T`. That is, `'(thing)` interprets `(thing)` in a type context.

These `Names` can be used to construct Template Haskell expressions, patterns, declarations etc. They may also be given as an argument to the `reify` function.

- It is possible for a splice to expand to an expression that contain names which are not in scope at the site of the splice. As an example, consider the following code:

```
module Bar where

import Language.Haskell.TH

add1 :: Quote m => Int -> m Exp
add1 x = [| x + 1 |]
```

Now consider a splice using `add1` in a separate module:

```
module Foo where

import Bar

two :: Int
two = $(add1 1)
```

Template Haskell cannot know what the argument to `add1` will be at the function's definition site, so a lifting mechanism is used to promote `x` into a value of type `Quote m => m Exp`. This functionality is exposed to the user as the `Lift` typeclass in the `Language.Haskell.TH.Syntax` module. If a type has a `Lift` instance, then any of its values can be lifted to a Template Haskell expression:

```
class Lift t where
  lift :: Quote m => t -> m Exp
  liftTyped :: Quote m => t -> Code m t
```

In general, if GHC sees an expression within Oxford brackets (e.g., `[| foo bar |]`), then GHC looks up each name within the brackets. If a name is global (e.g., suppose `foo` comes from an import or a top-level declaration), then the fully qualified name is used directly in the quotation. If the name is local (e.g., suppose `bar` is bound locally in the function definition `mkFoo bar = [| foo bar |]`), then GHC uses `lift` on it (so GHC pretends `[| foo bar |]` actually contains `[| foo $(lift bar) |]`). Local names, which are not in scope at splice locations, are actually evaluated when the quotation is processed.

The `template-haskell` library provides `Lift` instances for many common data types. Furthermore, it is possible to derive `Lift` instances automatically by using the [DeriveLift](#) (page 497) language extension. See [Deriving Lift instances](#) (page 497) for more information.

- You may omit the `$(...)` in a top-level declaration splice. Simply writing an expression (rather than a declaration) implies a splice. For example, you can write

```
module Foo where
import Bar

f x = x

$(deriveStuff 'f)    -- Uses the $(...) notation

g y = y+1

deriveStuff 'g        -- Omits the $(...)

h z = z-1
```

This abbreviation makes top-level declaration slices quieter and less intimidating.

- Pattern splices introduce variable binders but scoping of variables in expressions inside the pattern's scope is only checked when a splice is run. Note that pattern splices that occur outside of any quotation brackets are run at compile time. Pattern splices occurring inside a quotation bracket are *not* run at compile time; they are run when the bracket is spliced in, sometime later. For example,

```
mkPat :: Quote m => m Pat
mkPat = [p | (x, y) |]

-- in another module:
foo :: (Char, String) -> String
foo $(mkPat) = x : z

bar :: Quote m => m Exp
bar = [| \ $(mkPat) -> x : w |]
```

will fail with `z` being out of scope in the definition of `foo` but it will *not* fail with `w` being out of scope in the definition of `bar`. That will only happen when `bar` is spliced.

- A pattern quasiquoter *may* generate binders that scope over the right-hand side of a definition because these binders are in scope lexically. For example, given a quasiquoter `haskell` that parses Haskell, in the following code, the `y` in the right-hand side of `f` refers to the `y` bound by the `haskell` pattern quasiquoter, *not* the top-level `y = 7`.

```
y :: Int
y = 7

f :: Int -> Int -> Int
f n = \ [haskell|y|] -> y+n
```

- Top-level declaration splices break up a source file into *declaration groups*. A *declaration group* is the group of declarations created by a top-level declaration splice, plus those following it, down to but not including the next top-level declaration splice. N.B. only top-level splices delimit declaration groups, not expression splices. The first declaration group in a module includes all top-level definitions down to but not including the first top-level declaration splice.

Each group is compiled just like a separately compiled module. That is:

- Later groups can “see” declarations, and instance declarations, from earlier groups;
- But earlier groups cannot “see” declarations, or instance declarations, from later groups.

Each declaration group is mutually recursive only within the group. Declaration groups can refer to definitions within previous groups, but not later ones.

Accordingly, the type environment seen by `reify` includes all the top-level declarations up to the end of the immediately preceding declaration group, but no more.

Unlike normal declaration splices, declaration quasiquoters do not cause a break. These quasiquoters are expanded before the rest of the declaration group is processed, and the declarations they generate are merged into the surrounding declaration group. Consequently, the type environment seen by `reify` from a declaration quasiquoter will not include anything from the quasiquoter’s declaration group.

Concretely, consider the following code

```
module M where

import ...

f x = x

$(th1 4)

h y = k y y $(blah1)

[qq|blah|]

k x y z = x + y + z

$(th2 10)

w z = $(blah2)
```

In this example, a `reify` inside...

1. The splice `$(th1 ...)` would see the definition of `f` - the splice is top-level and thus all definitions in the previous declaration group are visible (that is, all definitions in the module up-to, but not including, the splice itself).
2. The splice `$(blah1)` cannot refer to the function `w` - `w` is part of a later declaration group, and thus invisible, similarly, `$(blah1)` cannot see the definition of `h` (since it is part of the same declaration group as `$(blah1)`). However, the splice `$(blah1)` can see the definition of `f` (since it is in the immediately preceding declaration group).
3. The splice `$(th2 ...)` would see the definition of `f`, all the bindings created by `$(th1 ...)`, the definition of `h` and all bindings created by `[qq|blah|]` (they are all in previous declaration groups).
4. The body of `h` *can* refer to the function `k` appearing on the other side of the declaration quasiquoter, as quasiquoters do not cause a declaration group to be broken up.
5. The `qq` quasiquoter would be able to see the definition of `f` from the preceding declaration group, but not the definitions of `h` or `k`, or any definitions from subsequent declaration groups.

6. The splice `$(blah2)` would see the same definitions as the splice `$(th2 ...)` (but *not* any bindings it creates).

Note that since an expression splice is unable to refer to declarations in the same declaration group, we can introduce a top-level (empty) splice to break up the declaration group

```
module M where

data D = C1 | C2

f1 = $(th1 ...)

$(return [])

f2 = $(th2 ...)
```

Here

1. The splice `$(th1 ...)` *cannot* refer to `D` - it is in the same declaration group.
2. The declaration group containing `D` is terminated by the empty top-level declaration splice `$(return [])` (recall, `Q` is a `Monad`, so we may simply return the empty list of declarations).
3. Since the declaration group containing `D` is in the previous declaration group, the splice `$(th2 ...)` *can* refer to `D`.

Note that in some cases, the presence or absence of top-level declaration splices can affect the *runtime* behavior of the surrounding code, because the resolution of instances may differ depending on their visibility. One case where this arises is with *incoherent instances* (page 538)

```
module Main where

main :: IO ()
main = do
  let i :: Int
      i = 42
  putStrLn (m1 i)
  putStrLn (m2 i)

class C1 a where
  m1 :: a -> String

instance {-# INCOHERENT #-} C1 a where
  m1 _ = "C1 incoherent"

instance C1 Int where
  m1 = show

class C2 a where
  m2 :: a -> String

instance {-# INCOHERENT #-} C2 a where
  m2 _ = "C2 incoherent"
```

(continues on next page)

(continued from previous page)

```
$(return [])

instance C2 Int where
  m2 = show
```

Here, C1 and C2 are the same classes with nearly identical instances. The only significant differences between C1 and C2, aside from the minor name change, is that all of C1's instances are defined within the same declaration group, whereas the C2 Int instance is put in a separate declaration group from the incoherent C2 a instance. This has an impact on the runtime behavior of the main function

```
$ runghc Main.hs
42
C2 incoherent
```

Note that m1 i returns "42", but m2 i returns "C2 incoherent". When each of these expressions are typechecked, GHC must figure out which C1 Int and C2 Int instances to use:

1. When resolving the C1 Int instance, GHC discovers two possible instances in the same declaration group: the incoherent C1 a instance and the non-incoherent C1 Int instance. According to the instance search rules described in [Overlapping instances](#) (page 538), because there is exactly one non-incoherent instance to pick, GHC will choose the C1 Int instance. As a result, m1 i will be equivalent to show i (i.e., "42").
  2. When resolving the C2 Int instance, GHC only discovers one instance in the same declaration group: the incoherent C2 a instance. Note that GHC does *not* see the C2 Int instance, as that is in a later declaration group that is made separate by the intervening declaration splice. As a result, GHC will choose the C2 a instance, making m2 i equivalent to "C2 incoherent".
- Expression quotations accept most Haskell language constructs. However, there are some GHC-specific extensions which expression quotations currently do not support, including
    - Type holes in typed splices (see [#10945](#) and [#10946](#))

(Compared to the original paper, there are many differences of detail. The syntax for a declaration splice uses "\$" not "splice". The type of the enclosed expression must be Quote m => m [Dec], not [Q Dec]. Typed expression splices and quotations are supported.)

### -fenable-th-splice-warnings

Template Haskell splices won't be checked for warnings, because the code causing the warning might originate from a third-party library and possibly was not written by the user. If you want to have warnings for splices anyway, pass [-fenable-th-splice-warnings](#) (page 588).

### 6.13.2 Using Template Haskell

- The data types and monadic constructor functions for Template Haskell are in the library `Language.Haskell.TH.Syntax`.
- You can only run a function at compile time if it is imported from another module. That is, you can't define a function in a module, and call it from within a splice in the same module. (It would make sense to do so, but it's hard to implement.)
- You can only run a function at compile time if it is imported from another module *that is not part of a mutually-recursive group of modules that includes the module currently being compiled*. Furthermore, all of the modules of the mutually-recursive group must be reachable by non-SOURCE imports from the module where the splice is to be run.

For example, when compiling module A, you can only run Template Haskell functions imported from B if B does not import A (directly or indirectly). The reason should be clear: to run B we must compile and run A, but we are currently type-checking A.

- If you are building GHC from source, you need at least a stage-2 bootstrap compiler to run Template Haskell splices and quasi-quotes. A stage-1 compiler will only accept regular quotes of Haskell. Reason: TH splices and quasi-quotes compile and run a program, and then looks at the result. So it's important that the program it compiles produces results whose representations are identical to those of the compiler itself.

Template Haskell works in any mode (`--make` (page 78), `--interactive` (page 78), or file-at-a-time). There used to be a restriction to the former two, but that restriction has been lifted.

### 6.13.3 Viewing Template Haskell generated code

The flag `-ddump-splices` (page 300) shows the expansion of all top-level declaration splices, both typed and untyped, as they happen. As with all dump flags, the default is for this output to be sent to stdout. For a non-trivial program, you may be interested in combining this with the `-ddump-to-file` (page 298) flag (see *Dumping out compiler intermediate structures* (page 298)). For each file using Template Haskell, this will show the output in a `.dump-splices` file.

The flag `-dth-dec-file` (page 300) dumps the expansions of all top-level TH declaration splices, both typed and untyped, in the file `M.th.hs` for each module *M* being compiled. Note that other types of splices (expressions, types, and patterns) are not shown. Application developers can check this into their repository so that they can grep for identifiers that were defined in Template Haskell. This is similar to using `-ddump-to-file` (page 298) with `-ddump-splices` (page 300) but it always generates a file instead of being coupled to `-ddump-to-file` (page 298). The format is also different: it does not show code from the original file, instead it only shows generated code and has a comment for the splice location of the original file.

Below is a sample output of `-ddump-splices` (page 300)

```
TH_pragma.hs:(6,4)-(8,26): Splicing declarations
[d| foo :: Int -> Int
   foo x = x + 1 |]
=====>
foo :: Int -> Int
foo x = (x + 1)
```

Below is the output of the same sample using `-dth-dec-file` (page 300)

```
-- TH_pragma.hs:(6,4)-(8,26): Splicing declarations
foo :: Int -> Int
foo x = (x + 1)
```

### 6.13.4 A Template Haskell Worked Example

To help you get over the confidence barrier, try out this skeletal worked example. First cut and paste the two modules below into `Main.hs` and `Printf.hs`:

```
{- Main.hs -}
module Main where

-- Import our template "pr"
import Printf ( pr )

-- The splice operator $ takes the Haskell source code
-- generated at compile time by "pr" and splices it into
-- the argument of "putStrLn".
main = putStrLn ( $(pr "Hello") )


{- Printf.hs -}
module Printf where

-- Skeletal printf from the paper.
-- It needs to be in a separate module to the one where
-- you intend to use it.

-- Import some Template Haskell syntax
import Language.Haskell.TH

-- Describe a format string
data Format = D | S | L String

-- Parse a format string. This is left largely to you
-- as we are here interested in building our first ever
-- Template Haskell program and not in building printf.
parse :: String -> [Format]
parse s = [ L s ]

-- Generate Haskell source code from a parsed representation
-- of the format string. This code will be spliced into
-- the module which calls "pr", at compile time.
gen :: Quote m => [Format] -> m Exp
gen [D] = [| \n -> show n |]
gen [S] = [| \s -> s |]
gen [L s] = stringE s

-- Here we generate the Haskell code for the splice
-- from an input format string.
pr :: Quote m => String -> m Exp
pr s = gen (parse s)
```



Now run the compiler,

```
$ ghc --make -XTemplateHaskell main.hs -o main
```

Run main and here is your output:

```
$ ./main
Hello
```

### 6.13.5 Template Haskell quotes and Rebindable Syntax

Rebindable syntax does not play well with untyped TH quotes: applying the rebinding syntax rules would go against the lax nature of untyped quotes that are accepted even in the presence of unbound identifiers (see [#18102](#)). Applying the rebinding syntax rules to them would force the code that defines the said quotes to have all the necessary functions (e.g. `ifThenElse` or `fromInteger`) in scope, instead of delaying the resolution of those symbols to the code that splices the quoted Haskell syntax, as is usually done with untyped TH. For this reason, even if a module has untyped TH quotes with `RebindableSyntax` enabled, GHC turns off rebinding syntax while processing the quotes. The code that splices the quotes is however free to turn on `RebindableSyntax` to have the usual rules applied to the resulting code.

Typed TH quotes on the other hand are perfectly compatible with the eager application of rebinding syntax rules, and GHC will therefore process any such quotes according to the rebinding syntax rules whenever the `RebindableSyntax` extension is turned on in the modules where such quotes appear.

### 6.13.6 Using Template Haskell with Profiling

Template Haskell relies on GHC's built-in bytecode compiler and interpreter to run the splice expressions. The bytecode interpreter runs the compiled expression on top of the same runtime on which GHC itself is running; this means that the compiled code referred to by the interpreted expression must be compatible with this runtime, and in particular this means that object code that is compiled for profiling *cannot* be loaded and used by a splice expression, because profiled object code is only compatible with the profiling version of the runtime.

This causes difficulties if you have a multi-module program containing Template Haskell code and you need to compile it for profiling, because GHC cannot load the profiled object code and use it when executing the splices.

Fortunately GHC provides two workarounds.

The first option is to compile the program twice:

1. Compile the program or library first the normal way, without `-prof` (page 715).
2. Then compile it again with `-prof` (page 715), and additionally use `-osuf p_o` to name the object files differently (you can choose any suffix that isn't the normal object suffix here). GHC will automatically load the object files built in the first step when executing splice expressions. If you omit the `-osuf {suffix}` (page 243) flag when building with `-prof` (page 715) and Template Haskell is used, GHC will emit an error message.

The second option is to add the flag `-fexternal-interpreter` (page 70) (see [Running the interpreter in a separate process](#) (page 70)), which runs the interpreter in a separate process, wherein it can load and run the profiled code directly. There's no need to compile the code twice, just add `-fexternal-interpreter` (page 70) and it should just work. (this option is experimental in GHC 8.0.x, but it may become the default in future releases).

### 6.13.7 Template Haskell Quasi-quotation

#### QuasiQuotes

**Since**  
6.10.1

Enable Template Haskell Quasi-quotation syntax.

Quasi-quotation allows patterns and expressions to be written using programmer-defined concrete syntax; the motivation behind the extension and several examples are documented in “[Why It’s Nice to be Quoted: Quasiquoting for Haskell](#)” (Proc Haskell Workshop 2007). The example below shows how to write a quasiquoter for a simple expression language.

Here are the salient features

- A quasi-quote has the form `[quoter| string |]`.
  - The `<quoter>` must be the name of an imported quoter, either qualified or unqualified; it cannot be an arbitrary expression.
  - The `<quoter>` cannot be “e”, “t”, “d”, or “p”, since those overlap with Template Haskell quotations.
  - There must be no spaces in the token `[quoter|`.
  - The quoted `<string>` can be arbitrary, and may contain newlines.
  - The quoted `<string>` finishes at the first occurrence of the two-character sequence `|]`. Absolutely no escaping is performed. If you want to embed that character sequence in the string, you must invent your own escape convention (such as, say, using the string `|~|` instead), and make your quoter function interpret `|~|` as `|]`. One way to implement this is to compose your quoter with a pre-processing pass to perform your escape conversion. See the discussion in [#5348](#) for details.
- A quasiquote may appear in place of
  - An expression
  - A pattern
  - A type
  - A top-level declaration

(Only the first two are described in the paper.)

- A quoter is a value of type `Language.Haskell.TH.Quote.QuasiQuoter`, which is defined thus:

```
data QuasiQuoter = QuasiQuoter { quoteExp  :: String -> Q Exp,
                                quotePat  :: String -> Q Pat,
                                quoteType :: String -> Q Type,
                                quoteDec  :: String -> Q [Dec] }
```

That is, a quoter is a tuple of four parsers, one for each of the contexts in which a quasi-quote can occur.

- A quasi-quote is expanded by applying the appropriate parser to the string enclosed by the Oxford brackets. The context of the quasi-quote (expression, pattern, type, declaration) determines which of the parsers is called.

- Unlike normal declaration splices of the form `$(...)`, declaration quasi-quotes do not cause a declaration group break. See [Syntax](#) (page 582) for more information.

**Warning:** *QuasiQuotes* (page 592) introduces an unfortunate ambiguity with list comprehension syntax. Consider the following,

```
let x = [v | v <- [0..10]]
```

Without *QuasiQuotes* (page 592) this is parsed as a list comprehension. With *QuasiQuotes* (page 592) this is parsed as a quasi-quote; however, this parse will fail due to the lack of a closing `|]`. See [#11679](#).

The example below shows quasi-quotation in action. The quoter `expr` is bound to a value of type `QuasiQuoter` defined in module `Expr`. The example makes use of an antiquoted variable `n`, indicated by the syntax `'int:n` (this syntax for anti-quotation was defined by the parser's author, *not* by GHC). This binds `n` to the integer value argument of the constructor `IntExpr` when pattern matching. Please see the referenced paper for further details regarding anti-quotation as well as the description of a technique that uses SYB to leverage a single parser of type `String -> a` to generate both an expression parser that returns a value of type `Q Expr` and a pattern parser that returns a value of type `Q Pat`.

Quasiquoters must obey the same stage restrictions as Template Haskell, e.g., in the example, `expr` cannot be defined in `Main.hs` where it is used, but must be imported.

```
{- ----- file Main.hs ----- -}
module Main where

import Expr

main :: IO ()
main = do { print $ eval [expr|1 + 2|]
          ; case IntExpr 1 of
              { [expr|'int:n|] -> print n
              ; -               -> return ()
              }
          }

{- ----- file Expr.hs ----- -}
module Expr where

import qualified Language.Haskell.TH as TH
import Language.Haskell.TH.Quote

data Expr = IntExpr Integer
          | AntiIntExpr String
          | BinopExpr BinOp Expr Expr
          | AntiExpr String
          deriving (Show, Typeable, Data)

data BinOp = AddOp
           | SubOp
           | MulOp
```

(continues on next page)

(continued from previous page)

```

    | DivOp
    deriving(Show, Typeable, Data)

eval :: Expr -> Integer
eval (IntExpr n)      = n
eval (BinopExpr op x y) = (opToFun op) (eval x) (eval y)
  where
    opToFun AddOp = (+)
    opToFun SubOp = (-)
    opToFun MulOp = (*)
    opToFun DivOp = div

expr = QuasiQuoter { quoteExp = parseExprExp, quotePat =  parseExprPat }

-- Parse an Expr, returning its representation as
-- either a Q Exp or a Q Pat. See the referenced paper
-- for how to use SYB to do this by writing a single
-- parser of type String -> Expr instead of two
-- separate parsers.

parseExprExp :: String -> Q Exp
parseExprExp ...

parseExprPat :: String -> Q Pat
parseExprPat ...

```

Now run the compiler:

```
$ ghc --make -XQuasiQuotes Main.hs -o main
```

Run “main” and here is your output:

```
$ ./main
3
1
```

## 6.14 Bang patterns and Strict Haskell

In high-performance Haskell code (e.g. numeric code) eliminating thunks from an inner loop can be a huge win. GHC supports three extensions to allow the programmer to specify use of strict (call-by-value) evaluation rather than lazy (call-by-need) evaluation.

- Bang patterns (*BangPatterns* (page 595)) makes pattern matching and let bindings stricter.
- Strict data types (*StrictData* (page 597)) makes constructor fields strict by default, on a per-module basis.
- Strict pattern (*Strict* (page 597)) makes all patterns and let bindings strict by default, on a per-module basis.

The latter two extensions are simply a way to avoid littering high-performance code with bang patterns, making it harder to read.

Bang patterns and strict matching do not affect the type system in any way.

### 6.14.1 Bang patterns

#### BangPatterns

##### Since

6.8.1

##### Status

Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314)

Allow use of bang pattern syntax.

GHC supports an extension of pattern matching called *bang patterns*, written `!pat`. Bang patterns are available by default as a part of [GHC2021](#) (page 314).

The main idea is to add a single new production to the syntax of patterns:

```
pat ::= !pat
```

Matching an expression `e` against a pattern `!p` is done by first evaluating `e` (to WHNF) and then matching the result against `p`. Example:

```
f1 !x = True
```

This definition makes `f1` is strict in `x`, whereas without the bang it would be lazy.

Note the following points:

- Bang patterns can be nested:

```
f2 (!x, y) = [x,y]
```

Here, `f2` is strict in `x` but not in `y`.

- Bang patterns can be used in case expressions too:

```
g1 x = let y = f x in body
g2 x = case f x of { y -> body }
g3 x = case f x of { !y -> body }
```

The functions `g1` and `g2` mean exactly the same thing. But `g3` evaluates `(f x)`, binds `y` to the result, and then evaluates `body`.

- Bang patterns do not have any effect with constructor patterns:

```
f3 !(x,y) = [x,y]
f4 (x,y)  = [x,y]
```

Here, `f3` and `f4` are identical; putting a bang before a pattern that forces evaluation anyway does nothing. However, see the caveat below.

- There is one problem with syntactic ambiguity. Consider:

```
f !x = 3
```

Is this a definition of the infix function “(!)”, or of the “`f`” with a bang pattern? GHC resolves this ambiguity by looking at the surrounding whitespace:

```
a ! b = ...    -- infix operator
a !b = ...    -- bang pattern
```

See [GHC Proposal #229](#) for the precise rules.

#### 6.14.1.1 Strict bindings

The `BangPatterns` extension furthermore enables syntax for strict `let` or `where` bindings with `!pat = expr`. For example,

```
let !x = e in body
let !(p,q) = e in body
```

In both cases `e` is evaluated before starting to evaluate `body`.

Note the following points:

- A strict binding (with a top level `!`) should not be thought of as a regular pattern binding that happens to have a bang pattern (*Bang patterns* (page 595)) on the LHS. Rather, the top level `!` should be considered part of the `let`-binding, rather than part of the pattern. This makes a difference when we come to the rules in *Dynamic semantics of bang patterns* (page 600).
- Only a top-level bang (perhaps under parentheses) makes the binding strict; otherwise, it is considered a normal bang pattern. For example,

```
let (!x,[y]) = e in b
```

is equivalent to this:

```
let { t = case e of (x,[y]) -> x `seq` (x,y)
      x = fst t
      y = snd t }
in b
```

The binding is lazy, but when either `x` or `y` is evaluated by `b` the entire pattern is matched, including forcing the evaluation of `x`.

- Because the `!` in a strict binding is not a bang pattern, it must be visible without looking through pattern synonyms

```
pattern Bang x <- !x
f1 = let Bang x = y in ...
f2 = let !x      = y in ... -- not equivalent to f1
```

- Strict bindings are not allowed at the top level of a module.
- See *Semantics of let bindings with bang patterns* (page 600) for the detailed semantics, and the [Haskell prime feature description](#) for more discussion and examples.

## 6.14.2 Strict-by-default data types

### StrictData

**Since**  
8.0.1

Make fields of data types defined in the current module strict by default.

Informally the `StrictData` language extension switches data type declarations to be strict by default allowing fields to be lazy by adding a `~` in front of the field.

When the user writes

```
data T = C a
data T' = C' ~a
```

we interpret it as if they had written

```
data T = C !a
data T' = C' a
```

The extension only affects definitions in this module.

The `~` annotation must be written in prefix form:

```
data T = MkT ~Int    -- valid
data T = MkT ~ Int   -- invalid
```

See [GHC Proposal #229](#) for the precise rules.

## 6.14.3 Strict-by-default pattern bindings

### Strict

**Implies**  
[StrictData](#) (page 597)

**Since**  
8.0.1

Make bindings in the current module strict by default.

Informally the `Strict` language extension switches functions, data types, and bindings to be strict by default, allowing optional laziness by adding `~` in front of a variable. This essentially reverses the present situation where laziness is default and strictness can be optionally had by adding `!` in front of a variable.

`Strict` implies [StrictData](#) (page 597).

- **Function definitions**

When the user writes

```
f x = ...
```

we interpret it as if they had written

```
f !x = ...
```

Adding ~ in front of x gives the regular lazy behavior.

Turning patterns into irrefutable ones requires ~(~p) when Strict is enabled.

- **Let/where bindings**

When the user writes

```
let x = ...  
let pat = ...
```

we interpret it as if they had written

```
let !x = ...  
let !pat = ...
```

Adding ~ in front of x gives the regular lazy behavior. The general rule is that we add an implicit bang on the outermost pattern, unless disabled with ~.

- **Pattern matching in case expressions, lambdas, do-notation, etc**

The outermost pattern of all pattern matches gets an implicit bang, unless disabled with ~. This applies to case expressions, patterns in lambda, do-notation, list comprehension, and so on. For example

```
case x of (a,b) -> rhs
```

is interpreted as

```
case x of !(a,b) -> rhs
```

Since the semantics of pattern matching in case expressions is strict, this usually has no effect whatsoever. But it does make a difference in the degenerate case of variables and newtypes. So

```
case x of y -> rhs
```

is lazy in Haskell, but with Strict is interpreted as

```
case x of !y -> rhs
```

which evaluates x. Similarly, if newtype Age = MkAge Int, then

```
case x of MkAge i -> rhs
```

is lazy in Haskell; but with Strict the added bang makes it strict.

Similarly

```
\ x -> body  
do { x <- rhs; blah }  
[ e | x <- rhs; blah ]
```

all get implicit bangs on the x pattern.



- **Nested patterns**

Notice that we do *not* put bangs on nested patterns. For example

```
let (p,q) = if flob then (undefined, undefined) else (True, False)
in ...
```

will behave like

```
let !(p,q) = if flob then (undefined, undefined) else (True,False)
in ...
```

which will strictly evaluate the right hand side, and bind `p` and `q` to the components of the pair. But the pair itself is lazy (unless we also compile the Prelude with `Strict`; see [Modularity](#) (page 599) below). So `p` and `q` may end up bound to `undefined`. See also [Dynamic semantics of bang patterns](#) (page 600) below.

- **Top level bindings**

are unaffected by `Strict`. For example:

```
x = factorial 20
(y,z) = if x > 10 then True else False
```

Here `x` and the pattern binding `(y,z)` remain lazy. Reason: there is no good moment to force them, until first use.

- **Newtypes**

There is no effect on newtypes, which simply rename existing types. For example:

```
newtype T = C a
f (C x) = rhs1
g !(C x) = rhs2
```

In ordinary Haskell, `f` is lazy in its argument and hence in `x`; and `g` is strict in its argument and hence also strict in `x`. With `Strict`, both become strict because `f`'s argument gets an implicit bang.

#### 6.14.4 Modularity

`Strict` and `StrictData` only affects definitions in the module they are used in. Functions and data types imported from other modules are unaffected. For example, we won't evaluate the argument to `Just` before applying the constructor. Similarly we won't evaluate the first argument to `Data.Map.findWithDefault` before applying the function.

This is crucial to preserve correctness. Entities defined in other modules might rely on laziness for correctness (whether functional or performance).

Tuples, lists, `Maybe`, and all the other types from Prelude continue to have their existing, lazy, semantics.

### 6.14.5 Dynamic semantics of bang patterns

The semantics of Haskell pattern matching is described in [Section 3.17.2](#) of the Haskell Report. To this description add one extra item 9, saying:

- Matching the pattern `!pat` against a value `v` behaves as follows:
  - if `v` is bottom, the match diverges
  - otherwise, `pat` is matched against `v`

Similarly, in Figure 4 of [Section 3.17.3](#), add a new case (w):

```
case v of { !pat -> e; _ -> e' }  
= v `seq` case v of { pat -> e; _ -> e' }
```

That leaves `let` expressions, whose translation is given in [Section 3.12](#) of the Haskell Report. Replace the “Translation” there with the following one. Given `let { bind1 ... bindn } in body`:

---

#### SPLIT-LAZY

Given a lazy pattern binding `p = e`, where `p` is not a variable, and `x1...xn` are the variables bound by `p`, and all these binders have lifted type, replace the binding with this (where `v` is fresh):

```
v = case e of { p -> (x1, ..., xn) }  
x1 = case v of { (x1, ..., xn) -> x1 }  
...  
xn = case v of { (x1, ..., xn) -> xn }``
```

If `n=1` (i.e. exactly one variable is bound), the desugaring uses the `Solo` type to make a 1-tuple.

---

#### SPLIT-STRICT

Given a strict pattern binding `!p = e`, where `x1...xn` are the variables bound by `p`, and all these binders have lifted type:

1. Replace the binding with this (where `v` is fresh):

```
v = case e of { !p -> (x1, ..., xn) }  
(x1, ..., xn) = v
```

2. Replace body with `v `seq` body`.

As in SPLIT-LAZY, if `n=1` the desugaring uses the `Solo` type to make a 1-tuple.

This transformation is illegal at the top level of a module (since there is no body), so strict bindings are illegal at top level.

The transformation is correct when `p` is a variable `x`, but can be optimised to:

```
let !x = e in body ==> let x = e in x `seq` body
```

---

#### CASE

Given a non-recursive strict pattern binding `!p = e`, where `x1...xn` are the variables bound by `p`, and any of the binders has unlifted type: replace the binding with nothing at all, and replace body with `case e of p -> body`.

This transformation is illegal at the top level of a module, so such bindings are rejected.

The result of this transformation is ill-scoped if any of the binders `x1...xn` appears in `e`; hence the restriction to non-recursive pattern bindings.

Exactly the same transformation applies to a non-recursive lazy pattern binding (i.e. one lacking a top-level `!`) that binds any unlifted variables; but such a binding emits a warning *-Wunbanged-strict-patterns* (page 120). The warning encourages the programmer to make visible the fact that this binding is necessarily strict.

The result will be a (possibly) recursive set of bindings, binding only simple variables on the left hand side. (One could go one step further, as in the Haskell Report and make the recursive bindings non-recursive using `fix`, but we do not do so in Core, and it only obfuscates matters, so we do not do so here.)

The translation is carefully crafted to make bang patterns meaningful for recursive and polymorphic bindings as well as straightforward non-recursive bindings.

Here are some examples of how this translation works. The first expression of each sequence is Haskell source; the subsequent ones are Core.

Here is a simple non-recursive case:

```
let x :: Int      -- Non-recursive
    !x = factorial y
in body

==> (SPLIT-STRICT)
    let x = factorial y in x `seq` body

==> (inline seq)
    let x = factorial y in case x of !x -> body

==> (inline x)
    case factorial y of !x -> body
```

Same again, only with a pattern binding:

```
let !(Just x) = e in body

==> (SPLIT-STRICT)
    let v = case e of !(Just x) -> Solo x
        Solo x = v
    in v `seq` body

==> (SPLIT-LAZY, drop redundant bang)
    let v = case e of Just x -> Solo x
        x = case v of Solo x -> x
    in v `seq` body

==> (inline seq, float x,y bindings inwards)
    let v = case e of Just x -> Solo x
```

(continues on next page)

(continued from previous page)

```

in case v of !v -> let x = case v of Solo x -> x
                in body

==>> (fluff up v's pattern; this is a standard Core optimisation)
let v = case e of Just x -> Solo x
in case v of v@(Solo p) -> let x = case v of Solo x -> x
                        in body

==>> (case of known constructor)
let v = case e of Just x -> Solo x
in case v of v@(Solo p) -> let x = p
                        in body

==>> (inline x, v)
case (case e of Just x -> Solo x) of
  Solo p -> body[p/x]

==>> (case of case)
case e of Just x -> body[p/x]

```

The final form is just what we want: a simple case expression. Notice, crucially, that that *pattern* `Just x` is forced eagerly, but `x` itself is not evaluated unless and until `body` does so. Note also that this example uses a pattern that binds exactly one variable, and illustrates the use of the `Solo` 1-tuple.

Rule (SPLIT-STRICT) applies even if the pattern binds no variables:

```

let !(True,False) = e in body

==>> (SPLIT-STRICT)
let v = case e of !(True,False) -> (); () = v in v `seq` body

==>> (inline, simplify, drop redundant bang)
case e of (True,False) -> body

```

That is, we force `e` and check that it has the right form before proceeding with `body`. This happens even if the pattern is itself vacuous:

```

let !_ = e in body

==>> (SPLIT-STRICT)
let v = case e of !_ -> (); () = v in v `seq` body

==>> (inline, simplify)
case e of !_ -> body

```

Again, `e` is forced before evaluating `body`. This (along with `!x = e`) is the reason that (SPLIT-STRICT) uses a bang-pattern in the case in the desugared right-hand side.

Note that rule (CASE) applies only when any of the *binders* is unlifted; it is irrelevant whether the binding *itself* is unlifted (see [GHC proposal #35](#)). For example (see [Unboxed types and primitive operations](#) (page 609)):

```
let (# a::Int, b::Bool #) = e in body
====> (SPLIT-LAZY)
    let v = case e of (# a,b #) -> (a,b)
        a = case v of (a,b) -> a
        b = case v of (a,b) -> b
    in body
```

Even though the tuple pattern is unboxed, it is matched only when `a` or `b` are evaluated in `body`.

Here is an example with an unlifted data type:

```
type T :: UnliftedType
data T = MkT Int
f1 x = let MkT y = blah in body1
f2 x = let z :: T = blah in body2
f3 x = let _ :: T = blah in body3
```

In `f1`, even though `T` is an unlifted type, the pattern `MkT y` binds a lifted variable `y`, so (SPLIT-LAZY) applies, and `blah` is not evaluated until `body1` evaluates `y`. In contrast, in `f2` the pattern `z :: T` binds a variable `z` of unlifted type, so (CASE) applies and the `let`-binding is strict. In `f3` the pattern binds no variables, so again it is lazy like `f1`.

Here is a recursive case

```
letrec xs :: [Int] -- Recursive
    !xs = factorial y : xs
in body

====> (SPLIT-STRICT)
    letrec xs = factorial y : xs in xs `seq` body

====> (inline seq)
    letrec xs = factorial y : xs in case xs of xs -> body

====> (eliminate case of value)
    letrec xs = factorial y : xs in body
```

and a polymorphic one:

```
let f :: forall a. [a] -> [a] -- Polymorphic
    !f = fst (reverse, True)
in body

====> (SPLIT-STRICT)
    let f = /\a. fst (reverse a, True) in f `seq` body

====> (inline seq, inline f)
    case (/\a. fst (reverse a, True)) of !f -> body
```

Notice that the `seq` is added only in the translation to Core. If we did it in Haskell source, thus

```
let f = ... in f `seq` body
```

then `f`'s polymorphic type would get instantiated, so the Core translation would be

```
let f = ... in f Any `seq` body
```

When overloading is involved, the results might be slightly counter intuitive:

```
let f :: forall a. Eq a => a -> [a] -> Bool    -- Overloaded
    !f = fst (member, True)
in body

==>> (SPLIT-STRICT)
    let f = /\a \(d::Eq a). fst (member, True) in f `seq` body

==>> (inline seq, case of value)
    let f = /\a \(d::Eq a). fst (member, True) in body
```

Note that the bang has no effect at all in this case

## 6.15 Parallel and Concurrent

GHC implements some major extensions to Haskell to support concurrent and parallel programming. Let us first establish terminology:

- *Parallelism* means running a Haskell program on multiple processors, with the goal of improving performance. Ideally, this should be done invisibly, and with no semantic changes.
- *Concurrency* means implementing a program by using multiple I/O-performing threads. While a concurrent Haskell program *can* run on a parallel machine, the primary goal of using concurrency is not to gain performance, but rather because that is the simplest and most direct way to write the program. Since the threads perform I/O, the semantics of the program is necessarily non-deterministic.

GHC supports both concurrency and parallelism.

### 6.15.1 Concurrent and Parallel Haskell

#### 6.15.1.1 Concurrent Haskell

Concurrent Haskell is the name given to GHC's concurrency extension. It is enabled by default, so no special flags are required. The [Concurrent Haskell paper](#) is still an excellent resource, as is [Tackling the awkward squad](#).

To the programmer, Concurrent Haskell introduces no new language constructs; rather, it appears simply as a library, `Control.Concurrent`. The functions exported by this library include:

- Forking and killing threads.
- Sleeping.
- Synchronised mutable variables, called MVars
- Support for bound threads; see the paper [Extending the FFI with concurrency](#).

### 6.15.1.2 Parallel Haskell

GHC includes support for running Haskell programs in parallel on symmetric, shared-memory multi-processor (SMP). By default GHC runs your program on one processor; if you want it to run in parallel you must link your program with the `-threaded` (page ??), and run it with the RTS `-N <x>` (page 151) option; see [Using SMP parallelism](#) (page 150)). The runtime will schedule the running Haskell threads among the available OS threads, running as many in parallel as you specified with the `-N <x>` (page 151) RTS option.

### 6.15.1.3 Annotating pure code for parallelism

Ordinary single-threaded Haskell programs will not benefit from enabling SMP parallelism alone: you must expose parallelism to the compiler. One way to do so is forking threads using Concurrent Haskell ([Concurrent Haskell](#) (page 604)), but the simplest mechanism for extracting parallelism from pure code is to use the `par` combinator, which is closely related to (and often used with) `seq`. Both of these are available from the [parallel library](#):

```
infixr 0 `par`
infixr 1 `pseq`

par  :: a -> b -> b
pseq :: a -> b -> b
```

The expression `(x `par` y)` *sparks* the evaluation of `x` (to weak head normal form) and returns `y`. Sparks are queued for execution in FIFO order, but are not executed immediately. If the runtime detects that there is an idle CPU, then it may convert a spark into a real thread, and run the new thread on the idle CPU. In this way the available parallelism is spread amongst the real CPUs.

For example, consider the following parallel version of our old nemesis, `nfib`:

```
import Control.Parallel

nfib :: Int -> Int
nfib n | n <= 1 = 1
      | otherwise = par n1 (pseq n2 (n1 + n2))
                    where n1 = nfib (n-1)
                          n2 = nfib (n-2)
```

For values of `n` greater than 1, we use `par` to spark a thread to evaluate `nfib (n-1)`, and then we use `pseq` to force the parent thread to evaluate `nfib (n-2)` before going on to add together these two subexpressions. In this divide-and-conquer approach, we only spark a new thread for one branch of the computation (leaving the parent to evaluate the other branch). Also, we must use `pseq` to ensure that the parent will evaluate `n2` *before* `n1` in the expression `(n1 + n2 + 1)`. It is not sufficient to reorder the expression as `(n2 + n1 + 1)`, because the compiler may not generate code to evaluate the addends from left to right.

Note that we use `pseq` rather than `seq`. The two are almost equivalent, but differ in their runtime behaviour in a subtle way: `seq` can evaluate its arguments in either order, but `pseq` is required to evaluate its first argument before its second, which makes it more suitable for controlling the evaluation order in conjunction with `par`.

When using `par`, the general rule of thumb is that the sparked computation should be required at a later time, but not too soon. Also, the sparked computation should not be too small,

otherwise the cost of forking it in parallel will be too large relative to the amount of parallelism gained. Getting these factors right is tricky in practice.

It is possible to glean a little information about how well `par` is working from the runtime statistics; see *[RTS options to control the garbage collector](#)* (page 222).

More sophisticated combinators for expressing parallelism are available from the `Control.Parallel.Strategies` module in the [parallel package](#). This module builds functionality around `par`, expressing more elaborate patterns of parallel computation, such as `parallel map`.

## 6.15.2 Software Transactional Memory

GHC now supports a new way to coordinate the activities of Concurrent Haskell threads, called Software Transactional Memory (STM). The [STM papers](#) are an excellent introduction to what STM is, and how to use it.

The main library you need to use is the [stm library](#). The main features supported are these:

- Atomic blocks.
- Transactional variables.
- Operations for composing transactions: `retry`, and `orElse`.
- Data invariants.

All these features are described in the papers mentioned earlier.

## 6.15.3 Static pointers

### StaticPointers

**Since**  
7.10.1

Allow use of static pointer syntax.

The language extension *[StaticPointers](#)* (page 606) adds a new syntactic form `static e`, which stands for a reference to the closed expression `(e)`. This reference is stable and portable, in the sense that it remains valid across different processes on possibly different machines. Thus, a process can create a reference and send it to another process that can resolve it to `(e)`.

With this extension turned on, `static` is no longer a valid identifier.

Static pointers were first proposed in the paper [Towards Haskell in the cloud](#), Jeff Epstein, Andrew P. Black and Simon Peyton-Jones, Proceedings of the 4th ACM Symposium on Haskell, pp. 118-129, ACM, 2011.



### 6.15.3.1 Using static pointers

Each reference is given a key which can be used to locate it at runtime with `GHC.StaticPtr.unsafeLookupStaticPtr` which uses a global and immutable table called the Static Pointer Table. The compiler includes entries in this table for all static forms found in the linked modules. The value can be obtained from the reference via `GHC.StaticPtr.deRefStaticPtr`.

The body `e` of a `static e` expression must be a closed expression. Where we say an expression is *closed* when all of its free (type) variables are closed. And a variable is *closed* if it is let-bound to a *closed* expression and its type is *closed* as well. And a type is *closed* if it has no free variables.

All of the following are permissible:

```
inc :: Int -> Int
inc x = x + 1

ref1 = static 'a'
ref2 = static inc
ref3 = static (inc 1)
ref4 = static ((\x -> x + 1) (1 :: Int))
ref5 = static (let x = 'a' in x)
ref6 = let x = 'a' in static x
```

While the following definitions are rejected:

```
ref7 y = let x = y in static x      -- x is not closed
ref8 y = static (let x = 1 in y)    -- y is not let-bound
ref9 (y :: a) = let x = undefined :: a
                  in static x      -- x has a non-closed type
```

**Note:** While modules loaded in GHCi with the `:load` (page 59) command may use *StaticPointers* (page 606) and static expressions, statements entered on the REPL may not. This is a limitation of GHCi; see [#12356](#) for details.

**Note:** The set of keys used for locating static pointers in the Static Pointer Table is not guaranteed to remain stable for different program binaries. Or in other words, only processes launched from the same program binary are guaranteed to use the same set of keys.

### 6.15.3.2 Static semantics of static pointers

Informally, if we have a closed expression

```
e :: forall a_1 ... a_n . t
```

the static form is of type

```
static e :: (IsStatic p, Typeable a_1, ... , Typeable a_n) => p t
```

A static form determines a value of type `StaticPtr t`, but just like `OverloadedLists` and `OverloadedStrings`, this literal expression is overloaded to allow lifting a `StaticPtr` into another type implicitly, via the `IsStatic` class:

```
class IsStatic p where
  fromStaticPtr :: Typeable a => StaticPtr a -> p a
```

The only predefined instance is the obvious one that does nothing:

```
instance IsStatic StaticPtr where
  fromStaticPtr sptr = sptr
```

See `GHC.StaticPtr.IsStatic`.

Furthermore, type `t` is constrained to have a `Typeable` instance. The following are therefore illegal:

```
static id                -- No Typeable instance for (a -> a)
static Control.Monad.ST.runST -- No Typeable instance for ((forall s. ST s
->a) -> a)
```

That being said, with the appropriate use of wrapper datatypes, the above limitations induce no loss of generality:

```
{-# LANGUAGE ConstraintKinds      #-}
{-# LANGUAGE ExistentialQuantification #-}
{-# LANGUAGE Rank2Types          #-}
{-# LANGUAGE StandaloneDeriving   #-}
{-# LANGUAGE StaticPointers      #-}

import Control.Monad.ST
import Data.Typeable
import GHC.StaticPtr

data Dict c = c => Dict

g1 :: Typeable a => StaticPtr (Dict (Show a) -> a -> String)
g1 = static (\Dict -> show)

data Rank2Wrapper f = R2W (forall s. f s)
  deriving Typeable
newtype Flip f a s = Flip { unFlip :: f s a }
  deriving Typeable

g2 :: Typeable a => StaticPtr (Rank2Wrapper (Flip ST a) -> a)
g2 = static \(R2W f) -> runST (unFlip f))
```

## 6.16 Unboxed types and primitive operations

GHC is built on a raft of primitive data types and operations; “primitive” in the sense that they cannot be defined in Haskell itself. While you really can use this stuff to write fast code, we generally find it a lot less painful, and more satisfying in the long run, to use higher-level language features and libraries. With any luck, the code you write will be optimised to the efficient unboxed version in any case. And if it isn't, we'd like to know about it.

All these primitive data types and operations are exported by the module [GHC.Exts](#).

If you want to mention any of the primitive data types or operations in your program, you must first import `GHC.Exts` to bring them into scope. Many of them have names ending in `#`, and to mention such names you need the [MagicHash](#) (page 321) extension.

To enable defining literals for other primitive data types, see the [ExtendedLiterals](#) (page 546) extension.

The primops make extensive use of [unboxed types](#) (page 609) and [unboxed tuples](#) (page 611), which we briefly summarise here.

### 6.16.1 Unboxed types

Most types in GHC are boxed, which means that values of that type are represented by a pointer to a heap object. The representation of a Haskell `Int`, for example, is a two-word heap object. An unboxed type, however, is represented by the value itself, no pointers or heap allocation are involved.

Unboxed types correspond to the “raw machine” types you would use in C: `Int#` (long int), `Double#` (double), `Addr#` (void \*), etc. The *primitive operations* (`PrimOps`) on these types are what you might expect; e.g., `(+#)` is addition on `Int#`s, and is the machine-addition that we all know and love—usually one instruction.

Primitive (unboxed) types cannot be defined in Haskell, and are therefore built into the language and compiler. Primitive types are always unlifted; that is, a value of a primitive type cannot be bottom. (Note: a “boxed” type means that a value is represented by a pointer to a heap object; a “lifted” type means that terms of that type may be bottom. See the next paragraph for an example.) We use the convention (but it is only a convention) that primitive types, values, and operations have a `#` suffix (see [The magic hash](#) (page 321)). For some primitive types we have special syntax for literals, also described in the *same section* (page ??).

Primitive values are often represented by a simple bit-pattern, such as `Int#`, `Float#`, `Double#`. But this is not necessarily the case: a primitive value might be represented by a pointer to a heap-allocated object. Examples include `Array#`, the type of primitive arrays. Thus, `Array#` is an unlifted, boxed type. A primitive array is heap-allocated because it is too big a value to fit in a register, and would be too expensive to copy around; in a sense, it is accidental that it is represented by a pointer. If a pointer represents a primitive value, then it really does point to that value: no unevaluated thunks, no indirections. Nothing can be at the other end of the pointer than the primitive value. A numerically-intensive program using unboxed types can go a *lot* faster than its “standard” counterpart—we saw a threefold speedup on one example.

### 6.16.2 Unboxed type kinds

Because unboxed types are represented without the use of pointers, we cannot store them in a polymorphic data type. For example, the `Just` node of `Just 42#` would have to be different from the `Just` node of `Just 42`; the former stores an integer directly, while the latter stores a pointer. GHC currently does not support this variety of `Just` nodes (nor for any other data type). Accordingly, the *kind* of an unboxed type is different from the kind of a boxed type.

The Haskell Report describes that `*` (spelled `Type` and imported from `Data.Kind` in the GHC dialect of Haskell) is the kind of ordinary data types, such as `Int`. Furthermore, type constructors can have kinds with arrows; for example, `Maybe` has kind `Type -> Type`. Unboxed types have a kind that specifies their runtime representation. For example, the type `Int#` has kind `TYPE IntRep` and `Double#` has kind `TYPE DoubleRep`. These kinds say that the runtime representation of an `Int#` is a machine integer, and the runtime representation of a `Double#` is a machine double-precision floating point. In contrast, the kind `Type` is actually just a synonym for `TYPE LiftedRep`. More details of the `TYPE` mechanisms appear in the *section on runtime representation polymorphism* (page ??).

Given that `Int#`'s kind is not `Type`, then it follows that `Maybe Int#` is disallowed. Similarly, because type variables tend to be of kind `Type` (for example, in `(.) :: (b -> c) -> (a -> b) -> a -> c`, all the type variables have kind `Type`), polymorphism tends not to work over primitive types. Stepping back, this makes some sense, because a polymorphic function needs to manipulate the pointers to its data, and most primitive types are unboxed.

There are some restrictions on the use of primitive types:

- You cannot define a newtype whose representation type (the argument type of the data constructor) is an unboxed type. Thus, this is illegal:

```
newtype A = MkA Int#
```

However, this restriction can be relaxed by enabling *UnliftedNewtypes* (page 613). The *section on unlifted newtypes* (page 613) details the behavior of such types.

- You cannot bind a variable with an unboxed type in a *top-level* binding.
- You cannot bind a variable with an unboxed type in a *recursive* binding.
- You may bind unboxed variables in a (non-recursive, non-top-level) pattern binding, but you must make any such pattern-match strict. (Failing to do so emits a warning *-Wunbanged-strict-patterns* (page 120).) For example, rather than:

```
data Foo = Foo Int Int#  
  
f x = let (Foo a b, w) = ..rhs.. in ..body..
```

you must write:

```
data Foo = Foo Int Int#  
  
f x = let !(Foo a b, w) = ..rhs.. in ..body..
```

since `b` has type `Int#`. See *Dynamic semantics of bang patterns* (page 600).

### 6.16.3 Unboxed tuples

#### UnboxedTuples

##### Implies

[UnboxedSums](#) (page 612)

##### Since

6.8.1

Unboxed tuples aren't really exported by `GHC.Exts`; they are a syntactic extension ([UnboxedTuples](#) (page 611)). An unboxed tuple looks like this:

```
(# e_1, ..., e_n #)
```

where `e_1..e_n` are expressions of any type (primitive or non-primitive). The type of an unboxed tuple looks the same.

Note that when unboxed tuples are enabled, `#` is a single lexeme, so for example when using operators like `#` and `#-` you need to write `( # )` and `( #- )` rather than `(#)` and `(#-)`.

Unboxed tuples are used for functions that need to return multiple values, but they avoid the heap allocation normally associated with using fully-fledged tuples. When an unboxed tuple is returned, the components are put directly into registers or on the stack; the unboxed tuple itself does not have a composite representation. Many of the primitive operations listed in `primops.txt.pp` return unboxed tuples. In particular, the `I0` and `ST` monads use unboxed tuples to avoid unnecessary allocation during sequences of operations.

The typical use of unboxed tuples is simply to return multiple values, binding those multiple results with a case expression, thus:

```
f x y = (# x+1, y-1 #)
g x = case f x x of { (# a, b #) -> a + b }
```

You can have an unboxed tuple in a pattern binding, thus

```
f x = let (# p,q #) = h x in ..body..
```

If the types of `p` and `q` are not unboxed, the resulting binding is lazy like any other Haskell pattern binding. The above example desugars like this:

```
f x = let t = case h x of { (# p,q #) -> (p,q) }
      p = fst t
      q = snd t
  in ..body..
```

Indeed, the bindings can even be recursive. See [Dynamic semantics of bang patterns](#) (page 600) for a more precise account.

To refer to the unboxed tuple type constructors themselves, e.g. if you want to attach instances to them, use `(# #)`, `(#,#)`, `(#,#)`, etc. This mirrors the syntax for boxed tuples `()`, `(,)`, `(,,)`, etc.

## 6.16.4 Unboxed sums

### UnboxedSums

#### Implied by

*UnboxedTuples* (page 611)

#### Since

8.2.1

Enable the use of unboxed sum syntax. Implied by *UnboxedTuples* (page 611).

*-XUnboxedSums* enables new syntax for anonymous, unboxed sum types. The syntax for an unboxed sum type with N alternatives is

```
(# t_1 | t_2 | ... | t_N #)
```

where  $t_1 \dots t_N$  are types (which can be unlifted, including unboxed tuples and sums).

Unboxed tuples can be used for multi-arity alternatives. For example:

```
(# (# Int, String #) | Bool #)
```

The term level syntax is similar. Leading and preceding bars (|) indicate which alternative it is. Here are two terms of the type shown above:

```
(# (# 1, "foo" #) | #) -- first alternative
(# | True #) -- second alternative
```

The pattern syntax reflects the term syntax:

```
case x of
  (# (# i, str #) | #) -> ...
  (# | bool #) -> ...
```

Note that spaces are always required around bars. For example,  $(\# \mid 1\# \mid \mid \#)$  is valid, but  $(\# \mid 1\# \mid \#)$  and  $(\# \mid 1\# \mid \mid \#)$  are both invalid.

The type constructors themselves can be written in prefix form as  $(\# \mid \#)$ ,  $(\# \mid \mid \#)$ ,  $(\# \mid \mid \mid \#)$ , etc. Partial applications must also use prefix form, i.e.  $(\# \mid \#) \text{Int}\#$ . Saturated applications can be written either way, so that  $(\# \mid \#) \text{Int}\# \text{Float}\#$  is equivalent to  $(\# \text{Int}\# \mid \text{Float}\# \#)$ .

Unboxed sums are “unboxed” in the sense that, instead of allocating sums in the heap and representing values as pointers, unboxed sums are represented as their components, just like unboxed tuples. These “components” depend on alternatives of a sum type. Like unboxed tuples, unboxed sums are lazy in their lifted components.

The code generator tries to generate as compact layout as possible for each unboxed sum. In the best case, size of an unboxed sum is size of its biggest alternative plus one word (for a tag). The algorithm for generating the memory layout for a sum type works like this:

- All types are classified as one of these classes: 32bit word, 64bit word, 32bit float, 64bit float, pointer.
- For each alternative of the sum type, a layout that consists of these fields is generated. For example, if an alternative has `Int`, `Float#` and `String` fields, the layout will have an 32bit word, 32bit float and pointer fields.

- Layout fields are then overlapped so that the final layout will be as compact as possible. For example, suppose we have the unboxed sum:

```
(# (# Word32#, String, Float# #)
 | (# Float#, Float#, Maybe Int #) #)
```

The final layout will be something like

```
Int32, Float32, Float32, Word32, Pointer
```

The first Int32 is for the tag. There are two Float32 fields because floating point types can't overlap with other types, because of limitations of the code generator that we're hoping to overcome in the future. The second alternative needs two Float32 fields: The Word32 field is for the Word32# in the first alternative. The Pointer field is shared between String and Maybe Int values of the alternatives.

As another example, this is the layout for the unboxed version of Maybe a type, (# (# #) | a #):

```
Int32, Pointer
```

The Pointer field is not used when tag says that it's Nothing. Otherwise Pointer points to the value in Just. As mentioned above, this type is lazy in its lifted field. Therefore, the type

```
data Maybe' a = Maybe' (# (# #) | a #)
```

is *precisely* isomorphic to the type Maybe a, although its memory representation is different.

In the degenerate case where all the alternatives have zero width, such as the Bool-like (# (# #) | (# #) #), the unboxed sum layout only has an Int32 tag field (i.e., the whole thing is represented by an integer).

### 6.16.5 Unlifted Newtypes

#### UnliftedNewtypes

Since  
8.10.1

Enable the use of newtypes over types with non-lifted runtime representations.

GHC implements an *UnliftedNewtypes* (page 613) extension as specified in [the GHC proposal #98](#). *UnliftedNewtypes* (page 613) relaxes the restrictions around what types can appear inside of a newtype. For example, the type

```
newtype A = MkA Int#
```

is accepted when this extension is enabled. This creates a type `A :: TYPE IntRep` and a data constructor `MkA :: Int# -> A`. Although the kind of A is inferred by GHC, there is nothing visually distinctive about this type that indicated that is it not of kind Type like newtypes typically are. *GADTSyntax* (page ??) can be used to provide a kind signature for additional clarity

```
newtype A :: TYPE IntRep where
  MkA :: Int# -> A
```

The Coercible machinery works with unlifted newtypes just like it does with lifted types. In either of the equivalent formulations of A given above, users would additionally have access to a coercion between A and Int#.

As a consequence of the *representation-polymorphic binder restriction* (page ??), representation-polymorphic fields are disallowed in data constructors of data types declared using data. However, since newtype data constructor application is implemented as a coercion instead of as function application, this restriction does not apply to the field inside a newtype data constructor. Thus, the type checker accepts

```
newtype Identity# :: forall (r :: RuntimeRep). TYPE r -> TYPE r where
  MkIdentity# :: forall (r :: RuntimeRep) (a :: TYPE r). a -> Identity# a
```

And with *UnboxedSums* (page 612) enabled

```
newtype Maybe# :: forall (r :: RuntimeRep). TYPE r -> TYPE (SumRep '[r,
↳ TupleRep '[]]) where
  MkMaybe# :: forall (r :: RuntimeRep) (a :: TYPE r). (# a | (# #) #) -> Maybe
↳ # a
```

This extension also relaxes some of the restrictions around data family instances. In particular, *UnliftedNewtypes* (page 613) permits a newtype instance to be given a return kind of TYPE r, not just Type. For example, the following newtype instance declarations would be permitted:

```
class Foo a where
  data FooKey a :: TYPE IntRep
class Bar (r :: RuntimeRep) where
  data BarType r :: TYPE r

instance Foo Bool where
  newtype FooKey Bool = FooKeyBoolC Int#
instance Bar WordRep where
  newtype BarType WordRep = BarTypeWordRepC Word#
```

It is worth noting that *UnliftedNewtypes* (page 613) is *not* required to give the data families themselves return kinds involving TYPE, such as the FooKey and BarType examples above. The extension is only required for newtype instance declarations, such as FooKeyBoolC and BarTypeWordRepC above.

This extension impacts the determination of whether or not a newtype has a Complete User-Supplied Kind (CUSK). The exact impact is specified *the section on CUSKs* (page ??).



## 6.16.6 Unlifted Datatypes

### UnliftedDatatypes

#### Implies

[DataKinds](#) (page 404), [StandaloneKindSignatures](#) (page 417)

#### Since

9.2.1

Enable the declaration of data types with unlifted or levity-polymorphic result kind.

GHC implements the [UnliftedDatatypes](#) (page 615) extension as specified in the [GHC proposal #265](#). [UnliftedDatatypes](#) (page 615) relaxes the restrictions around what result kinds are allowed in data declarations. For example, the type

```
data UList a :: UnliftedType where
  UCons :: a -> UList a -> UList a
  UNil  :: UList a
```

defines a list type that lives in kind `UnliftedType` (e.g., `TYPE (BoxedRep Unlifted)`). As such, each occurrence of a term of that type is assumed to be evaluated (and the compiler makes sure that is indeed the case). In other words: Unlifted data types behave like data types in strict languages such as OCaml or Idris. However unlike [StrictData](#) (page 597), this extension will not change whether the fields of a (perhaps unlifted) data type are strict or lazy. For example, `UCons` is lazy in its first argument as its field has kind `Type`.

The fact that unlifted types are always evaluated allows GHC to elide evaluatedness checks at runtime. See the Motivation section of the proposal for how this can improve performance for some programs.

The above data declaration in GADT syntax correctly suggests that unlifted data types are compatible with the full GADT feature set. Somewhat conversely, you can also declare unlifted data types in Haskell98 syntax, which requires you to specify the result kind via [StandaloneKindSignatures](#) (page 417):

```
type UList :: Type -> UnliftedType
data UList a = UCons a (UList a) | UNil
```

You may even declare levity-polymorphic data types:

```
type PEither :: Type -> Type -> TYPE (BoxedRep l)
data PEither l r = PLeft l | PRight r

f :: PEither @Unlifted Int Bool -> Bool
f (PRight b) = b
f _         = False
```

While `f` above could reasonably be levity-polymorphic (as it evaluates its argument either way), GHC currently disallows the more general type `PEither @l Int Bool -> Bool`. This is a consequence of the *representation-polymorphic binder restriction* (page ??).

Pattern matching against an unlifted data type work just like that for lifted types; but see [Dynamic semantics of bang patterns](#) (page 600) for the semantics of pattern bindings involving unlifted data types.

Due to [#19487](#), it is not currently possible to declare levity-polymorphic data types with nullary data constructors. There is a workaround, though:

```
type T :: TYPE (BoxedRep l)
data T where
  MkT :: forall l. (() :: Constraint) => T @l
```

The use of `=>` makes the type of `MkT` lifted. If you want a zero-runtime-cost alternative, use `MkT :: Proxy# () -> T @l` instead and bear with the additional `proxy#` argument at construction sites.

This extension also relaxes some of the restrictions around data family instances. In particular, [UnliftedDatatypes](#) (page 615) permits a `data` instance to be given a return kind that unifies with `TYPE (BoxedRep l)`, not just `Type`. For example, the following `data` instance declarations would be permitted:

```
data family F a :: UnliftedType
data instance F Int = FInt

data family G a :: TYPE (BoxedRep l)
data instance G Int = GInt Int -- defaults to Type
data instance G Bool :: UnliftedType where
  GBool :: Bool -> G Bool
data instance G Char :: Type where
  GChar :: Char -> G Char
data instance G Double :: forall l. TYPE (BoxedRep l) where
  GDouble :: Int -> G @l Double
```

It is worth noting that [UnliftedDatatypes](#) (page 615) is *not* required to give the data families themselves return kinds involving `TYPE`, such as the `G` example above. The extension is only required for `data` instance declarations, such as `FInt` and `GBool` above.

## 6.17 Foreign function interface (FFI)

### ForeignFunctionInterface

**Since**  
6.8.1

**Status**  
Included in [GHC2024](#) (page 314), [GHC2021](#) (page 314), [Haskell2010](#) (page 315)

Allow use of the Haskell foreign function interface.

GHC (mostly) conforms to the Haskell Foreign Function Interface as specified in the Haskell Report. Refer to the [relevant chapter](#) of the Haskell Report for more details.

FFI support is enabled by default, but can be enabled or disabled explicitly with the [ForeignFunctionInterface](#) (page 616) flag.

GHC implements a number of GHC-specific extensions to the FFI Chapter of the Haskell 2010 Report. These extensions are described in [GHC extensions to the FFI Chapter](#) (page 618), but please note that programs using these features are not portable. Hence, these features should be avoided where possible.

The FFI libraries are documented in the accompanying library documentation; see for example the [Foreign](#) module.

## 6.17.1 GHC differences to the FFI Chapter

### 6.17.1.1 Guaranteed call safety

The Haskell 2010 Report specifies that *safe* FFI calls must allow foreign calls to safely call into Haskell code. In practice, this means that called functions also have to assume heap-allocated Haskell values may move around arbitrarily in order to allow for GC.

This greatly constrains library authors since it implies that it is not safe to pass any heap object reference to a *safe* foreign function call. For instance, it is often desirable to pass *unpinned* (page 633) `ByteArray#`s directly to native code to avoid making an otherwise-unnecessary copy. However, this can not be done safely for *safe* calls since the array might be moved by the garbage collector in the middle of the call.

The Chapter *does* allow for implementations to move objects around during *unsafe* calls as well. So strictly Haskell 2010-conforming programs cannot pass heap-allocated references to *unsafe* FFI calls either.

GHC, since version 8.4, **guarantees** that garbage collection will never occur during an *unsafe* call, even in the bytecode interpreter, and further guarantees that *unsafe* calls will be performed in the calling thread. Making it safe to pass heap-allocated objects to *unsafe* functions.

In previous releases, GHC would take advantage of the freedom afforded by the Chapter by performing *safe* foreign calls in place of *unsafe* calls in the bytecode interpreter. This meant that some packages which worked when compiled would fail under GHCi (e.g. [#13730](#)). But this is no longer the case in recent releases.

### 6.17.1.2 Interactions between safe calls and bound threads

A *safe* call calling into Haskell is run on a bound thread by the RTS. This means any nesting of *safe* calls will be executed on the same operating system thread. *Sequential safe* calls however do not enjoy this luxury and may be run on arbitrary OS threads.

This behaviour is considered an implementation detail and code relying on thread local state should instead use one of the interfaces provided in `Control.Concurrent` to make this explicit.

For information on what bound threads are, see the documentation for the `Control.Concurrent`.

For more details on the implementation see the Paper: “Extending the Haskell Foreign Function Interface with Concurrency”. Last known to be accessible [here](#).

### 6.17.1.3 Varargs not supported by `ccall` calling convention

Note that functions requiring varargs arguments are unsupported by the `ccall` calling convention. Foreign imports needing to call such functions should rather use the `capi` convention, giving an explicit signature for the needed call-pattern. For instance, one could write:

```
foreign import "capi" "printf"
  my_printf :: Ptr CChar -> CInt -> IO ()

printInt :: CInt -> IO ()
printInt n = my_printf "printed number %d" n
```

## 6.17.2 GHC extensions to the FFI Chapter

The FFI features that are described in this section are specific to GHC. Your code will not be portable to other compilers if you use them.

### 6.17.2.1 Unlifted FFI Types

#### **UnliftedFFITypes**

Since  
6.8.1

The following unlifted unboxed types may be used as basic foreign types (see FFI Chapter, Section 8.6) for both safe and unsafe foreign calls: `Int#`, `Word#`, `Char#`, `Float#`, `Double#`, `Addr#`, and `StablePtr#`. Several unlifted boxed types may be used as arguments to FFI calls, subject to these restrictions:

- Valid arguments for foreign import unsafe FFI calls: `Array#`, `SmallArray#`, `ByteArray#`, and the mutable counterparts of these types.
- Valid arguments for foreign import safe FFI calls: `ByteArray#` and `MutableByteArray#`. The byte array must be *pinned* (page 633).
- Mutation: In both foreign import unsafe and foreign import safe FFI calls, it is safe to mutate a `MutableByteArray`. Mutating any other type of array leads to undefined behavior. Reason: Mutable arrays of heap objects record writes for the purpose of garbage collection. An array of heap objects is passed to a foreign C function, the runtime does not record any writes. Consequently, it is not safe to write to an array of heap objects in a foreign function. Since the runtime has no facilities for tracking mutation of a `MutableByteArray#`, these can be safely mutated in any foreign function.
- Note that safe FFI calls don't take any measures to keep their arguments alive while the called C function runs. For arguments whose live time doesn't extend past the FFI call `keepAlive#` or a `StablePtr` should be used to ensure the argument isn't garbage collected before the call finishes.

None of these restrictions are enforced at compile time. Failure to heed these restrictions will lead to runtime errors that can be very difficult to track down. (The errors likely will not manifest until garbage collection happens.) In tabular form, these restrictions are:

Table 2: Restrictions on unlifted boxed arguments passed to foreign C calls. Cells marked as “Unsound” represent combinations that lead to undefined runtime behavior. GHC does not reject such unsound programs at compile time.

Argument Type	When value is used as argument to FFI call that is			
	foreign import safe reads are	foreign import safe writes are	foreign import unsafe reads are	foreign import unsafe writes are
Array#	Unsound	Unsound	Sound	Unsound
MutableArray#	Unsound	Unsound	Sound	Unsound
SmallArray#	Unsound	Unsound	Sound	Unsound
MutableSmallArray#	Unsound	Unsound	Sound	Unsound
unpinned ByteArray#	Unsound	Unsound	Sound	Unsound
unpinned MutableByteArray#	Unsound	Unsound	Sound	Sound
pinned ByteArray#	Sound	Unsound	Sound	Unsound
pinned MutableByteArray#	Sound	Sound	Sound	Sound

When passing any of the unlifted array types as an argument to a foreign C call, a foreign function sees a pointer that refers to the payload of the array, not to the `StgArrBytes/StgMutArrPtrs/StgSmallMutArrPtrs` heap object containing it<sup>1</sup>. By contrast, a *foreign Cmm call* (page 621), introduced by `foreign import prim`, sees the heap object, not just the payload. This means that, in some situations, the foreign C function might not need any knowledge of the RTS closure types. The following example sums the first three bytes in a `MutableByteArray#`<sup>2</sup> without using anything from `Rts.h`:

```
// C source
uint8_t add_triplet(uint8_t* arr) {
    return (arr[0] + arr[1] + arr[2]);
}

-- Haskell source
foreign import ccall unsafe "add_triplet"
addTriplet :: MutableByteArray# RealWorld -> IO Word8
```

In other situations, the C function may need knowledge of the RTS closure types. The following example sums the first element of each `ByteArray#` (interpreting the bytes as an array of `CInt`) element of an `Array# ByteArray#`<sup>3</sup>:

```
// C source, must include the RTS to make the struct StgArrBytes
// available along with its fields, such as `payload`.
#include "Rts.h"
int sum_first (StgArrBytes **bufs, StgWord sz) {
    int res = 0;
    for(StgWord ix = 0; ix < sz; ix++) {
        res = res + ((int*)(bufs[ix]->payload))[0];
    }
}
```

(continues on next page)

<sup>1</sup> Prior to GHC 8.10, when passing an `ArrayArray#` argument to a foreign function, the foreign function would see a pointer to the `StgMutArrPtrs` rather than just the payload.

<sup>2</sup> In practice, the FFI should not be used for a task as simple as reading bytes from a `MutableByteArray#`. Users should prefer `GHC.Exts.readWord8Array#` for this.

<sup>3</sup> As in<sup>2</sup>, the FFI is not actually needed for this. `GHC.Exts` includes primitives for reading from an `Array# a`, such as `GHC.Exts.indexArray#`.

(continued from previous page)

```

    return res;
}

-- Haskell source
foreign import ccall unsafe "sum_first"
    sumFirst :: Array# ByteArray# -> CInt -> IO CInt

sumFirst' :: Array# ByteArray# -> IO CInt
sumFirst' arr = sumFirst arr (sizeofArray# arr)

```

Although GHC allows the user to pass all unlifted boxed types to foreign functions, some of them are not amenable to useful work. Although `Array#` is unlifted, the elements in its payload can be lifted, and a foreign C function cannot safely force thunks. Consequently, a foreign C function may not dereference any of the addresses that comprise the payload of `Array# a` if `a` has a lifted representation.

### 6.17.2.2 Newtype wrapping of the IO monad

The FFI spec requires the IO monad to appear in various places, but it can sometimes be convenient to wrap the IO monad in a newtype, thus:

```
newtype MyIO a = MIO (IO a)
```

(A reason for doing so might be to prevent the programmer from calling arbitrary IO procedures in some part of the program.)

The Haskell FFI already specifies that arguments and results of foreign imports and exports will be automatically unwrapped if they are newtypes (Section 3.2 of the FFI addendum). GHC extends the FFI by automatically unwrapping any newtypes that wrap the IO monad itself. More precisely, wherever the FFI specification requires an IO type, GHC will accept any newtype-wrapping of an IO type. For example, these declarations are OK:

```

foreign import foo :: Int -> MyIO Int
foreign import "dynamic" baz :: (Int -> MyIO Int) -> CInt -> MyIO Int

```

### 6.17.2.3 Explicit “forall”s in foreign types

The type variables in the type of a foreign declaration may be quantified with an explicit `forall` by using the [ExplicitForAll](#) (page 560) language extension, as in the following example:

```

{-# LANGUAGE ExplicitForAll #-}
foreign import ccall "mmap" c_mmap :: forall a. CSize -> IO (Ptr a)

```

Note that an explicit `forall` must appear at the front of the type signature and is not permitted to appear nested within the type, as in the following (erroneous) examples:

```

foreign import ccall "mmap" c_mmap' :: CSize -> forall a. IO (Ptr a)
foreign import ccall quux :: (forall a. Ptr a) -> IO ()

```

#### 6.17.2.4 Primitive imports

##### GHCForeignImportPrim

###### Since

6.12.1

###### Status

InternalUseOnly

With *GHCForeignImportPrim* (page 621), GHC extends the FFI with an additional calling convention prim, e.g.:

```
foreign import prim "foo" foo :: ByteArray# -> (# Int#, Int# #)
```

This is used to import functions written in Cmm code that follow an internal GHC calling convention. The arguments and results must be unboxed types, except that an argument may be of type `Any :: Type` or `Any :: UnliftedType` (which can be arranged by way of `unsafeCoerce#`) and the result type is allowed to be an unboxed tuple or the types `Any :: Type` or `Any :: UnliftedType`.

This feature is not intended for use outside of the core libraries that come with GHC. For more details see the [GHC developer wiki](#).

#### 6.17.2.5 Interruptible foreign calls

##### InterruptibleFFI

###### Since

7.2.1

This concerns the interaction of foreign calls with `Control.Concurrent.throwTo`. Normally when the target of a `throwTo` is involved in a foreign call, the exception is not raised until the call returns, and in the meantime the caller is blocked. This can result in unresponsiveness, which is particularly undesirable in the case of user interrupt (e.g. Control-C). The default behaviour when a Control-C signal is received (SIGINT on Unix) is to raise the `UserInterrupt` exception in the main thread; if the main thread is blocked in a foreign call at the time, then the program will not respond to the user interrupt.

The problem is that it is not possible in general to interrupt a foreign call safely. However, GHC does provide a way to interrupt blocking *system* calls which works for most system calls on both Unix and Windows.

When the `InterruptibleFFI` extension is enabled, a foreign call can be annotated with `interruptible` instead of `safe` or `unsafe`:

```
foreign import ccall interruptible
  "sleep" sleepBlock :: CUInt -> IO CUInt
```

`interruptible` behaves exactly as `safe`, except that when a `throwTo` is directed at a thread in an interruptible foreign call, irrespective of the masking state, the exception is added to the blocked exceptions queue of the target thread and an OS-specific mechanism will be used to attempt to cause the foreign call to return:

##### Unix systems

The thread making the foreign call is sent a `SIGPIPE` signal using `pthread_kill()`. This is usually enough to cause a blocking system call to return with `EINTR` (GHC by default

installs an empty signal handler for SIGPIPE, to override the default behaviour which is to terminate the process immediately).

### Windows systems

[Vista and later only] The RTS calls the Win32 function `CancelSynchronousIo`, which will cause a blocking I/O operation to return with the error `ERROR_OPERATION_ABORTED`.

Once the system call is successfully interrupted, the surrounding code must return control out of the foreign import, back into Haskell code, so that any blocked exception can be raised if the masking state of the thread allows it. Being under mask gives the Haskell code an opportunity to detect and react to the interrupt error code from the c call.

If the foreign code simply retries the system call directly without returning back to Haskell, then the intended effect of *interruptible* disappears and functions like `System.Timeout.timeout` will not work.

Finally, after the interruptible foreign call returns into Haskell, the Haskell code should allow exceptions to be raised (`Control.Exception's allowInterrupt`, or `interruptible yield` for non-`--threaded`, see [#8684](#)), and implement the EINTR-retrying in Haskell (e.g. using e.g. `Foreign.C.Error.throwErrnoIfMinus1Retry`).

Be especially careful when using *interruptible* to check that the called foreign function is prepared to deal with the consequences of the call being interrupted. On Unix it is considered good practice to always check for EINTR after system calls, so you can expect it not to crash (but in that case *interruptible* will not work as intended unless the code then returns all the way up to Haskell as described above). But on Windows it is not typically common practice to handle `ERROR_OPERATION_ABORTED`.

The approach works *only* for foreign code that does I/O (system calls), not for CPU-intensive computations that do not do any system calls. This is because the only way by which the foreign code can observe interruption is by system calls returning interruption error codes. To be able to interrupt long-running foreign code doing no system calls, the code must likely be changed to explicitly check for intended early termination.

### 6.17.2.6 The CAPI calling convention

#### CApiFFI

Since  
7.6.1

The CApiFFI extension allows a calling convention of `capi` to be used in foreign declarations, e.g.

```
foreign import capi "header.h f" f :: CInt -> IO CInt
```

Rather than generating code to call `f` according to the platform's ABI, we instead call `f` using the C API defined in the header `header.h`. Thus `f` can be called even if it may be defined as a CPP `#define` rather than a proper function.

When using `capi`, it is also possible to import values, rather than functions. For example,

```
foreign import capi "pi.h value pi" c_pi :: CDouble
```

will work regardless of whether `pi` is defined as

```
const double pi = 3.14;
```



or with

```
#define pi 3.14
```

In order to tell GHC the C type that a Haskell type corresponds to when it is used with the CAPI, a CTYPE pragma can be used on the type definition. The header which defines the type can optionally also be specified. The syntax looks like:

```
data    {-# CTYPE "unistd.h" "useconds_t" #-} T = ...
newtype {-# CTYPE          "useconds_t" #-} T = ...
```

In case foreign declarations contain const-qualified pointer return type, ConstPtr from `Foreign.C.ConstPtr` may be used to encode this, e.g.

```
foreign import capi "header.h f" f :: CInt -> ConstPtr CInt
```

which corresponds to

```
const *int f(int);
```

#### 6.17.2.7 hs\_thread\_done()

```
void hs_thread_done(void);
```

GHC allocates a small amount of thread-local memory when a thread calls a Haskell function via a foreign export. This memory is not normally freed until `hs_exit()`; the memory is cached so that subsequent calls into Haskell are fast. However, if your application is long-running and repeatedly creates new threads that call into Haskell, you probably want to arrange that this memory is freed in those threads that have finished calling Haskell functions. To do this, call `hs_thread_done()` from the thread whose memory you want to free.

Calling `hs_thread_done()` is entirely optional. You can call it as often or as little as you like. It is safe to call it from a thread that has never called any Haskell functions, or one that never will. If you forget to call it, the worst that can happen is that some memory remains allocated until `hs_exit()` is called. If you call it too often, the worst that can happen is that the next call to a Haskell function incurs some extra overhead.

#### 6.17.2.8 Freeing many stable pointers efficiently

The standard function `hs_free_stable_ptr` locks the stable pointer table, frees the given stable pointer, and then unlocks the stable pointer table again. When freeing many stable pointers at once, it is usually more efficient to lock and unlock the table only once.

```
extern void hs_lock_stable_ptr_table (void);
extern void hs_unlock_stable_ptr_table (void);
extern void hs_free_stable_ptr_unsafe (HsStablePtr sp);
```

`hs_free_stable_ptr_unsafe` must be used *only* when the table has been locked using `hs_lock_stable_ptr_table`. It must be unlocked afterwards using `hs_unlock_stable_ptr_table`. The Haskell garbage collector cannot run while the table is locked, so it should be unlocked promptly. The following operations are forbidden while the stable pointer table is locked:

- Calling any Haskell function, whether or not that function manipulates stable pointers.
- Calling any FFI function that deals with the stable pointer table except for arbitrarily many calls to `hs_free_stable_ptr_unsafe` and the final call to `hs_unlock_stable_ptr_table`.
- Calling `hs_free_fun_ptr`.

---

**Note:** GHC versions before 8.8 defined undocumented functions `hs_lock_stable_tables` and `hs_unlock_stable_tables` instead of `hs_lock_stable_ptr_table` and `hs_unlock_stable_ptr_table`. Those names are now deprecated.

---

### 6.17.3 Using the FFI with GHC

The following sections also give some hints and tips on the use of the foreign function interface in GHC.

#### 6.17.3.1 Using foreign export and foreign import ccall "wrapper" with GHC

When GHC compiles a module (say `M.hs`) which uses foreign export or foreign import "wrapper", it generates a `M_stub.h` for use by C programs.

For a plain foreign export, the file `M_stub.h` contains a C prototype for the foreign exported function. For example, if we compile the following module:

```
module Foo where

foreign export ccall foo :: Int -> IO Int

foo :: Int -> IO Int
foo n = return (length (f n))

f :: Int -> [Int]
f 0 = []
f n = n:(f (n-1))
```

Then `Foo_stub.h` will contain something like this:

```
#include "HsFFI.h"
extern HsInt foo(HsInt a0);
```

To invoke `foo()` from C, just `#include "Foo_stub.h"` and call `foo()`.

The `Foo_stub.h` file can be redirected using the `-stubdir` option; see [Redirecting the compilation output\(s\)](#) (page 242).

## Using your own main()

Normally, GHC's runtime system provides a `main()`, which arranges to invoke `Main.main` in the Haskell program. However, you might want to link some Haskell code into a program which has a `main` function written in another language, say C. In order to do this, you have to initialize the Haskell runtime system explicitly.

Let's take the example from above, and invoke it from a standalone C program. Here's the C code:

```
#include <stdio.h>
#include "HsFFI.h"

#if defined(__GLASGOW_HASKELL__)
#include "Foo_stub.h"
#endif

int main(int argc, char *argv[])
{
    int i;

    hs_init(&argc, &argv);

    for (i = 0; i < 5; i++) {
        printf("%d\n", foo(2500));
    }

    hs_exit();
    return 0;
}
```

We've surrounded the GHC-specific bits with `#if defined(__GLASGOW_HASKELL__)`; the rest of the code should be portable across Haskell implementations that support the FFI standard.

The call to `hs_init()` initializes GHC's runtime system. Do NOT try to invoke any Haskell functions before calling `hs_init()`: bad things will undoubtedly happen.

We pass references to `argc` and `argv` to `hs_init()` so that it can separate out any arguments for the RTS (i.e. those arguments between `+RTS...` -RTS).

After we've finished invoking our Haskell functions, we can call `hs_exit()`, which terminates the RTS.

There can be multiple calls to `hs_init()`, but each one should be matched by one (and only one) call to `hs_exit()`. The outermost `hs_exit()` will actually de-initialise the system. Note that currently GHC's runtime cannot reliably re-initialise after this has happened; see [The Foreign Function Interface](#) (page 802).

---

**Note:** When linking the final program, it is normally easiest to do the link using GHC, although this isn't essential. If you do use GHC, then don't forget the flag `-no-hs-main` (page 290), otherwise GHC will try to link to the Main Haskell module.

---

---

**Note:** On Windows `hs_init` treats `argv` as UTF8-encoded. Passing other encodings might lead to unexpected results. Passing NULL as `argv` is valid but can lead to `<unknown>` showing up

---

in error messages instead of the name of the executable.

---

To use +RTS flags with `hs_init()`, we have to modify the example slightly. By default, GHC's RTS will only accept "safe" +RTS flags (see *Options affecting linking* (page 288)), and the `-rtsopts[={none|some|all|ignore|ignoreAll}]` (page 291) link-time flag overrides this. However, `-rtsopts[={none|some|all|ignore|ignoreAll}]` (page 291) has no effect when `-no-hs-main` (page 290) is in use (and the same goes for `-with-rtsopts={opts}` (page 292)). To set these options we have to call a GHC-specific API instead of `hs_init()`:

```
#include <stdio.h>
#include "HsFFI.h"

#if defined(__GLASGOW_HASKELL__)
#include "Foo_stub.h"
#include "Rts.h"
#endif

int main(int argc, char *argv[])
{
    int i;

    #if __GLASGOW_HASKELL__ >= 703
    {
        RtsConfig conf = defaultRtsConfig;
        conf.rts_opts_enabled = RtsOptsAll;
        hs_init_ghc(&argc, &argv, conf);
    }
    #else
    hs_init(&argc, &argv);
    #endif

    for (i = 0; i < 5; i++) {
        printf("%d\n", foo(2500));
    }

    hs_exit();
    return 0;
}
```

Note two changes: we included `Rts.h`, which defines the GHC-specific external RTS interface, and we called `hs_init_ghc()` instead of `hs_init()`, passing an argument of type `RtsConfig`. `RtsConfig` is a struct with various fields that affect the behaviour of the runtime system. Its definition is:

```
typedef struct {
    RtsOptsEnabledEnum rts_opts_enabled;
    const char *rts_opts;
} RtsConfig;

extern const RtsConfig defaultRtsConfig;

typedef enum {
    RtsOptsNone,           // +RTS causes an error
```

(continues on next page)

(continued from previous page)

```

    RtsOptsSafeOnly,      // safe RTS options allowed; others cause an error
    RtsOptsAll            // all RTS options allowed
} RtsOptsEnabledEnum;

```

There is a default value `defaultRtsConfig` that should be used to initialise variables of type `RtsConfig`. More fields will undoubtedly be added to `RtsConfig` in the future, so in order to keep your code forwards-compatible it is best to initialise with `defaultRtsConfig` and then modify the required fields, as in the code sample above.

## Making a Haskell library that can be called from foreign code

The scenario here is much like in [Using your own main\(\)](#) (page 625), except that the aim is not to link a complete program, but to make a library from Haskell code that can be deployed in the same way that you would deploy a library of C code.

The main requirement here is that the runtime needs to be initialized before any Haskell code can be called, so your library should provide initialisation and deinitialisation entry points, implemented in C or C++. For example:

```

#include <stdlib.h>
#include "HsFFI.h"

HsBool mylib_init(void){
    int argc = 3;
    char *argv[] = { "mylib", "+RTS", "-A32m", NULL };
    char **pargv = argv;

    // Initialize Haskell runtime
    hs_init(&argc, &pargv);

    // do any other initialization here and
    // return false if there was a problem
    return HS_BOOL_TRUE;
}

void mylib_end(void){
    hs_exit();
}

```

The initialisation routine, `mylib_init`, calls `hs_init()` as normal to initialise the Haskell runtime, and the corresponding deinitialisation function `mylib_end()` calls `hs_exit()` to shut down the runtime.

### 6.17.3.2 Using header files

C functions are normally declared using prototypes in a C header file. Earlier versions of GHC (6.8.3 and earlier) `#included` the header file in the C source file generated from the Haskell code, and the C compiler could therefore check that the C function being called via the FFI was being called at the right type.

GHC no longer includes external header files when compiling via C, so this checking is not performed. The change was made for compatibility with the *native code generator* (page 278) (`-fasm` (page ??)) and to comply strictly with the FFI specification, which requires that FFI calls are not subject to macro expansion and other CPP conversions that may be applied when using C header files. This approach also simplifies the inlining of foreign calls across module and package boundaries: there's no need for the header file to be available when compiling an inlined version of a foreign call, so the compiler is free to inline foreign calls in any context.

The `-#include` option is now deprecated, and the `include-files` field in a Cabal package specification is ignored.

### 6.17.3.3 Memory Allocation

The FFI libraries provide several ways to allocate memory for use with the FFI, and it isn't always clear which way is the best. This decision may be affected by how efficient a particular kind of allocation is on a given compiler/platform, so this section aims to shed some light on how the different kinds of allocation perform with GHC.

#### **alloca**

Useful for short-term allocation when the allocation is intended to scope over a given IO computation. This kind of allocation is commonly used when marshalling data to and from FFI functions.

In GHC, `alloca` is implemented using `MutableByteArray#`, so allocation and deallocation are fast: much faster than C's `malloc/free`, but not quite as fast as stack allocation in C. Use `alloca` whenever you can.

#### **mallocForeignPtr**

Useful for longer-term allocation which requires garbage collection. If you intend to store the pointer to the memory in a foreign data structure, then `mallocForeignPtr` is *not* a good choice, however.

In GHC, `mallocForeignPtr` is also implemented using `MutableByteArray#`. Although the memory is pointed to by a `ForeignPtr`, there are no actual finalizers involved (unless you add one with `addForeignPtrFinalizer`), and the deallocation is done using GC, so `mallocForeignPtr` is normally very cheap.

#### **malloc/free**

If all else fails, then you need to resort to `Foreign.malloc` and `Foreign.free`. These are just wrappers around the C functions of the same name, and their efficiency will depend ultimately on the implementations of these functions in your platform's C library. We usually find `malloc` and `free` to be significantly slower than the other forms of allocation above.

#### **Foreign.Marshal.Pool**

Pools can be a more convenient way to structure your memory allocation than using one of the other forms of allocation. They are backed by the RTS internal arena instead of `malloc/free`.

#### 6.17.3.4 Multi-threading and the FFI

In order to use the FFI in a multi-threaded setting, you must use the `-threaded` (page ??) option (see [Options affecting linking](#) (page 288)).

#### Foreign imports and multi-threading

When you call a `foreign` imported function that is annotated as `safe` (the default) in a single-threaded runtime (the program was linked without using `-threaded` (page ??)), then other Haskell threads will be blocked until the call returns.

In the multi-threaded runtime (the program was linked using `-threaded` (page ??)), foreign imported functions run concurrently (both `safe` and `unsafe`), but a similar effect can happen when you call an `unsafe` function, and a global garbage collection is triggered in another thread. In this situation, the garbage collector cannot proceed, and this can lead to performance issues that often appear under high load, as other threads are more active and thus more prone to trigger global garbage collection.

This means that if you need to make a foreign call to a function that takes a long time or potentially blocks, then you should mark it `safe` and use `-threaded` (page ??). Some library functions make such calls internally; their documentation should indicate when this is the case.

On the other hand, a foreign call to a function that is guaranteed to take a short time, and does not call back into Haskell can be marked `unsafe`. This works both for the single-threaded and the multi-threaded runtime. When considering what “a short time” is, a foreign function that does comparable work to what Haskell code does between each heap allocation (not very much), is a good candidate.

Outside these two clear cases for `safe` and `unsafe` foreign functions, there is a trade-off between whole-program throughput and efficiency of the individual foreign function call.

If you are making foreign calls from multiple Haskell threads and using `-threaded` (page ??), make sure that the foreign code you are calling is thread-safe. In particular, some GUI libraries are not thread-safe and require that the caller only invokes GUI methods from a single thread. If this is the case, you may need to restrict your GUI operations to a single Haskell thread, and possibly also use a bound thread (see [The relationship between Haskell threads and OS threads](#) (page 630)).

Note that foreign calls made by different Haskell threads may execute in *parallel*, even when the `+RTS -N` flag is not being used ([RTS options for SMP parallelism](#) (page 151)). The `-N <x>` (page 151) flag controls parallel execution of Haskell threads, but there may be an arbitrary number of foreign calls in progress at any one time, regardless of the `+RTS -N` value.

If a call is annotated as `interruptible` and the program was multithreaded, the call may be interrupted in the event that the Haskell thread receives an exception. The mechanism by which the interrupt occurs is platform dependent, but is intended to cause blocking system calls to return immediately with an interrupted error code. The underlying operating system thread is not to be destroyed. See [Interruptible foreign calls](#) (page 621) for more details.

## The relationship between Haskell threads and OS threads

Normally there is no fixed relationship between Haskell threads and OS threads. This means that when you make a foreign call, that call may take place in an unspecified OS thread. Furthermore, there is no guarantee that multiple calls made by one Haskell thread will be made by the same OS thread.

This usually isn't a problem, and it allows the GHC runtime system to make efficient use of OS thread resources. However, there are cases where it is useful to have more control over which OS thread is used, for example when calling foreign code that makes use of thread-local state. For cases like this, we provide *bound threads*, which are Haskell threads tied to a particular OS thread. For information on bound threads, see the documentation for the `Control.Concurrent` module.

## Foreign exports and multi-threading

When the program is linked with `-threaded` (page ??), then you may invoke foreign exported functions from multiple OS threads concurrently. The runtime system must be initialised as usual by calling `hs_init()`, and this call must complete before invoking any foreign exported functions.

### On the use of `hs_exit()`

`hs_exit()` normally causes the termination of any running Haskell threads in the system, and when `hs_exit()` returns, there will be no more Haskell threads running. The runtime will then shut down the system in an orderly way, generating profiling output and statistics if necessary, and freeing all the memory it owns.

It isn't always possible to terminate a Haskell thread forcibly: for example, the thread might be currently executing a foreign call, and we have no way to force the foreign call to complete. What's more, the runtime must assume that in the worst case the Haskell code and runtime are about to be removed from memory (e.g. if this is a *Windows DLL* (page 770), `hs_exit()` is normally called before unloading the DLL). So `hs_exit()` *must* wait until all outstanding foreign calls return before it can return itself.

The upshot of this is that if you have Haskell threads that are blocked in foreign calls, then `hs_exit()` may hang (or possibly busy-wait) until the calls return. Therefore it's a good idea to make sure you don't have any such threads in the system when calling `hs_exit()`. This includes any threads doing I/O, because I/O may (or may not, depending on the type of I/O and the platform) be implemented using blocking foreign calls.

The GHC runtime treats program exit as a special case, to avoid the need to wait for blocked threads when a standalone executable exits. Since the program and all its threads are about to terminate at the same time that the code is removed from memory, it isn't necessary to ensure that the threads have exited first. If you want this fast and loose version of `hs_exit()`, you can call:

```
void hs_exit_nowait(void);
```

instead. This is particularly useful if you have foreign libraries that need to call `hs_exit()` at program exit (perhaps via a C++ destructor): in this case you should use `hs_exit_nowait()`, because the thread that called `exit()` and is running C++ destructors is in a foreign call from Haskell that will never return, so `hs_exit()` would deadlock.



## Waking up Haskell threads from C

Sometimes we want to be able to wake up a Haskell thread from some C code. For example, when using a callback-based C API, we register a C callback and then we need to wait for the callback to run.

One way to do this is to create a `foreign export` that will do whatever needs to be done to wake up the Haskell thread - perhaps `putMVar` - and then call this from our C callback. There are a couple of problems with this:

1. Calling a foreign export has a lot of overhead: it creates a complete new Haskell thread, for example.
2. The call may block for a long time if a GC is in progress. We can't use this method if the C API we're calling doesn't allow blocking in the callback.

For these reasons GHC provides an external API to `tryPutMVar`, `hs_try_putmvar`, which you can use to cheaply and asynchronously wake up a Haskell thread from C/C++.

```
void hs_try_putmvar (int capability, HsStablePtr sp);
```

The C call `hs_try_putmvar(cap, mvar)` is equivalent to the Haskell call `tryPutMVar mvar ()`, except that it is

- non-blocking: takes a bounded, short, amount of time
- asynchronous: the actual `putMVar` may be performed after the call returns (for example, if the RTS is currently garbage collecting). That's why `hs_try_putmvar()` doesn't return a result to say whether the put succeeded. It is your responsibility to ensure that the `MVar` is empty; if it is full, `hs_try_putmvar()` will have no effect.

**Example.** Suppose we have a C/C++ function to call that will return and then invoke a callback at some point in the future, passing us some data. We want to wait in Haskell for the callback to be called, and retrieve the data. We can do it like this:

```
import GHC.Conc (newStablePtrPrimMVar, PrimMVar)

makeExternalCall = mask_ $ do
  mvar <- newEmptyMVar
  sp <- newStablePtrPrimMVar mvar
  fp <- mallocForeignPtr
  withForeignPtr fp $ \presult -> do
    (cap, _) <- threadCapability ==<< myThreadId
    scheduleCallback sp cap presult
    takeMVar mvar `onException`
      forkIO (do takeMVar mvar; touchForeignPtr fp)
    peek presult

foreign import ccall "scheduleCallback"
  scheduleCallback :: StablePtr PrimMVar
                  -> Int
                  -> Ptr Result
                  -> IO ()
```

And inside `scheduleCallback`, we create a callback that will in due course store the result data in the `Ptr Result`, and then call `hs_try_putmvar()`.

There are a few things to note here.

- There's a special function to create the `StablePtr`: `newStablePtrPrimMVar`, because the RTS needs a `StablePtr` to the primitive `MVar#` object, and we can't create that directly. Do *not* just use `newStablePtr` on the `MVar`: your program will crash.
- The `StablePtr` is freed by `hs_try_putmvar()`. This is because it would otherwise be difficult to arrange to free the `StablePtr` reliably: we can't free it in Haskell, because if the `takeMVar` is interrupted by an asynchronous exception, then the callback will fire at a later time. We can't free it in C, because we don't know when to free it (not when `hs_try_putmvar()` returns, because that is an async call that uses the `StablePtr` at some time in the future).
- The `mask_` is to avoid asynchronous exceptions before the `scheduleCallback` call, which would leak the `StablePtr`.
- We find out the current capability number and pass it to C. This is passed back to `hs_try_putmvar`, and helps the RTS to know which capability it should try to perform the `tryPutMVar` on. If you don't care, you can pass `-1` for the capability to `hs_try_putmvar`, and it will pick an arbitrary one.

Picking the right capability will help avoid unnecessary context switches. Ideally you should pass the capability that the thread that will be woken up last ran on, which you can find by calling `threadCapability` in Haskell.

- If you want to also pass some data back from the C callback to Haskell, this is best done by first allocating some memory in Haskell to receive the data, and passing the address to C, as we did in the above example.
- `takeMVar` can be interrupted by an asynchronous exception. If this happens, the callback in C will still run at some point in the future, will still write the result, and will still call `hs_try_putmvar()`. Therefore we have to arrange that the memory for the result stays alive until the callback has run, so if an exception is thrown during `takeMVar` we fork another thread to wait for the callback and hold the memory alive using `touchForeignPtr`.

For a fully working example, see `testsuite/tests/concurrent/should_run/hs_try_putmvar001.hs` in the GHC source tree.

#### 6.17.3.5 Floating point and the FFI

The standard C99 `fenv.h` header provides operations for inspecting and modifying the state of the floating point unit. In particular, the rounding mode used by floating point operations can be changed, and the exception flags can be tested.

In Haskell, floating-point operations have pure types, and the evaluation order is unspecified. So strictly speaking, since the `fenv.h` functions let you change the results of, or observe the effects of floating point operations, use of `fenv.h` renders the behaviour of floating-point operations anywhere in the program undefined.

Having said that, we *can* document exactly what GHC does with respect to the floating point state, so that if you really need to use `fenv.h` then you can do so with full knowledge of the pitfalls:

- GHC completely ignores the floating-point environment, the runtime neither modifies nor reads it.
- The floating-point environment is not saved over a normal thread context-switch. So if you modify the floating-point state in one thread, those changes may be visible in other threads. Furthermore, testing the exception state is not reliable, because a context switch may change it. If you need to modify or test the floating point state and use threads, then you must use bound threads (`Control.Concurrent.forkOS`), because a

bound thread has its own OS thread, and OS threads do save and restore the floating-point state.

- It is safe to modify the floating-point unit state temporarily during a foreign call, because foreign calls are never pre-empted by GHC.

#### 6.17.3.6 Pinned Byte Arrays

A pinned byte array is one that the garbage collector is not allowed to move. Consequently, it has a stable address that can be safely requested with `byteArrayContents#`. Not that being pinned doesn't prevent the `byteArray` from being gc'ed in the same fashion a regular byte array would be. There are a handful of primitive functions in [GHC.Exts](#) used to enforce or check for pinnedness: `isByteArrayPinned#`, `isMutableByteArrayPinned#`, and `newPinnedByteArray#`. A byte array can be pinned as a result of three possible causes:

1. It was allocated by `newPinnedByteArray#`.
2. It is large. Currently, GHC defines large object to be one that is at least as large as 80% of a 4KB block (i.e. at least 3277 bytes).
3. It has been copied into a compact region. The documentation for `ghc-compact` and `compact` describes this process.

## 6.18 Safe Haskell

Safe Haskell is an extension to the Haskell language that is implemented in GHC as of version 7.2. It allows for unsafe code to be securely included in a trusted code base by restricting the features of GHC Haskell the code is allowed to use. Put simply, it makes the types of programs trustable.

While a primary use case of Safe Haskell is running untrusted code, Safe Haskell doesn't provide this directly. Instead, Safe Haskell provides strict type safety. Without Safe Haskell, GHC allows many exceptions to the type system which can subvert any abstractions. By providing strict type safety, Safe Haskell enables developers to build their own library level sandbox mechanisms to run untrusted code.

While Safe Haskell is an extension, it actually runs in the background for every compilation with GHC. It does this to track the type violations of modules to infer their safety, even when they aren't explicitly using Safe Haskell. Please refer to section [Safe Haskell Inference](#) (page 642) for more details of this.

The design of Safe Haskell covers the following aspects:

- A [safe language](#) (page 636) dialect of Haskell that provides stricter guarantees about the code. It allows types and module boundaries to be trusted.
- A [safe import](#) extension that specifies that the module being imported must be trusted.
- A definition of *trust* (or safety) and how it operates, along with ways of defining and changing the trust of modules and packages.

Safe Haskell, however, *does not offer* compilation safety. During compilation time it is possible for arbitrary processes to be launched, using for example the [custom pre-processor](#) (page 285) flag. This can be manipulated to either compromise a user's system at compilation time, or to modify the source code just before compilation to try to alter Safe Haskell flags. This is discussed further in section [Safe Compilation](#) (page 644).

### 6.18.1 Uses of Safe Haskell

Safe Haskell has been designed with two use cases in mind:

- Enforcing strict type safety at compile time
- Compiling and executing untrusted code

#### 6.18.1.1 Strict type-safety (good style)

Haskell offers a powerful type system and separation of pure and effectual functions through the `IO` monad. However, there are several loop holes in the type system, the most obvious being the `unsafePerformIO :: IO a -> a` function. The safe language dialect of Safe Haskell disallows the use of such functions. This can be useful restriction as it makes Haskell code easier to analyse and reason about. It also codifies the existing culture in the Haskell community of trying to avoid unsafe functions unless absolutely necessary. As such, using the safe language (through the `-XSafe` flag) can be thought of as a way of enforcing good style, similar to the function of `-Wall`.

#### 6.18.1.2 Building secure systems (restricted IO Monads)

Systems such as information flow control security, capability based security systems and DSLs for working with encrypted data.. etc can be built in the Haskell language as a library. However they require guarantees about the properties of Haskell that aren't true in general due to the presence of functions like `unsafePerformIO`. Safe Haskell gives users enough guarantees about the type system to allow them to build such secure systems.

As an example, let's define an interface for a plugin system where the plugin authors are untrusted, possibly malicious third-parties. We do this by restricting the plugin interface to pure functions or to a restricted `IO` monad that we have defined. The restricted `IO` monad will only allow a safe subset of `IO` actions to be executed. We define the plugin interface so that it requires the plugin module, `Danger`, to export a single computation, `Danger.runMe`, of type `RIO ()`, where `RIO` is a monad defined as follows:

```
-- While we use `Safe`, the `Trustworthy` pragma would also be
-- fine. We simply want to ensure that:
-- 1) The module exports an interface that untrusted code can't
--    abuse.
-- 2) Untrusted code can import this module.
--
{-# LANGUAGE Safe #-}

module RIO (RIO(), runRIO, rioReadFile, rioWriteFile) where

-- Notice that symbol UnsafeRIO is not exported from this module!
newtype RIO a = UnsafeRIO { runRIO :: IO a }

instance Functor RIO where
    fmap f (UnsafeRIO m) = UnsafeRIO (fmap f m)

instance Applicative RIO where
    pure = UnsafeRIO . pure
    (UnsafeRIO f) <*> (UnsafeRIO m) = UnsafeRIO (f <*> m)
```

(continues on next page)

(continued from previous page)

```
instance Monad RIO where
  (UnsafeRIO m) >>= k = UnsafeRIO $ m >>= runRIO . k

-- Returns True iff access is allowed to file name
pathOK :: FilePath -> IO Bool
pathOK file = {- Implement some policy based on file name -}

rioReadFile :: FilePath -> RIO String
rioReadFile file = UnsafeRIO $ do
  ok <- pathOK file
  if ok then readFile file else return ""

rioWriteFile :: FilePath -> String -> RIO ()
rioWriteFile file contents = UnsafeRIO $ do
  ok <- pathOK file
  if ok then writeFile file contents else return ()
```

We then compile the Danger plugin using the new Safe Haskell -XSafe flag:

```
{-# LANGUAGE Safe #-}
module Danger ( runMe ) where

runMe :: RIO ()
runMe = ...
```

Before going into the Safe Haskell details, let's point out some of the reasons this security mechanism would fail without Safe Haskell:

- The design attempts to restrict the operations that Danger can perform by using types, specifically the RIO type wrapper around IO . The author of Danger can subvert this though by simply writing arbitrary IO actions and using `unsafePerformIO :: IO a -> a` to execute them as pure functions.
- The design also relies on Danger not being able to access the `UnsafeRIO` constructor. Unfortunately Template Haskell can be used to subvert module boundaries and so could be used to gain access to this constructor.
- There is no way to place restrictions on the modules that Danger can import. This gives the author of Danger a very large attack surface, essentially any package currently installed on the system. Should any of these packages have a vulnerability, then the Danger module can exploit it.

Safe Haskell prevents all these attacks. This is done by compiling the RIO module with the [Safe](#) (page 642) or [Trustworthy](#) (page 643) flag and compiling Danger with the [Safe](#) (page 642) flag. We explain each below.

The use of [Safe](#) (page 642) to compile Danger restricts the features of Haskell that can be used to a [safe subset](#) (page 636). This includes disallowing `unsafePerformIO`, Template Haskell, pure FFI functions, RULES and restricting the operation of Overlapping Instances. The [Safe](#) (page 642) flag also restricts the modules can be imported by Danger to only those that are considered trusted. Trusted modules are those compiled with [Safe](#) (page 642), where GHC provides a mechanical guarantee that the code is safe. Or those modules compiled with [Trustworthy](#) (page 643), where the module author claims that the module is Safe.

This is why the RIO module is compiled with [Safe](#) (page 642) or [Trustworthy](#) (page 643), to

allow the `Danger` module to import it. The *Trustworthy* (page 643) flag doesn't place any restrictions on the module like *Safe* (page 642) does (expect to restrict overlapping instances to *safe overlapping instances* (page 637)). Instead the module author claims that while code may use unsafe features internally, it only exposes an API that can be used in a safe manner.

However, the unrestricted use of *Trustworthy* (page 643) is a problem as an arbitrary module can use it to mark themselves as trusted, yet *Trustworthy* (page 643) doesn't offer any guarantees about the module, unlike *Safe* (page 642). To control the use of trustworthy modules it is recommended to use the *-fpackage-trust* (page 643) flag. This flag adds an extra requirement to the trust check for trustworthy modules. It requires that for a trustworthy module to be considered trusted, and allowed to be used in *Safe* (page 642) compiled code, the client C compiling the code must tell GHC that they trust the package the trustworthy module resides in. This is essentially a way of for C to say, while this package contains trustworthy modules that can be used by untrusted modules compiled with *Safe* (page 642), I trust the author(s) of this package and trust the modules only expose a safe API. The trust of a package can be changed at any time, so if a vulnerability found in a package, C can declare that package untrusted so that any future compilation against that package would fail. For a more detailed overview of this mechanism see *Trust and Safe Haskell Modes* (page 639).

In the example, `Danger` can import module `RIO` because `RIO` is compiled with *Safe* (page 642). Thus, `Danger` can make use of the `rioReadFile` and `rioWriteFile` functions to access permitted file names. The main application then imports both `RIO` and `Danger`. To run the plugin, it calls `RIO.runRIO Danger.runMe` within the `IO` monad. The application is safe in the knowledge that the only `IO` to ensue will be to files whose paths were approved by the `pathOK` test.

The Safe Haskell checks can be disabled for a module by passing the *-fno-safe-haskell* (page 643) flag. This is useful in particular when compiling with source plugins as running a plugin marks the module as unsafe and can then cause downstream modules to fail the safety checks.

### 6.18.2 Safe Language

The Safe Haskell *safe language* (enabled by *-XSafe*) guarantees the following properties:

- *Referential transparency* — The types can be trusted. Any pure function, is guaranteed to be pure. Evaluating them is deterministic and won't cause any side effects. Functions in the `IO` monad are still allowed and behave as usual. So, for example, the `unsafePerformIO :: IO a -> a` function is disallowed in the safe language to enforce this property.
- *Module boundary control* — Only symbols that are publicly available through other module export lists can be accessed in the safe language. Values using data constructors not exported by the defining module, cannot be examined or created. As such, if a module `M` establishes some invariants through careful use of its export list, then code written in the safe language that imports `M` is guaranteed to respect those invariants.
- *Semantic consistency* — For any module that imports a module written in the safe language, expressions that compile both with and without the safe import have the same meaning in both cases. That is, importing a module written in the safe language cannot change the meaning of existing code that isn't dependent on that module. So, for example, there are some restrictions placed on the use of *OverlappingInstances* (page 538), as these can violate this property.
- *Strict subset* — The safe language is strictly a subset of Haskell as implemented by GHC. Any expression that compiles in the safe language has the same meaning as it does when compiled in normal Haskell.



These four properties guarantee that in the safe language you can trust the types, can trust that module export lists are respected, and can trust that code that successfully compiles has the same meaning as it normally would.

To achieve these properties, in the safe language dialect we disable completely the following features:

- [TemplateHaskell](#) (page 582) — Can be used to gain access to constructors and abstract data types that weren't exported by a module, subverting module boundaries.

Furthermore, we restrict the following features:

- [ForeignFunctionInterface](#) (page 616) — Foreign import declarations that import a function with a non-IO type are disallowed.
- RULES — Rewrite rules defined in a module M compiled with [Safe](#) (page 642) are dropped. Rules defined in Trustworthy modules that M imports are still valid and will fire as usual.
- [OverlappingInstances](#) (page 538) — There is no restriction on the creation of overlapping instances, but we do restrict their use at a particular call site. This is a detailed restriction, please refer to [Safe Overlapping Instances](#) (page 637) for details.
- [GeneralisedNewtypeDeriving](#) (page 499) and [DerivingVia](#) (page 508) — GND and DerivingVia are not allowed in the safe language. This is due to the ability of them to violate module boundaries when module authors forget to put nominal role annotations on their types as appropriate. For this reason, the `Data.Coerce` module is also considered unsafe. We are hoping to find a better solution here in the future.
- `GHC.Generics` — Hand crafted instances of the `Generic` type class are not allowed in Safe Haskell. Such instances aren't strictly unsafe, but there is an important invariant that a `Generic` instance should adhere to the structure of the data type for which the instance is defined, and allowing manually implemented `Generic` instances would break that invariant. Derived instances (through the [DeriveGeneric](#) (page 655) extension) are still allowed. Note that the only allowed [deriving strategy](#) (page 507) for deriving `Generic` under Safe Haskell is `stock`, as another strategy (e.g., `anyclass`) would produce an instance that violates the invariant.

Refer to the [generic programming](#) (page 653) section for more details.

### 6.18.2.1 Safe Overlapping Instances

Due to the semantic consistency guarantee of Safe Haskell, we must restrict the function of overlapping instances. We don't restrict their ability to be defined, as this is a global property and not something we can determine by looking at a single module. Instead, when a module calls a function belonging to a type-class, we check that the instance resolution done is considered 'safe'. This check is enforced for modules compiled with both `-XSafe` and `-XTrustworthy`.

More specifically, consider the following modules:

```
{-# LANGUAGE Safe #-}
module Class (TC(..)) where
  class TC a where { op :: a -> String }

{-# LANGUAGE Safe #-}
module Dangerous (TC(..)) where
  import Class
```

(continues on next page)

(continued from previous page)

```

instance
  {-# OVERLAPS #-}
  TC [Int] where { op _ = "[Int]" }

{-# LANGUAGE Safe #-}
module TCB_Runner where
  import Class
  import Dangerous

instance
  TC [a] where { op _ = "[a]" }

f :: String
f = op ([1,2,3,4] :: [Int])

```

Both module `Class` and module `Dangerous` will compile under *Safe* (page 642) without issue. However, in module `TCB_Runner`, we must check if the call to `op` in function `f` is safe.

What does it mean to be *Safe*? That importing a module compiled with *Safe* (page 642) shouldn't change the meaning of code that compiles fine without importing the module. This is the *Safe Haskell* property known as *semantic consistency*.

In our situation, module `TCB_Runner` compiles fine without importing module `Dangerous`. So when deciding which instance to use for the call to `op`, if we determine the instance `TC [Int]` from module `Dangerous` is the most specific, this is unsafe. This prevents code written by third-parties we don't trust (which is compiled using `-XSafe` in *Safe Haskell*) from changing the behaviour of our existing code.

Specifically, we apply the following rule to determine if a type-class method call is *unsafe* when overlapping instances are involved:

- Most specific instance, `Ix`, defined in an `-XSafe` compiled module.
- `Ix` is an orphan instance or a multi-parameter-type-class.
- At least one overlapped instance, `Iy`, is both:
  - From a different module than `Ix`
  - `Iy` is not marked `OVERLAPPABLE`

This is a slightly involved heuristic, but captures the situation of an imported module `N` changing the behaviour of existing code. For example, if the second condition isn't violated, then the module author `M` must depend either on a type-class or type defined in `N`.

When a particular type-class method call is considered unsafe due to overlapping instances, and the module being compiled is using *Safe* (page 642) or *Trustworthy* (page 643), then compilation will fail. For *Unsafe* (page 643), no restriction is applied, and for modules using safe inference, they will be inferred unsafe.



### 6.18.3 Safe Imports

Safe Haskell enables a small extension to the usual import syntax of Haskell, adding a `safe` keyword:

```
impdecl -> import [safe] [qualified] modid [as modid] [impspec]
```

When used, the module being imported with the `safe` keyword must be a trusted module, otherwise a compilation error will occur. The safe import extension is enabled by either of the `-XSafe`, `-XTrustworthy`, or `-XUnsafe` flags. When the `-XSafe` flag is used, the `safe` keyword is allowed but meaningless, as every import is treated as a safe import.

### 6.18.4 Trust and Safe Haskell Modes

Safe Haskell introduces the following three language flags:

- *Safe* (page 642) — Enables the safe language dialect, asking GHC to guarantee trust. The safe language dialect requires that all imports be trusted or a compilation error will occur. Safe Haskell will also infer this safety type for modules automatically when possible. Please refer to section *Safe Haskell Inference* (page 642) for more details of this.
- *Trustworthy* (page 643) — Means that while this module may invoke unsafe functions internally, the module's author claims that it exports an API that can't be used in an unsafe way. This doesn't enable the safe language. It does however restrict the resolution of overlapping instances to only allow *safe overlapping instances* (page 637). The trust guarantee is provided by the module author, not GHC. An import statement with the `safe` keyword results in a compilation error if the imported module is not trusted. An import statement without the keyword behaves as usual and can import any module whether trusted or not.
- *Unsafe* (page 643) — Marks the module being compiled as unsafe so that modules compiled using *Safe* (page 642) can't import it. You may want to explicitly mark a module unsafe when it exports internal constructors that can be used to violate invariants.

While these are flags, they also correspond to Safe Haskell module types that a module can have. You can think of using these as declaring an explicit contract (or type) that a module must have. If it is invalid, then compilation will fail. GHC will also infer the correct type for Safe Haskell, please refer to section *Safe Haskell Inference* (page 642) for more details.

The procedure to check if a module is trusted or not depends on if the `-fpackage-trust` (page 643) flag is present. The check is similar in both cases with the `-fpackage-trust` (page 643) flag enabling an extra requirement for trustworthy modules to be regarded as trusted.

#### 6.18.4.1 Trust check (`-fpackage-trust` disabled)

A module `M` in a package `P` is trusted by a client `C` if and only if:

- Both of these hold:
  - The module was compiled with *Safe* (page 642)
  - All of `M`'s direct imports are trusted by `C`
- *or* all of these hold:
  - The module was compiled with *Trustworthy* (page 643)

- All of *M*'s direct *safe imports* are trusted by *C*

The above definition of trust has an issue. Any module can be compiled with *Trustworthy* (page 643) and it will be trusted. To control this, there is an additional definition of package trust (enabled with the *-fpackage-trust* (page 643) flag). The point of package trust is to require that the client *C* explicitly say which packages are allowed to contain trustworthy modules. Trustworthy packages are only trusted if they reside in a package trusted by *C*.

#### 6.18.4.2 Trust check (*-fpackage-trust* enabled)

When the *-fpackage-trust* (page 643) flag is enabled, whether or not a module is trusted depends on if certain packages are trusted. Package trust is determined by the client *C* invoking GHC (i.e. you).

Specifically, a package *P* is *trusted* when one of these hold:

- *C*'s package database records that *P* is trusted (and no command-line arguments override this)
- *C*'s command-line flags say to trust *P* regardless of what is recorded in the package database.

In either case, *C* is the only authority on package trust. It is up to the client to decide which *packages they trust* (page 641).

When the *-fpackage-trust* (page 643) flag is used a *module M from package P* is *trusted by a client C* if and only if:

- Both of these hold:
  - The module was compiled with *Safe* (page 642)
  - All of *M*'s direct imports are trusted by *C*
- *or* all of these hold:
  - The module was compiled with *Trustworthy* (page 643)
  - All of *M*'s direct safe imports are trusted by *C*
  - Package *P* is trusted by *C*

For the first trust definition the trust guarantee is provided by GHC through the restrictions imposed by the safe language. For the second definition of trust, the guarantee is provided initially by the module author. The client *C* then establishes that they trust the module author by indicating they trust the package the module resides in. This trust chain is required as GHC provides no guarantee for *Trustworthy* (page 643) compiled modules.

The reason there are two modes of checking trust is that the extra requirement enabled by *-fpackage-trust* (page 643) causes the design of Safe Haskell to be invasive. Packages using Safe Haskell when the flag is enabled may or may not compile depending on the state of trusted packages on a user's machine. This is both fragile, and causes compilation failures for everyone, even if they aren't trying to use any of the guarantees provided by Safe Haskell. Disabling *-fpackage-trust* (page 643) by default and turning it into a flag makes Safe Haskell an opt-in extension rather than an always on feature.

### 6.18.4.3 Example

#### Package Wuggle:

```
{-# LANGUAGE Safe #-}
module Buggle where
  import Prelude
  f x = ...blah...
```

#### Package P:

```
{-# LANGUAGE Trustworthy #-}
module M where
  import System.IO.Unsafe
  import safe Buggle
```

Suppose a client C decides to trust package P and package base. Then does C trust module M? Well M is marked *Trustworthy* (page 643), so we don't restrict the language. However, we still must check M's imports:

- First, M imports `System.IO.Unsafe`. This is an unsafe module, however M was compiled with *Trustworthy* (page 643), so P's author takes responsibility for that import. C trusts P's author, so this import is fine.
- Second, M safe imports Buggle. For this import P's author takes no responsibility for the safety, instead asking GHC to check whether Buggle is trusted by C. Is it?
- Buggle, is compiled with `-XSafe`, so the code is machine-checked to be OK, but again under the assumption that all of Buggle's imports are trusted by C. We must recursively check all imports!
- Buggle only imports `Prelude`, which is compiled with *Trustworthy* (page 643). `Prelude` resides in the base package, which C trusts, and (we'll assume) all of `Prelude`'s imports are trusted. So C trusts `Prelude`, and so C also trusts Buggle. (While `Prelude` is typically imported implicitly, it still obeys the same rules outlined here).

Notice that C didn't need to trust package Wuggle; the machine checking is enough. C only needs to trust packages that contain *Trustworthy* (page 643) modules.

### 6.18.4.4 Trustworthy Requirements

Module authors using the *Trustworthy* (page 643) language extension for a module M should ensure that M's public API (the symbols exposed by its export list) can't be used in an unsafe manner. This means that symbols exported should respect type safety and referential transparency.

### 6.18.4.5 Package Trust

Safe Haskell gives packages a new Boolean property, that of trust. Several new options are available at the GHC command-line to specify the trust property of packages:

#### **-trust** <pkg>

Exposes package <pkg> if it was hidden and considers it a trusted package regardless of the package database.

**-distrust** (pkg)

Exposes package (pkg) if it was hidden and considers it an untrusted package regardless of the package database.

**-distrust-all-packages**

Considers all packages distrusted unless they are explicitly set to be trusted by subsequent command-line options.

To set a package's trust property in the package database please refer to [Packages](#) (page 259).

### 6.18.5 Safe Haskell Inference

In the case where a module is compiled without one of [Safe](#) (page 642), [Trustworthy](#) (page 643) or [Unsafe](#) (page 643) being used, GHC will try to figure out itself if the module can be considered safe. This safety inference will never mark a module as trustworthy, only as either unsafe or as safe. GHC uses a simple method to determine this for a module M: If M would compile without error under the [Safe](#) (page 642) flag, then M is marked as safe. Otherwise, it is marked as unsafe.

When should you use Safe Haskell inference and when should you use an explicit [Safe](#) (page 642) flag? The later case should be used when you have a hard requirement that the module be safe. This is most useful for the [Uses of Safe Haskell](#) (page 634) of Safe Haskell: running untrusted code. Safe inference is meant to be used by ordinary Haskell programmers. Users who probably don't care about Safe Haskell.

Haskell library authors have a choice. Most should just use Safe inference. Assuming you avoid any unsafe features of the language then your modules will be marked safe. Inferred vs. Explicit has the following trade-offs:

- *Inferred* — This works well and adds no dependencies on the Safe Haskell type of any modules in other packages. It does mean that the Safe Haskell type of your own modules could change without warning if a dependency changes. One way to deal with this is through the use of [Safe Haskell warning flags](#) (page 642) that will warn if GHC infers a Safe Haskell type different from expected.
- *Explicit* — This gives your library a stable Safe Haskell type that others can depend on. However, it will increase the chance of compilation failure when your package dependencies change.

### 6.18.6 Safe Haskell Flag Summary

In summary, Safe Haskell consists of the following three language flags:

**Safe**

**Since**  
7.2.1

Restricts the module to the safe language. All of the module's direct imports must be trusted, but the module itself need not reside in a trusted package, because the compiler vouches for its trustworthiness. The "safe" keyword is allowed but meaningless in import statements, as regardless, every import is required to be safe.

- *Module Trusted* — Yes
- *Haskell Language* — Restricted to Safe Language
- *Imported Modules* — All forced to be safe imports, all must be trusted.

## Trustworthy

### Since

7.2.1

This establishes that the module is trusted, but the guarantee is provided by the module's author. A client of this module then specifies that they trust the module author by specifying they trust the package containing the module. *Trustworthy* (page 643) doesn't restrict the module to the safe language. It does however restrict the resolution of overlapping instances to only allow *safe overlapping instances* (page 637). It also allows the use of the safe import keyword.

- *Module Trusted* — Yes.
- *Module Trusted* (*-fpackage-trust* (page 643) enabled) — Yes but only if the package the module resides in is also trusted.
- *Haskell Language* — Unrestricted, except only safe overlapping instances allowed.
- *Imported Modules* — Under control of module author which ones must be trusted.

## Unsafe

### Since

7.4.1

Mark a module as unsafe so that it can't be imported by code compiled with *Safe* (page 642). Also enable the Safe Import extension so that a module can require a dependency to be trusted.

- *Module Trusted* — No
- *Haskell Language* — Unrestricted
- *Imported Modules* — Under control of module author which ones must be trusted.

A flag to disable Safe Haskell checks:

### **-fno-safe-haskell**

This flag can be enabled to override any declared safety property of the module (Safe, Unsafe, Trustworthy) so compilation proceeds as if none of these flags were specified. This is particularly useful when compiling using plugins, which usually results in the compiled modules being marked as unsafe.

And one general flag:

### **-fpackage-trust**

When enabled, turn on an extra check for a trustworthy module *M*, requiring the package that *M* resides in be considered trusted, for *M* to be considered trusted.

And five warning flags:

### **-Wunsafe**

Issue a warning if the module being compiled is regarded to be unsafe. Should be used to check the safety type of modules when using safe inference.

### **-Wsafe**

Issue a warning if the module being compiled is regarded to be safe. Should be used to check the safety type of modules when using safe inference. If the module is explicitly marked as safe then no warning will be issued.

**-Wtrustworthy-safe**

Issue a warning if the module being compiled is marked as `-XTrustworthy` but it could instead be marked as `-XSafe`, a more informative bound. Can be used to detect once a Safe Haskell bound can be improved as dependencies are updated.

**-Winferred-safe-imports**

**Since**  
8.10.1  
**Default**  
off

The module A below is annotated to be explicitly Safe, but it imports Safe-Inferred module.

```
{-# LANGUAGE Safe #-}  
module A where  
  
import B (double)  
  
quad :: Int -> Int  
quad = double . double  
  
module B where  
  
double :: Int -> Int  
double n = n + n
```

The inferred status is volatile: if an unsafe import is added to the module B, it will cause compilation error of A. When `-Winferred-safe-imports` (page 644) is enabled, the compiler will emit a warning about this.

**-Wmissing-safe-haskell-mode**

**Since**  
8.10.1  
**Default**  
off

The compiler will warn when none of *Safe* (page 642), *Trustworthy* (page 643) or *Unsafe* (page 643) is specified.

### 6.18.7 Safe Compilation

GHC includes a variety of flags that allow arbitrary processes to be run at compilation time. One such example is the *custom pre-processor* (page 285) flag. Another is the ability of Template Haskell to execute Haskell code at compilation time, including IO actions. Safe Haskell *does not address this danger* (although, Template Haskell is a disallowed feature).

Due to this, it is suggested that when compiling untrusted source code that has had no manual inspection done, the following precautions be taken:

- Compile in a sandbox, such as a chroot or similar container technology. Or simply as a user with very reduced system access.

- Compile untrusted code with the `-XSafe` flag being specified on the command line. This will ensure that modifications to the source being compiled can't disable the use of the Safe Language as the command line flag takes precedence over a source level pragma.
- Ensure that all untrusted code is imported as a *safe import* (page 639) and that the *-fpackage-trust* (page 643) flag (see *flag* (page 641)) is used with packages from untrusted sources being marked as untrusted.

There is a more detailed discussion of the issues involved in compilation safety and some potential solutions on the [GHC Wiki](#).

Additionally, the use of *annotations* (page 679) is forbidden, as that would allow bypassing Safe Haskell restrictions. See [#10826](#) for details.

## 6.19 Miscellaneous

### 6.19.1 Rewrite rules

```
{-# RULES "<name>" forall <binder> ... . <expr> = <expr> ... #-}
```

**Where**  
top-level

Define a rewrite rule to be used to optimize a source program.

The programmer can specify rewrite rules as part of the source program (in a pragma). Here is an example:

```
{-# RULES
    "map/map"    forall f g xs. map f (map g xs) = map (f . g) xs
    #-}
```

Use the debug flag *-ddump-simpl-stats* (page 301) to see what rules fired. If you need more information, then *-ddump-rule-firings* (page 301) shows you each individual rule firing and *-ddump-rule-rewrites* (page 302) also shows what the code looks like before and after the rewrite.

#### **-fenable-rewrite-rules**

Allow the compiler to apply rewrite rules to the source program.

#### 6.19.1.1 Syntax

From a syntactic point of view:

- There may be zero or more rules in a *RULES* (page 645) pragma, separated by semicolons (which may be generated by the layout rule).
- The layout rule applies in a pragma. Currently no new indentation level is set, so if you put several rules in single *RULES* pragma and wish to use layout to separate them, you must lay out the starting in the same column as the enclosing definitions.

```
{-# RULES
    "map/map"    forall f g xs. map f (map g xs) = map (f . g) xs
    "map/append" forall f xs ys. map f (xs ++ ys) = map f xs ++ map f _
```

(continues on next page)

(continued from previous page)

```
→ys
  #-}
```

Furthermore, the closing `#-}` should start in a column to the right of the opening `{-#`.

- Each rule has a name, enclosed in double quotes. The name itself has no significance at all. It is only used when reporting how many times the rule fired.
- A rule may optionally have a phase-control number (see [Phase control](#) (page 670)), immediately after the name of the rule. Thus:

```
{-# RULES
    "map/map" [2] forall f g xs. map f (map g xs) = map (f . g) xs
  #-}
```

The `[2]` means that the rule is active in Phase 2 and subsequent phases. The inverse notation `[~2]` is also accepted, meaning that the rule is active up to, but not including, Phase 2.

Rules support the special phase-control notation `[~]`, which means the rule is never active. This feature supports plugins (see [Compiler Plugins](#) (page 681)), by making it possible to define a RULE that is never run by GHC, but is nevertheless parsed, typechecked etc, so that it is available to the plugin.

- Each (term) variable mentioned in a rule must either be in scope (e.g. `map`), or bound by the `forall` (e.g. `f`, `g`, `xs`). The variables bound by the `forall` are called the *pattern* variables. They are separated by spaces, just like in a type `forall`.
- A pattern variable may optionally have a type signature. If the type of the pattern variable is polymorphic, it *must* have a type signature. For example, here is the `foldr/build` rule:

```
"fold/build" forall k z (g::forall b. (a->b->b) -> b -> b) .
              foldr k z (build g) = g k z
```

Since `g` has a polymorphic type, it must have a type signature.

- If [ExplicitForAll](#) (page 560) is enabled, type/kind variables can also be explicitly bound. For example:

```
{-# RULES "id" forall a. forall (x :: a). id @a x = x #-}
```

When a type-level explicit `forall` is present, each type/kind variable mentioned must now also be either in scope or bound by the `forall`. In particular, unlike some other places in Haskell, this means free kind variables will not be implicitly bound. For example:

```
"this_is_bad" forall (c :: k). forall (x :: Proxy c) ...
"this_is_ok"  forall k (c :: k). forall (x :: Proxy c) ...
```

When bound type/kind variables are needed, both `foralls` must always be included, though if no pattern variables are needed, the second can be left empty. For example:

```
{-# RULES "map/id" forall a. forall. map (id @a) = id @[a] #-}
```

- The left hand side of a rule must consist of a top-level variable applied to arbitrary expressions. For example, this is *not* OK:



```

"wrong1" forall e1 e2. case True of { True -> e1; False -> e2 } = e1
"wrong2" forall f.      f True = True
"wrong3" forall x.      Just x = Nothing

```

In "wrong1", the LHS is not an application; in "wrong2", the LHS has a pattern variable in the head. In "wrong3", the LHS consists of a *constructor*, rather than a *variable*, applied to an argument.

- A rule does not need to be in the same module as (any of) the variables it mentions, though of course they need to be in scope.
- All rules are implicitly exported from the module, and are therefore in force in any module that imports the module that defined the rule, directly or indirectly. (That is, if A imports B, which imports C, then C's rules are in force when compiling A.) The situation is very similar to that for instance declarations.
- Inside a *RULES* (page 645) "forall" is treated as a keyword, regardless of any other flag settings. Furthermore, inside a *RULES* (page 645), the language extension *ScopedTypeVariables* (page 565) is automatically enabled; see *Lexically scoped type variables* (page 565).
- Like other pragmas, *RULES* (page 645) pragmas are always checked for scope errors, and are typechecked. Typechecking means that the LHS and RHS of a rule are typechecked, and must have the same type. However, rules are only *enabled* if the *-fenable-rewrite-rules* (page 645) flag is on (see *Semantics* (page 647)).

#### 6.19.1.2 Semantics

From a semantic point of view:

- Rules are enabled (that is, used during optimisation) by the *-fenable-rewrite-rules* (page 645) flag. This flag is implied by *-O* (page 127), and may be switched off (as usual) by *-fno-enable-rewrite-rules* (page 645). (NB: enabling *-fenable-rewrite-rules* (page 645) without *-O* (page 127) may not do what you expect, though, because without *-O* (page 127) GHC ignores all optimisation information in interface files; see *-fignore-interface-pragmas* (page 135)). Note that *-fenable-rewrite-rules* (page 645) is an *optimisation* flag, and has no effect on parsing or typechecking.
- Rules are regarded as left-to-right rewrite rules. When GHC finds an expression that is a substitution instance of the LHS of a rule, it replaces the expression by the (appropriately-substituted) RHS. By "a substitution instance" we mean that the LHS can be made equal to the expression by substituting for the pattern variables.
- GHC makes absolutely no attempt to verify that the LHS and RHS of a rule have the same meaning. That is undecidable in general, and infeasible in most interesting cases. The responsibility is entirely the programmer's!
- GHC makes no attempt to make sure that the rules are confluent or terminating. For example:

```

"loop"      forall x y.  f x y = f y x

```

This rule will cause the compiler to go into an infinite loop.

- If more than one rule matches a call, GHC will choose one arbitrarily to apply.
- GHC currently uses a very simple, syntactic, matching algorithm for matching a rule LHS with an expression. It seeks a substitution which makes the LHS and expression

syntactically equal modulo alpha conversion. The pattern (rule), but not the expression, is eta-expanded if necessary. (Eta-expanding the expression can lead to laziness bugs.) But not beta conversion (that's called higher-order matching).

Matching is carried out on GHC's intermediate language, which includes type abstractions and applications. So a rule only matches if the types match too. See [Specialisation](#) (page 652) below.

- GHC keeps trying to apply the rules as it optimises the program. For example, consider:

```
let s = map f
    t = map g
in
s (t xs)
```

The expression `s (t xs)` does not match the rule "map/map", but GHC will substitute for `s` and `t`, giving an expression which does match. If `s` or `t` was (a) used more than once, and (b) large or a redex, then it would not be substituted, and the rule would not fire.

- GHC will never match a forall'd variable in a template with an expression which contains locally bound variables. For example, it is permitted to write a rule which contains a case expression:

```
{-# RULES
  "test/case-tup" forall (x :: (Int, Int)) (y :: Int) (z :: Int).
    test (case x of (l, r) -> y) z = case x of (l, r) -> test y z
  #-}
```

But the rule will not match when `y` contains either of `l` or `r` because they are locally bound. Therefore the following application will fail to trigger the rule:

```
prog :: (Int, Int) -> (Int, Int)
prog x = test (case x of (p, q) -> p) 0
```

because `y` would have to match against `p` (which is locally bound) but it will fire for:

```
prog :: (Int, Int) -> (Int, Int)
prog x = test (case x of (p, q) -> 0) 0
```

because `y` can match against `0`.

- GHC implements **higher order matching** as described by [GHC proposal #555](#). When a pattern variable is applied to distinct locally bound variables it forms what we call a **higher order pattern**. When matching, higher order patterns are treated like pattern variables, but they are allowed to match expressions that contain the locally bound variables that are part of the higher order patterns.

For example, we can use this to fix the broken rule from the example from the previous bullet point:

```
{-# RULES
  "test/case-tup" forall (x :: (Int, Int)) (f :: Int -> Int -> Int) (z :: Int)
    test (case x of (l, r) -> f l r) z = case x of (m, n) -> test (f m n) z
  #-}
```

This modified rule does fire for:

```
prog :: (Int, Int) -> (Int, Int)
prog x = test (case x of (p, q) -> p) 0
```

Under higher order matching, `f p q` matches `p` by assigning `f = \p q -> p`. The resulting code after the rewrite is:

```
prog x = case x of (m, n) -> test ((\p q -> p) m n) 0
```

- A rule that has a forall binder with a polymorphic type, is likely to fail to fire. E. g.,

```
{-# RULES forall (x :: forall a. Num a => a -> a). f x = blah #-}
```

Here `x` has a polymorphic type. This applies to a forall'd binder with a type class constraint, such as:

```
{-# RULES forall @m (x :: KnownNat m => Proxy m). g x = blah #-}
```

See [#21093](#) for discussion.

### 6.19.1.3 How rules interact with INLINE/NOINLINE pragmas

Ordinary inlining happens at the same time as rule rewriting, which may lead to unexpected results. Consider this (artificial) example

```
f x = x
g y = f y
h z = g True

{-# RULES "f" f True = False #-}
```

Since `f`'s right-hand side is small, it is inlined into `g`, to give

```
g y = y
```

Now `g` is inlined into `h`, but `f`'s RULE has no chance to fire. If instead GHC had first inlined `g` into `h` then there would have been a better chance that `f`'s RULE (page 645) might fire.

The way to get predictable behaviour is to use a `NOINLINE` (page 669) pragma, or an `INLINE[ (phase) ]` pragma, on `f`, to ensure that it is not inlined until its RULES (page 645) have had a chance to fire. The warning flag `-Winline-rule-shadowing` (page 119) (see [Warnings and sanity-checking](#) (page 96)) warns about this situation.

### 6.19.1.4 How rules interact with CONLIKE pragmas

GHC is very cautious about duplicating work. For example, consider

```
f k z xs = let xs = build g
            in ... (foldr k z xs) ... sum xs ...
{-# RULES "foldr/build" forall k z g. foldr k z (build g) = g k z #-}
```

Since `xs` is used twice, GHC does not fire the foldr/build rule. Rightly so, because it might take a lot of work to compute `xs`, which would be duplicated if the rule fired.

Sometimes, however, this approach is over-cautious, and we *do* want the rule to fire, even though doing so would duplicate redex. There is no way that GHC can work out when this is a good idea, so we provide the `CONLIKE` pragma to declare it, thus:

```
{-# INLINE CONLIKE [1] f #-}
f x = blah
```

`CONLIKE` is a modifier to an `INLINE` or `NOINLINE` pragma. It specifies that an application of `f` to one argument (in general, the number of arguments to the left of the `=` sign) should be considered cheap enough to duplicate, if such a duplication would make rule fire. (The name “`CONLIKE`” is short for “constructor-like”, because constructors certainly have such a property.) The `CONLIKE` (page 670) pragma is a modifier to `INLINE` (page 666)/`NOINLINE` (page 669) because it really only makes sense to match `f` on the LHS of a rule if you are sure that `f` is not going to be inlined before the rule has a chance to fire.

### 6.19.1.5 How rules interact with class methods

Giving a `RULE` for a class method is a bad idea:

```
class C a where
  op :: a -> a -> a

instance C Bool where
  op x y = ...rhs for op at Bool...

{-# RULES "f" op True y = False #-}
```

In this example, `op` is not an ordinary top-level function; it is a class method. GHC rapidly rewrites any occurrences of `op-used-at-type-Bool` to a specialised function, say `opBool`, where

```
opBool :: Bool -> Bool -> Bool
opBool x y = ..rhs for op at Bool...
```

So the `RULE` never has a chance to fire, for just the same reasons as in *How rules interact with `INLINE`/`NOINLINE` pragmas* (page 649).

The solution is to define the instance-specific function yourself, with a pragma to prevent it being inlined too early, and give a `RULE` for it:

```
instance C Bool where
  op = opBool

opBool :: Bool -> Bool -> Bool
{-# NOINLINE [1] opBool #-}
opBool x y = ..rhs for op at Bool...

{-# RULES "f" opBool True y = False #-}
```

If you want a `RULE` that truly applies to the overloaded class method, the only way to do it is like this:

```
class C a where
  op_c :: a -> a -> a
```

(continues on next page)

(continued from previous page)

```

op :: C a => a -> a -> a
{-# NOINLINE [1] op #-}
op = op_c

{-# RULES "reassociate" op (op x y) z = op x (op y z) #-}

```

Now the inlining of `op` is delayed until the rule has a chance to fire. The down-side is that instance declarations must define `op_c`, but all other uses should go via `op`.

#### 6.19.1.6 List fusion

The RULES mechanism is used to implement fusion (deforestation) of common list functions. If a “good consumer” consumes an intermediate list constructed by a “good producer”, the intermediate list should be eliminated entirely.

The following are good producers:

- List comprehensions
- Enumerations of `Int`, `Integer` and `Char` (e.g. `['a'..'z']`).
- Explicit lists (e.g. `[True, False]`)
- The `cons` constructor (e.g. `3:4:[]`)
- `++`
- `map`
- `take`, `filter`
- `iterate`, `repeat`
- `zip`, `zipWith`

The following are good consumers:

- List comprehensions
- `array` (on its second argument)
- `++` (on its first argument)
- `foldr`
- `map`
- `take`, `filter`
- `concat`
- `unzip`, `unzip2`, `unzip3`, `unzip4`
- `zip`, `zipWith` (but on one argument only; if both are good producers, `zip` will fuse with one but not the other)
- `partition`
- `head`
- `and`, `or`, `any`, `all`
- `sequence_`

- msum

So, for example, the following should generate no intermediate lists:

```
array (1,10) [(i,i*i) | i <- map (+ 1) [0..9]]
```

This list could readily be extended; if there are Prelude functions that you use a lot which are not included, please tell us.

If you want to write your own good consumers or producers, look at the Prelude definitions of the above functions to see how to do so.

### 6.19.1.7 Specialisation

Rewrite rules can be used to get the same effect as a feature present in earlier versions of GHC. For example, suppose that:

```
genericLookup :: Ord a => Table a b -> a -> b
intLookup     ::          Table Int b -> Int -> b
```

where `intLookup` is an implementation of `genericLookup` that works very fast for keys of type `Int`. You might wish to tell GHC to use `intLookup` instead of `genericLookup` whenever the latter was called with type `Table Int b -> Int -> b`. It used to be possible to write a *SPECIALIZE* (page 672) pragma with a right-hand-side:

```
{-# SPECIALIZE genericLookup :: Table Int b -> Int -> b = intLookup #-}
```

This feature is no longer in GHC, but rewrite rules let you do the same thing:

```
{-# RULES "genericLookup/Int" genericLookup = intLookup #-}
```

This slightly odd-looking rule instructs GHC to replace `genericLookup` by `intLookup` *when-ever the types match*. What is more, this rule does not need to be in the same file as `genericLookup`, unlike the *SPECIALIZE* pragmas which currently do (so that they have an original definition available to specialise).

It is *Your Responsibility* to make sure that `intLookup` really behaves as a specialised version of `genericLookup`!!!

An example in which using *RULES* for specialisation will Win Big:

```
toDouble :: Real a => a -> Double
toDouble = fromRational . toRational

{-# RULES "toDouble/Int" toDouble = i2d #-}
i2d (I# i) = D# (int2Double# i) -- uses Glasgow prim-op directly
```

The `i2d` function is virtually one machine instruction; the default conversion—via an intermediate `Rational`—is obscenely expensive by comparison.

### 6.19.1.8 Controlling what's going on in rewrite rules

- Use `-ddump-rules` (page 301) to see the rules that are defined *in this module*. This includes rules generated by the specialisation pass, but excludes rules imported from other modules.
- Use `-ddump-simpl-stats` (page 301) to see what rules are being fired. If you add `-dppr-debug` (page 299) you get a more detailed listing.
- Use `-ddump-rule-firings` (page 301) or `-ddump-rule-rewrites` (page 302) to see in great detail what rules are being fired. If you add `-dppr-debug` (page 299) you get a still more detailed listing.
- The definition of (say) `build` in `GHC/Base.hs` looks like this:

```
build    :: forall a. (forall b. (a -> b -> b) -> b -> b) -> [a]
{-# INLINE build #-}
build g = g (:) []
```

Notice the `INLINE` (page 666)! That prevents `(:)` from being inlined when compiling `PrelBase`, so that an importing module will “see” the `(:)`, and can match it on the LHS of a rule. `INLINE` prevents any inlining happening in the RHS of the `INLINE` thing. I regret the delicacy of this.

- In `libraries/base/GHC/Base.hs` look at the rules for `map` to see how to write rules that will do fusion and yet give an efficient program even if fusion doesn't happen. More rules in `GHC/List.hs`.

## 6.19.2 Special built-in functions

GHC has a few built-in functions with special behaviour. In particular:

- `GHC.Exts.inline` allows control over inlining on a per-call-site basis.
- `GHC.Exts.lazy` restrains the strictness analyser.
- `GHC.Exts.oneShot` gives a hint to the compiler about how often a function is being called.

## 6.19.3 Generic programming

There are a few ways to do datatype-generic programming using the `GHC.Generics` framework. One is making use of the `Generically` and `Generically1` wrappers from `GHC.Generics`, instances can be derived via them using `DerivingVia` (page 508):

```
{-# LANGUAGE DeriveGeneric      #-}
{-# LANGUAGE DerivingStrategies #-}
{-# LANGUAGE DerivingVia        #-}

import GHC.Generics

data V4 a = V4 a a a a
  deriving
  stock (Generic, Generic1)

  deriving (Semigroup, Monoid)
```

(continues on next page)

(continued from previous page)

```
via Generically (V4 a)

deriving (Functor, Applicative)
via Generically1 V4
```

The older approach uses *DeriveGeneric* (page 655), *DefaultSignatures* (page 524), and *DeriveAnyClass* (page 504). It derives instances by providing a distinguished generic implementation as part of the type class declaration. This section gives a very brief overview of how to do it.

Generic programming support in GHC allows defining classes with methods that do not need a user specification when instantiating: the method body is automatically derived by GHC. This is similar to what happens for standard classes such as `Read` and `Show`, for instance, but now for user-defined classes.

**Note:** GHC used to have an implementation of generic classes as defined in the paper “Derivable type classes”, Ralf Hinze and Simon Peyton Jones, Haskell Workshop, Montreal Sept 2000, pp. 94-105. These have been removed and replaced by the more general support for generic programming.

### 6.19.3.1 Deriving representations

The first thing we need is generic representations. The `GHC.Generics` module defines a couple of primitive types that are used to represent Haskell datatypes:

```
-- | Unit: used for constructors without arguments
data U1 p = U1

-- | Constants, additional parameters and recursion of kind Type
newtype K1 i c p = K1 { unK1 :: c }

-- | Meta-information (constructor names, etc.)
newtype M1 i c f p = M1 { unM1 :: f p }

-- | Sums: encode choice between constructors
infixr 5 :+:
data (:+:) f g p = L1 (f p) | R1 (g p)

-- | Products: encode multiple arguments to constructors
infixr 6 :*:
data (:*:) f g p = f p :*: g p
```

The `Generic` and `Generic1` classes mediate between user-defined datatypes and their internal representation as a sum-of-products:

```
class Generic a where
  -- Encode the representation of a user datatype
  type Rep a :: Type -> Type
  -- Convert from the datatype to its representation
  from :: a -> (Rep a) x
  -- Convert from the representation to the datatype
```

(continues on next page)



(continued from previous page)

```

to      :: (Rep a) x -> a

class Generic1 (f :: k -> Type) where
  type Rep1 f :: k -> Type

  from1  :: f a -> Rep1 f a
  to1    :: Rep1 f a -> f a

```

Generic1 is used for functions that can only be defined over type containers, such as `map`. Note that Generic1 ranges over types of kind `Type -> Type` by default, but if the *PolyKinds* (page 411) extension is enabled, then it can range of types of kind `k -> Type`, for any kind `k`.

## DeriveGeneric

### Since

7.2.1

### Status

Included in *GHC2024* (page 314), *GHC2021* (page 314)

Allow automatic deriving of instances for the Generic typeclass.

Instances of these classes can be derived by GHC with the *DeriveGeneric* (page 655) extension, and are necessary to be able to define generic instances automatically.

For example, a user-defined datatype of trees

```
data UserTree a = Node a (UserTree a) (UserTree a) | Leaf
```

in a Main module in a package named `foo` will get the following representation:

```

instance Generic (UserTree a) where
  -- Representation type
  type Rep (UserTree a) =
    M1 D ('MetaData "UserTree" "Main" "package-name" 'False) (
      M1 C ('MetaCons "Node" 'PrefixI 'False) (
        M1 S ('MetaSel 'Nothing
              'NoSourceUnpackedness
              'NoSourceStrictness
              'DecidedLazy)
          (K1 R a)
        ):*: M1 S ('MetaSel 'Nothing
              'NoSourceUnpackedness
              'NoSourceStrictness
              'DecidedLazy)
          (K1 R (UserTree a))
        ):*: M1 S ('MetaSel 'Nothing
              'NoSourceUnpackedness
              'NoSourceStrictness
              'DecidedLazy)
          (K1 R (UserTree a)))
      ):+: M1 C ('MetaCons "Leaf" 'PrefixI 'False) U1)

  -- Conversion functions

```

(continues on next page)

(continued from previous page)

```

from (Node x l r) = M1 (L1 (M1 (M1 (K1 x) :: M1 (K1 l) :: M1 (K1 r))))
from Leaf         = M1 (R1 (M1 U1))
to (M1 (L1 (M1 (M1 (K1 x) :: M1 (K1 l) :: M1 (K1 r)))) = Node x l r
to (M1 (R1 (M1 U1)))                                = Leaf

```

This representation is generated automatically if a deriving Generic clause is attached to the datatype. *Standalone deriving* (page ??) can also be used.

### 6.19.3.2 Writing generic functions

A generic function is defined by creating a class and giving instances for each of the representation types of `GHC.Generics`. As an example we show generic serialization:

```

data Bin = 0 | I

class GSerialize f where
  gput :: f a -> [Bin]

instance GSerialize U1 where
  gput U1 = []

instance (GSerialize a, GSerialize b) => GSerialize (a :: b) where
  gput (x :: y) = gput x ++ gput y

instance (GSerialize a, GSerialize b) => GSerialize (a :+: b) where
  gput (L1 x) = 0 : gput x
  gput (R1 x) = I : gput x

instance (GSerialize a) => GSerialize (M1 i c a) where
  gput (M1 x) = gput x

instance (Serialize a) => GSerialize (K1 i a) where
  gput (K1 x) = put x

```

A caveat: this encoding strategy may not be reliable across different versions of GHC. When deriving a Generic instance is free to choose any nesting of `:+:` and `:::` it chooses, so if GHC chooses `(a :+: b) :+: c`, then the encoding for `a` would be `[0, 0]`, `b` would be `[0, I]`, and `c` would be `[I]`. However, if GHC chooses `a :+: (b :+: c)`, then the encoding for `a` would be `[0]`, `b` would be `[I, 0]`, and `c` would be `[I, I]`. (In practice, the current implementation tries to produce a more-or-less balanced nesting of `:+:` and `:::` so that the traversal of the structure of the datatype from the root to a particular component can be performed in logarithmic rather than linear time.)

Typically this `GSerialize` class will not be exported, as it only makes sense to have instances for the representation types.

### 6.19.3.3 Unlifted representation types

The data family `URec` is provided to enable generic programming over datatypes with certain unlifted arguments. There are six instances corresponding to common unlifted types:

```
data family URec a p

data instance URec (Ptr ()) p = UAddr { uAddr# :: Addr# }
data instance URec Char p = UChar { uChar# :: Char# }
data instance URec Double p = UDouble { uDouble# :: Double# }
data instance URec Int p = UInt { uInt# :: Int# }
data instance URec Float p = UFloat { uFloat# :: Float# }
data instance URec Word p = UWord { uWord# :: Word# }
```

Six type synonyms are provided for convenience:

```
type UAddr = URec (Ptr ())
type UChar = URec Char
type UDouble = URec Double
type UFloat = URec Float
type UInt = URec Int
type UWord = URec Word
```

As an example, this data declaration:

```
data IntHash = IntHash Int#
  deriving Generic
```

results in the following Generic instance:

```
instance 'Generic' IntHash where
  type 'Rep' IntHash =
    'D1' ('MetaData "IntHash" "Main" "package-name" 'False)
      ('C1' ('MetaCons "IntHash" 'PrefixI 'False)
        ('S1' ('MetaSel 'Nothing
                  'NoSourceUnpackedness
                  'NoSourceStrictness
                  'DecidedLazy)
              'UInt'))
```

A user could provide, for example, a `GSerialize UInt` instance so that a `Serialize IntHash` instance could be easily defined in terms of `GSerialize`.

### 6.19.3.4 Generic defaults

The only thing left to do now is to define a “front-end” class, which is exposed to the user:

```
class Serialize a where
  put :: a -> [Bin]

  default put :: (Generic a, GSerialize (Rep a)) => a -> [Bin]
  put = gput . from
```

Here we use a *default signature* (page ??) to specify that the user does not have to provide an implementation for `put`, as long as there is a `Generic` instance for the type to instantiate. For the `UserTree` type, for instance, the user can just write:

```
instance (Serialize a) => Serialize (UserTree a)
```

The default method for `put` is then used, corresponding to the generic implementation of serialization. If you are using *DeriveAnyClass* (page 504), the same instance is generated by simply attaching a deriving `Serialize` clause to the `UserTree` datatype declaration. For more examples of generic functions please refer to the *generic-deriving* package on Hackage.

#### 6.19.3.5 More information

For more details please refer to the [Haskell Wiki page](#) or the original paper [[Generics2010](#)].

### 6.19.4 Assertions

If you want to make use of assertions in your standard Haskell code, you could define a function like the following:

```
assert :: Bool -> a -> a
assert False x = error "assertion failed!"
assert _      x = x
```

which works, but gives you back a less than useful error message – an assertion failed, but which and where?

One way out is to define an extended `assert` function which also takes a descriptive string to include in the error message and perhaps combine this with the use of a pre-processor which inserts the source location where `assert` was used.

GHC offers a helping hand here, doing all of this for you. For every use of `assert` in the user's source:

```
kelvinToC :: Double -> Double
kelvinToC k = assert (k >= 0.0) (k-273.15)
```

GHC will rewrite this to also include the source location where the assertion was made,

```
assert pred val ==> assertError "Main.hs|15" pred val
```

The rewrite is only performed by the compiler when it spots applications of `Control.Exception.assert`, so you can still define and use your own versions of `assert`, should you so wish. If not, import `Control.Exception` to make use `assert` in your code.

GHC ignores assertions when optimisation is turned on with the `-O` (page 127) flag. That is, expressions of the form `assert pred e` will be rewritten to `e`. You can also disable assertions using the *-fignore-asserts* (page 135) option. The option *-fno-ignore-asserts* (page 135) allows enabling assertions even when optimisation is turned on.

Assertion failures can be caught, see the documentation for the `Control.Exception` library for the details.

### 6.19.5 HasCallStack

`GHC.Stack.HasCallStack` is a lightweight method of obtaining a partial call-stack at any point in the program.

A function can request its call-site with the `HasCallStack` constraint and access it as a Haskell value by using `callStack`.

One can then use functions from `GHC.Stack` to inspect or pretty print (as is done in `f` below) the call stack.

```
f :: HasCallStack => IO ()
f = putStrLn (prettyCallStack callStack)

g :: HasCallStack => IO ()
g = f
```

Evaluating `f` directly shows a call stack with a single entry, while evaluating `g`, which also requests its call-site, shows two entries, one for each computation “annotated” with `HasCallStack`.

```
ghci> f
CallStack (from HasCallStack):
  f, called at <interactive>:19:1 in interactive:Ghci1
ghci> g
CallStack (from HasCallStack):
  f, called at <interactive>:17:5 in main:Main
  g, called at <interactive>:20:1 in interactive:Ghci2
```

The error function from the Prelude supports printing the call stack that led to the error in addition to the usual error message:

```
ghci> error "bad"
*** Exception: bad
CallStack (from HasCallStack):
  error, called at <interactive>:25:1 in interactive:Ghci5
```

The call stack here consists of a single entry, pinpointing the source of the call to error. However, by annotating several computations with `HasCallStack`, figuring out the exact circumstances and sequences of calls that lead to a call to error becomes a lot easier, as demonstrated with the simple example below.

```
f :: HasCallStack => IO ()
f = error "bad bad bad"

g :: HasCallStack => IO ()
g = f

h :: HasCallStack => IO ()
h = g
```

```
ghci> h
*** Exception: bad bad bad
CallStack (from HasCallStack):
  error, called at call-stack.hs:4:5 in main:Main
```

(continues on next page)

(continued from previous page)

```
f, called at call-stack.hs:7:5 in main:Main
g, called at call-stack.hs:10:5 in main:Main
h, called at <interactive>:28:1 in interactive:Ghci1
```

The CallStack will only extend as far as the types allow it, for example

```
myHead :: HasCallStack => [a] -> a
myHead []      = error "empty"
myHead (x:xs) = x

bad :: Int
bad = myHead []
```

```
ghci> bad
*** Exception: empty
CallStack (from HasCallStack):
  error, called at Bad.hs:8:15 in main:Bad
  myHead, called at Bad.hs:12:7 in main:Bad
```

includes the call-site of error in myHead, and of myHead in bad, but not the call-site of bad at the GHCi prompt.

GHC solves HasCallStack constraints in two steps:

1. If there is a CallStack in scope - i.e. the enclosing definition has a HasCallStack constraint - GHC will push the new call-site onto the existing CallStack.
2. Otherwise GHC will solve the HasCallStack constraint for the singleton CallStack containing just the current call-site.

Importantly, GHC will **never** infer a HasCallStack constraint, you must request it explicitly.

CallStack is kept abstract, but GHC provides a function

```
getCallStack :: CallStack -> [(String, SrcLoc)]
```

to access the individual call-sites in the stack. The String is the name of the function that was called, and the SrcLoc provides the package, module, and file name, as well as the line and column numbers.

GHC.Stack additionally exports a function withFrozenCallStack that allows users to freeze the current CallStack, preventing any future push operations from having an effect. This can be used by library authors to prevent CallStacks from exposing unnecessary implementation details. Consider the myHead example above, the error line in the printed stack is not particularly enlightening, so we might choose to suppress it by freezing the CallStack that we pass to error.

```
myHead :: HasCallStack => [a] -> a
myHead []      = withFrozenCallStack (error "empty")
myHead (x:xs) = x
```

```
ghci> myHead []
*** Exception: empty
CallStack (from HasCallStack):
  myHead, called at Bad.hs:12:7 in main:Bad
```

**NOTE:** The intrepid user may notice that `HasCallStack` is just an alias for an implicit parameter `?callStack :: CallStack`. This is an implementation detail and **should not** be considered part of the `CallStack` API, we may decide to change the implementation in the future.

#### 6.19.5.1 Compared with other sources of stack traces

`HasCallStack` does not interact with the RTS and does not require compilation with `-prof`. On the other hand, as the `CallStack` is built up explicitly via the `HasCallStack` constraints, it will generally not contain as much information as the simulated call-stacks maintained by the RTS.

### 6.19.6 Whitespace

As in the Haskell Language Report, Haskell comments are valid whitespace. In addition, lines (which must end with a line feed character) that begin as follows are valid whitespace in source code, except immediately after a `where`, `let`, `do` or `of` keyword:

- `#!`. This accommodates ‘shebang’ interpreter directives in scripts on Unix-like operating systems.
- `<space>#!`, where `<space>` is an initial space character before the ‘shebang’.
- `#pragma`. This accommodates the use of a directive that passes additional information to a compiler.
- `#line <line> "<file>"`, where `<line>` is a positive integer and `<file>` can comprise zero or more characters. This accommodates a compiler directive that resets the numbering of lines of source code, and the identification of the source code file name, in compiler messages.
- `#<line> "<file>"`, where `<line>` is a positive integer and `<file>` can comprise zero or more characters.

## 6.20 Pragmas

GHC supports several pragmas, or instructions to the compiler placed in the source code. Pragmas don’t normally affect the meaning of the program, but they might affect the efficiency of the generated code.

Pragmas all take the form `{-# word ... #-}` where `<word>` indicates the type of pragma, and is followed optionally by information specific to that type of pragma. Case is ignored in `<word>`. The various values for `<word>` that GHC understands are described in the following sections; any pragma encountered with an unrecognised `<word>` is ignored.

Certain pragmas are *file-header pragmas*:

- A file-header pragma must precede the `module` keyword in the file.
- There can be as many file-header pragmas as you please, and they can be preceded or followed by comments.
- File-header pragmas are read once only, before pre-processing the file (e.g. with `cpp`).
- The file-header pragmas are: `{-# LANGUAGE #-}`, `{-# OPTIONS_GHC #-}`, and `{-# INCLUDE #-}`.

### 6.20.1 LANGUAGE pragma

```
{-# LANGUAGE (ext), (ext), ... #-}
```

**Where**

file header

Enable or disable a set of language extensions.

The LANGUAGE pragma allows language extensions to be enabled in a portable way. It is the intention that all Haskell compilers support the LANGUAGE pragma with the same syntax, although not all extensions are supported by all compilers, of course. The LANGUAGE pragma should be used instead of OPTIONS\_GHC, if possible.

For example, to enable the FFI and preprocessing with CPP:

```
{-# LANGUAGE ForeignFunctionInterface, CPP #-}
```

LANGUAGE is a file-header pragma (see [Pragmas](#) (page 661)).

Every language extension can also be turned into a command-line flag by prefixing it with “-X”; for example -XForeignFunctionInterface. (Similarly, all “-X” flags can be written as LANGUAGE pragmas.)

A list of all supported language extensions can be obtained by invoking `ghc --supported-extensions` (see [--supported-extensions](#) (page 79)).

Any extension from the Extension type defined in [Language.Haskell.Extension](#) may be used. GHC will report an error if any of the requested extensions are not supported.

### 6.20.2 OPTIONS\_GHC pragma

```
{-# OPTIONS_GHC (flags) #-}
```

**Where**

file header

The OPTIONS\_GHC pragma is used to specify additional options that are given to the compiler when compiling this source file. See [Command line options in source files](#) (page 76) for details.

Previous versions of GHC accepted OPTIONS rather than OPTIONS\_GHC, but that is now deprecated.

OPTIONS\_GHC is a file-header pragma (see [Pragmas](#) (page 661)).

### 6.20.3 INCLUDE pragma

The INCLUDE used to be necessary for specifying header files to be included when using the FFI and compiling via C. It is no longer required for GHC, but is accepted (and ignored) for compatibility with other compilers.



## 6.20.4 WARNING and DEPRECATED pragmas

**{-# WARNING #-}**

**Where**

declaration or module name

The WARNING pragma allows you to attach an arbitrary warning to a particular function, class, type, export field or module.

**{-# DEPRECATED #-}**

**Where**

declaration or module name

A DEPRECATED pragma lets you specify that a particular function, class, type, export or module is deprecated.

There are three ways of using these pragmas.

- You can work on an entire module thus:

```
module Wibble {-# DEPRECATED "Use Wobble instead" #-} where
...
```

Or:

```
module Wibble {-# WARNING "This is an unstable interface." #-} where
...
```

When you compile any module that import Wibble, GHC will print the specified message.

- You can attach a warning to a function, class, type, or data constructor, with the following top-level declarations:

```
{-# DEPRECATED f, C, T "Don't use these" #-}
{-# WARNING unsafePerformIO "This is unsafe; I hope you know what you're
→doing" #-}
```

When you compile any module that imports and uses any of the specified entities, GHC will print the specified message.

You can only attach to entities declared at top level in the module being compiled, and you can only use unqualified names in the list of entities. A capitalised name, such as T refers to *either* the type constructor T *or* the data constructor T, or both if both are in scope. If both are in scope, there is currently no way to specify one without the other (c.f. fixities *Infix type constructors, classes, and type variables* (page 367)).

- You can add a warning to an instance (including derived instances):

```
instance {-# DEPRECATED "Don't use" #-} Show T1 where { .. }
instance {-# WARNING "Don't use either" #-} Show G1 where { .. }

deriving instance {-# DEPRECATED "to be removed" #-} Eq T2
deriving instance {-# WARNING "to be removed as well" #-} Eq G2
```

Doing so will cause warnings to be emitted whenever such instances are used to solve a constraint. For example:

```
foo = show (MkT1 :: T1) -- warning: uses "instance Show T1"

bar :: forall a. Eq a => a -> Bool
bar x = x == x
baz :: T2 -> Bool
baz = bar -- warning: uses "instance Eq T2"
quux :: Eq T2 => T2 -> Bool
quux = bar -- no warning: does not use "instance Eq T2"
```

As with other deprecation mechanisms, note that warnings will not be emitted for the usages of those instances in the module in which they are defined.

- Finally, you can attach a warning to an export field, be it a regular export:

```
module Wibble (
  {-# DEPRECATED "Do not use this type" #-} T,
  {-# WARNING "This is a hacky function" #-} f
) where
...
```

Or a re-export of import from another module:

```
module Wibble (
  {-# DEPRECATED "Import this function from A instead" #-} g
) where
import A
```

Or a re-export of an entire module:

```
module Wibble (
  {-# DEPRECATED "This declaration has been moved to B instead" #-}
  module B
) where
import B
```

When you compile any module that imports and uses any of the specified entities, GHC will print the specified message.

An entity will only be warned about if all of its exports are deprecated:

```
module Wibble (
  {-# WARNING "This would not be warned about" #-} g,
  module A
)
import A (g)
```

If the `:ghc-flag: -Wincomplete-export-warnings` is on, such occurrences are warned about.

Moreover, all warning declarations of a specific name have to be warned with the same pragma and message:

```
module Wibble (
  {-# WARNING "This would throw an error" #-} T(T1),
  {-# WARNING "Because the warning messages differ for T" #-} T,
```

(continues on next page)

(continued from previous page)

```
)
...
```

Also note that the argument to `DEPRECATED` and `WARNING` can also be a list of strings, in which case the strings will be presented on separate lines in the resulting warning message,

```
{-# DEPRECATED foo, bar ["Don't use these", "Use gar instead"] #-}
```

Warnings and deprecations are not reported for (a) uses within the defining module, (b) defining a method in a class instance, (c) unqualified uses of an entity imported through different modules when not all of them are warned about, and (d) uses in an export list (except for export warnings). The latter reduces spurious complaints within a library in which one module gathers together and re-exports the exports of several others.

A `WARNING` pragma (but not a `DEPRECATED` pragma) may optionally specify a *warning category* as a string literal following the `in` keyword. This affects the flag used to suppress the warning. The examples above do not specify a category, so the default category deprecations applies, and they can be suppressed with the flag `-Wno-deprecations` (page 102) (and its synonym `-Wno-warnings-deprecations` (page 102)).

If a category is specified, the warning can instead be suppressed with the flag `-Wno-x- (category)`, for example warnings from the following pragma can be suppressed with `-Wno-x-partial`:

```
{-# WARNING in "x-partial" head "This function is partial..." #-}
```

Alternatively, warnings from all `WARNING` and `DEPRECATED` pragmas regardless of category can be suppressed with `-Wno-extended-warnings` (page 101).

When a deprecated name appears in both value and type namespaces (i.e. punning occurs) `WARNING` and `DEPRECATED` pragmas will affect both:

```
{-# LANGUAGE PatternSynonyms #-}

data D = MkD
pattern D = MkD
{-# DEPRECATED D "This will deprecate both the type D and the pattern synonym
↳D" #-}
```

It is possible to specify the namespace of the name to be warned about or deprecated using type and data specifiers, but this feature requires enabling `ExplicitNamespaces` (page 364):

```
{-# LANGUAGE PatternSynonyms #-}

data D = MkD
pattern D = MkD
{-# DEPRECATED data D "This will deprecate only the pattern synonym D" #-}
{-# DEPRECATED type D "This will deprecate only the type D" #-}
```

## 6.20.5 MINIMAL pragma

```
{-# MINIMAL (name) | (name) , ... #-}
```

### Where

in class body

Define the methods needed for a minimal complete instance of a class.

The MINIMAL pragma is used to specify the minimal complete definition of a class, i.e. specify which methods must be implemented by all instances. If an instance does not satisfy the minimal complete definition, then a warning is generated. This can be useful when a class has methods with circular defaults. For example

```
class Eq a where
  (==) :: a -> a -> Bool
  (/=) :: a -> a -> Bool
  x == y = not (x /= y)
  x /= y = not (x == y)
  {-# MINIMAL (==) | (/=) #-}
```

Without the MINIMAL pragma no warning would be generated for an instance that implements neither method.

The syntax for minimal complete definition is:

```
mindef ::= name
        | '(' mindef ')'
        | mindef '|' mindef
        | mindef ',' mindef
```

A vertical bar denotes disjunction, i.e. one of the two sides is required. A comma denotes conjunction, i.e. both sides are required. Conjunction binds stronger than disjunction.

If no MINIMAL pragma is given in the class declaration, it is just as if a pragma `{-# MINIMAL op1, op2, ..., opn #-}` was given, where the `opi` are the methods that lack a default method in the class declaration (c.f. [-Wmissing-methods](#) (page 109), [Warnings and sanity-checking](#) (page 96)).

This warning can be turned off with the flag [-Wno-missing-methods](#) (page 109).

## 6.20.6 INLINE and NOINLINE pragmas

These pragmas control the inlining of function definitions.

### 6.20.6.1 INLINE pragma

```
{-# INLINE (name) #-}
```

### Where

any function definition

Force GHC to inline a value.

GHC (with [-O](#) (page 127), as always) tries to inline (or “unfold”) functions/values that are “small enough,” thus avoiding the call overhead and possibly exposing other more-wonderful optimisations. GHC has a set of heuristics, tuned over a long period of time using many

benchmarks, that decide when it is beneficial to inline a function at its call site. The heuristics are designed to inline functions when it appears to be beneficial to do so, but without incurring excessive code bloat. If a function looks too big, it won't be inlined, and functions larger than a certain size will not even have their definition exported in the interface file. Some of the thresholds that govern these heuristic decisions can be changed using flags, see *-f\**: [platform-independent flags](#) (page 128).

Normally GHC will do a reasonable job of deciding by itself when it is a good idea to inline a function. However, sometimes you might want to override the default behaviour. For example, if you have a key function that is important to inline because it leads to further optimisations, but GHC judges it to be too big to inline.

The sledgehammer you can bring to bear is the `INLINE` pragma, used thusly:

```
key_function :: Int -> String -> (Bool, Double)
{-# INLINE key_function #-}
```

The major effect of an `INLINE` pragma is to declare a function's "cost" to be very low. The normal unfolding machinery will then be very keen to inline it. However, an `INLINE` pragma for a function "f" has a number of other effects:

- While GHC is keen to inline the function, it does not do so blindly. For example, if you write

```
map key_function xs
```

there really isn't any point in inlining `key_function` to get

```
map (\x -> body) xs
```

In general, GHC only inlines the function if there is some reason (no matter how slight) to suppose that it is useful to do so.

- Moreover, GHC will only inline the function if it is *fully applied*, where "fully applied" means applied to as many arguments as appear (syntactically) on the LHS of the function definition. For example:

```
comp1 :: (b -> c) -> (a -> b) -> a -> c
{-# INLINE comp1 #-}
comp1 f g = \x -> f (g x)

comp2 :: (b -> c) -> (a -> b) -> a -> c
{-# INLINE comp2 #-}
comp2 f g x = f (g x)
```

The two functions `comp1` and `comp2` have the same semantics, but `comp1` will be inlined when applied to *two* arguments, while `comp2` requires *three*. This might make a big difference if you say

```
map (not `comp1` not) xs
```

which will optimise better than the corresponding use of `comp2`.

- It is useful for GHC to optimise the definition of an `INLINE` function `f` just like any other non-`INLINE` function, in case the non-inlined version of `f` is ultimately called. But we don't want to inline the *optimised* version of `f`; a major reason for `INLINE` pragmas is to expose functions in `f`'s RHS that have rewrite rules, and it's no good if those functions have been optimised away.

So *GHC guarantees to inline precisely the code that you wrote*, no more and no less. It does this by capturing a copy of the definition of the function to use for inlining (we call this the “inline-RHS”), which it leaves untouched, while optimising the ordinarily RHS as usual. For externally-visible functions the inline-RHS (not the optimised RHS) is recorded in the interface file.

- An `INLINE` function is not worker/wrapped by strictness analysis. It’s going to be inlined wholesale instead.

GHC ensures that inlining cannot go on forever: every mutually-recursive group is cut by one or more *loop breakers* that is never inlined (see [Secrets of the GHC inliner](#), JFP 12(4) July 2002). GHC tries not to select a function with an `INLINE` pragma as a loop breaker, but when there is no choice even an `INLINE` function can be selected, in which case the `INLINE` pragma is ignored. For example, for a self-recursive function, the loop breaker can only be the function itself, so an `INLINE` pragma is always ignored.

`INLINE` pragmas are a particularly good idea for the `then/return` (or `bind/unit`) functions in a monad. For example, in GHC’s own `UniqueSupply` monad code, we have:

```
{-# INLINE thenUs #-}  
{-# INLINE returnUs #-}
```

See also the `NOINLINE` ([NOINLINE pragma](#) (page 669)) and `INLINABLE` ([INLINABLE pragma](#) (page 669)) pragmas.

### INLINE pragma effects on various locations

Syntactically, an `INLINE` pragma for a function can be put anywhere its type signature could be put. This means a `INLINE` pragma can really be put on any definition site for a binding. This includes top-level, `let` and `where` bindings as well as default class methods and instance declarations.

The pragma itself will only have an effect when the RHS of the binding it’s applied to is used. For regular bindings this is straight forward but for class methods and instance definitions this can have surprising ramifications.

If we consider a class definition with two instances like this:

```
class C a where  
  op1 :: a -> a  
  
  op2 :: [a] -> [a]  
  op2 xs = reverse (xs ++ xs)  
  {-# INLINE op2 #-}  
  
instance C T1 where  
  op1 x = ...blah...  
  
instance C T2 where  
  {-# INLINE op1 #-}  
  op1 x = ...blah...  
  op2 xs = ...blah...
```

Then `op2` for the `T1` instance will get an implicit `INLINE` pragma. This is because the RHS of the default method is used for `op2` which retains it’s `INLINE` pragma.

In the T2 instance `op1` gets an `INLINE` pragma and behaves accordingly. However `op2` for T2 is **not** implemented by the default method. This means the pragma in the class definition doesn't apply to this instance. With no pragma being explicitly applied GHC will then decide on a proper inlining behaviour for T2's `op2` method on its own.

#### 6.20.6.2 INLINABLE pragma

`{-# INLINABLE (name) #-}`

**Where**

any function definition

Suggest that the compiler always consider inlining `name`.

An `{-# INLINABLE f #-}` pragma on a function `f` has the following behaviour:

- While `INLINE` says “please inline me”, the `INLINABLE` says “feel free to inline me; use your discretion”. In other words the choice is left to GHC, which uses the same rules as for pragma-free functions. Unlike `INLINE`, that decision is made at the *call site*, and will therefore be affected by the inlining threshold, optimisation level etc.
- Like `INLINE`, the `INLINABLE` pragma retains a copy of the original RHS for inlining purposes, and persists it in the interface file, regardless of the size of the RHS.
- One way to use `INLINABLE` is in conjunction with the special function `inline` (*Special built-in functions* (page 653)). The call `inline f` tries very hard to inline `f`. To make sure that `f` can be inlined, it is a good idea to mark the definition of `f` as `INLINABLE`, so that GHC guarantees to expose an unfolding regardless of how big it is. Moreover, by annotating `f` as `INLINABLE`, you ensure that `f`'s original RHS is inlined, rather than whatever random optimised version of `f` GHC's optimiser has produced.
- The `INLINABLE` pragma also works with `SPECIALISE`: if you mark function `f` as `INLINABLE`, then you can subsequently `SPECIALISE` in another module (see *SPECIALIZE pragma* (page 672)).
- Unlike `INLINE`, it is OK to use an `INLINABLE` pragma on a recursive function. The principal reason to do so to allow later use of `SPECIALISE`.

The alternative spelling `INLINEABLE` is also accepted by GHC.

#### 6.20.6.3 NOINLINE pragma

`{-# NOINLINE (name) #-}`

**Where**

any function definition

Instructs the compiler not to inline a value.

The *NOINLINE* (page 669) pragma does exactly what you'd expect: it stops the named function from being inlined by the compiler. You shouldn't ever need to do this, unless you're very cautious about code size.

`NOTINLINE` is a synonym for `NOINLINE` (`NOINLINE` is specified by Haskell 98 as the standard way to disable inlining, so it should be used if you want your code to be portable).

#### 6.20.6.4 CONLIKE modifier

`{-# CONLIKE #-}`

##### Where

modifies [INLINE](#) (page 666) or [NOINLINE](#) (page 669) pragma

Instructs GHC to consider a value to be especially cheap to inline.

An [INLINE](#) (page 666) or [NOINLINE](#) (page 669) pragma may have a [CONLIKE](#) (page 670) modifier, which affects matching in [RULE](#) (page 645)s (only). See [How rules interact with CONLIKE pragmas](#) (page 649).

#### 6.20.6.5 Phase control

Sometimes you want to control exactly when in GHC's pipeline the [INLINE](#) (page 666) pragma is switched on. Inlining happens only during runs of the *simplifier*. Each run of the simplifier has a different *phase number*; the phase number decreases towards zero. If you use [-dverbose-core2core](#) (page 301) you will see the sequence of phase numbers for successive runs of the simplifier. In an [INLINE](#) (page 666) pragma you can optionally specify a phase number, thus:

- “[INLINE](#)[k] f” means: do not inline f until phase k, but from phase k onwards be very keen to inline it.
- “[INLINE](#)[~k] f” means: be very keen to inline f until phase k, but from phase k onwards do not inline it.
- “[NOINLINE](#)[k] f” means: do not inline f until phase k, but from phase k onwards be willing to inline it (as if there was no pragma).
- “[NOINLINE](#)[~k] f” means: be willing to inline f until phase k, but from phase k onwards do not inline it.

The same information is summarised here:

	-- Before phase 2	Phase 2 and later
<code>{-# INLINE [2] f #-}</code>	-- No	Yes
<code>{-# INLINE [~2] f #-}</code>	-- Yes	No
<code>{-# NOINLINE [2] f #-}</code>	-- No	Maybe
<code>{-# NOINLINE [~2] f #-}</code>	-- Maybe	No
<code>{-# INLINE f #-}</code>	-- Yes	Yes
<code>{-# NOINLINE f #-}</code>	-- No	No

By “Maybe” we mean that the usual heuristic inlining rules apply (if the function body is small, or it is applied to interesting-looking arguments etc). Another way to understand the semantics is this:

- For both [INLINE](#) (page 666) and [NOINLINE](#) (page 669), the phase number says when inlining is allowed at all.
- The [INLINE](#) (page 666) pragma has the additional effect of making the function body look small, so that when inlining is allowed it is very likely to happen.

The same phase-numbering control is available for [RULE](#) (page 645)s ([Rewrite rules](#) (page 645)).



### 6.20.7 OPAQUE pragma

```
{-# OPAQUE (name) #-}
```

**Where**  
top-level

Instructs the compiler to ensure that every call of `name` remains a call of `name`, and not some name-mangled variant.

The *OPAQUE* (page 671) pragma is an even stronger variant of the *NOINLINE* (page 669) pragma. Like the *NOINLINE* (page 669), named functions annotated with a *OPAQUE* (page 671) pragma are not inlined, nor will they be specialized. Unlike the *NOINLINE* (page 669), named functions annotated with a *OPAQUE* (page 671) pragma are left untouched by the Worker/Wrapper transformation. Unlike *NOINLINE* (page 669), *OPAQUE* (page 671) has no phase control.

In effect, every call of a named function annotated with an *OPAQUE* (page 671) pragma remains a call of that named function, not some name-mangled variant. You shouldn't ever need to use the *OPAQUE* (page 671) pragma, unless you have a reason to care about name-mangling.

### 6.20.8 LINE pragma

```
{-# LINE (lineno) "{file}" #-}
```

**Where**  
anywhere

Generated by preprocessors to convey source line numbers of the original source.

This pragma is similar to C's `#line` pragma, and is mainly for use in automatically generated Haskell code. It lets you specify the line number and filename of the original code; for example

```
{-# LINE 42 "Foo.vhs" #-}
```

if you'd generated the current file from something called `Foo.vhs` and this line corresponds to line 42 in the original. GHC will adjust its error messages to refer to the line/file named in the *LINE* pragma.

*LINE* pragmas generated from Template Haskell set the file and line position for the duration of the splice and are limited to the splice. Note that because Template Haskell splices abstract syntax, the file positions are not automatically advanced.

### 6.20.9 COLUMN pragma

This is the analogue of the *LINE* pragma and is likewise intended for use in automatically generated Haskell code. It lets you specify the column number of the original code; for example

```
foo = do
  {-# COLUMN 42 #-}pure ()
  pure ()
```

This adjusts all column numbers immediately after the pragma to start at 42. The presence of this pragma only affects the quality of the diagnostics and does not change the syntax of the code itself.

## 6.20.10 RULES pragma

The *RULES* (page 645) pragma lets you specify rewrite rules. It is described in *Rewrite rules* (page 645).

## 6.20.11 SPECIALIZE pragma

**`{-# SPECIALIZE (name) :: (type) #-}`**

Ask that GHC specialize a polymorphic value to a particular type.

(UK spelling also accepted.) For key overloaded functions, you can create extra versions (NB: at the cost of larger code) specialised to particular types. Thus, if you have an overloaded function:

```
hammeredLookup :: Ord key => [(key, value)] -> key -> value
```

If it is heavily used on lists with `Widget` keys, you could specialise it as follows:

```
{-# SPECIALIZE hammeredLookup :: [(Widget, value)] -> Widget -> value #-}
```

- A *SPECIALIZE* pragma for a function can be put anywhere its type signature could be put. Moreover, you can also *SPECIALIZE* an *imported* function provided it was given an *INLINEABLE* pragma at its definition site (*INLINEABLE pragma* (page 669)).
- A *SPECIALIZE* has the effect of generating (a) a specialised version of the function and (b) a rewrite rule (see *Rewrite rules* (page 645)) that rewrites a call to the un-specialised function into a call to the specialised one. Moreover, given a *SPECIALIZE* pragma for a function `f`, GHC will automatically create specialisations for any type-class-overloaded functions called by `f`, if they are in the same module as the *SPECIALIZE* pragma, or if they are *INLINEABLE*; and so on, transitively.
- You can add phase control (*Phase control* (page 670)) to the *RULE* generated by a *SPECIALIZE* pragma, just as you can if you write a *RULE* directly. For example:

```
{-# SPECIALIZE [0] hammeredLookup :: [(Widget, value)] -> Widget -> ↵  
    ↪value #-}
```

generates a specialisation rule that only fires in Phase 0 (the final phase). If you do not specify any phase control in the *SPECIALIZE* pragma, the phase control is inherited from the inline pragma (if any) of the function. For example:

```
foo :: Num a => a -> a  
foo = ...blah...  
{-# NOINLINE [0] foo #-}  
{-# SPECIALIZE foo :: Int -> Int #-}
```

The *NOINLINE* pragma tells GHC not to inline `foo` until Phase 0; and this property is inherited by the specialisation *RULE*, which will therefore only fire in Phase 0.

The main reason for using phase control on specialisations is so that you can write optimisation *RULES* that fire early in the compilation pipeline, and only *then* specialise the calls to the function. If specialisation is done too early, the optimisation rules might fail to fire.

- The type in a *SPECIALIZE* pragma can be any type that is less polymorphic than the type of the original function. In concrete terms, if the original function is `f` then the pragma

```
{-# SPECIALIZE f :: <type> #-}
```

is valid if and only if the definition

```
f_spec :: <type>
f_spec = f
```

is valid. Here are some examples (where we only give the type signature for the original function, not its code):

```
f :: Eq a => a -> b -> b
{-# SPECIALIZE f :: Int -> b -> b #-}

g :: (Eq a, Ix b) => a -> b -> b
{-# SPECIALIZE g :: (Eq a) => a -> Int -> Int #-}

h :: Eq a => a -> a -> a
{-# SPECIALIZE h :: (Eq a) => [a] -> [a] -> [a] #-}
```

The last of these examples will generate a RULE with a somewhat-complex left-hand side (try it yourself), so it might not fire very well. If you use this kind of specialisation, let us know how well it works.

### 6.20.11.1 SPECIALIZE INLINE

```
{-# SPECIALIZE INLINE (name) :: (type) #-}
```

**Where**  
top-level

A SPECIALIZE pragma can optionally be followed with a INLINE or NOINLINE pragma, optionally followed by a phase, as described in *INLINE and NOINLINE pragmas* (page 666). The INLINE pragma affects the specialised version of the function (only), and applies even if the function is recursive. The motivating example is this:

```
-- A GADT for arrays with type-indexed representation
data Arr e where
  ArrInt :: !Int -> ByteArray# -> Arr Int
  ArrPair :: !Int -> Arr e1 -> Arr e2 -> Arr (e1, e2)

(!:) :: Arr e -> Int -> e
{-# SPECIALIZE INLINE (!:) :: Arr Int -> Int -> Int #-}
{-# SPECIALIZE INLINE (!:) :: Arr (a, b) -> Int -> (a, b) #-}
(ArrInt _ ba)    !: (I# i) = I# (indexIntArray# ba i)
(ArrPair _ a1 a2) !: i    = (a1 !: i, a2 !: i)
```

Here, (!:) is a recursive function that indexes arrays of type Arr e. Consider a call to (!:) at type (Int,Int). The second specialisation will fire, and the specialised function will be inlined. It has two calls to (!:), both at type Int. Both these calls fire the first specialisation, whose body is also inlined. The result is a type-based unrolling of the indexing function.

You can add explicit phase control (*Phase control* (page 670)) to SPECIALIZE INLINE pragma, just like on an *INLINE* (page 666) pragma; if you do so, the same phase is used for the rewrite rule and the INLINE control of the specialised function.

**Warning:** You can make GHC diverge by using `SPECIALISE INLINE` on an ordinarily-recursive function.

### 6.20.11.2 SPECIALIZE for imported functions

Generally, you can only give a *SPECIALIZE* (page 672) pragma for a function defined in the same module. However if a function `f` is given an *INLINEABLE* (page 669) pragma at its definition site, then it can subsequently be specialised by importing modules (see *INLINEABLE pragma* (page 669)). For example

```
module Map( lookup, blah blah ) where
  lookup :: Ord key => [(key,a)] -> key -> Maybe a
  lookup = ...
  {-# INLINEABLE lookup #-}

module Client where
  import Map( lookup )

  data T = T1 | T2 deriving( Eq, Ord )
  {-# SPECIALISE lookup :: [(T,a)] -> T -> Maybe a
```

Here, `lookup` is declared *INLINEABLE* (page 669), but it cannot be specialised for type `T` at its definition site, because that type does not exist yet. Instead a client module can define `T` and then specialise `lookup` at that type.

Moreover, every module that imports `Client` (or imports a module that imports `Client`, transitively) will “see”, and make use of, the specialised version of `lookup`. You don’t need to put a *SPECIALIZE* (page 672) pragma in every module.

Moreover you often don’t even need the *SPECIALIZE* (page 672) pragma in the first place. When compiling a module `M`, GHC’s optimiser (when given the `-O` (page 127) flag) automatically considers each top-level overloaded function declared in `M`, and specialises it for the different types at which it is called in `M`. The optimiser *also* considers each *imported* *INLINEABLE* (page 669) overloaded function, and specialises it for the different types at which it is called in `M`. So in our example, it would be enough for `lookup` to be called at type `T`:

```
module Client where
  import Map( lookup )

  data T = T1 | T2 deriving( Eq, Ord )

  findT1 :: [(T,a)] -> Maybe a
  findT1 m = lookup m T1    -- A call of lookup at type T
```

However, sometimes there are no such calls, in which case the pragma can be useful.

### 6.20.12 SPECIALIZE instance pragma

```
{-# SPECIALIZE instance (instance head) #-}
```

**Where**

instance body

Same idea, except for instance declarations. For example:

```
instance (Eq a) => Eq (Foo a) where {
  {-# SPECIALIZE instance Eq (Foo [(Int, Bar)]) #-}
  ... usual stuff ...
}
```

The pragma must occur inside the where part of the instance declaration.

### 6.20.13 UNPACK pragma

```
{-# UNPACK #-}
```

**Where**

data constructor field

Instructs the compiler to unpack the contents of a constructor field into the constructor itself.

The UNPACK indicates to the compiler that it should unpack the contents of a constructor field into the constructor itself, removing a level of indirection. For example:

```
data T = T {-# UNPACK #-} !Float
          {-# UNPACK #-} !Float
```

will create a constructor T containing two unboxed floats. This may not always be an optimisation: if the T constructor is scrutinised and the floats passed to a non-strict function for example, they will have to be rebored (this is done automatically by the compiler).

Unpacking constructor fields should only be used in conjunction with `-O` (page 127)<sup>1</sup>, in order to expose unfoldings to the compiler so the reboring can be removed as often as possible. For example:

```
f :: T -> Float
f (T f1 f2) = f1 + f2
```

The compiler will avoid reboring f1 and f2 by inlining + on floats, but only when `-O` (page 127) is on.

Any single-constructor data is eligible for unpacking; for example

```
data T = T {-# UNPACK #-} !(Int,Int)
```

will store the two Ints directly in the T constructor, by flattening the pair. Multi-level unpacking is also supported:

```
data T = T {-# UNPACK #-} !S
data S = S {-# UNPACK #-} !Int {-# UNPACK #-} !Int
```

<sup>1</sup> In fact, `UNPACK` (page 675) has no effect without `-O` (page 127), for technical reasons (see #5252).

will store two unboxed `Int#`s directly in the `T` constructor. The unpacker can see through newtypes, too.

Since 9.6.1, data types with multiple constructors can also be unpacked, effectively transforming the field into an unboxed sum of the unpackings of each constructor (see [UnboxedSums](#) (page 612)).

See also the `-funbox-strict-fields` (page 147) flag, which essentially has the effect of adding `{-# UNPACK #-}` to every strict constructor field which is of a single-constructor data type. Sum types won't be unpacked automatically by this though, only with the explicit pragma.

### 6.20.14 NOUNPACK pragma

`{-# NOUNPACK #-}`

**Where**  
top-level

Instructs the compiler not to unpack a constructor field.

The `NOUNPACK` pragma indicates to the compiler that it should not unpack the contents of a constructor field. Example:

```
data T = T {-# NOUNPACK #-} !(Int,Int)
```

Even with the flags `-funbox-strict-fields` (page 147) and `-O` (page 127), the field of the constructor `T` is not unpacked.

### 6.20.15 SOURCE pragma

`{-# SOURCE #-}`

**Where**  
after import statement

Import a module by `hs-boot` file to break a module loop.

The `{-# SOURCE #-}` pragma is used only in import declarations, to break a module loop. It is described in detail in [How to compile mutually recursive modules](#) (page 247).

### 6.20.16 COMPLETE pragmas

`{-# COMPLETE #-}`

**Where**  
at top level

Specify the set of constructors or pattern synonyms which constitute a total match.

The `COMPLETE` pragma is used to inform the pattern match checker that a certain set of patterns is complete and that any function which matches on all the specified patterns is total.

The most common usage of `COMPLETE` pragmas is with [Pattern synonyms](#) (page 513). On its own, the checker is very naive and assumes that any match involving a pattern synonym will

fail. As a result, any pattern match on a pattern synonym is regarded as incomplete unless the user adds a catch-all case.

For example, the data types  $2 * A$  and  $A + A$  are isomorphic but some computations are more naturally expressed in terms of one or the other. To get the best of both worlds, we can choose one as our implementation and then provide a set of pattern synonyms so that users can use the other representation if they desire. We can then specify a `COMPLETE` pragma in order to inform the pattern match checker that a function which matches on both `LeftChoice` and `RightChoice` is total.

```
data Choice a = Choice Bool a

pattern LeftChoice :: a -> Choice a
pattern LeftChoice a = Choice False a

pattern RightChoice :: a -> Choice a
pattern RightChoice a = Choice True a

{-# COMPLETE LeftChoice, RightChoice #-}

foo :: Choice Int -> Int
foo (LeftChoice n) = n * 2
foo (RightChoice n) = n - 2
```

`COMPLETE` pragmas are only used by the pattern match checker. If a function definition matches on all the constructors specified in the pragma then the compiler will produce no warning.

`COMPLETE` pragmas can contain any data constructors or pattern synonyms which are in scope, but must mention at least one data constructor or pattern synonym defined in the same module. `COMPLETE` pragmas may only appear at the top level of a module. Once defined, they are automatically imported and exported from modules. `COMPLETE` pragmas should be thought of as asserting a universal truth about a set of patterns and as a result, should not be used to silence context specific incomplete match warnings.

It is also possible to restrict the types to which a `COMPLETE` pragma applies by putting a double colon `::` after the list of constructors, followed by a result type constructor, which will be used to restrict the cases in which the pragma applies. GHC will compare the annotated result type constructor with the type constructor in the head of the scrutinee type in a pattern match to see if the `COMPLETE` pragma is meant to apply to it.

This is especially useful in cases that the constructors specified are polymorphic, e.g.:

```
data Proxy a = Proxy

class IsEmpty a where
  isEmpty :: a -> Bool

class IsCons a where
  type Elt a
  isCons :: a -> Maybe (Elt a, a)

pattern Empty :: IsEmpty a => a
pattern Empty <- (isEmpty -> True)

pattern Cons :: IsCons a => Elt a -> a -> a
```

(continues on next page)

(continued from previous page)

```
pattern Cons x xs <- (isCons -> Just (x,xs))
```

```
instance IsEmpty (Proxy a) where
  isEmpty Proxy = True
```

```
instance IsEmpty [a] where
  isEmpty = null
```

```
instance IsCons [a] where
  type Elt [a] = a
  isCons [] = Nothing
  isCons (x:xs) = Just (x,xs)
```

```
{-# COMPLETE Empty :: Proxy #-}
{-# COMPLETE Empty, Cons :: [] #-}
```

```
foo :: Proxy a -> Int
foo Empty = 0
```

```
bar :: [a] -> Int
bar Empty = 0
bar (Cons _ _) = 1
```

```
baz :: [a] -> Int
baz Empty = 0
```

In this example, `foo` and `bar` will not be warned about, as their pattern matches are covered by the two `COMPLETE` pragmas above, but `baz` will be warned about as incomplete.

### 6.20.17 OVERLAPPING, OVERLAPPABLE, OVERLAPS, and INCOHERENT pragmas

```
{-# OVERLAPPING #-}
```

```
{-# OVERLAPPABLE #-}
```

```
{-# OVERLAPS #-}
```

```
{-# INCOHERENT #-}
```

**Where**

on instance head

The pragmas `OVERLAPPING`, `OVERLAPPABLE`, `OVERLAPS`, `INCOHERENT` are used to specify the overlap behavior for individual instances, as described in Section [Overlapping instances](#) (page 538). The pragmas are written immediately after the instance keyword, like this:

```
instance {-# OVERLAPPING #-} C t where ...
```



## EXTENDING AND USING GHC AS A LIBRARY

GHC exposes its internal APIs to users through the built-in `ghc` package. It allows you to write programs that leverage GHC's entire compilation driver, in order to analyze or compile Haskell code programmatically. Furthermore, GHC gives users the ability to load compiler plugins during compilation - modules which are allowed to view and change GHC's internal intermediate representation, Core. Plugins are suitable for things like experimental optimizations or analysis, and offer a lower barrier of entry to compiler development for many common cases.

Furthermore, GHC offers a lightweight annotation mechanism that you can use to annotate your source code with metadata, which you can later inspect with either the compiler API or a compiler plugin.

### 7.1 Source annotations

Annotations are small pragmas that allow you to attach data to identifiers in source code, which are persisted when compiled. These pieces of data can then be inspected and utilized when using GHC as a library or writing a compiler plugin.

#### 7.1.1 Annotating values

Any expression that has both `Typeable` and `Data` instances may be attached to a top-level value binding using an `ANN` pragma. In particular, this means you can use `ANN` to annotate data constructors (e.g. `Just`) as well as normal values (e.g. `take`). By way of example, to annotate the function `foo` with the annotation `Just "Hello"` you would do this:

```
{-# ANN foo (Just "Hello") #-}  
foo = ...
```

A number of restrictions apply to use of annotations:

- The binder being annotated must be at the top level (i.e. no nested binders)
- The binder being annotated must be declared in the current module
- The expression you are annotating with must have a type with `Typeable` and `Data` instances
- The *Template Haskell staging restrictions* (page 589) apply to the expression being annotated with, so for example you cannot run a function from the module being compiled.

To be precise, the annotation `{-# ANN x e #-}` is well staged if and only if `$(e)` would be (disregarding the usual type restrictions of the splice syntax, and the usual restriction on splicing inside a splice - `$( [| 1 | ] )` is fine as an annotation, albeit redundant).

If you feel strongly that any of these restrictions are too onerous, [please give the GHC team a shout](#).

However, apart from these restrictions, many things are allowed, including expressions which are not fully evaluated! Annotation expressions will be evaluated by the compiler just like Template Haskell splices are. So, this annotation is fine:

```
{-# ANN f SillyAnnotation { foo = (id 10) + $( [| 20 | ] ), bar = 'f' } #-}
f = ...
```

### 7.1.2 Annotating types

You can annotate types with the ANN pragma by using the type keyword. For example:

```
{-# ANN type Foo (Just "A `Maybe String` annotation") #-}
data Foo = ...
```

### 7.1.3 Annotating modules

You can annotate modules with the ANN pragma by using the module keyword. For example:

```
{-# ANN module (Just "A `Maybe String` annotation") #-}
```

## 7.2 Using GHC as a Library

The `ghc` package exposes most of GHC's frontend to users, and thus allows you to write programs that leverage it. This library is actually the same library used by GHC's internal, frontend compilation driver, and thus allows you to write tools that programmatically compile source code and inspect it. Such functionality is useful in order to write things like IDE or refactoring tools. As a simple example, here's a program which compiles a module, much like `ghc` itself does by default when invoked:

```
import GHC
import GHC.Paths ( libdir )
import GHC.Driver.Session ( defaultFatalMessenger, defaultFlushOut )

main =
  defaultErrorHandler defaultFatalMessenger defaultFlushOut $ do
    runGhc (Just libdir) $ do
      dflags <- getSessionDynFlags
      setSessionDynFlags dflags
      target <- guessTarget "test_main.hs" Nothing
      setTargets [target]
      load LoadAllTargets
```

The argument to `runGhc` is a bit tricky. GHC needs this to find its libraries, so the argument must refer to the directory that is printed by `ghc --print-libdir` for the same version of

GHC that the program is being compiled with. Above we therefore use the `ghc-paths` package which provides this for us.

Compiling it results in:

```
$ cat test_main.hs
main = putStrLn "hi"
$ ghc -package ghc simple_ghc_api.hs
[1 of 1] Compiling Main                ( simple_ghc_api.hs, simple_ghc_api.o )
Linking simple_ghc_api ...
$ ./simple_ghc_api
$ ./test_main
hi
$
```

For more information on using the API, as well as more samples and references, please see [this Haskell.org wiki page](https://www.haskell.org/wiki/page).

## 7.3 Compiler Plugins

GHC has the ability to load compiler plugins at compile time. The feature is similar to the one provided by `GCC`, and allows users to write plugins that can adjust the behaviour of the constraint solver, inspect and modify the compilation pipeline, as well as transform and inspect GHC's intermediate language, Core. Plugins are suitable for experimental analysis or optimization, and require no changes to GHC's source code to use.

Plugins cannot optimize/inspect C-`\`, nor can they implement things like parser/front-end modifications like `GCC`, apart from limited changes to the constraint solver. If you feel strongly that any of these restrictions are too onerous, [please give the GHC team a shout](#).

Plugins do not work with `-fexternal-interpreter`. If you need to run plugins with `-fexternal-interpreter` let GHC developers know in [#14335](#).

### 7.3.1 Using compiler plugins

Plugins can be added on the command line with the `-fplugin={module}` (page 681) option where `{module}` is a module in a registered package that exports the plugin. Plugins are loaded in order, with command-line and Cabal flags preceding those in `OPTIONS` pragmas which are processed in file order. Arguments can be passed to the plugins with the `-fplugin-opt={module}:{args}` (page 681) option. The list of enabled plugins can be reset with the `-fclear-plugins` (page 682) option.

#### **-fplugin={module}**

Load the plugin in the given module. The module must be a member of a package registered in GHC's package database.

#### **-fplugin-opt={module}:{args}**

Give arguments to a plugin module; module must be specified with `-fplugin={module}` (page 681). The order of plugin pragmas matter but the order of arg pragmas does not. The same set of arguments go to all plugins from the same module.

```
-- Two Echo plugins will both get args A and B.
{-# OPTIONS -fplugin Echo -fplugin-opt Echo:A #-}
```

(continues on next page)

(continued from previous page)

```
{-# OPTIONS -fplugin Echo -fplugin-opt Echo:B #-}

-- While order of the plugins matters, arg order does not.
{-# OPTIONS -fplugin-opt Echo2:B #-}

{-# OPTIONS -fplugin Echo1 #-}
{-# OPTIONS -fplugin-opt Echo1:A #-}

{-# OPTIONS -fplugin Echo2 #-}
```

If you want to use the same plugin with different arguments then reexport the same plugin from different lightweight modules.

```
-- Echo1 and Echo2 as lightweight modules re-exporting Echo.plugin.
module Echo1 (plugin) where import Echo (plugin)
module Echo2 (plugin) where import Echo (plugin)

-- Echo1 gets arg A while Echo2 gets arg B.
{-# OPTIONS -fplugin Echo1 -fplugin-opt Echo1:A #-}
{-# OPTIONS -fplugin Echo2 -fplugin-opt Echo2:B #-}
```

### **-fplugin-trustworthy**

By default, when a module is compiled with plugins, it will be marked as unsafe. With this flag passed, all plugins are treated as trustworthy and the safety inference will no longer be affected.

### **-fclear-plugins**

Clear the list of plugins previously specified with *-fplugin* (page 681). This is useful in GHCi where simply removing the *-fplugin* (page 681) options from the command line is not possible. Instead `:set -fclear-plugins` can be used.

As an example, in order to load the plugin exported by `Foo.Plugin` in the package `foo-ghc-plugin`, and give it the parameter “baz”, we would invoke GHC like this:

```
$ ghc -fplugin Foo.Plugin -fplugin-opt Foo.Plugin:baz Test.hs
[1 of 1] Compiling Main             ( Test.hs, Test.o )
Loading package ghc-prim ... linking ... done.
Loading package integer-gmp ... linking ... done.
Loading package base ... linking ... done.
Loading package ffi-1.0 ... linking ... done.
Loading package foo-ghc-plugin-0.1 ... linking ... done.
...
Linking Test ...
$
```

Plugins can be also be loaded from libraries directly. It allows plugins to be loaded in cross-compilers (as a workaround for [#14335](#)).

### **-fplugin-library=(file-path);(unit-id);(module);(args)**

Arguments are specified in a list form, so a plugin specified to *-fplugin-library=(file-path);(unit-id);(module);(args)* (page 682) will look like `'path/to/plugin;package-123;Plugin.Module;["Argument","List"]'`.

Alternatively, core plugins can be specified with Template Haskell.

```
addCorePlugin "Foo.Plugin"
```

This inserts the plugin as a core-to-core pass. Unlike `-fplugin=(module)`, the plugin module can't reside in the same package as the module calling `Lan-guage.Haskell.TH.Syntax.addCorePlugin`. This way, the implementation can expect the plugin to be built by the time it is needed.

Plugin modules live in a separate namespace from the user import namespace. By default, these two namespaces are the same; however, there are a few command line options which control specifically plugin packages:

#### **-plugin-package <pkg>**

This option causes the installed package <pkg> to be exposed for plugins, such as `-fplugin=(module)` (page 681). The package <pkg> can be specified in full with its version number (e.g. `network-1.0`) or the version number can be omitted if there is only one version of the package installed. If there are multiple versions of <pkg> installed and `-hide-all-plugin-packages` (page 683) was not specified, then all other versions will become hidden. `-plugin-package <pkg>` (page 683) supports thinning and renaming described in *Thinning and renaming modules* (page 264).

Unlike `-package <pkg>` (page 261), this option does NOT cause package <pkg> to be linked into the resulting executable or shared object.

#### **-plugin-package-id <pkg-id>**

Exposes a package in the plugin namespace like `-plugin-package <pkg>` (page 683), but the package is named by its installed package ID rather than by name. This is a more robust way to name packages, and can be used to select packages that would otherwise be shadowed. Cabal passes `-plugin-package-id <pkg-id>` (page 683) flags to GHC. `-plugin-package-id <pkg-id>` (page 683) supports thinning and renaming described in *Thinning and renaming modules* (page 264).

#### **-hide-all-plugin-packages**

By default, all exposed packages in the normal, source import namespace are also available for plugins. This causes those packages to be hidden by default. If you use this flag, then any packages with plugins you require need to be explicitly exposed using `-plugin-package <pkg>` (page 683) options.

At the moment, the only way to specify a dependency on a plugin in Cabal is to put it in `build-depends` (which uses the conventional `-package-id <unit-id>` (page 262) flag); however, in the future there will be a separate field for specifying plugin dependencies specifically.

### 7.3.2 Writing compiler plugins

Plugins are modules that export at least a single identifier, `plugin`, of type `GHC.Plugins.Plugin`. All plugins should import `GHC.Plugins` as it defines the interface to the compilation pipeline.

A `Plugin` effectively holds a function which installs a compilation pass into the compiler pipeline. By default there is the empty plugin which does nothing, `GHC.Plugins.defaultPlugin`, which you should override with record syntax to specify your installation function. Since the exact fields of the `Plugin` type are open to change, this is the best way to ensure your plugins will continue to work in the future with minimal interface impact.

Plugin exports a field, `installCoreToDos` which is a function of type `[CommandLineOption] -> [CoreToDo] -> CoreM [CoreToDo]`. A `CommandLineOption` is effectively just `String`, and

a `CoreToDo` is basically a function of type `Core -> Core`. A `CoreToDo` gives your pass a name and runs it over every compiled module when you invoke GHC.

As a quick example, here is a simple plugin that just does nothing and just returns the original compilation pipeline, unmodified, and says 'Hello':

```
module DoNothing.Plugin (plugin) where
import GHC.Plugins

plugin :: Plugin
plugin = defaultPlugin {
    installCoreToDos = install
}

install :: [CommandLineOption] -> [CoreToDo] -> CoreM [CoreToDo]
install _ todo = do
    putMsgS "Hello!"
    return todo
```

Provided you compiled this plugin and registered it in a package (with cabal for instance,) you can then use it by just specifying `-fplugin=DoNothing.Plugin` on the command line, and during the compilation you should see GHC say 'Hello'.

Running multiple plugins is also supported, by passing multiple `-fplugin=...` options. GHC will load the plugins in the order in which they are specified on the command line and, when appropriate, compose their effects in the same order. That is, if we had two `Core` plugins, `Plugin1` and `Plugin2`, each defining an `install` function like the one above, then GHC would first run `Plugin1.install` on the default `[CoreToDo]`, take the result and feed it to `Plugin2.install`. `-fplugin=Plugin1 -fplugin=Plugin2` will update the `Core` pipeline by applying `Plugin1.install opts1 ==> Plugin2.install opts2` (where `opts1` and `opts2` are the options passed to each plugin using `-fplugin-opt=...`). This is not specific to `Core` plugins but holds for all the types of plugins that can be composed or sequenced in some way: the first plugin to appear on the GHC command line will always act first.

### 7.3.3 Core plugins in more detail

`CoreToDo` is effectively a data type that describes all the kinds of optimization passes GHC does on `Core`. There are passes for simplification, CSE, etc. There is a specific case for plugins, `CoreDoPluginPass :: String -> PluginPass -> CoreToDo` which should be what you always use when inserting your own pass into the pipeline. The first parameter is the name of the plugin, and the second is the pass you wish to insert.

`CoreM` is a monad that all of the `Core` optimizations live and operate inside of.

A plugin's installation function (`install` in the above example) takes a list of `CoreToDos` and returns a list of `CoreToDo`. Before GHC begins compiling modules, it enumerates all the needed plugins you tell it to load, and runs all of their installation functions, initially on a list of passes that GHC specifies itself. After doing this for every plugin, the final list of passes is given to the optimizer, and are run by simply going over the list in order.

You should be careful with your installation function, because the list of passes you give back isn't questioned or double checked by GHC at the time of this writing. An installation function like the following:

```
install :: [CommandLineOption] -> [CoreToDo] -> CoreM [CoreToDo]
install _ _ = return []
```

is certainly valid, but also certainly not what anyone really wants.

### 7.3.3.1 Manipulating bindings

In the last section we saw that besides a name, a `CoreDoPluginPass` takes a pass of type `PluginPass`. A `PluginPass` is a synonym for `(ModGuts -> CoreM ModGuts)`. `ModGuts` is a type that represents the one module being compiled by GHC at any given time.

A `ModGuts` holds all of the module's top level bindings which we can examine. These bindings are of type `CoreBind` and effectively represent the binding of a name to body of code. Top-level module bindings are part of a `ModGuts` in the field `mg_binds`. Implementing a pass that manipulates the top level bindings merely needs to iterate over this field, and return a new `ModGuts` with an updated `mg_binds` field. Because this is such a common case, there is a function provided named `bindsOnlyPass` which lifts a function of type `([CoreBind] -> CoreM [CoreBind])` to type `(ModGuts -> CoreM ModGuts)`.

Continuing with our example from the last section, we can write a simple plugin that just prints out the name of all the non-recursive bindings in a module it compiles:

```
module SayNames.Plugin (plugin) where
import GHC.Plugins

plugin :: Plugin
plugin = defaultPlugin {
    installCoreToDos = install
}

install :: [CommandLineOption] -> [CoreToDo] -> CoreM [CoreToDo]
install _ todo = do
    return (CoreDoPluginPass "Say name" pass : todo)

pass :: ModGuts -> CoreM ModGuts
pass guts = do dflags <- getDynFlags
               bindsOnlyPass (mapM (printBind dflags)) guts
    where printBind :: DynFlags -> CoreBind -> CoreM CoreBind
          printBind dflags bndr@(NonRec b _) = do
              putMsgS $ "Non-recursive binding named " ++ showSDoc dflags (ppr b)
              return bndr
          printBind _ bndr = return bndr
```

### 7.3.3.2 Late Plugins

If the `CoreProgram` of a module is modified in a normal core plugin, the modified bindings can end up in unfoldings the interface file for the module. This may be undesirable, as the plugin could make changes which affect inlining or optimization.

Late plugins can be used to avoid introducing such changes into the interface file. Late plugins are a bit different from typical core plugins:

1. They do not run in the `CoreM` monad. Instead, they are explicitly passed the `HscEnv` and they run in `I0`.
2. They are given `CgGuts` instead of `ModGuts`. `CgGuts` are a restricted form of `ModGuts` intended for code generation. The `CoreProgram` held in the `CgGuts` given to a late plugin will already be fully optimized.



3. They must maintain a `CostCentreState` and track any cost centres they introduce by adding them to the `cg_ccs` field of `CgGuts`. This is because the automatic collection of cost centres happens before the late plugin stage. If a late plugin does not introduce any cost centres, it may simply return the given cost centre state.

Here is a very simply example of a late plugin that changes the value of a binding in a module. If it finds a non-recursive top-level binding named `testBinding` with type `Int`, it will change its value to the `Int` expression `111111`.

```
plugin :: Plugin
plugin = defaultPlugin { latePlugin = lateP }

lateP :: LatePlugin
lateP _ _ (cg_guts, cc_state) = do
  binds' <- editCoreBinding (cg_binds cg_guts)
  return (cg_guts { cg_binds = binds' }, cc_state)

editCoreBinding :: CoreProgram -> IO CoreProgram
editCoreBinding pgm = pure . go
  where
    go :: [CoreBind] -> [CoreBind]
    go (b@(NonRec v e) : bs)
      | occNameString (getOccName v) == "testBinding" && exprType e `eqType`
        ↪ intTy =
        NonRec v (mkUncheckedIntExpr 111111) : bs
    go (b:bs) = b : go bs
    go [] = []
```

Since this is a late plugin, the changed binding value will not end up in the interface file.

### 7.3.3.3 Using Annotations

Previously we discussed annotation pragmas (*Source annotations* (page 679)), which we mentioned could be used to give compiler plugins extra guidance or information. Annotations for a module can be retrieved by a plugin, but you must go through the modules `ModGuts` in order to get it. Because annotations can be arbitrary instances of `Data` and `Typeable`, you need to give a type annotation specifying the proper type of data to retrieve from the interface file, and you need to make sure the annotation type used by your users is the same one your plugin uses. For this reason, we advise distributing annotations as part of the package which also provides compiler plugins if possible.

To get the annotations of a single binder, you can use `getAnnotations` and specify the proper type. Here's an example that will print out the name of any top-level non-recursive binding with the `SomeAnn` annotation:

```
{-# LANGUAGE DeriveDataTypeable #-}
module SayAnnNames.Plugin (plugin, SomeAnn(..)) where
import GHC.Plugins
import Control.Monad (unless)
import Data.Data

data SomeAnn = SomeAnn deriving Data

plugin :: Plugin
```

(continues on next page)



(continued from previous page)

```

plugin = defaultPlugin {
  installCoreToDo = install
}

install :: [CommandLineOption] -> [CoreToDo] -> CoreM [CoreToDo]
install _ todo = do
  return (CoreDoPluginPass "Say name" pass : todo)

pass :: ModGuts -> CoreM ModGuts
pass g = do
  dflags <- getDynFlags
  mapM_ (printAnn dflags g) (mg_binds g) >> return g
  where printAnn :: DynFlags -> ModGuts -> CoreBind -> CoreM CoreBind
        printAnn dflags guts bndr@(NonRec b _) = do
          anns <- annotationsOn guts b :: CoreM [SomeAnn]
          unless (null anns) $ putMsgS $ "Annotated binding found: " ++ _
  <- showSDoc dflags (ppr b)
  return bndr
  printAnn _ _ bndr = return bndr

annotationsOn :: Data a => ModGuts -> CoreBndr -> CoreM [a]
annotationsOn guts bndr = do
  (_, anns) <- getAnnotations deserializeWithData guts
  return $ lookupWithDefaultUFM_Directly anns [] (varUnique bndr)

```

Please see the GHC API documentation for more about how to use internal APIs, etc.

### 7.3.4 Typechecker plugins

In addition to Core plugins, GHC has experimental support for typechecker plugins, which allow the behaviour of the constraint solver to be modified. For example, they make it possible to interface the compiler to an SMT solver, in order to support a richer theory of type-level arithmetic expressions than the theory built into GHC (see *Computing With Type-Level Naturals* (page 434)).

The Plugin type has a field tcPlugin of type [CommandLineOption] -> Maybe TcPlugin, where the TcPlugin type is defined thus:

```

data TcPlugin = forall s . TcPlugin
  { tcPluginInit      :: TcPluginM s
  , tcPluginSolve     :: s -> TcPluginSolver
  , tcPluginRewrite   :: s -> UniqFM TyCon TcPluginRewriter
  , tcPluginStop      :: s -> TcPluginM ()
  }

type TcPluginSolver = EvBindsVar -> [Ct] -> [Ct] -> TcPluginM _
<- TcPluginSolveResult

type TcPluginRewriter = RewriteEnv -> [Ct] -> [Type] -> TcPluginM _
<- TcPluginRewriteResult

data TcPluginSolveResult

```

(continues on next page)

(continued from previous page)

```
= TcPluginSolveResult
  { tcPluginInsolubleCts :: [Ct]
  , tcPluginSolvedCts    :: [(EvTerm, Ct)]
  , tcPluginNewCts       :: [Ct]
  }

data TcPluginRewriteResult
= TcPluginNoRewrite
| TcPluginRewriteTo
  { tcPluginRewriteTo      :: Reduction
  , tcRewriterNewWantededs :: [Ct]
  }
```

(The details of this representation are subject to change as we gain more experience writing typechecker plugins. It should not be assumed to be stable between GHC releases.)

The basic idea is as follows:

- When type checking a module, GHC calls `tcPluginInit` once before constraint solving starts. This allows the plugin to look things up in the context, initialise mutable state or open a connection to an external process (e.g. an external SMT solver). The plugin can return a result of any type it likes, and the result will be passed to the other fields of the `TcPlugin` record.
- During constraint solving, GHC repeatedly calls `tcPluginSolve`. This function is provided with the current set of constraints, and should return a `TcPluginSolveResult` that indicates whether a contradiction was found or progress was made. If the plugin solver makes progress, GHC will re-start the constraint solving pipeline, looping until a fixed point is reached.
- When rewriting type family applications, GHC calls `tcPluginRewriter`. The plugin supplies a collection of type families which it is interested in rewriting. For each of those, the rewriter is provided with the arguments to that type family, as well as the current collection of Given constraints. The plugin can then specify a rewriting for this type family application, if desired.
- Finally, GHC calls `tcPluginStop` after constraint solving is finished, allowing the plugin to dispose of any resources it has allocated (e.g. terminating the SMT solver process).

Plugin code runs in the `TcPluginM` monad, which provides a restricted interface to GHC API functionality that is relevant for typechecker plugins, including `IO` and reading the environment. If you need functionality that is not exposed in the `TcPluginM` module, you can use `unsafeTcPluginTcM :: TcM a -> TcPluginM a`, but are encouraged to contact the GHC team to suggest additions to the interface. Note that `TcPluginM` can perform arbitrary `IO` via `tcPluginIO :: IO a -> TcPluginM a`, although some care must be taken with side effects (particularly in `tcPluginSolve`). In general, it is up to the plugin author to make sure that any `IO` they do is safe.

### 7.3.4.1 Constraint solving with plugins

The key component of a typechecker plugin is a function of type `TcPluginSolver`, like this:

```
solve :: EvBindsVar -> [Ct] -> [Ct] -> TcPluginM TcPluginSolveResult
solve binds givens wanteds = ...
```

This function will be invoked in two different ways:

1. after simplification of Given constraints, where the plugin gets the opportunity to rewrite givens,
2. after GHC has attempted to solve Wanted constraints.

The two ways can be distinguished by checking the Wanted constraints: in the first case (and the first case only), the plugin will be passed an empty list of Wanted constraints.

The plugin can then respond with:

- solved constraints, which will be removed from the inert set,
- new constraints, which will be added to the work list,
- insoluble constraints, which will be reported as errors.

The plugin must respond with constraints of the same flavour, i.e. in (1) it should return only Givens, and for (2) it should return only Wanted; all other constraints will be ignored.

If the plugin cannot make any progress, it should return `TcPluginSolveResult [] [] []`. Otherwise, if there were any new constraints, the main constraint solver will be re-invoked to simplify them, then the plugin will be invoked again. The plugin is responsible for making sure that this process eventually terminates.

Plugins are provided with all available constraints (including equalities and typeclass constraints), but it is easy for them to discard those that are not relevant to their domain, because they need return only those constraints for which they have made progress (either by solving or contradicting them).

Constraints that have been solved by the plugin must be provided with evidence in the form of an `EvTerm` of the type of the constraint. This evidence is ignored for Given constraints, which GHC “solves” simply by discarding them; typically this is used when they are uninformative (e.g. reflexive equations). For Wanted constraints, the evidence will form part of the Core term that is generated after typechecking, and can be checked by `-dcore-lint`. It is possible for the plugin to create equality axioms for use in evidence terms, but GHC does not check their consistency, and inconsistent axiom sets may lead to segfaults or other runtime misbehaviour.

Evidence is required also when creating new Given constraints, which are usually implied by old ones. It is not uncommon that the evidence of a new Given constraint contains a removed constraint: the new one has replaced the removed one.

### 7.3.4.2 Type family rewriting with plugins

Typechecker plugins can also directly rewrite type family applications, by supplying the `tcPluginRewrite` field of the `TcPlugin` record.

```
tcPluginRewrite :: s -> UniqFM TyCon TcPluginRewriter
```

That is, the plugin registers a map, from a type family's `TyCon` to its associated rewriting function:

```
type TcPluginRewriter = [Ct] -> [Type] -> TcPluginM TcPluginRewriteResult
```

This rewriting function is supplied with the `Given` constraints from the current context, and the type family arguments. Note that the type family application is guaranteed to be exactly saturated. This function should then return a possible rewriting of the type family application, by means of the following datatype:

```
data TcPluginRewriteResult
  = TcPluginNoRewrite
  | TcPluginRewriteTo
    { tcPluginRewriteTo    :: Reduction
    , tcRewriterNewWanted :: [Ct]
    }
```

That is, the rewriter can specify a rewriting of the type family application – in which case it can also emit new `Wanted` constraints – or it can do nothing.

To specify a rewriting, the plugin must provide a `Reduction`, which is defined as follows:

```
data Reduction = Reduction Coercion !Type
```

That is, on top of specifying what type the type-family application rewrites to, the plugin must also supply a coercion which witnesses this rewriting:

```
co :: F orig_arg_1 ... orig_arg_n ~ rewritten_ty
```

Note in particular that the LHS type of the coercion should be the original type-family application, while its RHS type is the type that the plugin wants to rewrite the type-family application to.

## 7.3.5 Source plugins

In addition to core and type checker plugins, you can install plugins that can access different representations of the source code. The main purpose of these plugins is to make it easier to implement development tools.

There are several different access points that you can use for defining plugins that access the representations. All these fields receive the list of `CommandLineOption` strings that are passed to the compiler using the `-fplugin-opt={module}:{args}` (page 681) flags.

```
plugin :: Plugin
plugin = defaultPlugin {
  parsedResultAction = parsed
  , typeCheckResultAction = typechecked
}
```

(continues on next page)

(continued from previous page)

```

, spliceRunAction = spliceRun
, interfaceLoadAction = interfaceLoad
, renamedResultAction = renamed
}

```

### 7.3.5.1 Parsed representation

When you want to define a plugin that uses the syntax tree of the source code, you would like to override the `parsedResultAction` field. This access point enables you to get access to information about the lexical tokens and comments in the source code as well as the original syntax tree of the compiled module.

```

parsed :: [CommandLineOption] -> ModSummary
      -> ParsedResult -> Hsc ParsedResult

```

The `ModSummary` contains useful meta-information about the compiled module. The `ParsedResult` contains a `HsParsedModule`, which contains the lexical and syntactical information we mentioned before. The result that you return will change the result of the parsing. If you don't want to change the result, just return the `ParsedResult` that you received as the argument.

If the parser encounters any errors that prevent an AST from being constructed, the plugin will not be run, but other kinds of errors, as well as warnings, will be given to the plugin via the `PsMessages` value of the `ParsedResult`. This allows you to modify, remove, and add warnings or errors before they are displayed to the user, although in most cases, you will likely want to return the messages unmodified. The parsing pass will fail if the `Messages` `PsError` collection inside the return `ParsedResult` is not empty after all parsing plugins have been run.

### 7.3.5.2 Type checked representation

When you want to define a plugin that needs semantic information about the source code, use the `typeCheckResultAction` field. For example, if your plugin have to decide if two names are referencing the same definition or it has to check the type of a function it is using semantic information. In this case you need to access the renamed or type checked version of the syntax tree with `typeCheckResultAction` or `renamedResultAction`.

```

typechecked :: [CommandLineOption] -> ModSummary -> TcGblEnv -> TcM TcGblEnv
renamed :: [CommandLineOption] -> TcGblEnv -> HsGroup GhcRn -> TcM (TcGblEnv,
↳ HsGroup GhcRn)

```

By overriding the `renamedResultAction` field we can modify each `HsGroup` after it has been renamed. A source file is separated into groups depending on the location of template haskell splices so the contents of these groups may not be intuitive. In order to save the entire renamed AST for inspection at the end of typechecking you can set `renamedResultAction` to `keepRenamedSource` which is provided by the `Plugins` module. This is important because some parts of the renamed syntax tree (for example, imports) are not found in the typechecked one.

### 7.3.5.3 Evaluated code

When the compiler type checks the source code, *Template Haskell* (page 581) Splices and *Template Haskell Quasi-quotation* (page 592) will be replaced by the syntax tree fragments generated from them. However for tools that operate on the source code the code generator is usually more interesting than the generated code. For this reason we included `spliceRunAction`. This field is invoked on each expression before they are evaluated. The input is type checked, so semantic information is available for these syntax tree fragments. If you return a different expression you can change the code that is generated.

```
spliceRun :: [CommandLineOption] -> LHsExpr GhcTc -> TcM (LHsExpr GhcTc)
```

However take care that the generated definitions are still in the input of `typeCheckResultAction`. If you don't take care to filter the typechecked input, the behavior of your tool might be inconsistent.

### 7.3.5.4 Interface files

Sometimes when you are writing a tool, knowing the source code is not enough, you also have to know details about the modules that you import. In this case we suggest using the `interfaceLoadAction`. This will be called each time when the code of an already compiled module is loaded. It will be invoked for modules from installed packages and even modules that are installed with GHC. It will NOT be invoked with your own modules.

```
interfaceLoad :: forall lcl . [CommandLineOption] -> ModIface  
              -> IfM lcl ModIface
```

In the `ModIface` datatype you can find lots of useful information, including the exported definitions and type class instances.

The `ModIface` datatype also contains facilities for extending it with extra data, stored in a Map of serialised fields, indexed by field names and using GHC's internal `Binary` class. The interface to work with these fields is:

```
readIfaceField :: Binary a => FieldName -> ModIface -> IO (Maybe a)  
writeIfaceField :: Binary a => FieldName -> a -> ModIface -> IO ModIface  
deleteIfaceField :: FieldName -> ModIface -> ModIface
```

The `FieldName` is open-ended, but typically it should contain the producing package name, along with the actual field name. Then, the version number can either be attached to the serialised data for that field, or in cases where multiple versions of a field could exist in the same interface file, included in the field name.

Depending on if the field version advances with the package version, or independently, the version can be attached to either the package name or the field name. Examples of each case:

```
package/field  
ghc-n.n.n/core  
package/field-n
```

To read an interface file from an external tool without linking to GHC, the format is described at [Extensible Interface Files](#).

### 7.3.5.5 Source plugin example

In this example, we inspect all available details of the compiled source code. We don't change any of the representation, but write out the details to the standard output. The pretty printed representation of the parsed, renamed and type checked syntax tree will be in the output as well as the evaluated splices and quasi quotes. The name of the interfaces that are loaded will also be displayed.

```
module SourcePlugin where

import Control.Monad.IO.Class
import GHC.Driver.Session (getDynFlags)
import GHC.Driver.Plugins
import GHC.Plugins
import GHC.Tc.Types
import Language.Haskell.Syntax.Extension
import GHC.Hs.Decls
import GHC.Hs.Expr
import GHC.Hs.ImpExp
import GHC.Types.Avail
import GHC.Utils.Outputable
import GHC.Hs.Doc
import GHC

plugin :: Plugin
plugin = defaultPlugin
  { parsedResultAction = parsedPlugin
  , renamedResultAction = renamedAction
  , typeCheckResultAction = typecheckPlugin
  , spliceRunAction = metaPlugin
  , interfaceLoadAction = interfaceLoadPlugin
  }

parsedPlugin :: [CommandLineOption] -> ModSummary
              -> ParsedResult -> Hsc ParsedResult
parsedPlugin _ _ parsed@(ParsedResult pm msgs)
  = do dflags <- getDynFlags
      liftIO $ putStrLn $ "parsePlugin: \n" ++ (showSDoc dflags $ ppr $
↳hpm_module pm)
      liftIO $ putStrLn $ "parsePlugin warnings: \n" ++ (showSDoc dflags
↳$ ppr $ psWarnings msgs)
      liftIO $ putStrLn $ "parsePlugin errors: \n" ++ (showSDoc dflags $
↳ppr $ psErrors msgs)
      return parsed

renamedAction :: [CommandLineOption] -> TcGblEnv -> HsGroup GhcRn -> TcM_
↳(TcGblEnv, HsGroup GhcRn)
renamedAction _ tc gr = do
  dflags <- getDynFlags
  liftIO $ putStrLn $ "typeCheckPlugin (rn): " ++ (showSDoc dflags $ ppr gr)
  return (tc, gr)

typecheckPlugin :: [CommandLineOption] -> ModSummary -> TcGblEnv -> TcM_
```

(continues on next page)

(continued from previous page)

```

→ TcGblEnv
typecheckPlugin _ _ tc
  = do dflags <- getDynFlags
      liftIO $ putStrLn $ "typeCheckPlugin (rn): \n" ++ (showSDoc dflags $ _
→ppr $ tcg_rn_decls tc)
      liftIO $ putStrLn $ "typeCheckPlugin (tc): \n" ++ (showSDoc dflags $ _
→ppr $ tcg_binds tc)
      return tc

metaPlugin :: [CommandLineOption] -> LHsExpr GhcTc -> TcM (LHsExpr GhcTc)
metaPlugin _ meta
  = do dflags <- getDynFlags
      liftIO $ putStrLn $ "meta: " ++ (showSDoc dflags $ ppr meta)
      return meta

interfaceLoadPlugin :: [CommandLineOption] -> ModIface -> IfM lcl ModIface
interfaceLoadPlugin _ iface
  = do dflags <- getDynFlags
      liftIO $ putStrLn $ "interface loaded: " ++ (showSDoc dflags $ ppr $ _
→mi_module iface)
      return iface

```

When you compile a simple module that contains Template Haskell splice

```

{-# OPTIONS_GHC -fplugin SourcePlugin #-}
{-# LANGUAGE TemplateHaskell #-}
module A where

a = ()

$(return [])

```

with the compiler flags `-fplugin SourcePlugin` it will give the following output:

```

parsePlugin:
module A where
a = ()
$(return [])
parsePlugin warnings:

parsePlugin errors:

typeCheckPlugin (rn): a = ()
interface loaded: Language.Haskell.TH.Lib.Internal
meta: return []
typeCheckPlugin (rn):
typeCheckPlugin (rn):
Nothing
typeCheckPlugin (tc):
{$trModule = Module (TrNameS "main"#) (TrNameS "A"#), a = ()}

```



### 7.3.6 Hole fit plugins

Hole-fit plugins are plugins that are called when a typed-hole error message is being generated, and allows you to access information about the typed-hole at compile time, and allows you to customize valid hole fit suggestions.

Using hole-fit plugins, you can extend the behavior of valid hole fit suggestions to use e.g. Hoogle or other external tools to find and/or synthesize valid hole fits, with the same information about the typed-hole that GHC uses.

There are two access points are bundled together for defining hole fit plugins, namely a candidate plugin and a fit plugin, for modifying the candidates to be checked and fits respectively.

```
type CandPlugin = TypedHole -> [HoleFitCandidate] -> TcM [HoleFitCandidate]

type FitPlugin = TypedHole -> [HoleFit] -> TcM [HoleFit]

data HoleFitPlugin = HoleFitPlugin
  { candPlugin :: CandPlugin
    -- ^ A plugin for modifying hole fit candidates before they're checked
  , fitPlugin  :: FitPlugin
    -- ^ A plugin for modifying valid hole fits after they've been found.
  }
```

Where TypedHole contains all the information about the hole available to GHC at error generation.

```
data TypedHole = TyH { tyHRelevantCts :: Cts
  -- ^ Any relevant Cts to the hole
  , tyHImplies :: [Implication]
  -- ^ The nested implications of the hole with the
  -- innermost implication first.
  , tyHCt :: Maybe Ct
  -- ^ The hole constraint itself, if available.
}
```

HoleFitPlugins are then defined as follows

```
plugin :: Plugin
plugin = defaultPlugin {
  holeFitPlugin = (fmap . fmap) fromPureHFPlugin hfPlugin
}

hfPlugin :: [CommandLineOption] -> Maybe HoleFitPlugin
```

Where fromPureHFPlugin :: HoleFitPlugin -> HoleFitPluginR is a convenience function provided in the GHC.Tc.Errors.Hole module, for defining plugins that do not require internal state.

### 7.3.6.1 Stateful hole fit plugins

HoleFitPlugins are wrapped in a HoleFitPluginR, which provides a TcRef for the plugin to use to track internal state, and to facilitate communication between the candidate and fit plugin.

```
-- | HoleFitPluginR adds a TcRef to hole fit plugins so that plugins can
-- track internal state. Note the existential quantification, ensuring that
-- the state cannot be modified from outside the plugin.
data HoleFitPluginR = forall s. HoleFitPluginR
  { hfPluginInit :: TcM (TcRef s)
    -- ^ Initializes the TcRef to be passed to the plugin
  , hfPluginRun  :: TcRef s -> HoleFitPlugin
    -- ^ The function defining the plugin itself
  , hfPluginStop :: TcRef s -> TcM ()
    -- ^ Cleanup of state, guaranteed to be called even on error
  }
```

The plugin is then defined as by providing a value for the holeFitPlugin field, a function that takes the CommandLineOption strings that are passed to the compiler using the `-fplugin-opt=<module>:<args>` (page 681) flags and returns a HoleFitPluginR. This function can be used to pass the CommandLineOption strings along to the candidate and fit plugins respectively.

### 7.3.6.2 Hole fit plugin example

The following plugins allows users to limit the search for valid hole fits to certain modules, to sort the hole fits by where they originated (in ascending or descending order), as well as allowing users to put a limit on how much time is spent on searching for valid hole fits, after which new searches are aborted.

```
{-# LANGUAGE TypeApplications, RecordWildCards #-}
module HolePlugin where

import GHC.Plugins hiding ((<>))

import GHC.Tc.Errors.Hole

import Data.List (stripPrefix, sortOn)

import GHC.Tc.Types

import GHC.Tc.Utills.Monad

import Data.Time (UTCTime, NominalDiffTime)
import qualified Data.Time as Time

import Text.Read

data HolePluginState = HPS { timeAlloted :: Maybe NominalDiffTime
                             , elapsedTime :: NominalDiffTime
                             , timeCurStarted :: UTCTime }
```

(continues on next page)

(continued from previous page)

```

bumpElapsed :: NominalDiffTime -> HolePluginState -> HolePluginState
bumpElapsed ad (HPS a e t) = HPS a (e + ad) t

setAlloted :: Maybe NominalDiffTime -> HolePluginState -> HolePluginState
setAlloted a (HPS _ e t) = HPS a e t

setCurStarted :: UTCTime -> HolePluginState -> HolePluginState
setCurStarted nt (HPS a e _) = HPS a e nt

hpStartState :: HolePluginState
hpStartState = HPS Nothing zero undefined
  where zero = fromInteger @NominalDiffTime 0

initPlugin :: [CommandLineOption] -> TcM (TcRef HolePluginState)
initPlugin [msecs] = newTcRef $ hpStartState { timeAlloted = alloted }
  where
    errMsg = "Invalid amount of milliseconds given to plugin: " <> show msecs
    alloted = case readMaybe @Integer msecs of
      Just millisecs -> Just $ fromInteger @NominalDiffTime millisecs / 1000
      _ -> error errMsg
initPlugin _ = newTcRef hpStartState

fromModule :: HoleFitCandidate -> [String]
fromModule (GreHFCand gre) =
  map (moduleNameString . importSpecModule) $ gre_imp gre
fromModule _ = []

toHoleFitCommand :: TypedHole -> String -> Maybe String
toHoleFitCommand TyH{tyHCt = Just (CHoleCan _ h)} str
  = stripPrefix ("_" <> str) $ occNameString $ holeOcc h
toHoleFitCommand _ _ = Nothing

-- | This candidate plugin filters the candidates by module,
-- using the name of the hole as module to search in
modFilterTimeoutP :: [CommandLineOption] -> TcRef HolePluginState ->
  CandPlugin
modFilterTimeoutP _ ref hole cand = do
  curTime <- liftIO Time.getCurrentTime
  HPS {...} <- readTcRef ref
  updTcRef ref (setCurStarted curTime)
  return $ case timeAlloted of
    -- If we're out of time we remove all the candidates. Then nothing is
    -- checked.
    Just sofar | elapsedTime > sofar -> []
    _ -> case toHoleFitCommand hole "only_" of

      Just modName -> filter (inScopeVia modName) cand
      _ -> cand
  where inScopeVia modNameStr cand@(GreHFCand _) =
    elem (toModName modNameStr) $ fromModule cand
    inScopeVia _ _ = False

```

(continues on next page)

(continued from previous page)

```

toModName = replace ' ' '.'
replace :: Eq a => a -> a -> [a] -> [a]
replace _ _ [] = []
replace a b (x:xs) = (if x == a then b else x):replace a b xs

modSortP :: [CommandLineOption] -> TcRef HolePluginState -> FitPlugin
modSortP _ ref hole hfs = do
  curTime <- liftIO Time.getCurrentTime
  HPS {...} <- readTcRef ref
  updTcRef ref $ bumpElapsed (Time.diffUTCTime curTime timeCurStarted)
  return $ case timeAlloted of
    -- If we're out of time, remove any candidates, so nothing is checked.
    Just sofar | elapsedTime > sofar -> [RawHoleFit $ text msg]
    _ -> case toHoleFitCommand hole "sort_by_mod" of
      -- If only_ is on, the fits will all be from the same module.
      Just ('_':'d':'e':'s':'c':_) -> reverse hfs
      Just _ -> orderByModule hfs
      _ -> hfs
  where orderByModule :: [HoleFit] -> [HoleFit]
        orderByModule = sortOn (fmap fromModule . mbHFCand)
        mbHFCand :: HoleFit -> Maybe HoleFitCandidate
        mbHFCand HoleFit {hfCand = c} = Just c
        mbHFCand _ = Nothing
        msg = hang (text "Error: The time ran out, and the search was aborted."
  → for this hole.")
          7 $ text "Try again with a longer timeout."

plugin :: Plugin
plugin = defaultPlugin { holeFitPlugin = holeFitP, pluginRecompile =
  → purePlugin}

holeFitP :: [CommandLineOption] -> Maybe HoleFitPluginR
holeFitP opts = Just (HoleFitPluginR initP pluginDef stopP)
  where initP = initPlugin opts
        stopP = const $ return ()
        pluginDef ref = HoleFitPlugin { candPlugin = modFilterTimeoutP opts
  → ref
                                     , fitPlugin = modSortP opts ref }

```

When you then compile a module containing the following

```

{-# OPTIONS -fplugin=HolePlugin
            -fplugin-opt=HolePlugin:600
            -funclutter-valid-hole-fits #-}
module Main where

import Prelude hiding (head, last)

import Data.List (head, last)

f, g, h, i, j :: [Int] -> Int

```

(continues on next page)

(continued from previous page)

```

f = _too_long
j = _
i = _sort_by_mod_desc
g = _only_Data_List
h = _only_Prelude

main :: IO ()
main = return ()

```

The output is as follows:

```

Main.hs:12:5: error:
• Found hole: _too_long :: [Int] -> Int
  Or perhaps ‘_too_long’ is mis-spelled, or not in scope
• In the expression: _too_long
  In an equation for ‘f’: f = _too_long
• Relevant bindings include
  f :: [Int] -> Int (bound at Main.hs:12:1)
Valid hole fits include
  Error: The time ran out, and the search was aborted for this hole.
    Try again with a longer timeout.

12 | f = _too_long
    |          ^^^^^^^^^

Main.hs:13:5: error:
• Found hole: _ :: [Int] -> Int
• In the expression: _
  In an equation for ‘j’: j = _
• Relevant bindings include
  j :: [Int] -> Int (bound at Main.hs:13:1)
Valid hole fits include
  j :: [Int] -> Int
  f :: [Int] -> Int
  g :: [Int] -> Int
  h :: [Int] -> Int
  i :: [Int] -> Int
  head :: forall a. [a] -> a
  (Some hole fits suppressed; use -fmax-valid-hole-fits=N or -fno-max-
→valid-hole-fits)

13 | j = _
    |   ^

Main.hs:14:5: error:
• Found hole: _sort_by_mod_desc :: [Int] -> Int
  Or perhaps ‘_sort_by_mod_desc’ is mis-spelled, or not in scope
• In the expression: _sort_by_mod_desc
  In an equation for ‘i’: i = _sort_by_mod_desc
• Relevant bindings include
  i :: [Int] -> Int (bound at Main.hs:14:1)
Valid hole fits include

```

(continues on next page)

(continued from previous page)

```

sum :: forall (t :: * -> *) a. (Foldable t, Num a) => t a -> a
product :: forall (t :: * -> *) a. (Foldable t, Num a) => t a -> a
minimum :: forall (t :: * -> *) a. (Foldable t, Ord a) => t a -> a
maximum :: forall (t :: * -> *) a. (Foldable t, Ord a) => t a -> a
length :: forall (t :: * -> *) a. Foldable t => t a -> Int
last :: forall a. [a] -> a
(Some hole fits suppressed; use -fmax-valid-hole-fits=N or -fno-max-
->valid-hole-fits)
|
14 | i = _sort_by_mod_desc
    |   ^^^^^^^^^^^^^^^^^
Main.hs:15:5: error:
• Found hole: _only_Data_List :: [Int] -> Int
  Or perhaps ‘_only_Data_List’ is mis-spelled, or not in scope
• In the expression: _only_Data_List
  In an equation for ‘g’: g = _only_Data_List
• Relevant bindings include
  g :: [Int] -> Int (bound at Main.hs:15:1)
Valid hole fits include
  head :: forall a. [a] -> a
  last :: forall a. [a] -> a
|
15 | g = _only_Data_List
    |   ^^^^^^^^^^^^^^^^^
Main.hs:16:5: error:
• Found hole: _only_Prelude :: [Int] -> Int
  Or perhaps ‘_only_Prelude’ is mis-spelled, or not in scope
• In the expression: _only_Prelude
  In an equation for ‘h’: h = _only_Prelude
• Relevant bindings include
  h :: [Int] -> Int (bound at Main.hs:16:1)
Valid hole fits include
  length :: forall (t :: * -> *) a. Foldable t => t a -> Int
  maximum :: forall (t :: * -> *) a. (Foldable t, Ord a) => t a -> a
  minimum :: forall (t :: * -> *) a. (Foldable t, Ord a) => t a -> a
  product :: forall (t :: * -> *) a. (Foldable t, Num a) => t a -> a
  sum :: forall (t :: * -> *) a. (Foldable t, Num a) => t a -> a
|
16 | h = _only_Prelude
    |   ^^^^^^^^^^^^^^^^^

```

### 7.3.7 Defaulting plugins

Defaulting plugins are called when ambiguous variables might otherwise cause errors, in the same way as the built-in defaulting mechanism.

A defaulting plugin can propose potential ways to fill ambiguous variables according to whatever criteria you would like. GHC will verify that those proposals will not lead to type errors in a context that you declare.

Defaulting plugins have a single access point in the *GHC.Tc.Types* module

```
-- | A collection of candidate default types for sets of type variables.
data DefaultingProposal
  = DefaultingProposal
    { deProposals :: [(TcTyVar, Type)]
      -- ^ The type variable assignments to try.
    , deProposalCts :: [Ct]
      -- ^ The constraints against which defaults are checked.
    }

type FillDefaulting = WantedConstraints -> TcPluginM [DefaultingProposal]

-- | A plugin for controlling defaulting.
data DefaultingPlugin = forall s. DefaultingPlugin
  { dePluginInit :: TcPluginM s
    -- ^ Initialize plugin, when entering type-checker.
  , dePluginRun :: s -> FillDefaulting
    -- ^ Default some types
  , dePluginStop :: s -> TcPluginM ()
    -- ^ Clean up after the plugin, when exiting the type-checker.
  }
```

The plugin has type `WantedConstraints -> [DefaultingProposal]`.

- It is given the currently unsolved constraints.
- It returns a list of independent “defaulting proposals”.
- Each proposal of type `DefaultingProposal` specifies:
  - `deProposals`: specifies a list, in priority order, of sets of type variable assignments
  - `deProposalCts :: [Ct]` gives a set of constraints (always a subset of the incoming `WantedConstraints`) to use as a criterion for acceptance

After calling the plugin, GHC executes each `DefaultingProposal` in turn. To “execute” a proposal, GHC tries each of the proposed type assignments in `deProposals` in turn:

- It assigns the proposed types to the type variables, and then tries to solve `deProposalCts`
- If those constraints are completely solved by the assignment, GHC accepts the assignment and moves on to the next `DefaultingProposal`
- If not, GHC tries the next assignment in `deProposals`.

The plugin can assume that the incoming constraints are fully “zonked” (see [the Wiki page on zonking](#)).

The most robust `deProposalCts` to provide is the list of all wanted constraints that mention the variable you are defaulting. If you leave out a constraint, the default may be accepted, and

then potentially result in a type checker error if it is incompatible with one of the constraints you left out. This can be a useful way of forcing a default and reporting errors to the user.

There is an example of defaulting lifted types in the GHC test suite. In the *test-suite/tests/plugins/* directory see *defaulting-plugin/* for the implementation, *test-defaulting-plugin.hs* for an example of when defaulting happens, and *test-defaulting-plugin-fail.hs* for an example of when defaults don't fit and aren't applied.

### 7.3.8 Controlling Recompilation

By default, modules compiled with plugins are always recompiled even if the source file is unchanged. This most conservative option is taken due to the ability of plugins to perform arbitrary IO actions. In order to control the recompilation behaviour you can modify the `pluginRecompile` field in `Plugin`.

```
plugin :: Plugin
plugin = defaultPlugin {
  installCoreToDos = install,
  pluginRecompile = purePlugin
}
```

By inspecting the example plugin defined above, we can see that it is pure. This means that if the two modules have the same fingerprint then the plugin will always return the same result. Declaring a plugin as pure means that the plugin will never cause a module to be recompiled.

In general, the `pluginRecompile` field has the following type:

```
pluginRecompile :: [CommandLineOption] -> IO PluginRecompile
```

The `PluginRecompile` data type is an enumeration determining how the plugin should affect recompilation.

```
data PluginRecompile = ForceRecompile | NoForceRecompile | MaybeRecompile
  ↳ Fingerprint
```

A plugin which declares itself impure using `ForceRecompile` will always trigger a recompilation of the current module. `NoForceRecompile` is used for “pure” plugins which don't need to be rerun unless a module would ordinarily be recompiled. `MaybeRecompile` computes a `Fingerprint` and if this `Fingerprint` is different to a previously computed `Fingerprint` for the plugin, then we recompile the module.

As such, `purePlugin` is defined as a function which always returns `NoForceRecompile`.

```
purePlugin :: [CommandLineOption] -> IO PluginRecompile
purePlugin _ = return NoForceRecompile
```

Users can use the same functions that GHC uses internally to compute fingerprints. The `GHC.Fingerprint` module provides useful functions for constructing fingerprints. For example, combining together `fingerprintFingerprints` and `fingerprintString` provides an easy to to naively fingerprint the arguments to a plugin.

```
pluginFlagRecompile :: [CommandLineOption] -> IO PluginRecompile
pluginFlagRecompile =
  return . MaybeRecompile . fingerprintFingerprints . map fingerprintString .
  ↳ sort
```



defaultPlugin defines pluginRecompile to be impurePlugin which is the most conservative and backwards compatible option.

```
impurePlugin :: [CommandLineOption] -> IO PluginRecompile
impurePlugin _ = return ForceRecompile
```

### 7.3.9 Frontend plugins

A frontend plugin allows you to add new major modes to GHC. You may prefer this over a traditional program which calls the GHC API, as GHC manages a lot of parsing flags and administrative nonsense which can be difficult to manage manually. To load a frontend plugin exported by Foo.FrontendPlugin, we just invoke GHC with the `--frontend (module)` (page 79) flag as follows:

```
$ ghc --frontend Foo.FrontendPlugin ...other options...
```

Frontend plugins, like compiler plugins, are exported by registered plugins. However, unlike compiler modules, frontend plugins are modules that export at least a single identifier frontendPlugin of type `GHC.Plugins.FrontendPlugin`.

FrontendPlugin exports a field frontend, which is a function `[String] -> [(String, Maybe Phase)] -> Ghc ()`. The first argument is a list of extra flags passed to the frontend with `-ffrontend-opt`; the second argument is the list of arguments, usually source files and module names to be compiled (the Phase indicates if an `-x` flag was set), and a frontend simply executes some operation in the Ghc monad (which, among other things, has a Session).

As a quick example, here is a frontend plugin that prints the arguments that were passed to it, and then exits.

```
module DoNothing.FrontendPlugin (frontendPlugin) where
import GHC.Plugins

frontendPlugin :: FrontendPlugin
frontendPlugin = defaultFrontendPlugin {
    frontend = doNothing
}

doNothing :: [String] -> [(String, Maybe Phase)] -> Ghc ()
doNothing flags args = do
    liftIO $ print flags
    liftIO $ print args
```

Provided you have compiled this plugin and registered it in a package, you can just use it by specifying `--frontend DoNothing.FrontendPlugin` on the command line to GHC.

### 7.3.10 DynFlags plugins

A DynFlags plugin allows you to modify the DynFlags that GHC is going to use when processing a given (set of) file(s). DynFlags is a record containing all sorts of configuration and command line data, from verbosity level to the integer library to use, including compiler hooks, plugins and pretty-printing options. DynFlags plugins allow plugin authors to update any of those values before GHC starts doing any actual work, effectively meaning that the updates specified by the plugin will be taken into account and influence GHC's behaviour.

One of the motivating examples was the ability to register compiler hooks from a plugin. For example, one might want to modify the way Template Haskell code is executed. This is achievable by updating the hooks field of the DynFlags type, recording our custom "meta hook" in the right place. A simple application of this idea can be seen below:

```
module DynFlagsPlugin (plugin) where

import BasicTypes
import GHC.Plugins
import GHC.Hs.Expr
import Language.Haskell.Syntax.Extension
import GHC.Hs.Lit
import Hooks
import GHC.Tc.Uutils.Monad

plugin :: Plugin
plugin = driverPlugin { driverPlugin = hooksP }

hooksP :: [CommandLineOption] -> HscEnv -> IO HscEnv
hooksP opts hsc_env = do
    let hooks' = (hsc_hooks hsc_env)
                { runMetaHook = Just (fakeRunMeta opts) }
        hsc_env' = hsc_env { hsc_hooks = hooks' }
    return hsc_env'

-- This meta hook doesn't actually care running code in splices,
-- it just replaces any expression splice with the "0"
-- integer literal, and errors out on all other types of
-- meta requests.
fakeRunMeta :: [CommandLineOption] -> MetaHook TcM
fakeRunMeta opts (MetaE r) _ = do
    liftIO . putStrLn $ "Options = " ++ show opts
    pure $ r zero

    where zero :: LHsExpr GhcPs
          zero = L noSrcSpan $ HsLit NoExtField $
                HsInt NoExtField (mkIntegralLit (0 :: Int))

fakeRunMeta _ _ _ = error "fakeRunMeta: unimplemented"
```

This simple plugin takes over the execution of Template Haskell code, replacing any expression splice it encounters by 0 (at type Int), and errors out on any other type of splice.

Therefore, if we run GHC against the following code using the plugin from above:

```
{-# OPTIONS -fplugin=DynFlagsPlugin #-}
{-# LANGUAGE TemplateHaskell #-}
module Main where

main :: IO ()
main = print $( [|1|] )
```

This will not actually evaluate `[|1|]`, but instead replace it with the `0 :: Int` literal.

Just like the other types of plugins, you can write `DynFlags` plugins that can take and make use of some options that you can then specify using the `-fplugin-opt` flag. In the `DynFlagsPlugin` code from above, the said options would be available in the `opts` argument of `hooksP`.

Finally, since those `DynFlags` updates happen after the plugins are loaded, you cannot from a `DynFlags` plugin register other plugins by just adding them to the `plugins` field of `DynFlags`. In order to achieve this, you would have to load them yourself and store the result into the `cachedPlugins` field of `DynFlags`.

## 7.4 Referring to back ends

In versions of GHC numbered up to and including 9.4, a back end is referred to by name: type `Backend`, from module `GHC.Driver.Backend`, is a simple enumeration type. In versions of GHC numbered 9.6 and higher, `Backend` is an abstract type. The module specifies predicates and functions associated with a back end.

This change in representation requires changes in client code.

### 7.4.1 Client code that only names back ends

Suppose your client uses `Backend` only to mention back ends by name. That is, it never discriminates between back ends in a case expression, function definition, or equality comparison. Then the simplest way for you to migrate your code is to replace each value constructor from version 9.4 with the corresponding value from 9.6:

Old value	New value
<code>NCG</code>	<code>ncgBackend</code>
<code>LLVM</code>	<code>llvmBackend</code>
<code>ViaC</code>	<code>viaCBackend</code>
<code>Interpreter</code>	<code>interpreterBackend</code>
<code>NoBackend</code>	<code>noBackend</code>

### 7.4.2 Client code that discriminates among back ends

Suppose your code makes decisions based on the value of an expression of type `Backend`. Then the simplest way for you to migrate your decision-making code depends on the code's form.

- If your decision-making is driven by an equality or inequality predicate, an equivalent predicate may already be defined in module `GHC.Driver.Backend`. For example, if your client wants to be sure that optimization levels above `-O0` are permitted, it might have originally compared `backend /= Interpreter`. But now there is a predicate for that: `it is not (backendForcesOptimization0 backend)`.

If the predicate you want is not already defined, you will have to fall back on the more general strategy defined below.

- If your decision-making is still driven by a predicate, but the implementation of the predicate inspects the form of `Backend`, you may still be in luck. For example, if your client needs to know whether the `Backend` wishes to write files to disk, it can query `backendWritesFiles backend`. In version 9.4, this predicate holds for the `NCG`, `LLVM`, and `Via-C` back ends, but not for the `interpreter` or for `NoBackend`.
- In the general case, for any function definition, case expression, or equality test that discriminates among back ends, you can use the general migration strategy described below.

### 7.4.3 General migration strategy for client code

From version 9.6 onward, each back end may be queried for its name:

```
backendName :: Backend -> BackendName
```

The `BackendName` type must be imported from module `GHC.Driver.Backend.Internal`. It is defined to look the same as the old `Backend` type:

```
data BackendName
  = NCG
  | LLVM
  | ViaC
  | Interpreter
  | NoBackend
```

This type is also an instance of the `Eq` and `Show` classes.

If your existing code discriminates among existing back ends using a case expression, you need to apply `backendName` to the scrutinee.

```
case backend dflags of  -- code using the 9.4 interface
  NCG -> ...
  LLVM -> ...
  ...
```

can become

```
case backendName $ backend dflags of  -- code using the 9.6 interface
  NCG -> ...
```

(continues on next page)

(continued from previous page)

```
LLVM -> ...  
...
```

Only the scrutinee changes, not the pattern matches. And if your pattern matches were complete before, they are still complete.



## PROFILING

GHC comes with a time and space profiling system, so that you can answer questions like “why is my program so slow?”, or “why is my program using so much memory?”. We’ll start by describing how to do time profiling.

Time profiling a program is a three-step process:

1. Re-compile your program for profiling with the `-prof` (page 715) option, and probably one of the options for adding automatic annotations: `-fprof-late` (page 716) is the recommended option.
2. Having compiled the program for profiling, you now need to run it to generate the profile. For example, a simple time profile can be generated by running the program with `+RTS -p` (see `-p` (page 718)), which generates a file named `prog.prof` where `prog` is the name of your program (without the `.exe` extension, if you are on Windows).

There are many different kinds of profile that can be generated, selected by different RTS options. We will be describing the various kinds of profile throughout the rest of this chapter. Some profiles require further processing using additional tools after running the program.

3. Examine the generated profiling information, use the information to optimise your program, and repeat as necessary.

The time profiler measures the CPU time taken by the Haskell code in your application. In particular time taken by safe foreign calls is not tracked by the profiler (see [Profiling and foreign calls](#) (page 714)).

### 8.1 Cost centres and cost-centre stacks

GHC’s profiling system assigns costs to cost centres. A cost is simply the time or space (memory) required to evaluate an expression. Cost centres are program annotations around expressions; all costs incurred by the annotated expression are assigned to the enclosing cost centre. Furthermore, GHC will remember the stack of enclosing cost centres for any given expression at run-time and generate a call-tree of cost attributions.

Let’s take a look at an example:

```
main = print (fib 30)
fib n = if n < 2 then 1 else fib (n-1) + fib (n-2)
```

Compile and run this program as follows:

```
$ ghc -prof -fprof-auto -rtsopts Main.hs
$ ./Main +RTS -p
121393
$
```

When a GHC-compiled program is run with the `-p` (page 718) RTS option, it generates a file called `prog.prof`. In this case, the file will contain something like this:

```
Wed Oct 12 16:14 2011 Time and Allocation Profiling Report (Final)

Main +RTS -p -RTS

total time =          0.68 secs  (34 ticks @ 20 ms)
total alloc = 204,677,844 bytes  (excludes profiling overheads)

COST CENTRE MODULE  %time %alloc

fib                Main    100.0  100.0


COST CENTRE MODULE                no.      entries  individual   inherited
                                %time %alloc   %time
↪%alloc
MAIN                MAIN                102          0    0.0    0.0   100.0  ↪
↪100.0
CAF                 GHC.IO.Handle.FD    128          0    0.0    0.0    0.0  ↪
↪0.0
CAF                 GHC.IO.Encoding.Iconv 120          0    0.0    0.0    0.0  ↪
↪0.0
CAF                 GHC.Conc.Signal     110          0    0.0    0.0    0.0  ↪
↪0.0
CAF                 Main                108          0    0.0    0.0  100.0  ↪
↪100.0
main                Main                204          1    0.0    0.0  100.0  ↪
↪100.0
fib                 Main                205    2692537  100.0  100.0  100.0  ↪
↪100.0
```

The first part of the file gives the program name and options, and the total time and total memory allocation measured during the run of the program (note that the total memory allocation figure isn't the same as the amount of *live* memory needed by the program at any one time; the latter can be determined using heap profiling, which we will describe later in [Profiling memory usage](#) (page 722)).

The second part of the file is a break-down by cost centre of the most costly functions in the program. In this case, there was only one significant function in the program, namely `fib`, and it was responsible for 100% of both the time and allocation costs of the program.

The third and final section of the file gives a profile break-down by cost-centre stack. This is roughly a call-tree profile of the program. In the example above, it is clear that the costly call to `fib` came from `main`.

The time and allocation incurred by a given part of the program is displayed in two ways: "individual", which are the costs incurred by the code covered by this cost centre stack alone,



and “inherited”, which includes the costs incurred by all the children of this node.

The usefulness of cost-centre stacks is better demonstrated by modifying the example slightly:

```
main = print (f 30 + g 30)
  where
    f n = fib n
    g n = fib (n `div` 2)

fib n = if n < 2 then 1 else fib (n-1) + fib (n-2)
```

Compile and run this program as before, and take a look at the new profiling results:

COST CENTRE MODULE		no.	entries	%time	%alloc	%time	
→%alloc							
MAIN	MAIN	102	0	0.0	0.0	100.0	└
→100.0							
CAF	GHC.IO.Handle.FD	128	0	0.0	0.0	0.0	└
→0.0							
CAF	GHC.IO.Encoding.Iconv	120	0	0.0	0.0	0.0	└
→0.0							
CAF	GHC.Conc.Signal	110	0	0.0	0.0	0.0	└
→0.0							
CAF	Main	108	0	0.0	0.0	100.0	└
→100.0							
main	Main	204	1	0.0	0.0	100.0	└
→100.0							
main.g	Main	207	1	0.0	0.0	0.0	└
→0.1							
fib	Main	208	1973	0.0	0.1	0.0	└
→0.1							
main.f	Main	205	1	0.0	0.0	100.0	└
→99.9							
fib	Main	206	2692537	100.0	99.9	100.0	└
→99.9							

Now although we had two calls to `fib` in the program, it is immediately clear that it was the call from `f` which took all the time. The functions `f` and `g` which are defined in the `where` clause in `main` are given their own cost centres, `main.f` and `main.g` respectively.

The actual meaning of the various columns in the output is:

The number of times this particular point in the call tree was entered.

The percentage of the total run time of the program spent at this point in the call tree.

The percentage of the total memory allocations (excluding profiling overheads) of the program made by this call.

The percentage of the total run time of the program spent below this point in the call tree.

The percentage of the total memory allocations (excluding profiling overheads) of the program made by this call and all of its sub-calls.

In addition you can use the `-P` (page 718) RTS option to get the following additional information:

**ticks**

The raw number of time “ticks” which were attributed to this cost-centre; from this, we get the `%time` figure mentioned above.

**bytes**

Number of bytes allocated in the heap while in this cost-centre; again, this is the raw number from which we get the `%alloc` figure mentioned above.

What about recursive functions, and mutually recursive groups of functions? Where are the costs attributed? Well, although GHC does keep information about which groups of functions called each other recursively, this information isn’t displayed in the basic time and allocation profile, instead the call-graph is flattened into a tree as follows: a call to a function that occurs elsewhere on the current stack does not push another entry on the stack, instead the costs for this call are aggregated into the caller<sup>2</sup>.

### 8.1.1 Inserting cost centres by hand

Cost centres are just program annotations. When you say `-fprof-auto` to the compiler, it automatically inserts a cost centre annotation around every binding not marked `INLINE` in your program, but you are entirely free to add cost centre annotations yourself. Be careful adding too many cost-centre annotations as the optimiser is careful to not move them around or remove them, which can severely affect how your program is optimised and hence the runtime performance!

The syntax of a cost centre annotation for expressions is

```
{-# SCC "name" #-} <expression>
```

where “name” is an arbitrary string, that will become the name of your cost centre as it appears in the profiling output, and `<expression>` is any Haskell expression. An SCC annotation extends as far to the right as possible when parsing, having the same precedence as lambda abstractions, let expressions, and conditionals. Additionally, an annotation may not appear in a position where it would change the grouping of subexpressions:

```
a = 1 / 2 / 2           -- accepted (a=0.25)
b = 1 / {-# SCC "name" #-} 2 / 2  -- rejected (instead of b=1.0)
```

This restriction is required to maintain the property that inserting a pragma, just like inserting a comment, does not have unintended effects on the semantics of the program, in accordance with [GHC Proposal #176](#).

SCC stands for “Set Cost Centre”. The double quotes can be omitted if name is a Haskell identifier starting with a lowercase letter, for example:

```
{-# SCC id #-} <expression>
```

Cost centre annotations can also appear in the top-level or in a declaration context. In that case you need to pass a function name defined in the same module or scope with the annotation. Example:

---

<sup>2</sup> Note that this policy has changed slightly in GHC 7.4.1 relative to earlier versions, and may yet change further, feedback is welcome.

```
f x y = ...
  where
    g z = ...
    {-# SCC g #-}

{-# SCC f #-}
```

If you want to give a cost centre different name than the function name, you can pass a string to the annotation

```
f x y = ...
{-# SCC f "cost_centre_name" #-}
```

Here is an example of a program with a couple of SCCs:

```
main :: IO ()
main = do let xs = [1..1000000]
          let ys = [1..2000000]
          print $ {-# SCC last_xs #-} last xs
          print $ {-# SCC last_init_xs #-} last (init xs)
          print $ {-# SCC last_ys #-} last ys
          print $ {-# SCC last_init_ys #-} last (init ys)
```

which gives this profile when run:

COST CENTRE	MODULE	no.	entries	%time	%alloc	%time
→ %alloc						
MAIN	MAIN	102	0	0.0	0.0	100.0
→ 100.0						
CAF	GHC.IO.Handle.FD	130	0	0.0	0.0	0.0
→ 0.0						
CAF	GHC.IO.Encoding.Iconv	122	0	0.0	0.0	0.0
→ 0.0						
CAF	GHC.Conc.Signal	111	0	0.0	0.0	0.0
→ 0.0						
CAF	Main	108	0	0.0	0.0	100.0
→ 100.0						
main	Main	204	1	0.0	0.0	100.0
→ 100.0						
last_init_ys	Main	210	1	25.0	27.4	25.0
→ 27.4						
main.ys	Main	209	1	25.0	39.2	25.0
→ 39.2						
last_ys	Main	208	1	12.5	0.0	12.5
→ 0.0						
last_init_xs	Main	207	1	12.5	13.7	12.5
→ 13.7						
main.xs	Main	206	1	18.8	19.6	18.8
→ 19.6						
last_xs	Main	205	1	6.2	0.0	6.2
→ 0.0						

### 8.1.2 Rules for attributing costs

While running a program with profiling turned on, GHC maintains a cost-centre stack behind the scenes, and attributes any costs (memory allocation and time) to whatever the current cost-centre stack is at the time the cost is incurred.

The mechanism is simple: whenever the program evaluates an expression with an SCC annotation, `{-# SCC c -#}` *E*, the cost centre *c* is pushed on the current stack, and the entry count for this stack is incremented by one. The stack also sometimes has to be saved and restored; in particular when the program creates a thunk (a lazy suspension), the current cost-centre stack is stored in the thunk, and restored when the thunk is evaluated. In this way, the cost-centre stack is independent of the actual evaluation order used by GHC at run-time.

At a function call, GHC takes the stack stored in the function being called (which for a top-level function will be empty), and *appends* it to the current stack, ignoring any prefix that is identical to a prefix of the current stack.

We mentioned earlier that lazy computations, i.e. thunks, capture the current stack when they are created, and restore this stack when they are evaluated. What about top-level thunks? They are “created” when the program is compiled, so what stack should we give them? The technical name for a top-level thunk is a CAF (“Constant Applicative Form”). GHC assigns every CAF in a module a stack consisting of the single cost centre *M.CAF*, where *M* is the name of the module. It is also possible to give each CAF a different stack, using the option `-fprof-cafs` (page 717). This is especially useful when compiling with `-ffull-laziness` (page 134) (as is default with `-O` (page 127) and higher), as constants in function bodies will be lifted to the top-level and become CAFs. You will probably need to consult the Core (`-ddump-simpl` (page 302)) in order to determine what these CAFs correspond to.

## 8.2 Profiling and foreign calls

Simply put, the profiler includes time spent in unsafe foreign calls but ignores time taken in safe foreign calls. For example, time spent blocked on IO operations (e.g. `getLine`) is not accounted for in the profile as `getLine` is implemented using a safe foreign call.

The profiler estimates CPU time, for Haskell threads within the program only. In particular, time “taken” by the program in blocking safe foreign calls is not accounted for in time profiles. The runtime has the notion of a virtual processor which is known as a “capability”. Haskell threads are run on capabilities, and the profiler samples the capabilities in order to determine what is being executed at a certain time. When a safe foreign call is executed, it’s run outside the context of a capability; hence the sampling does not account for the time taken. Whilst the safe call is executed, other Haskell threads are free to run on the capability, and their cost will be attributed to the profiler. When the safe call is finished, the blocked, descheduled thread can be resumed and rescheduled.

However, the time taken by blocking on unsafe foreign calls is accounted for in the profile. This happens because unsafe foreign calls are executed by the same capability their calling Haskell thread is running on. Therefore, an unsafe foreign call will block the entire capability whilst it is running, and any time the capability is sampled the “cost” of the foreign call will be attributed to the calling cost-centre stack.

However, do note that you are not supposed to use unsafe foreign calls for any operations which do block! Do not be tempted to replace your safe foreign calls with unsafe calls just so they appear in the profile. This prevents GC from happening until the foreign call returns, which can be catastrophic for performance.

## 8.3 Compiler options for profiling

### **-prof**

To make use of the profiling system *all* modules must be compiled and linked with the `-prof` (page 715) option. Any SCC annotations you've put in your source will spring to life.

Without a `-prof` (page 715) option, your SCCs are ignored; so you can compile SCC-laden code without changing it.

### **-fno-prof-count-entries**

Tells GHC not to collect information about how often functions are entered at runtime (the “entries” column of the time profile), for this module. This tends to make the profiled code run faster, and hence closer to the speed of the unprofiled code, because GHC is able to optimise more aggressively if it doesn't have to maintain correct entry counts. This option can be useful if you aren't interested in the entry counts (for example, if you only intend to do heap profiling).

There are a few other profiling-related compilation options. Use them *in addition to* `-prof` (page 715). These do not have to be used consistently for all modules in a program.

### 8.3.1 Automatically placing cost-centres

GHC has a number of flags for automatically inserting cost-centres into the compiled program. Use these options carefully because inserting too many cost-centres in the wrong places will mean the optimiser will be less effective and the runtime behaviour of your profiled program will be different to that of the unprofiled one.

### **-fprof-callers=(name)**

Automatically enclose all occurrences of the named function in an SCC. Note that these cost-centres are added late in compilation (after simplification) and consequently the names may be slightly different than they appear in the source program (e.g. a call to `f` may be inlined with its wrapper, resulting in an occurrence of its worker, `$wf`).

In addition to plain module-qualified names (e.g. `GHC.Base.map`), `(name)` also accepts a small globbing language using `*` as a wildcard symbol:

```
pattern    := <module> '.' <identifier>
module     := '*'
           | <Haskell module name>
identifier := <ident_char>
ident
```

For instance, the following are all valid patterns:

- `Data.List.map`
- `*.map`
- `*.parse*`
- `*.<\*>`

The `*` character can be used literally by escaping (e.g. `\*`).

**-fprof-auto**

All bindings not marked *INLINE* (page 666), whether exported or not, top level or nested, will be given automatic SCC annotations. Functions marked *INLINE* (page 666) must be given a cost centre manually.

**-fprof-auto-top**

GHC will automatically add SCC annotations for all top-level bindings not marked *INLINE* (page 666). If you want a cost centre on an *INLINE* (page 666) function, you have to add it manually.

**-fprof-auto-exported**

GHC will automatically add SCC annotations for all exported functions not marked *INLINE* (page 666). If you want a cost centre on an *INLINE* (page 666) function, you have to add it manually.

**-fprof-auto-calls**

Adds an automatic SCC annotation to all *call sites*. This is particularly useful when using profiling for the purposes of generating stack traces; see the function `Debug.Trace.traceShow`, or the `-xc` (page 238) RTS flag (*RTS options for Haskell program coverage* (page 236)) for more details.

**-fprof-late****Since**

9.4.1

Adds an automatic SCC annotation to all top level bindings which might perform work. This is done late in the compilation pipeline after the optimizer has run and unfoldings have been created. This means these cost centres will not interfere with core-level optimizations and the resulting profile will be closer to the performance profile of an optimized non-profiled executable.

While the results of this are generally informative, some of the compiler internal names will leak into the profile. Further if a function is inlined into a use site it's costs will be counted against the caller's cost center.

For example if we have this code:

```
{-# INLINE mysum #-}  
mysum = sum  
main = print $ mysum [1..999999]
```

Then `mysum` will not show up in the profile since it will be inlined into `main` and therefore it's associated costs will be attributed to `main`'s implicit cost centre.

**-fprof-late-inline****Since**

9.4.1

Adds an automatic SCC annotation to all top level bindings late in the core pipeline after the optimizer has run. This is the same as *-fprof-late* (page 716) except that cost centers are included in some unfoldings.

The result of which is that cost centers *can* inhibit core optimizations to some degree at use sites after inlining. Further there can be significant overhead from cost centres added to small functions if they are inlined often.

You can try this mode if *-fprof-late* (page 716) results in a profile that's too hard to interpret.

**-fprof-late-overloaded****Since**

9.10.1

Adds an automatic SCC annotation to all *overloaded* top level bindings late in the compilation pipeline after the optimizer has run and unfoldings have been created. This means these cost centres will not interfere with core-level optimizations and the resulting profile will be closer to the performance profile of an optimized non-profiled executable.

This flag can help determine which top level bindings encountered during a program's execution are still overloaded after inlining and specialization.

**-fprof-late-overloaded-calls****Since**

9.10.1

Adds an automatic SCC annotation to all call sites that include dictionary arguments late in the compilation pipeline after the optimizer has run and unfoldings have been created. This means these cost centres will not interfere with core-level optimizations and the resulting profile will be closer to the performance profile of an optimized non-profiled executable.

This flag is potentially more useful than *-fprof-late-overloaded* (page 717) since it will also add SCC annotations to call sites of imported overloaded functions.

Some overloaded calls may not be annotated, specifically in cases where the optimizer turns an overloaded function into a join point. Calls to such functions will not be wrapped in SCC annotations, since it would make them non-tail calls, which is a requirement for join points. Instead, SCC annotations are added around the body of overloaded join variables and given distinct names (join-rhs-<var>) to avoid confusion.

**-fprof-cafs**

The costs of all CAFs in a module are usually attributed to one “big” CAF cost-centre. With this option, all CAFs get their own cost-centre. An “if all else fails” option...

**-fprof-manual****Default**

on

Process (or ignore) manual SCC annotations. Can be helpful to ignore annotations from libraries which are not desired.

**-auto-all**

Deprecated alias for *-fprof-auto* (page 715)

**-auto**

Deprecated alias for *-fprof-auto-exported* (page 716)

**-caf-all**

Deprecated alias for *-fprof-cafs* (page 717)

**-no-auto-all**

Deprecated alias for *-fno-prof-auto* (page ??)

**-no-auto**

Deprecated alias for *-fno-prof-auto* (page ??)

**-no-caf-all**

Deprecated alias for `-fno-prof-cafs` (page ??)

## 8.4 Time and allocation profiling

To generate a time and allocation profile, give one of the following RTS options to the compiled program when you run it (RTS options should be enclosed between `+RTS` ... `-RTS` as usual):

**-p****-P****-pa**

The `-p` (page 718) option produces a standard *time profile* report. It is written into the file `<stem>.prof`; the stem is taken to be the program name by default, but can be overridden by the `-po <stem>` (page 718) flag.

The `-P` (page 718) option produces a more detailed report containing the actual time and allocation data as well. (Not used much.)

The `-pa` (page 718) option produces the most detailed report containing all cost centres in addition to the actual time and allocation data.

**-pj**

The `-pj` (page 718) option produces a time/allocation profile report in JSON format written into the file `<program>.prof`.

**-po <stem>**

The `-po <stem>` (page 718) option overrides the stem used to form the output file paths for the cost-centre profiler (see `-p` (page 718) and `-pj` (page 718) flags above) and heap profiler (see `-h` (page 234)).

For instance, running a program with `+RTS -h -p -pohello-world` would produce a heap profile named `hello-world.hp` and a cost-centre profile named `hello-world.prof`.

**-V <secs>****Default**

0.001 when profiling, and 0.01 otherwise

Sets the interval that the RTS clock ticks at, which is also the sampling interval of the time and allocation profile. The default is 0.001 seconds when profiling, and 0.01 otherwise. The runtime uses a single timer signal to count ticks; this timer signal is used to control the context switch timer (*Using Concurrent Haskell* (page 150)) and the heap profiling timer *RTS options for heap profiling* (page 724). Also, the time profiler uses the RTS timer signal directly to record time profiling samples.

Normally, setting the `-V <secs>` (page 718) option directly is not necessary: the resolution of the RTS timer is adjusted automatically if a short interval is requested with the `-C <s>` (page 150) or `-i <secs>` (page 726) options. However, setting `-V <secs>` (page 718) is required in order to increase the resolution of the time profiler.

Using a value of zero disables the RTS clock completely, and has the effect of disabling timers that depend on it: the context switch timer and the heap profiling timer. Context switches will still happen, but deterministically and at a rate much faster than normal. Disabling the interval timer is useful for debugging, because it eliminates a source of non-determinism at runtime.



**-xc**

This option causes the runtime to print out the current cost-centre stack whenever an exception is raised. This can be particularly useful for debugging the location of exceptions, such as the notorious `Prelude.head: empty list error`. See *RTS options for Haskell program coverage* (page 236).

### 8.4.1 JSON profile format

profile in a machine-readable JSON format. The JSON file can be directly loaded into `speedscope.app` to interactively view the profile.

The top-level object of this format has the following properties,

**program (string)**

The name of the program

**arguments (list of strings)**

The command line arguments passed to the program

**rts\_arguments (list of strings)**

The command line arguments passed to the runtime system

**initial\_capabilities (integral number)**

How many capabilities the program was started with (e.g. using the `-N <x>` (page 151) option). Note that the number of capabilities may change during execution due to the `setNumCapabilities` function.

**total\_time (number)**

The total wall time of the program's execution in seconds.

**total\_ticks (integral number)**

How many profiler "ticks" elapsed over the course of the program's execution.

**end\_time (number)**

The approximate time when the program finished execution as a UNIX epoch timestamp.

**tick\_interval (float)**

How much time between profiler ticks.

**total\_alloc (integer)**

The cumulative allocations of the program in bytes.

**cost\_centres (list of objects)**

A list of the program's cost centres

**profile (object)**

The profile tree itself

Each entry in `cost_centres` is an object describing a cost-centre of the program having the following properties,

**id (integral number)**

A unique identifier used to refer to the cost-centre

**is\_caf (boolean)**

Whether the cost-centre is a Constant Applicative Form (CAF)

**label (string)**

A descriptive string roughly identifying the cost-centre.

**src\_loc (string)**

A string describing the source span enclosing the cost-centre.

The profile data itself is described by the `profile` field, which contains a tree-like object (which we'll call a "cost-centre stack" here) with the following properties,

**id (integral number)**

The id of a cost-centre listed in the `cost_centres` list.

**entries (integral number)**

How many times was this cost-centre entered?

**ticks (integral number)**

How many ticks was the program's execution inside of this cost-centre? This does not include child cost-centres.

**alloc (integral number)**

How many bytes did the program allocate while inside of this cost-centre? This does not include allocations while in child cost-centres.

**children (list)**

A list containing child cost-centre stacks.

For instance, a simple profile might look like this,

```
{
  "program": "Main",
  "arguments": [
    "nofib/shootout/n-body/Main",
    "50000"
  ],
  "rts_arguments": [
    "-pj",
    "-hy"
  ],
  "end_time": "Thu Feb 23 17:15 2017",
  "initial_capabilities": 0,
  "total_time": 1.7,
  "total_ticks": 1700,
  "tick_interval": 1000,
  "total_alloc": 3770785728,
  "cost_centres": [
    {
      "id": 168,
      "label": "IDLE",
      "module": "IDLE",
      "src_loc": "<built-in>",
      "is_caf": false
    },
    {
      "id": 156,
      "label": "CAF",
      "module": "GHC.Integer.Logarithms.Internals",
      "src_loc": "<entire-module>",
      "is_caf": true
    },
    {
```

(continues on next page)

(continued from previous page)

```
    "id": 155,
    "label": "CAF",
    "module": "GHC.Integer.Logarithms",
    "src_loc": "<entire-module>",
    "is_caf": true
  },
  {
    "id": 154,
    "label": "CAF",
    "module": "GHC.Event.Array",
    "src_loc": "<entire-module>",
    "is_caf": true
  }
],
"profile": {
  "id": 162,
  "entries": 0,
  "alloc": 688,
  "ticks": 0,
  "children": [
    {
      "id": 1,
      "entries": 0,
      "alloc": 208,
      "ticks": 0,
      "children": [
        {
          "id": 22,
          "entries": 1,
          "alloc": 80,
          "ticks": 0,
          "children": []
        }
      ]
    },
    {
      "id": 42,
      "entries": 1,
      "alloc": 1632,
      "ticks": 0,
      "children": []
    }
  ]
}
```

### 8.4.2 Eventlog profile format

In addition to the `.prof` and `.json` formats the cost centre definitions and samples are also emitted to the *eventlog* (page 234). The format of the events is specified in the *eventlog encodings* (page 807) section.

## 8.5 Profiling memory usage

In addition to profiling the time and allocation behaviour of your program, you can also generate a graph of its memory usage over time. This is useful for detecting the causes of space leaks, when your program holds on to more memory at run-time than it needs to. Space leaks lead to slower execution due to heavy garbage collector activity, and may even cause the program to run out of memory altogether.

Heap profiling differs from time profiling in the fact that it is not always necessary to use the profiling runtime to generate a heap profile. There are two heap profiling modes (`-hT` (page 234) and `-hi` (page 725)<sup>1</sup>) which are always available.

To generate a heap profile from your program:

1. Assuming you need the profiling runtime, compile the program for profiling (*Compiler options for profiling* (page 715)).
2. Run it with one of the heap profiling options described below (eg. `-hc` (page 724) for a basic producer profile) and enable the eventlog using `-l` (page 234).

Heap samples will be emitted to the GHC event log (see *Heap profiler event log output* (page 821) for details about event format).

3. Render the heap profile using `eventlog2html`. This produces an HTML file which contains the visualised profile.
4. Open the rendered interactive profile in your web browser.

For example, here is a heap profile produced of using eventlog profiling on GHC compiling the Cabal library. You can read a lot more about `eventlog2html` on the website.

---

<sup>1</sup> `-hi` (page 725) profiling is available with the normal runtime but you will need to compile with `-finfo-table-map` (page 747) to interpret the results.


## eventlog2html

Options: `./Profile-root-prof +RTS -hc -l-au`

Created at: 2019-10-03, 20:50 UTC

Type of profile: Cost centre profiling (implied by -hc)


Sampling rate in seconds: 0.1

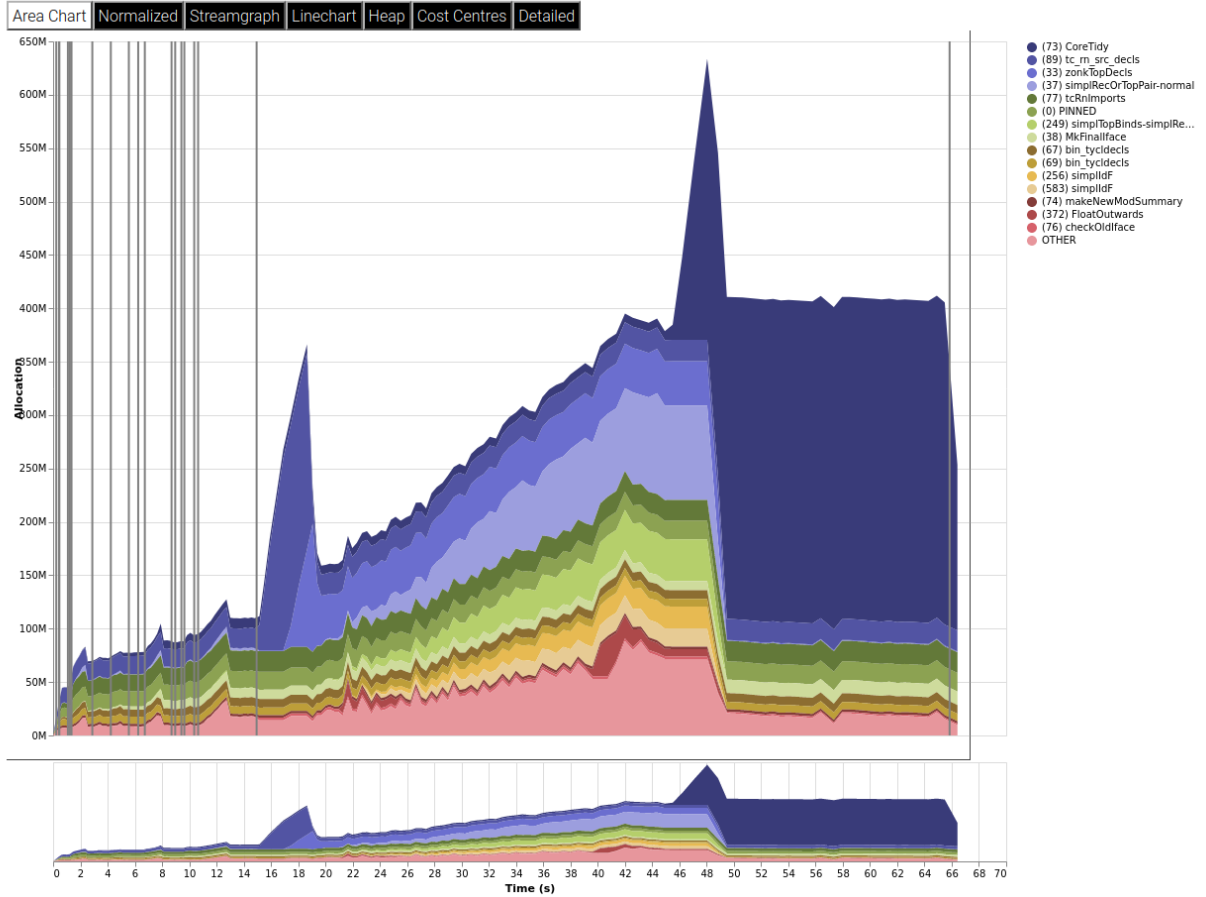

Note that there is the legacy `prog.hp` format which has been deprecated in favour of eventlog based profiling. In order to render the legacy format, the steps are as follows.

3. Run **hp2ps** to produce a Postscript file, `prog.ps`. The **hp2ps** utility is described in detail in *hp2ps - Rendering heap profiles to PostScript* (page 729).
4. Display the heap profile using a postscript viewer such as Ghostview, or print it out on a Postscript-capable printer.

For example, here is a heap profile produced for the `sphere` program from GHC's `nofib` benchmark suite,

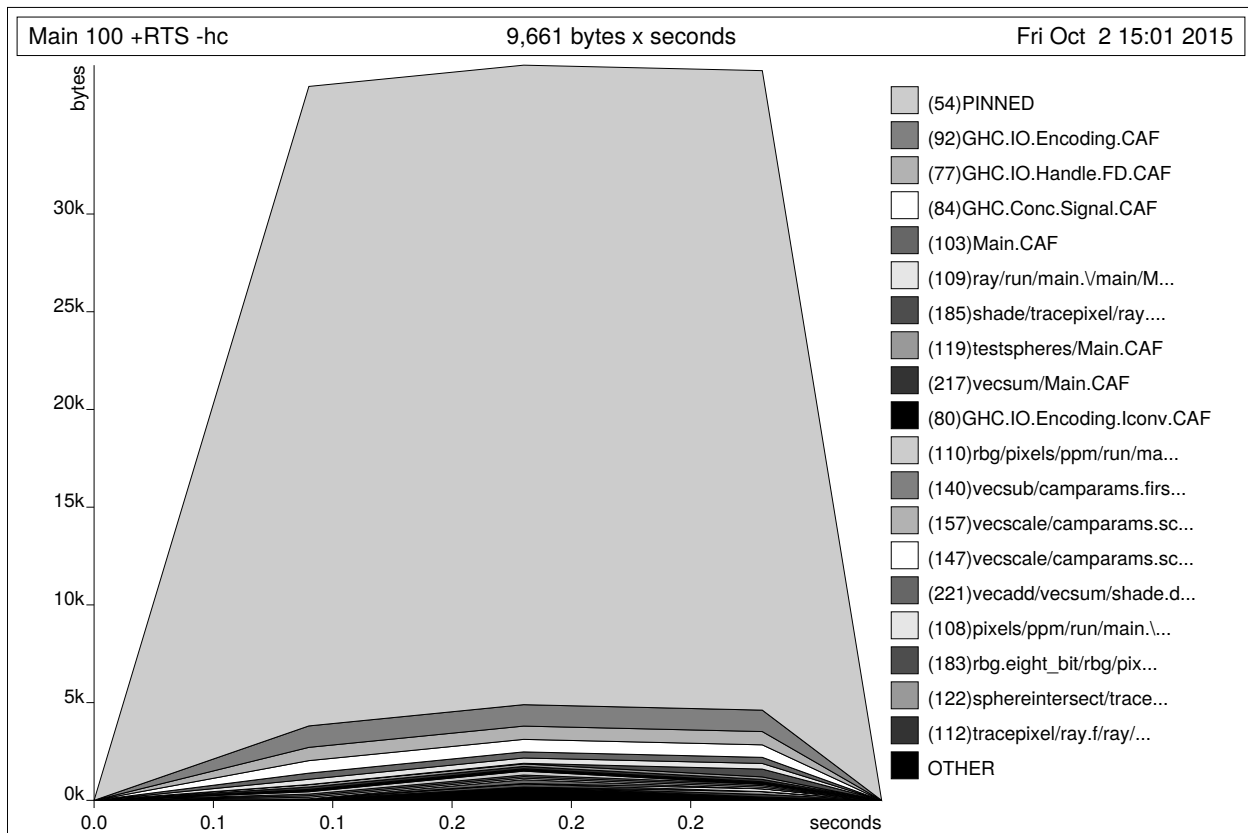

Note that there might be a big difference between the OS reported memory usage of your program and the amount of live data as reported by heap profiling. The reasons for the difference are explained in [Understanding how OS memory usage corresponds to live data](#) (page 759).

### 8.5.1 RTS options for heap profiling

There are several different kinds of heap profile that can be generated. All the different profile types yield a graph of live heap against time, but they differ in how the live heap is broken down into bands. The following RTS options select which break-down to use:

#### -hT

Breaks down the graph by heap closure type. This does not require the profiling runtime.

#### -hc

*Requires -prof* (page 715). Breaks down the graph by the cost-centre stack which produced the data.

#### -hm

*Requires -prof* (page 715). Break down the live heap by the module containing the code which produced the data.

#### -hd

*Requires -prof* (page 715). Breaks down the graph by closure description. For actual data, the description is just the constructor name, for other closures it is a compiler-generated string identifying the closure.

**-hy**

Requires *-prof* (page 715). Breaks down the graph by type. For closures which have function type or unknown/polymorphic type, the string will represent an approximation to the actual type.

**-he****Since**

9.10.1

Requires *-prof* (page 715). Break down the graph by era.

Each closure is tagged with the era in which it is created. Eras start at 1 and can be set in your program to domain specific values using functions from `GHC.Profiling.Eras` or incremented automatically by the *--automatic-era-increment* (page 726).

**-hr**

Requires *-prof* (page 715). Break down the graph by retainer set. Retainer profiling is described in more detail below (*Retainer Profiling* (page 727)).

**-hb**

Requires *-prof* (page 715). Break down the graph by biography. Biographical profiling is described in more detail below (*Biographical Profiling* (page 728)).

**-hi**

Break down the graph by the address of the info table of a closure. For this to produce useful output the program must have been compiled with *-finfo-table-map* (page 747) but it does not require the profiling runtime.

**-l**

Emit profile samples to the *GHC event log* (page 234). This format is both more expressive than the old `.hp` format and can be correlated with other events over the program's runtime. See *Heap profiler event log output* (page 821) for details on the produced event structure.

In addition, the profile can be restricted to heap data which satisfies certain criteria - for example, you might want to display a profile by type but only for data produced by a certain module, or a profile by retainer for a certain type of data. Restrictions are specified as follows:

**-hc** (name)

Requires *-prof* (page 715). Restrict the profile to closures produced by cost-centre stacks with one of the specified cost centres at the top.

**-hC** (name)

Requires *-prof* (page 715). Restrict the profile to closures produced by cost-centre stacks with one of the specified cost centres anywhere in the stack.

**-hm** (module)

Requires *-prof* (page 715). Restrict the profile to closures produced by the specified modules.

**-hd** (desc)

Requires *-prof* (page 715). Restrict the profile to closures with the specified description strings.

**-hy** (type)

Requires *-prof* (page 715). Restrict the profile to closures with the specified types.

**-he** {era}

Requires *-prof* (page 715). Restrict the profile to the specified era.

**-hr** {cc}

Requires *-prof* (page 715). Restrict the profile to closures with retainer sets containing cost-centre stacks with one of the specified cost centres at the top.

**-hb** {bio}

Requires *-prof* (page 715). Restrict the profile to closures with one of the specified biographies, where {bio} is one of lag, drag, void, or use.

For example, the following options will generate a retainer profile restricted to Branch and Leaf constructors:

```
prog +RTS -hr -hdBranch,Leaf
```

There can only be one “break-down” option (eg. *-hr* (page 725) in the example above), but there is no limit on the number of further restrictions that may be applied. All the options may be combined, with one exception: GHC doesn't currently support mixing the *-hr* (page 725) and *-hb* (page 725) options.

There are three more options which relate to heap profiling:

**-i** {secs}

Set the profiling (sampling) interval to {secs} seconds (the default is 0.1 second). Fractions are allowed: for example *-i0.2* will get 5 samples per second. This only affects heap profiling; time profiles are always sampled with the frequency of the RTS clock. See *Time and allocation profiling* (page 718) for changing that.

**--no-automatic-heap-samples**

**Since**

9.2.1

Don't start heap profiling from the start of program execution. If this option is enabled, it's expected that the user will manually start heap profiling or request specific samples using functions from `GHC.Profiling`.

**--no-automatic-time-samples**

**Since**

9.10.1

Don't start time profiling from the start of program execution. If this option is enabled, it's expected that the user will manually start time profiling or request specific samples using functions from `GHC.Profiling`.

**--automatic-era-increment**

**Since**

9.10.1

Increment the era by 1 on each major garbage collection. This is used in conjunction with *-he* (page 725).

**--null-eventlog-writer**

**Since**

9.2.2



Don't output eventlog to file, only configure tracing events. Meant to be used with customized event log writer.

**-L** *(num)*

Sets the maximum length of a cost-centre stack name in a heap profile. Defaults to 25.

### 8.5.2 Retainer Profiling

Retainer profiling is designed to help answer questions like “why is this data being retained?”. We start by defining what we mean by a retainer:

A retainer is either the system stack, an unevaluated closure (thunk), or an explicitly mutable object.

In particular, constructors are *not* retainers.

An object B retains object A if (i) B is a retainer object and (ii) object A can be reached by recursively following pointers starting from object B, but not meeting any other retainer objects on the way. Each live object is retained by one or more retainer objects, collectively called its retainer set, or its retainers.

When retainer profiling is requested by giving the program the `-hr` option, a graph is generated which is broken down by retainer set. A retainer set is displayed as a set of cost-centre stacks; because this is usually too large to fit on the profile graph, each retainer set is numbered and shown abbreviated on the graph along with its number, and the full list of retainer sets is dumped into the file `prog.prof`.

Retainer profiling requires multiple passes over the live heap in order to discover the full retainer set for each object, which can be quite slow. So we set a limit on the maximum size of a retainer set, where all retainer sets larger than the maximum retainer set size are replaced by the special set `MANY`. The maximum set size defaults to 8 and can be altered with the `-R (size)` (page 727) RTS option:

**-R** *(size)*

Restrict the number of elements in a retainer set to *(size)* (default 8).

#### 8.5.2.1 Hints for using retainer profiling

The definition of retainers is designed to reflect a common cause of space leaks: a large structure is retained by an unevaluated computation, and will be released once the computation is forced. A good example is looking up a value in a finite map, where unless the lookup is forced in a timely manner the unevaluated lookup will cause the whole mapping to be retained. These kind of space leaks can often be eliminated by forcing the relevant computations to be performed eagerly, using `seq` or strictness annotations on data constructor fields.

Often a particular data structure is being retained by a chain of unevaluated closures, only the nearest of which will be reported by retainer profiling - for example A retains B, B retains C, and C retains a large structure. There might be a large number of Bs but only a single A, so A is really the one we're interested in eliminating. However, retainer profiling will in this case report B as the retainer of the large structure. To move further up the chain of retainers, we can ask for another retainer profile but this time restrict the profile to B objects, so we get a profile of the retainers of B:

```
prog +RTS -hr -hcB
```

This trick isn't foolproof, because there might be other B closures in the heap which aren't the retainers we are interested in, but we've found this to be a useful technique in most cases.

### 8.5.3 Precise Retainer Analysis

If you want to precisely answer questions about why a certain type of closure is retained then it is worthwhile using `ghc-debug` which has a terminal interface which can be used to easily answer queries such as, what is retaining a certain closure.

### 8.5.4 Biographical Profiling

A typical heap object may be in one of the following four states at each point in its lifetime:

- The lag stage, which is the time between creation and the first use of the object,
- the use stage, which lasts from the first use until the last use of the object, and
- The drag stage, which lasts from the final use until the last reference to the object is dropped.
- An object which is never used is said to be in the void state for its whole lifetime.

A biographical heap profile displays the portion of the live heap in each of the four states listed above. Usually the most interesting states are the void and drag states: live heap in these states is more likely to be wasted space than heap in the lag or use states.

It is also possible to break down the heap in one or more of these states by a different criteria, by restricting a profile by biography. For example, to show the portion of the heap in the drag or void state by producer:

```
prog +RTS -hc -hbdrag,void
```

Once you know the producer or the type of the heap in the drag or void states, the next step is usually to find the retainer(s):

```
prog +RTS -hr -hccc...
```

---

**Note:** This two stage process is required because GHC cannot currently profile using both biographical and retainer information simultaneously.

---

### 8.5.5 Actual memory residency

How does the heap residency reported by the heap profiler relate to the actual memory residency of your program when you run it? You might see a large discrepancy between the residency reported by the heap profiler, and the residency reported by tools on your system (eg. `ps` or `top` on Unix, or the Task Manager on Windows). There are several reasons for this:

- There is an overhead of profiling itself, which is subtracted from the residency figures by the profiler. This overhead goes away when compiling without profiling support, of course. The space overhead is currently 2 extra words per heap object, which probably results in about a 30% overhead.

- Garbage collection requires more memory than the actual residency. The factor depends on the kind of garbage collection algorithm in use: a major GC in the standard generation copying collector will usually require  $3L$  bytes of memory, where  $L$  is the amount of live data. This is because by default (see the RTS `-F {factor}` (page 225) option) we allow the old generation to grow to twice its size ( $2L$ ) before collecting it, and we require additionally  $L$  bytes to copy the live data into. When using compacting collection (see the `-c` (page 224) option), this is reduced to  $2L$ , and can further be reduced by tweaking the `-F {factor}` (page 225) option. Also add the size of the allocation area (see `-A {size}` (page 223)).
- The program text itself, the C stack, any non-heap data (e.g. data allocated by foreign libraries, and data allocated by the RTS), and `mmap()`'d memory are not counted in the heap profile.

For more discussion about understanding how understanding process residency see [Understanding how OS memory usage corresponds to live data](#) (page 759).

## 8.6 hp2ps - Rendering heap profiles to PostScript

Usage:

```
hp2ps [flags] [<file>[.hp]]
```

The program **hp2ps** program converts a `.hp` file produced by the `-h<break-down>` runtime option into a PostScript graph of the heap profile. By convention, the file to be processed by **hp2ps** has a `.hp` extension. The PostScript output is written to `file@.ps`. If `<file>` is omitted entirely, then the program behaves as a filter.

**hp2ps** is distributed in `ghc/utils/hp2ps` in a GHC source distribution. It was originally developed by Dave Wakeling as part of the HBC/LML heap profiler.

The flags are:

**-d**

In order to make graphs more readable, **hp2ps** sorts the shaded bands for each identifier. The default sort ordering is for the bands with the largest area to be stacked on top of the smaller ones. The `-d` option causes rougher bands (those representing series of values with the largest standard deviations) to be stacked on top of smoother ones.

**-b**

Normally, **hp2ps** puts the title of the graph in a small box at the top of the page. However, if the JOB string is too long to fit in a small box (more than 35 characters), then **hp2ps** will choose to use a big box instead. The `-b` option forces **hp2ps** to use a big box.

**-e(float)[in|mm|pt]**

Generate encapsulated PostScript suitable for inclusion in LaTeX documents. Usually, the PostScript graph is drawn in landscape mode in an area 9 inches wide by 6 inches high, and **hp2ps** arranges for this area to be approximately centred on a sheet of a4 paper. This format is convenient of studying the graph in detail, but it is unsuitable for inclusion in LaTeX documents. The `-e` option causes the graph to be drawn in portrait mode, with float specifying the width in inches, millimetres or points (the default). The resulting PostScript file conforms to the Encapsulated PostScript (EPS) convention, and it can be included in a LaTeX document using Rokicki's dvi-to-PostScript converter **dvips**.

**-g**

Create output suitable for the `gs` PostScript previewer (or similar). In this case the graph is printed in portrait mode without scaling. The output is unsuitable for a laser printer.

**-l**

Normally a profile is limited to 20 bands with additional identifiers being grouped into an OTHER band. The `-l` flag removes this 20 band and limit, producing as many bands as necessary. No key is produced as it won't fit!. It is useful for creation time profiles with many bands.

**-m(int)**

Normally a profile is limited to 20 bands with additional identifiers being grouped into an OTHER band. The `-m` flag specifies an alternative band limit (the maximum is 20).

`-m0` requests the band limit to be removed. As many bands as necessary are produced. However no key is produced as it won't fit! It is useful for displaying creation time profiles with many bands.

**-p**

Use previous parameters. By default, the PostScript graph is automatically scaled both horizontally and vertically so that it fills the page. However, when preparing a series of graphs for use in a presentation, it is often useful to draw a new graph using the same scale, shading and ordering as a previous one. The `-p` flag causes the graph to be drawn using the parameters determined by a previous run of `hp2ps` on `file`. These are extracted from `file@.aux`.

**-s**

Use a small box for the title.

**-t(float)**

Normally trace elements which sum to a total of less than 1% of the profile are removed from the profile. The `-t` option allows this percentage to be modified (maximum 5%).

`-t0` requests no trace elements to be removed from the profile, ensuring that all the data will be displayed.

**-c**

Generate colour output.

**-y**

Ignore marks.

**-?**

Print out usage information.

## 8.7 Profiling Parallel and Concurrent Programs

Combining `-threaded` (page ??) and `-prof` (page 715) is perfectly fine, and indeed it is possible to profile a program running on multiple processors with the RTS `-N <x>` (page 151) option.<sup>3</sup>

Some caveats apply, however. In the current implementation, a profiled program is likely to scale much less well than the unprofiled program, because the profiling implementation uses some shared data structures which require locking in the runtime system. Furthermore, the

---

<sup>3</sup> This feature was added in GHC 7.4.1.

memory allocation statistics collected by the profiled program are stored in shared memory but *not* locked (for speed), which means that these figures might be inaccurate for parallel programs.

We strongly recommend that you use `-fno-prof-count-entries` (page 715) when compiling a program to be profiled on multiple cores, because the entry counts are also stored in shared memory, and continuously updating them on multiple cores is extremely slow.

We also recommend using [ThreadScope](#) for profiling parallel programs; it offers a GUI for visualising parallel execution, and is complementary to the time and space profiling features provided with GHC.

## 8.8 Observing Code Coverage

Code coverage tools allow a programmer to determine what parts of their code have been actually executed, and which parts have never actually been invoked. GHC has an option for generating instrumented code that records code coverage as part of the Haskell Program Coverage (HPC) toolkit, which is included with GHC. HPC tools can be used to render the generated code coverage information into human understandable format.

Correctly instrumented code provides coverage information of two kinds: source coverage and boolean-control coverage. Source coverage is the extent to which every part of the program was used, measured at three different levels: declarations (both top-level and local), alternatives (among several equations or case branches) and expressions (at every level). Boolean coverage is the extent to which each of the values `True` and `False` is obtained in every syntactic boolean context (ie. `guard`, `condition`, `qualifier`).

HPC displays both kinds of information in two primary ways: textual reports with summary statistics (`hpc report`) and sources with color mark-up (`hpc markup`). For boolean coverage, there are four possible outcomes for each guard, condition or qualifier: both `True` and `False` values occur; only `True`; only `False`; never evaluated. In `hpc-markup` output, highlighting with a yellow background indicates a part of the program that was never evaluated; a green background indicates an always-`True` expression and a red background indicates an always-`False` one.

### 8.8.1 A small example: Reciprocation

For an example we have a program, called `Recip.hs`, which computes exact decimal representations of reciprocals, with recurring parts indicated in brackets.

```
reciprocal :: Int -> (String, Int)
reciprocal n | n > 1 = ('0' : '.' : digits, recur)
              | otherwise = error
                  "attempting to compute reciprocal of number <= 1"
  where
    (digits, recur) = divide n 1 []
divide :: Int -> Int -> [Int] -> (String, Int)
divide n c cs | c `elem` cs = ([], position c cs)
              | r == 0      = (show q, 0)
              | r /= 0      = (show q ++ digits, recur)
  where
    (q, r) = (c*10) `quotRem` n
    (digits, recur) = divide n r (c:cs)
```

(continues on next page)

(continued from previous page)

```

position :: Int -> [Int] -> Int
position n (x:xs) | n==x      = 1
                  | otherwise = 1 + position n xs

showRecip :: Int -> String
showRecip n =
  "1/" ++ show n ++ " = " ++
  if r==0 then d else take p d ++ "(" ++ drop p d ++ ")"
  where
    p = length d - r
    (d, r) = reciprocal n

main = do
  number <- readLn
  putStrLn (showRecip number)
  main

```

HPC instrumentation is enabled with the `-fhpc` (page 733) flag:

```
$ ghc -fhpc Recip.hs
```

GHC creates a subdirectory `.hpc` in the current directory, and puts HPC index (`.mix`) files in there, one for each module compiled. You don't need to worry about these files: they contain information needed by the `hpc` tool to generate the coverage data for compiled modules after the program is run.

```

$ ./Recip
1/3
= 0.(3)

```

Running the program generates a file with the `.tix` suffix, in this case `Recip.tix`, which contains the coverage data for this run of the program. The program may be run multiple times (e.g. with different test data), and the coverage data from the separate runs is accumulated in the `.tix` file. To reset the coverage data and start again, just remove the `.tix` file. You can control where the `.tix` file is generated using the environment variable `HPCTIXFILE` (page 732).

### HPCTIXFILE

Set the HPC `.tix` file output path.

Having run the program, we can generate a textual summary of coverage:

```

$ hpc report Recip
80% expressions used (81/101)
12% boolean coverage (1/8)
    14% guards (1/7), 3 always True,
        1 always False,
        2 unevaluated
    0% 'if' conditions (0/1), 1 always False
100% qualifiers (0/0)
55% alternatives used (5/9)
100% local declarations used (9/9)
100% top-level declarations used (5/5)

```

We can also generate a marked-up version of the source.

```
$ hpc markup Recip
writing Recip.hs.html
```

This generates one file per Haskell module, and 4 index files, `hpc_index.html`, `hpc_index_alt.html`, `hpc_index_exp.html`, `hpc_index_fun.html`.

## 8.8.2 Options for instrumenting code for coverage

### **-fhpc**

Enable code coverage for the current module or modules being compiled.

Modules compiled with this option can be freely mixed with modules compiled without it; indeed, most libraries will typically be compiled without `-fhpc` (page 733). When the program is run, coverage data will only be generated for those modules that were compiled with `-fhpc` (page 733), and the **hpc** tool will only show information about those modules.

### **-hpcdir(dir)**

#### **Default**

`.hpc`

Override the directory where GHC places the HPC index (`.mix`) files used by **hpc** to understand program structure.

## 8.8.3 The hpc toolkit

The **hpc** command has several sub-commands:

```
$ hpc
Usage: hpc COMMAND ...

Commands:
  help          Display help for hpc or a single command
Reporting Coverage:
  report        Output textual report about program coverage
  markup        Markup Haskell source with program coverage
Processing Coverage files:
  sum           Sum multiple .tix files in a single .tix file
  combine       Combine two .tix files in a single .tix file
  map           Map a function over a single .tix file
Coverage Overlays:
  overlay       Generate a .tix file from an overlay file
  draft         Generate draft overlay that provides 100% coverage
Others:
  show          Show .tix file in readable, verbose format
  version       Display version for hpc
```

In general, these options act on a `.tix` file after an instrumented binary has generated it.

The **hpc** tool assumes you are in the top-level directory of the location where you built your application, and the `.tix` file is in the same top-level directory. You can use the flag `--srcdir`

to use hpc for any other directory, and use `--srcdir` multiple times to analyse programs compiled from difference locations, as is typical for packages.

We now explain in more details the major modes of hpc.

### 8.8.3.1 hpc report

`hpc report` gives a textual report of coverage. By default, all modules and packages are considered in generating report, unless `include` or `exclude` are used. The report is a summary unless the `--per-module` flag is used. The `--xml-output` option allows for tools to use hpc to glean coverage.

```
$ hpc help report
Usage: hpc report [OPTION] .. <TIX_FILE> [<MODULE> [<MODULE> ...]]

Options:

  --per-module           show module level detail
  --decl-list           show unused decls
  --exclude=[PACKAGE:]<MODULE>  exclude MODULE and/or PACKAGE
  --include=[PACKAGE:]<MODULE>  include MODULE and/or PACKAGE
  --srcdir=DIR           path to source directory of .hs files
                        multi-use of srcdir possible
  --hpcdir=DIR           append sub-directory that contains .mix_
  --files                files
                        default .hpc [rarely used]
  --reset-hpcdirs       empty the list of hpcdir's
                        [rarely used]
  --xml-output           show output in XML
```

### 8.8.3.2 hpc markup

`hpc markup` marks up source files into colored html.

```
$ hpc help markup
Usage: hpc markup [OPTION] .. <TIX_FILE> [<MODULE> [<MODULE> ...]]

Options:

  --exclude=[PACKAGE:]<MODULE>  exclude MODULE and/or PACKAGE
  --include=[PACKAGE:]<MODULE>  include MODULE and/or PACKAGE
  --srcdir=DIR           path to source directory of .hs files
                        multi-use of srcdir possible
  --hpcdir=DIR           append sub-directory that contains .mix_
  --files                files
                        default .hpc [rarely used]
  --reset-hpcdirs       empty the list of hpcdir's
                        [rarely used]
  --fun-entry-count      show top-level function entry counts
  --highlight-covered    highlight covered code, rather than code_
  --gaps                 gaps
  --destdir=DIR          path to write output to
```



### 8.8.3.3 hpc sum

`hpc sum` adds together any number of `.tix` files into a single `.tix` file. `hpc sum` does not change the original `.tix` file; it generates a new `.tix` file.

```
$ hpc help sum
Usage: hpc sum [OPTION] .. <TIX_FILE> [<TIX_FILE> [<TIX_FILE> ..]]
Sum multiple .tix files in a single .tix file

Options:
  --exclude=[PACKAGE:][MODULE]  exclude MODULE and/or PACKAGE
  --include=[PACKAGE:][MODULE]  include MODULE and/or PACKAGE
  --output=FILE                 output FILE
  --union                       use the union of the module namespace
→ (default is intersection)
```

### 8.8.3.4 hpc combine

`hpc combine` is the swiss army knife of `hpc`. It can be used to take the difference between `.tix` files, to subtract one `.tix` file from another, or to add two `.tix` files. `hpc combine` does not change the original `.tix` file; it generates a new `.tix` file.

```
$ hpc help combine
Usage: hpc combine [OPTION] .. <TIX_FILE> <TIX_FILE>
Combine two .tix files in a single .tix file

Options:
  --exclude=[PACKAGE:][MODULE]  exclude MODULE and/or PACKAGE
  --include=[PACKAGE:][MODULE]  include MODULE and/or PACKAGE
  --output=FILE                 output FILE
  --function=FUNCTION           combine .tix files with join function
→ default = ADD
                                FUNCTION = ADD | DIFF | SUB
  --union                       use the union of the module namespace
→ (default is intersection)
```

### 8.8.3.5 hpc map

`hpc map` inverts or zeros a `.tix` file. `hpc map` does not change the original `.tix` file; it generates a new `.tix` file.

```
$ hpc help map
Usage: hpc map [OPTION] .. <TIX_FILE>
Map a function over a single .tix file

Options:
  --exclude=[PACKAGE:][MODULE]  exclude MODULE and/or PACKAGE
  --include=[PACKAGE:][MODULE]  include MODULE and/or PACKAGE
```

(continues on next page)

(continued from previous page)

<code>--output=FILE</code>	output FILE
<code>--function=FUNCTION</code>	apply function to .tix files, default = ID FUNCTION = ID   INV   ZERO
<code>--union</code>	use the union of the module namespace.
<code>→(default is intersection)</code>	

### 8.8.3.6 hpc overlay and hpc draft

Overlays are an experimental feature of HPC, a textual description of coverage. `hpc draft` is used to generate a draft overlay from a .tix file, and `hpc overlay` generates a .tix files from an overlay.

```
% hpc help overlay
Usage: hpc overlay [OPTION] .. <OVERLAY_FILE> [<OVERLAY_FILE> [...]]

Options:
    --srcdir=DIR    path to source directory of .hs files
                   multi-use of srcdir possible
    --hpcdir=DIR    append sub-directory that contains .mix
→files
    --reset-hpcdirs    default .hpc [rarely used]
                   empty the list of hpcdir's
                   [rarely used]
    --output=FILE    output FILE

% hpc help draft
Usage: hpc draft [OPTION] .. <TIX_FILE>

Options:
    --exclude=[PACKAGE:][MODULE]    exclude MODULE and/or PACKAGE
    --include=[PACKAGE:][MODULE]    include MODULE and/or PACKAGE
    --srcdir=DIR                    path to source directory of .hs files
                                   multi-use of srcdir possible
    --hpcdir=DIR                    append sub-directory that contains .mix
→files
    --reset-hpcdirs                default .hpc [rarely used]
                                   empty the list of hpcdir's
                                   [rarely used]
    --output=FILE                  output FILE
```

### 8.8.4 Caveats and Shortcomings of Haskell Program Coverage

HPC does not attempt to lock the `.tix` file, so multiple concurrently running binaries in the same directory will exhibit a race condition. At compile time, there is no way to change the name of the `.tix` file generated; at runtime, the name of the generated `.tix` file can be changed using `HPCTIXFILE` (page 732); the name of the `.tix` file will also change if you rename the binary. HPC does not work with GHCi.

## 8.9 Using “ticky-ticky” profiling (for implementors)

### **-ticky**

Enable ticky-ticky profiling. By default this only tracks the allocations *by* each closure type. See `-ticky-allocd` (page 737) to keep track of allocations *of* each closure type as well.

GHC’s ticky-ticky profiler provides a low-level facility for tracking entry and allocation counts of particular individual closures. Ticky-ticky profiling requires a certain familiarity with GHC internals, so it is best suited for expert users, but can provide an invaluable precise insight into the allocation behaviour of your programs.

Getting started with ticky profiling consists of three steps.

1. Add the `-ticky` flag when compiling a Haskell module to enable “ticky-ticky” profiling of that module. This makes GHC emit performance-counting instructions in every STG function.
2. Add `-ticky` to the command line when linking, so that you link against a version of the runtime system that allows you to display the results. In fact, in the link phase `-ticky` implies `-debug`, so you get the debug version of the runtime system too.
3. Then when running your program you can collect the results of the profiling in two ways.
  - Using the eventlog, the `-lt` (page 234) flag will emit ticky samples to the eventlog periodically. This has the advantage of being able to resolve dynamic behaviors over the program’s lifetime. See *Ticky counters* (page 829) for details on the event types reported. The ticky information can be rendered into an interactive table using `eventlog2html`.
  - A legacy textual format is emitted using the `-r {file}` (page 237) flag. This produces a textual table containing information about how much each counter ticked throughout the duration of the program.

### 8.9.1 Additional Ticky Flags

There are some additional flags which can be used to increase the number of ticky counters and the quality of the profile.

### **-ticky-allocd**

Keep track of how much each closure type is allocated.

### **-ticky-dyn-thunk**

Track allocations of dynamic thunks.

### **-ticky-LNE**

These are not allocated, and can be very performance sensitive so we usually don’t want to run ticky counters for these to avoid even worse performance for tickied builds.

But sometimes having information about these binders is critical. So we have a flag to ticky them anyway.

### **-ticky-tag-checks**

These dummy counters contain:

- The number of avoided tag checks in the entry count.
- “infer” as the argument string to distinguish them from regular counters.
- The name of the variable we are casing on, as well as a unique to represent the inspection site as one variable might be cased on multiple times. The unique comes first with the variable coming at the end. Like this: `u10_s98c` (Main) at `nofib/spectral/simple/Main.hs:677:1` in `u10` where `u10` is the variable and `u10_s98c` the unique associated with the inspection site.

Note that these counters are currently not processed well be `eventlog2html`. So if you want to check them you will have to use the text based interface.

### **-ticky-ap-thunk**

This allows us to get accurate entry counters for code like `f x y` at the cost of code size. We do this but not using the precomputed standard AP thunk code.

GHC's ticky-ticky profiler provides a low-level facility for tracking entry and allocation counts of particular individual closures. Because ticky-ticky profiling requires a certain familiarity with GHC internals, we have moved the documentation to the GHC developers wiki. Take a look at its [overview of the profiling options](#), which includes a link to the ticky-ticky profiling page.

Note that ticky-ticky samples can be emitted in two formats: the eventlog, using the `-lT` (page 234) event type, and a plain text summary format, using the `-r {file}` (page 237) option. The former has the advantage of being able to resolve dynamic behaviors over the program's lifetime. See [Ticky counters](#) (page 829) for details on the event types reported.

## **8.9.2 Understanding the Output of Ticky-Ticky profiles**

Once you have your rendered profile then you can begin to understand the allocation behaviour of your program. There are two classes of ticky-ticky counters.

### **Name-specific counters**

Each “name-specific counter” is associated with a name that is defined in the result of the optimiser. For each such name, there are three possible counters: entries, heap allocation by the named thing, and heap used to allocate that named thing.

### **Global counters**

Each “global counter” describes some aspect of the entire program execution. For example, one global counter tracks total heap allocation; another tracks allocation for PAPs.

In general you are probably interested mostly in the name-specific counters as these can provide detailed information about where allocates how much in your program.

### 8.9.3 Information about name-specific counters

Name-specific counters provide the following information about a closure.

- Entries - How many times the closure was entered.
- Allocs - How much (in bytes) is allocated *by* that closure.
- Allod - How often the closure is allocated.
- FVs - The free variables captured by that closure.
- Args - The arguments that closure takes.

The FVs and Args information is encoded using a small DSL.

Classification	Description
+	dictionary
\>	function
{C,I,F,D,W}	char, int, float, double, word
{c,i,f,d,w}	unboxed ditto
T	unboxed tuple
P	other primitive type
p	unboxed primitive type
L	list
E	enumeration type
S	single-constructor type
M	multi-constructor type
.	other type
-	reserved for others to mark as “uninteresting”

In particular note that you can use the ticky profiler to see any function calls to dictionary arguments by searching the profile for the + classifier. This indicates that the function has failed to specialise for one reason or another.

### 8.9.4 Examples

A typical use of ticky-ticky would be to generate a ticky report using the eventlog by evoking an application with RTS arguments like this:

```
app <args> +RTS -l-augT
```

This will produce an eventlog file which contains results from ticky counters. This file can be manually inspected like any regular eventlog. However for ticky-ticky eventlog2html has good support for producing tables from these logs.

With an up to date version of eventlog2html this can be simply done by invoking eventlog2html on the produced eventlog. In the example above the invocation would then be eventlog2html app.eventlog Which will produce a searchable and sortable table containing all the ticky counters in the log.

### 8.9.5 Notes about ticky profiling

- You can mix together modules compiled with and without `-ticky` but you will miss out on allocations and counts from uninstrumented modules in the profile.
- Linking with the `-ticky` has a quite severe performance impact on your program. `-ticky` implies using the unoptimised `-debug` RTS. Therefore `-ticky` shouldn't be used for production builds.
- Building with `-ticky` doesn't affect core optimisations of your program as the counters are inserted after the STG pipeline. At which point most optimizations have already been run.
- When using the eventlog it is possible to combine together ticky-ticky and IPE based profiling as each ticky counter definition has an associated info table. This address can be looked up in the IPE map so that further information (such as source location) can be determined about that closure.
- Global ticky counters are only available in the textual ticky output (`+RTS -r`). But this mode has some limitations (e.g. on column widths) and will contain raw json output in some columns. For this reason using an eventlog-based approach should be preferred if possible.

## DEBUGGING COMPILED PROGRAMS

Since the 7.10 release GHC can emit debugging information to help debugging tools understand the code that GHC produces. This debugging information is usable by most UNIX debugging tools.

**-g**

**-g(n)**

**Since**

7.10, numeric levels since 8.0

**Implies**

*-fexpose-internal-symbols* (page 287) when  $\langle n \rangle \geq 2$ .

Emit debug information in object code. Currently only DWARF debug information is supported on x86-64 and i386. Currently debug levels 0 through 3 are accepted:

- **-g0**: no debug information produced
- **-g1**: produces stack unwinding records for top-level functions (sufficient for basic backtraces)
- **-g2**: produces stack unwinding records for top-level functions as well as inner blocks (allowing more precise backtraces than with **-g1**).
- **-g3**: produces GHC-specific DWARF information for use by more sophisticated Haskell-aware debugging tools (see *Debugging information entities* (page 746) for details)

If  $\langle n \rangle$  is omitted, level 2 is assumed.

Note that for stack unwinding to be reliable, all libraries, including foreign libraries and those shipped with GHC such as `base`, must be compiled with unwinding information. GHC binary distributions configured in this way are provided for a select number of platforms; other platforms are advised to build using Hadrian's `+debug_info` flavour transformer. Note as well that the built-in unwinding support provided by the `base` library's `GHC.ExecutionStack` module requires that the runtime system be built with `libdw` support enabled (using the `--enable-dwarf-unwind` flag to configure while building the compiler) and a platform which `libdw` supports.

## 9.1 Tutorial

Let's consider a simple example,

```
1  -- fib.hs
2  fib :: Int -> Int
3  fib 0 = 0
4  fib 1 = 1
5  fib n = fib (n-1) + fib (n-2)
6
7  main :: IO ()
8  main = print $ fib 50
```

Let's first see how execution flows through this program. We start by telling GHC that we want debug information,

```
$ ghc -g -rtsopts fib.hs
```

Here we used the `-g` option to inform GHC that it should add debugging information in the produced binary. There are three levels of debugging output: `-g0` (no debugging information, the default), `-g1` (sufficient for basic backtraces), `-g2` (or just `-g` for short; emitting everything GHC knows). Note that this debugging information does not affect the optimizations performed by GHC.

---

**Tip:** Under Mac OS X debug information is kept apart from the executable. After compiling the executable you'll need to use the `dsymutil` utility to extract the debugging information and place them in the debug archive,

```
$ dsymutil fib
```

This should produce a file named `fib.dSYM`.

Now let's have a look at the flow of control. For this we can just start our program under `gdb` (or an equivalent debugger) as we would any other native executable,

```
$ gdb --args ./Fib +RTS -V0
Reading symbols from Fib...done.
(gdb) run
Starting program: /opt/exp/ghc/ghc-dwarf/Fib
[Thread debugging using libthread_db enabled]
Using host libthread_db library "/lib/x86_64-linux-gnu/libthread_db.so.1".
^C
Program received signal SIGINT, Interrupt.
0x000000000064fc7c in cfy4_info () at libraries/integer-gmp/src/GHC/Integer/
↳ Type.hs:424
424      minusInteger x y = inline plusInteger x (inline negateInteger y)
(gdb)
```

Here we have used the runtime system's `-V0` option to disable the RTS's periodic timer which may interfere with our debugging session. Upon breaking into the program `gdb` shows us a location in our source program corresponding to the current point of execution.

Moreover, we can ask `gdb` to tell us the flow of execution that lead us to this point in the program,



```
(gdb) bt
#0 0x000000000064fc7c in cfy4_info () at libraries/integer-gmp/src/GHC/
↳ Integer/Type.hs:424
#1 0x00000000006eb0c0 in ?? ()
#2 0x000000000064301c in cbuV_info () at libraries/integer-gmp/src/GHC/
↳ Integer/Type.hs:323
#3 0x000000000064311b in integerzmghmp_GHCziIntegerziType_eqInteger_info ()
↳ at libraries/integer-gmp/src/GHC/Integer/Type.hs:312
#4 0x0000000000406eca in roz_info () at Fib.hs:2
#5 0x00000000006eb0c0 in ?? ()
#6 0x000000000064f075 in cfu_info () at libraries/integer-gmp/src/GHC/
↳ Integer/Type.hs:412
#7 0x00000000006eb0c0 in ?? ()
#8 0x000000000064f075 in cfu_info () at libraries/integer-gmp/src/GHC/
↳ Integer/Type.hs:412
#9 0x00000000006eb0c0 in ?? ()
#10 0x000000000064eefe in integerzmghmp_GHCziIntegerziType_plusInteger_info ()
↳ at libraries/integer-gmp/src/GHC/Integer/Type.hs:393
...
#64 0x0000000000643ac8 in integerzmghmp_GHCziIntegerziType_ltIntegerzh_info ()
↳ at libraries/integer-gmp/src/GHC/Integer/Type.hs:343
#65 0x00000000004effcc in base_GHCziShow_zdwintegerToString_info () at
↳ libraries/base/GHC/Show.hs:443
#66 0x00000000004f0795 in base_GHCziShow_zdfShowIntegerzuzdcshow_info () at
↳ libraries/base/GHC/Show.hs:145
#67 0x000000000048892b in cdGW_info () at libraries/base/GHC/IO/Handle/Text.
↳ hs:595
#68 0x0000000000419cb2 in base_GHCziBase_thenIO1_info () at libraries/base/
↳ GHC/Base.hs:1072
```

**Hint:** Here we notice the first bit of the stack trace has many unidentified stack frames at address 0x006eb0c0. If we ask gdb about this location, we find that these frames are actually STG update closures,

```
(gdb) print/a 0x006eb0c0
$1 = 0x6eb0c0 <stg_upd_frame_info>
```

The reason gdb doesn't show this symbol name in the backtrace output is an infidelity in its interpretation of debug information, which assumes an invariant preserved in C but not Haskell programs. Unfortunately it is necessary to work around this manually until this behavior is fixed upstream.

**Note:** Because of the aggressive optimization that GHC performs to the programs it compiles it is quite difficult to pin-point exactly which point in the source program a given machine instruction should be attributed to. In fact, internally GHC associates each instruction with a **set** of source locations. When emitting the standard debug information used by gdb and other language-agnostic debugging tools, GHC is forced to heuristically choose one location from among this set.

For this reason we should be cautious when interpreting the source locations provided by GDB. While these locations will usually be in some sense "correct", they aren't always useful. This is why profiling tools targeting Haskell should supplement the standard source location

information with GHC-specific annotations (emitted with -g2) when assigning costs.

---

Indeed, we can even set breakpoints,

```
(gdb) break fib.hs:4
Breakpoint 1 at 0x406c60: fib.hs:4. (5 locations)
(gdb) run
Starting program: /opt/exp/ghc/ghc-dwarf/Fib

Breakpoint 1, c1RV_info () at Fib.hs:4
4      fib n = fib (n-1) + fib (n-2)
(gdb) bt
#0  c1RV_info () at Fib.hs:4
#1  0x00000000006eb0c0 in ?? ()
#2  0x0000000000643ac8 in integerzm_gmp_GHCziIntegerziType_ltIntegerzh_info () at
    ↳ libraries/integer-gmp/src/GHC/Integer/Type.hs:343
#3  0x00000000004effcc in base_GHCziShow_zdwintegerToString_info () at
    ↳ libraries/base/GHC/Show.hs:443
#4  0x00000000004f0795 in base_GHCziShow_zdfShowIntegerzuzdcshow_info () at
    ↳ libraries/base/GHC/Show.hs:145
#5  0x000000000048892b in cdGW_info () at libraries/base/GHC/IO/Handle/Text.
    ↳ hs:595
#6  0x0000000000419cb2 in base_GHCziBase_thenIO1_info () at libraries/base/
    ↳ GHC/Base.hs:1072
#7  0x00000000006ebcb0 in ?? () at rts/Exception.cmm:332
#8  0x00000000006e7320 in ?? ()
(gdb)
```

Due to the nature of GHC's heap and the heavy optimization that it performs, it is quite difficult to probe the values of bindings at runtime. In this way, the debugging experience of a Haskell program with DWARF support is still a bit impoverished compared to typical imperative debuggers.

## 9.2 Requesting a stack trace from Haskell code

GHC's runtime system has built-in support for collecting stack trace information from a running Haskell program. This currently requires that the `libdw` library from the `elfutils` package is available. Of course, the backtrace will be of little use unless debug information is available in the executable and its dependent libraries.

Stack trace functionality is exposed for use by Haskell programs in the [GHC.ExecutionStack](#) module. See the Haddock documentation in this module for details regarding usage.

## 9.3 Requesting a stack trace with SIGQUIT

On POSIX-compatible platforms GHC's runtime system (when built with `libdw` support) will produce a stack trace on `stderr` when a `SIGQUIT` signal is received (on many systems this signal can be sent using `Ctrl-\`). For instance (using the same `fib.hs` as above),

```
$ ./fib & killall -SIGQUIT fib

Caught SIGQUIT; Backtrace:
0x7f3176b15dd8 dwfl_thread_getframes (/usr/lib/x86_64-linux-gnu/libdw-0.
↳ 163.so)
0x7f3176b1582f (null) (/usr/lib/x86_64-linux-gnu/libdw-0.163.so)
0x7f3176b15b57 dwfl_getthreads (/usr/lib/x86_64-linux-gnu/libdw-0.163.so)
0x7f3176b16150 dwfl_getthread_frames (/usr/lib/x86_64-linux-gnu/libdw-0.
↳ 163.so)
0x6dc857 libdwGetBacktrace (rts/Libdw.c:248.0)
0x6e6126 backtrace_handler (rts/posix/Signals.c:541.0)
0x7f317677017f (null) (/lib/x86_64-linux-gnu/libc-2.19.so)
0x642e1c integerzmghmp_GHCziIntegerziType_eqIntegerzh_info (libraries/
↳ integer-gmp/src/GHC/Integer/Type.hs:320.1)
0x643023 integerzmghmp_GHCziIntegerziType_eqInteger_info (libraries/
↳ integer-gmp/src/GHC/Integer/Type.hs:312.1)
0x406eca roz_info (/opt/exp/ghc/ghc-dwarf/Fib.hs:2.1)
0x6eafc0 stg_upd_frame_info (rts/Updates.cmm:31.1)
0x64ee06 integerzmghmp_GHCziIntegerziType_plusInteger_info (libraries/
↳ integer-gmp/src/GHC/Integer/Type.hs:393.1)
0x6eafc0 stg_upd_frame_info (rts/Updates.cmm:31.1)
...
0x6439d0 integerzmghmp_GHCziIntegerziType_ltIntegerzh_info (libraries/
↳ integer-gmp/src/GHC/Integer/Type.hs:343.1)
0x4efed4 base_GHCziShow_zdwintegerToString_info (libraries/base/GHC/
↳ Show.hs:442.1)
0x4f069d base_GHCziShow_zdfShowIntegerzuzdcshow_info (libraries/base/
↳ GHC/Show.hs:145.5)
0x488833 base_GHCziIOziHandleziText_zdwa8_info (libraries/base/GHC/
↳ IO/Handle/Text.hs:582.1)
0x6ebbb0 stg_catch_frame_info (rts/Exception.cmm:370.1)
0x6e7220 stg_stop_thread_info (rts/StgStartup.cmm:42.1)
```

## 9.4 Implementor's notes: DWARF annotations

**Note:** Most users don't need to worry about the details described in this section. This discussion is primarily targeted at tooling authors who need to interpret the GHC-specific DWARF annotations contained in compiled binaries.

When invoked with the `-g` flag GHC will produce standard [DWARF v4](#) debugging information. This format is used by nearly all POSIX-compliant targets and can be used by debugging and performance tools (e.g. `gdb`, `lldb`, and `perf`) to understand the structure of GHC-compiled programs.

In particular GHC produces the following DWARF sections,

**.debug\_info**

Debug information entities (DIEs) describing all of the basic blocks in the compiled program.

**.debug\_line**

Line number information necessary to map instruction addresses to line numbers in the source program.

Note that the line information in this section is not nearly as rich as the information provided in `.debug_info`. Whereas `.debug_line` requires that each instruction is assigned exactly one source location, the DIEs in `.debug_info` can be used to identify all relevant sources locations.

**.debug\_frames**

Call frame information (CFI) necessary for stack unwinding to produce a call stack trace.

**.debug\_arange**

Address range information necessary for efficient lookup in debug information.

### 9.4.1 Debugging information entities

GHC may produce the following standard DIEs in the `.debug_info` section,

**DW\_TAG\_compile\_unit**

Represents a compilation unit (e.g. a Haskell module).

**DW\_TAG\_subprogram**

Represents a C-\- top-level basic block.

**DW\_TAG\_lexical\_block**

Represents a C-\- basic block. Note that this is a slight departure from the intended meaning of this DIE type as it does not necessarily reflect lexical scope in the source program.

As GHC's compilation products don't map perfectly onto DWARF constructs, GHC takes advantage of the extensibility of the DWARF standard to provide additional information.

Unfortunately DWARF isn't expressive enough to fully describe the code that GHC produces. This is most apparent in the case of line information, where GHC is forced to choose some between a variety of possible originating source locations. This limits the usefulness of DWARF information with traditional statistical profiling tools. For profiling it is recommended that one use the extended debugging information. See the *Profiling* section below.

In addition to the usual DIEs specified by the DWARF specification, GHC produces a variety of others using the vendor-extensibility regions of the tag and attribute space.

#### 9.4.1.1 DW\_TAG\_ghc\_src\_note

DW\_TAG\_ghc\_src\_note DIEs (tag 0x5b01) are found as children of DW\_TAG\_lexical\_block DIEs. They describe source spans which gave rise to the block; formally these spans are causally responsible for produced code: changes to code in the given span may change the code within the block; conversely changes outside the span are guaranteed not to affect the code in the block.

Spans are described with the following attributes,

**DW\_AT\_ghc\_span\_file (0x2b00, string)**

the name of the source file

**DW\_AT\_ghc\_span\_start\_line (0x2b01, integer)**

the line number of the beginning of the span

**DW\_AT\_ghc\_span\_start\_col (0x2b02, integer)**

the column number of the beginning of the span

**DW\_AT\_ghc\_span\_end\_line (0x2b03, integer)**

the line number of the end of the span

**DW\_AT\_ghc\_span\_end\_col (0x2b04, integer)**

the column number of the end of the span

## 9.5 Further Reading

For more information about the debug information produced by GHC see Peter Wortmann's PhD thesis, [\\*Profiling Optimized Haskell: Causal Analysis and Implementation\\*](#).

## 9.6 Direct Mapping

In addition to the DWARF debug information, which can be used by many standard tools, there is also a GHC specific way to map info table pointers to a source location. This lookup table is generated by using the `-finfo-table-map` flag.

### **-finfo-table-map**

**Since**

9.2

This flag enables the generation of a table which maps the address of an info table to an approximate source position of where that info table statically originated from. If you also want more precise information about constructor info tables then you should also use `-fdistinct-constructor-tables` (page 748).

The `-finfo-table-map` (page 747) flag will increase the binary size by quite a lot, depending on how big your project is. For compiling a project the size of GHC the overhead was about 200 megabytes.

**Since**

9.8

If you wish to reduce the size of `-finfo-table-map` (page 747) enabled binaries, consider building GHC from source and supplying the `--enable-ipe-data-compression` flag to the configure script. This will cause GHC to compress the `-finfo-table-map`

(page 747) related debugging information included in binaries using the `libzstd` compression library. **Note:** This feature requires that the machine building GHC has `libzstd` installed. The compression library `libzstd` may optionally be statically linked in the resulting compiler (on non-darwin machines) using the `--enable-static-libzstd` configure flag.

In a test compiling GHC itself, the size of the `-finfo-table-map` (page 747) enabled build results was reduced by over 20% when compression was enabled.

**Since**

9.10

**Implies**`-finfo-table-map-with-stack` (page ??)**Implies**`-finfo-table-map-with-fallback` (page ??)**`-finfo-table-map-with-stack`****Since**

9.10

Include info tables for STACK closures in the info table map. Note that this flag is implied by `-finfo-table-map` (page 747).

**`-fno-info-table-map-with-stack`****Since**

9.10

STACK info tables are often the majority of entries in the info table map. However, despite their contribution to the executable size, they are rarely useful unless debugging with a tool such as `ghc-debug`. Use this flag to omit STACK info tables from the info table map and decrease the size of executables with info table profiling information.

**`-finfo-table-map-with-fallback`****Since**

9.10

Include info tables with no source location information in the info table map. Note that this flag is implied by `-finfo-table-map` (page 747).

**`-fno-info-table-map-with-fallback`****Since**

9.10

Some info tables, such as those for primitive closure types, will have no provenance location in the program source. With `-finfo-table-map` (page 747), those info tables are given default source locations and included in the info table map. Use this flag to omit them from the info table map and decrease the size of executables with info table profiling information.

**`-fdistinct-constructor-tables`****Since**

9.2

For every usage of a data constructor in the source program a new info table will be created. This is useful with `-finfo-table-map` (page 747) and the `-hi` (page 725) profiling

mode as each info table will correspond to the usage of a data constructor rather than the data constructor itself.

## 9.7 Querying the Info Table Map

If it is generated then the info table map can be used in two ways.

1. The `whereFrom Haskell` function can be used to determine the source position which we think a specific closure was created.
2. The complete mapping is also dumped into the eventlog.

If you are using `gdb` then you can use the `lookupIPE` function (provided by `IPE.h` and exported in the public API) directly in order to find any information which is known about the info table for a specific closure.





## WHAT TO DO WHEN SOMETHING GOES WRONG

If you still have a problem after consulting this section, then you may have found a *bug*—please report it! See [Reporting bugs in GHC](#) (page 4) for details on how to report a bug and a list of things we’d like to know about your bug. If in doubt, send a report — we love mail from irate users :-!

([Haskell standards vs. Glasgow Haskell: language non-compliance](#) (page 795), which describes Glasgow Haskell’s shortcomings vs. the Haskell language definition, may also be of interest.)

### 10.1 When the compiler “does the wrong thing”

#### “Help! The compiler crashed (or panic’d)!”

These events are *always* bugs in the GHC system—please report them.

#### “This is a terrible error message.”

If you think that GHC could have produced a better error message, please report it as a bug.

#### “What about this warning from the C compiler?”

For example: `...warning: '\`Foo' declared '\`static' but never defined. Unsightly, but shouldn't be a problem.`

#### Sensitivity to .hi interface files

GHC is very sensitive about interface files. For example, if it picks up a non-standard `Prelude.hi` file, pretty terrible things will happen.

Furthermore, as sketched below, you may have big problems running programs compiled using unstable interfaces.

#### “I think GHC is producing incorrect code”

Unlikely :-) A useful be-more-paranoid option to give to GHC is `-dcore-lint-dcore-lint` option; this causes a “lint” pass to check for errors (notably type errors) after each Core-to-Core transformation pass. We run with `-dcore-lint` on all the time; it costs about 5% in compile time.

#### Why did I get a link error?

If the linker complains about not finding `_<something>_fast`, then something is inconsistent: you probably didn’t compile modules in the proper dependency order.

#### “Is this line number right?”

On this score, GHC usually does pretty well, especially if you “allow” it to be off by one or two. In the case of an instance or class declaration, the line number may only point you to the declaration, not to a specific method.

Please report line-number errors that you find particularly unhelpful.

## 10.2 When your program “does the wrong thing”

(For advice about overly slow or memory-hungry Haskell programs, please see [Hints](#) (page 753)).

### “Help! My program crashed!”

(e.g., a “segmentation fault” or “core dumped”) segmentation fault

If your program has no foreign calls in it, and no calls to known-unsafe functions (such as `unsafePerformIO`) then a crash is always a BUG in the GHC system, except in one case: If your program is made of several modules, each module must have been compiled after any modules on which it depends (unless you use `.hi-boot` files, in which case these *must* be correct with respect to the module source).

For example, if an interface is lying about the type of an imported value then GHC may well generate duff code for the importing module. *This applies to pragmas inside interfaces too!* If the pragma is lying (e.g., about the “arity” of a value), then duff code may result. Furthermore, arities may change even if types do not.

In short, if you compile a module and its interface changes, then all the modules that import that interface *must* be re-compiled.

A useful option to alert you when interfaces change is `-ddump-hi-diffs` option. It will run `diff` on the changed interface file, before and after, when applicable.

If you are using `make`, GHC can automatically generate the dependencies required in order to make sure that every module is up-to-date with respect to its imported interfaces. Please see [Dependency generation](#) (page 256).

If you are down to your last-compile-before-a-bug-report, we would recommend that you add a `-dcore-lint` option (for extra checking) to your compilation options.

So, before you report a bug because of a core dump, you should probably:

```
% rm *.o          # scrub your object files
% make my_prog    # re-make your program; use -ddump-hi-diffs to highlight
→ changes;
                  # as mentioned above, use -dcore-lint to be more paranoid
% ./my_prog ...   # retry...
```

Of course, if you have foreign calls in your program then all bets are off, because you can trash the heap, the stack, or whatever.

### “My program entered an ‘absent’ argument.”

This is definitely caused by a bug in GHC. Please report it (see [Reporting bugs in GHC](#) (page 4)).

### “What’s with this arithmetic (or floating-point) exception?”

Int, Float, and Double arithmetic is *unchecked*. Overflows, underflows and loss of precision are either silent or reported as an exception by the operating system (depending on the platform). Divide-by-zero *may* cause an untrapped exception (please report it if it does).

## HINTS

Please advise us of other “helpful hints” that should go here!

### 11.1 Sooner: producing a program more quickly

**Don’t use `-O` (page 127) or (especially) `-O2` (page 127):**

By using them, you are telling GHC that you are willing to suffer longer compilation times for better-quality code.

GHC is surprisingly zippy for normal compilations without `-O` (page 127)!

**Use more memory:**

Within reason, more memory for heap space means less garbage collection for GHC, which means less compilation time. If you use the `-Rghc-timing` option, you’ll get a garbage-collector report. (Again, you can use the cheap-and-nasty `+RTS -S -RTS` option to send the GC stats straight to standard error.)

If it says you’re using more than 20% of total time in garbage collecting, then more memory might help: use the `-H(size)` (see `-H [{size}]` (page 227)) option. Increasing the default allocation area size used by the compiler’s RTS might also help: use the `+RTS -A(size) -RTS` option (see `-A {size}` (page 223)).

If GHC persists in being a bad memory citizen, please report it as a bug.

**Don’t use too much memory!**

As soon as GHC plus its “fellow citizens” (other processes on your machine) start using more than the *real memory* on your machine, and the machine starts “thrashing,” *the party is over*. Compile times will be worse than terrible! Use something like the `cs` builtin `time` command to get a report on how many page faults you’re getting.

If you don’t know what virtual memory, thrashing, and page faults are, or you don’t know the memory configuration of your machine, *don’t* try to be clever about memory use: you’ll just make your life a misery (and for other people, too, probably).

**Try to use local disks when linking:**

Because Haskell objects and libraries tend to be large, it can take many real seconds to slurp the bits to/from a remote filesystem.

It would be quite sensible to *compile* on a fast machine using remotely-mounted disks; then *link* on a slow machine that had your disks directly mounted.

**Don’t derive/use Read unnecessarily:**

It’s ugly and slow.

**GHC compiles some program constructs slowly:**

We'd rather you reported such behaviour as a bug, so that we can try to correct it.

To figure out which part of the compiler is badly behaved, the `-v2` option is your friend.

## 11.2 Faster: producing a program that runs quicker

The key tool to use in making your Haskell program run faster are GHC's profiling facilities, described separately in [Profiling](#) (page 709). There is *no substitute* for finding where your program's time/space is *really* going, as opposed to where you imagine it is going.

Another point to bear in mind: By far the best way to improve a program's performance *dramatically* is to use better algorithms. Once profiling has thrown the spotlight on the guilty time-consumer(s), it may be better to re-think your program than to try all the tweaks listed below.

Another extremely efficient way to make your program snappy is to use library code that has been Seriously Tuned By Someone Else. You *might* be able to write a better quicksort than the one in `Data.List`, but it will take you much longer than typing `import Data.List`.

Please report any overly-slow GHC-compiled programs. Since GHC doesn't have any credible competition in the performance department these days it's hard to say what overly-slow means, so just use your judgement! Of course, if a GHC compiled program runs slower than the same program compiled with NHC or Hugs, then it's definitely a bug.

**Optimise, using `-O` or `-O2`:**

This is the most basic way to make your program go faster. Compilation time will be slower, especially with `-O2`.

At present, `-O2` is nearly indistinguishable from `-O`.

**Compile via LLVM:**

The [LLVM code generator](#) (page 278) can sometimes do a far better job at producing fast code than the [native code generator](#) (page 278). This is not universal and depends on the code. Numeric heavy code seems to show the best improvement when compiled via LLVM. You can also experiment with passing specific flags to LLVM with the `-optlo <option>` (page 281) and `-optlc <option>` (page 281) flags. Be careful though as setting these flags stops GHC from setting its usual flags for the LLVM optimiser and compiler.

**Overloaded functions are not your friend:**

Haskell's overloading (using type classes) is elegant, neat, etc., etc., but it is death to performance if left to linger in an inner loop. How can you squash it?

**Give explicit type signatures:**

Signatures are the basic trick; putting them on exported, top-level functions is good software-engineering practice, anyway. (Tip: using the `-Wmissing-signatures` (page 110) option can help enforce good signature-practice).

The automatic specialisation of overloaded functions (with `-O`) should take care of overloaded local and/or unexported functions.

**Use `SPECIALIZE` pragmas:**

Specialize the overloading on key functions in your program. See [SPECIALIZE pragma](#) (page 672) and [SPECIALIZE instance pragma](#) (page 675).

**"But how do I know where overloading is creeping in?"**

A low-tech way: `grep` (search) your interface files for overloaded type signatures. You

can view interface files using the `--show-iface {file}` (page 79) option (see *Other options related to interface files* (page 245)).

```
$ ghc --show-iface Foo.hi | grep -E '^[a-z].*::.*=>'
```

### Strict functions are your dear friends:

And, among other things, lazy pattern-matching is your enemy.

(If you don't know what a "strict function" is, please consult a functional-programming textbook. A sentence or two of explanation here probably would not do much good.)

Consider these two code fragments:

```
f (Wibble x y) = ... # strict

f arg = let { (Wibble x y) = arg } in ... # lazy
```

The former will result in far better code.

A less contrived example shows the use of BangPatterns on lets to get stricter code (a good thing):

```
f (Wibble x y)
  = let
      !(a1, b1, c1) = unpackFoo x
      !(a2, b2, c2) = unpackFoo y
  in ...
```

### GHC loves single-constructor data-types:

It's all the better if a function is strict in a single-constructor type (a type with only one data-constructor; for example, tuples are single-constructor types).

### Newtypes are better than datatypes:

If your datatype has a single constructor with a single field, use a newtype declaration instead of a data declaration. The newtype will be optimised away in most cases.

### "How do I find out a function's strictness?"

Don't guess—look it up.

Look for your function in the interface file, then for the third field in the pragma; it should say `Strictness: {string}`. The `{string}` gives the strictness of the function's arguments: see [the GHC Commentary](#) for a description of the strictness notation.

For an "unpackable" `U(...)` argument, the info inside tells the strictness of its components. So, if the argument is a pair, and it says `U(AU(LSS))`, that means "the first component of the pair isn't used; the second component is itself unpackable, with three components (lazy in the first, strict in the second & third)."

If the function isn't exported, just compile with the extra flag `-ddump-simpl` (page 302); next to the signature for any binder, it will print the self-same pragmatic information as would be put in an interface file. (Besides, Core syntax is fun to look at!)

### Force key functions to be **INLINEd** (esp. monads):

Placing `INLINE` pragmas on certain functions that are used a lot can have a dramatic effect. See *INLINE pragma* (page 666).

### Explicit export list:

If you do not have an explicit export list in a module, GHC must assume that everything in that module will be exported. This has various pessimising effects. For example, if a bit of code is actually *unused* (perhaps because of unfolding effects), GHC will not be

able to throw it away, because it is exported and some other module may be relying on its existence.

GHC can be quite a bit more aggressive with pieces of code if it knows they are not exported.

### Look at the Core syntax!

(The form in which GHC manipulates your code.) Just run your compilation with `-ddump-simpl` (page 302) (don't forget the `-O` (page 127)).

If profiling has pointed the finger at particular functions, look at their Core code. `lets` are bad, `cases` are good, dictionaries (`d.(Class).(Unique)`) [or anything overloading-ish] are bad, nested lambdas are bad, explicit data constructors are good, primitive operations (e.g., `==#`) are good, ...

### Use strictness annotations:

Putting a strictness annotation (!) on a constructor field helps in two ways: it adds strictness to the program, which gives the strictness analyser more to work with, and it might help to reduce space leaks.

It can also help in a third way: when used with `-funbox-strict-fields` (page 147) (see `-f*`: [platform-independent flags](#) (page 128)), a strict field can be unpacked or unboxed in the constructor, and one or more levels of indirection may be removed. Unpacking only happens for single-constructor datatypes (`Int` is a good candidate, for example).

Using `-funbox-strict-fields` (page 147) is only really a good idea in conjunction with `-O` (page 127), because otherwise the extra packing and unpacking won't be optimised away. In fact, it is possible that `-funbox-strict-fields` (page 147) may worsen performance even with `-O` (page 127), but this is unlikely (let us know if it happens to you).

### Use unboxed types (a GHC extension):

When you are *really* desperate for speed, and you want to get right down to the “raw bits.” Please see [Unboxed types](#) (page 609) for some information about using unboxed types.

Before resorting to explicit unboxed types, try using strict constructor fields and `-funbox-strict-fields` (page 147) first (see above). That way, your code stays portable.

### Use foreign import (a GHC extension) to plug into fast libraries:

This may take real work, but... There exist piles of massively-tuned library code, and the best thing is not to compete with it, but link with it.

[Foreign function interface \(FFI\)](#) (page 616) describes the foreign function interface.

### Don't use Floats:

If you're using `Complex`, definitely use `Complex Double` rather than `Complex Float` (the former is specialised heavily, but the latter isn't).

Floats (probably 32-bits) are almost always a bad idea, anyway, unless you Really Know What You Are Doing. Use Doubles. There's rarely a speed disadvantage—modern machines will use the same floating-point unit for both. With Doubles, you are much less likely to hang yourself with numerical errors.

One time when `Float` might be a good idea is if you have a *lot* of them, say a giant array of Floats. They take up half the space in the heap compared to Doubles. However, this isn't true on a 64-bit machine.

### Use unboxed arrays (UArray)

GHC supports arrays of unboxed elements, for several basic arithmetic element types including `Int` and `Char`: see the [Data.Array.Unboxed](#) library for details. These arrays

are likely to be much faster than using standard Haskell 98 arrays from the `Data.Array` library.

### Use a bigger heap!

If your program's GC stats (`-S [file]` (page 231) RTS option) indicate that it's doing lots of garbage-collection (say, more than 20% of execution time), more memory might help — with the `-H [size]` (page 227) or `-A [size]` (page 223) RTS options (see *RTS options to control the garbage collector* (page 222)). As a rule of thumb, try setting `-H [size]` (page 227) to the amount of memory you're willing to let your process consume, or perhaps try passing `-H [size]` (page 227) without any argument to let GHC calculate a value based on the amount of live data.

### Compact your data:

The `GHC.Compact` module provides a way to make garbage collection more efficient for long-lived data structures. Compacting a data structure collects the objects together in memory, where they are treated as a single object by the garbage collector and not traversed individually.

## 11.3 Smaller: producing a program that is smaller

Decrease the “go-for-it” threshold for unfolding smallish expressions. Give a `-funfolding-use-threshold=0` (page 147) option for the extreme case. (“Only unfoldings with zero cost should proceed.”) Warning: except in certain specialised cases (like Happy parsers) this is likely to actually *increase* the size of your program, because unfolding generally enables extra simplifying optimisations to be performed.

Avoid `Prelude.Read`.

Use `strip` on your executables.

## 11.4 Thriftier: producing a program that gobbles less heap space

“I think I have a space leak...”

Re-run your program with `+RTS -S` (page 231), and remove all doubt! (You'll see the heap usage get bigger and bigger...) (Hmmm... this might be even easier with the `-G1` (page 225) RTS option; so... `./a.out +RTS -S -G1`)

Once again, the profiling facilities (*Profiling* (page 709)) are the basic tool for demystifying the space behaviour of your program.

Strict functions are good for space usage, as they are for time, as discussed in the previous section. Strict functions get right down to business, rather than filling up the heap with closures (the system's notes to itself about how to evaluate something, should it eventually be required).



## 11.5 Controlling inlining via optimisation flags.

Inlining is one of the major optimizations GHC performs. Partially because inlining often allows other optimizations to be triggered. Sadly this is also a double edged sword. While inlining can often cut through runtime overheads this usually comes at the cost of not just program size, but also compiler performance. In extreme cases making it impossible to compile certain code.

For this reason GHC offers various ways to tune inlining behaviour.

### 11.5.1 Unfolding creation

In order for a function from a different module to be inlined GHC requires the functions unfolding. The following flags can be used to control unfolding creation. Making their creation more or less likely:

- `-fexpose-all-unfoldings` (page 134)
- `-funfolding-creation-threshold=<n>` (page 147)

### 11.5.2 Inlining decisions

If a unfolding is available the following flags can impact GHC's decision about inlining a specific binding.

- `-funfolding-use-threshold=<n>` (page 147)
- `-funfolding-case-threshold=<n>` (page 148)
- `-funfolding-case-scaling=<n>` (page 148)
- `-funfolding-dict-discount=<n>` (page 147)
- `-funfolding-fun-discount=<n>` (page 147)

Should the simplifier run out of ticks because of a inlining loop users are encouraged to try decreasing `-funfolding-case-threshold=<n>` (page 148) or `-funfolding-case-scaling=<n>` (page 148) to limit inlining into deeply nested expressions while allowing a higher tick factor.

The defaults of these are tuned such that we don't expect regressions for most user programs. Using a `-funfolding-case-threshold=<n>` (page 148) of 1-2 with a `-funfolding-case-scaling=<n>` (page 148) of 15-25 can cause usually small runtime regressions but will prevent most inlining loops from getting out of control.

In extreme cases lowering scaling and threshold further can be useful, but at that point it's very likely that beneficial inlining is prevented as well resulting in significant runtime regressions.

In such cases it's recommended to move the problematic piece of code into it's own module and changing inline parameters for the offending module only.



### 11.5.3 Inlining generics

There are also flags specific to the inlining of generics:

- `-finline-generics` (page 142)
- `-finline-generics-aggressively` (page 142)

## 11.6 Understanding how OS memory usage corresponds to live data

A confusing aspect about the RTS is the sometimes big difference between OS reported memory usage and the amount of live data reported by heap profiling or `GHC.Stats`.

There are two main factors which determine OS memory usage.

Firstly the collection strategy used by the oldest generation. By default a copying strategy is used which requires at least 2 times the amount of currently live data in order to perform a major collection. For example, if your program's live data is 1G then you would expect the OS to report at minimum 2G.

If instead you are using the compacting (`-c` (page 224)) or nonmoving (`-xn` (page 222)) strategies for the oldest generation then less overhead is required as the strategy immediately reuses already allocated memory by overwriting. For a program with heap size 1G then you might expect the OS to report at minimum a small percentage above 1G.

Secondly, after doing some allocation GHC is quite reluctant to return the memory to the OS. This is because after performing a major collection the program might still be allocating a lot and it costs to have to request more memory. Therefore the RTS keeps an extra amount to reuse which depends on the `-F {factor}` (page 225) option. By default the RTS will keep up to  $(2 + F) * \text{live\_bytes}$  after performing a major collection due to exhausting the available heap. The default value is  $F = 2$  so you can see OS memory usage reported to be as high as 4 times the amount used by your program.

Without further intervention, once your program has topped out at this high threshold, no more memory would be returned to the OS so memory usage would always remain at 4 times the live data. If you had a server with 1.5G live data, then if there was a memory spike up to 6G for a short period, then OS reported memory would never dip below 6G. This is what happened before GHC 9.2. In GHC 9.2 memory is gradually returned to the OS so OS memory usage returns closer to the theoretical minimums.

The `-Fd {factor}` (page 225) option controls the rate at which memory is returned to the OS. On consecutive major collections which are not triggered by heap overflows, a counter ( $t$ ) is increased and the  $F$  factor is inversely scaled according to the value of  $t$  and  $F_d$ . The factor is scaled by the equation:

$$F' = F \times 2^{\frac{-t}{F_d}}$$

By default  $F_d = 4$ , increasing  $F_d$  decreases the rate memory is returned.

Major collections which are not triggered by heap overflows arise mainly in two ways.

1. Idle collections (controlled by `-I {seconds}` (page 227))
2. Explicit trigger using `performMajorGC`.

For example, idle collections happen by default after 0.3 seconds of inactivity. If you are running your application and have also set `-Iw30`, so that the minimum period between idle

GCs is 30 seconds, then say you do a small amount of work every 5 seconds, there will be about 10 idle collections about 5 minutes. This number of consecutive idle collections will scale the F factor as follows:

$$F' = 2 \times 2^{\frac{-10}{4}} \approx 0.35$$

and hence we will only retain  $(0.35 + 2) * \text{live\_bytes}$  rather than the original 4 times. If you want less frequent idle collections then you should also decrease Fd so that more memory is returned each time a collection takes place.

If you set `-Fd0` then GHC will not attempt to return memory, which corresponds with the behaviour from releases prior to 9.2. You probably don't want to do this as unless you have idle periods in your program the behaviour will be similar anyway. If you want to retain a specific amount of memory then it's better to set `-H1G` in order to communicate that you are happy with a heap size of 1G. If you do this then OS reported memory will never decrease below this amount if it ever reaches this threshold.

The collecting strategy also affects the fragmentation of the heap and hence how easy it is to return memory to a theoretical baseline. Memory is allocated firstly in the unit of megablocks which is then further divided into blocks. Block-level fragmentation is how much unused space within the allocated megablocks there is. In a fragmented heap there will be many megablocks which are only partially full.

In theory the compacting strategy has a lower memory baseline but practically it can be hard to reach the baseline due to how compacting never defragments. On the other hand, the copying collecting has a higher theoretical baseline but we can often get very close to it because the act of copying leads to lower fragmentation.

There are some other flags which affect the amount of retained memory as well. Setting the maximum heap size using `-M {size}` (page 229) will make sure we don't try and retain more memory than the maximum size and explicitly setting `-H [{size}]` (page 227) will mean that we will always try and retain at least H bytes irrespective of the amount of live data.

## OTHER HASKELL UTILITY PROGRAMS

This section describes other program(s) which we distribute, that help with the Great Haskell Programming Task.

### 12.1 “Yacc for Haskell”: happy

Andy Gill and Simon Marlow have written a parser-generator for Haskell, called happy. Happy is to Haskell what Yacc is to C.

You can get happy from [the Happy Homepage](#).

Happy is at its shining best when compiled by GHC.

### 12.2 Writing Haskell interfaces to C code: hsc2hs

The hsc2hs command can be used to automate some parts of the process of writing Haskell bindings to C code. It reads an almost-Haskell source with embedded special constructs, and outputs a real Haskell file with these constructs processed, based on information taken from some C headers. The extra constructs deal with accessing C data from Haskell.

It may also output a C file which contains additional C functions to be linked into the program, together with a C header that gets included into the C code to which the Haskell module will be compiled (when compiled via C) and into the C file. These two files are created when the `#def` construct is used (see below).

Actually hsc2hs does not output the Haskell file directly. It creates a C program that includes the headers, gets automatically compiled and run. That program outputs the Haskell code.

In the following, “Haskell file” is the main output (usually a `.hs` file), “compiled Haskell file” is the Haskell file after ghc has compiled it to C (i.e. a `.hc` file), “C program” is the program that outputs the Haskell file, “C file” is the optionally generated C file, and “C header” is its header file.

### 12.2.1 command line syntax

hsc2hs takes input files as arguments, and flags that modify its behavior:

- o FILE, --output=FILE**  
Name of the Haskell file.
- t FILE, --template=FILE**  
The template file (see below).
- c PROG, --cc=PROG**  
The C compiler to use (default: gcc)
- l PROG, --ld=PROG**  
The linker to use (default: gcc).
- C FLAG, --cflag=FLAG**  
An extra flag to pass to the C compiler.
- I DIR**  
Passed to the C compiler.
- L FLAG, --lflag=FLAG**  
An extra flag to pass to the linker.
- i FILE, --include=FILE**  
As if the appropriate `#include` directive was placed in the source.
- D NAME[=VALUE], --define=NAME[=VALUE]**  
As if the appropriate `#define` directive was placed in the source.
- no-compile**  
Stop after writing out the intermediate C program to disk. The file name for the intermediate C program is the input file name with `.hsc` replaced with `_hsc_make.c`.
- k, --keep-files**  
Proceed as normal, but do not delete any intermediate files.
- x, --cross-compile**  
Activate cross-compilation mode (see [Cross-compilation](#) (page 764)).
- cross-safe**  
Restrict the `.hsc` directives to those supported by the `--cross-compile` mode (see [Cross-compilation](#) (page 764)). This should be useful if your `.hsc` files must be safely cross-compiled and you wish to keep non-cross-compilable constructs from creeping into them.
- , --help**  
Display a summary of the available flags and exit successfully.
- V, --version**  
Output version information and exit successfully.

The input file should end with `.hsc` (it should be plain Haskell source only; literate Haskell is not supported at the moment). Output files by default get names with the `.hsc` suffix replaced:

<code>.hs</code>	Haskell file
<code>_hsc.h</code>	C header
<code>_hsc.c</code>	C file

The C program is compiled using the Haskell compiler. This provides the include path to `HsFFI.h` which is automatically included into the C program.

## 12.2.2 Input syntax

All special processing is triggered by the `#` operator. To output a literal `#`, write it twice: `##`. Inside string literals and comments `#` characters are not processed.

A `#` is followed by optional spaces and tabs, an alphanumeric keyword that describes the kind of processing, and its arguments. Arguments look like C expressions separated by commas (they are not written inside parens). They extend up to the nearest unmatched `)`, `]` or `}`, or to the end of line if it occurs outside any `() [] {} ' ' " " /* */` and is not preceded by a backslash. Backslash-newline pairs are stripped.

In addition `#{stuff}` is equivalent to `#stuff` except that it's self-delimited and thus needs not to be placed at the end of line or in some brackets.

Meanings of specific keywords:

**`#include <file.h>, #include "file.h"`**

The specified file gets included into the C program, the compiled Haskell file, and the C header. `<HsFFI.h>` is included automatically.

**`#define (name), #define (name (value), #undef (name)`**

Similar to `#include`. Note that `#includes` and `#defines` may be put in the same file twice so they should not assume otherwise.

**`#let (name) (parameters) = "(definition)"`**

Defines a macro to be applied to the Haskell source. Parameter names are comma-separated, not inside parens. Such macro is invoked as other `#`-constructs, starting with `#name`. The definition will be put in the C program inside parens as arguments of `printf`. To refer to a parameter, close the quote, put a parameter name and open the quote again, to let C string literals concatenate. Or use `printf`'s format directives. Values of arguments must be given as strings, unless the macro stringifies them itself using the C preprocessor's `#parameter` syntax.

**`#def (C_definition)`**

The definition (of a function, variable, struct or typedef) is written to the C file, and its prototype or extern declaration to the C header. Inline functions are handled correctly. struct definitions and typedefs are written to the C program too. The `inline`, `struct` or `typedef` keyword must come just after `def`.

**`#if (condition), #ifdef (name), #ifndef (name), #elif (condition), #else, #endif, #error (message), #warning (message)`**

Conditional compilation directives are passed unmodified to the C program, C file, and C header. Putting them in the C program means that appropriate parts of the Haskell file will be skipped.

**`#const (C_expression)`**

The expression must be convertible to long or unsigned long. Its value (literal or negated literal) will be output.

**`#const_str (C_expression)`**

The expression must be convertible to `const char pointer`. Its value (string literal) will be output.

**`#type (C_type)`**

A Haskell equivalent of the C numeric type will be output. It will be one of `{Int, Word}{8, 16, 32, 64}`, `Float`, `Double`, `LDouble`.

**`#peek (struct_type), (field)`**

A function that peeks a field of a C struct will be output. It will have the type `Storable b => Ptr a -> IO b`. The intention is that `#peek` and `#poke` can be used for implementing

the operations of class `Storable` for a given C struct (see the `Foreign.Storable` module in the library documentation).

**#poke (struct\_type), (field)**

Similarly for `poke`. It will have the type `Storable b => Ptr a -> b -> IO ()`.

**#ptr (struct\_type), (field)**

Makes a pointer to a field struct. It will have the type `Ptr a -> Ptr b`.

**#offset (struct\_type), (field)**

Computes the offset, in bytes, of `field` in `struct_type`. It will have type `Int`.

**#size (struct\_type)**

Computes the size, in bytes, of `struct_type`. It will have type `Int`.

**#alignment (struct\_type)**

Computes the alignment, in bytes, of `struct_type`. It will have type `Int`.

**#enum (type), (constructor), (value), (value), ...**

A shortcut for multiple definitions which use `#const`. Each value is a name of a C integer constant, e.g. enumeration value. The name will be translated to Haskell by making each letter following an underscore uppercase, making all the rest lowercase, and removing underscores. You can supply a different translation by writing `hs_name = c_value` instead of a value, in which case `c_value` may be an arbitrary expression. The `hs_name` will be defined as having the specified type. Its definition is the specified constructor (which in fact may be an expression or be empty) applied to the appropriate integer value. You can have multiple `#enum` definitions with the same type; this construct does not emit the type definition itself.

### 12.2.3 Custom constructs

`#const`, `#type`, `#peek`, `#poke` and `#ptr` are not hardwired into the `hsc2hs`, but are defined in a C template that is included in the C program: `template-hsc.h`. Custom constructs and templates can be used too. Any `#`-construct with unknown key is expected to be handled by a C template.

A C template should define a macro or function with name prefixed by `hsc_` that handles the construct by emitting the expansion to `stdout`. See `template-hsc.h` for examples.

Such macros can also be defined directly in the source. They are useful for making a `#let`-like macro whose expansion uses other `#let` macros. Plain `#let` prepends `hsc_` to the macro name and wraps the definition in a `printf` call.

### 12.2.4 Cross-compilation

`hsc2hs` normally operates by creating, compiling, and running a C program. That approach doesn't work when cross-compiling — in this case, the C compiler's generates code for the target machine, not the host machine. For this situation, there's a special mode `hsc2hs --cross-compile` which can generate the `.hs` by extracting information from compilations only — specifically, whether or not compilation fails.

Only a subset of `.hsc` syntax is supported by `--cross-compile`. The following are unsupported:

- `#{const_str}`
- `#{let}`

- `{def}`
- Custom constructs





## RUNNING GHC ON WIN32 SYSTEMS

### 13.1 Starting GHC on Windows platforms

The installer that installs GHC on Win32 also sets up the file-suffix associations for “.hs” and “.lhs” files so that double-clicking them starts ghci.

Be aware of that ghc and ghci do require filenames containing spaces to be escaped using quotes:

```
c:\ghc\bin\ghci "c:\\Program Files\\Haskell\\Project.hs"
```

If the quotes are left off in the above command, ghci will interpret the filename as two, c:\\\\Program and Files\\\\\\Haskell\\\\\\Project.hs.

### 13.2 Running GHCi on Windows

We recommend running GHCi in a standard Windows console: select the GHCi option from the start menu item added by the GHC installer, or use Start->Run->cmd to get a Windows console and invoke ghci from there (as long as it's in your PATH).

If you run GHCi in a Cygwin or MSYS shell, then the Control-C behaviour is adversely affected. In one of these environments you should use the ghcii.sh script to start GHCi, otherwise when you hit Control-C you'll be returned to the shell prompt but the GHCi process will still be running. However, even using the ghcii.sh script, if you hit Control-C then the GHCi process will be killed immediately, rather than letting you interrupt a running program inside GHCi as it should. This problem is caused by the fact that the Cygwin and MSYS shell environments don't pass Control-C events to non-Cygwin child processes, because in order to do that there needs to be a Windows console.

There's an exception: you can use a Cygwin shell if the CYGWIN environment variable does *not* contain tty. In this mode, the Cygwin shell behaves like a Windows console shell and console events are propagated to child processes. Note that the CYGWIN environment variable must be set *before* starting the Cygwin shell; changing it afterwards has no effect on the shell.

This problem doesn't just affect GHCi, it affects any GHC-compiled program that wants to catch console events. See the [GHC.ConsoleHandler](#) module.

## 13.3 Interacting with the terminal

By default GHC builds applications that open a console window when they start. If you want to build a GUI-only application, with no console window, use the flag `-optl-mwindows` in the link step.

**Warning:** Windows GUI-only programs have no `stdin`, `stdout` or `stderr` so using the ordinary Haskell input/output functions will cause your program to fail with an IO exception, such as:

```
Fail: <stdout>: hPutChar: failed (Bad file descriptor)
```

However using `Debug.Trace.trace` is alright because it uses Windows debugging output support rather than `stderr`.

For some reason, Mingw ships with the `readline` library, but not with the `readline` headers. As a result, GHC (like Hugs) does not use `readline` for interactive input on Windows. You can get a close simulation by using an emacs shell buffer!

## 13.4 Differences in library behaviour

Some of the standard Haskell libraries behave slightly differently on Windows.

- On Windows, the `^Z` character is interpreted as an end-of-file character, so if you read a file containing this character the file will appear to end just before it. To avoid this, use `IOExts.openFileEx` to open a file in binary (untranslated) mode or change an already opened file handle into binary mode using `IOExts.hSetBinaryMode`. The `IOExts` module is part of the `lang` package.

## 13.5 File paths under Windows

Windows paths are not all the same. The different kinds of paths each have different meanings. The `MAX_PATH` limitation is not a limitation of the operating system nor the file system. It is a limitation of the default namespace enforced by the Win32 API for backwards compatibility.

The NT kernel however allows you ways to opt out of this path preprocessing by the Win32 APIs. This is done by explicitly using the desired namespace in the path.

The namespaces are:

- file namespace: `\\?\`
- device namespace: `\\.\`
- NT namespace: `\`

Each of these turn off path processing completely by the Win32 API and the paths are passed untouched to the filesystem.

Paths with a drive letter are *legacy* paths. The drive letters are actually meaningless to the kernel. Just like Unix operating systems, drive letters are just a mount point. You can view your mount points by using the `mountvol` command.

Since GHC 8.6.1, the Haskell I/O manager automatically promotes paths in the legacy format to Win32 file namespace. By default the I/O manager will do two things to your paths:

- replace \ with \\
- expand relative paths to absolute paths

If you want to opt out of all preprocessing just explicitly use namespaces in your paths. Due to this change, if you need to open raw devices (e.g. COM ports) you need to use the device namespace explicitly. (e.g. \\.\COM1). GHC and Haskell programs in general no longer support opening devices in the legacy format.

See the [Windows documentation](#) for more details.

## 13.6 Using GHC (and other GHC-compiled executables) with Cygwin

### 13.6.1 Background

The Cygwin tools aim to provide a Unix-style API on top of the windows libraries, to facilitate ports of Unix software to windows. To this end, they introduce a Unix-style directory hierarchy under some root directory (typically / is C:\cygwin\). Moreover, everything built against the Cygwin API (including the Cygwin tools and programs compiled with Cygwin's GHC) will see / as the root of their file system, happily pretending to work in a typical unix environment, and finding things like /bin and /usr/include without ever explicitly bothering with their actual location on the windows system (probably C:\cygwin\bin and C:\cygwin\usr\include).

### 13.6.2 The problem

GHC, by default, no longer depends on cygwin, but is a native Windows program. It is built using mingw, and it uses mingw's GHC while compiling your Haskell sources (even if you call it from cygwin's bash), but what matters here is that - just like any other normal windows program - neither GHC nor the executables it produces are aware of Cygwin's pretended unix hierarchy. GHC will happily accept either / or \\ as path separators, but it won't know where to find /home/joe/Main.hs or /bin/bash or the like. This causes all kinds of fun when GHC is used from within Cygwin's bash, or in make-sessions running under Cygwin.

### 13.6.3 Things to do

- Don't use absolute paths in make, configure & co if there is any chance that those might be passed to GHC (or to GHC-compiled programs). Relative paths are fine because cygwin tools are happy with them and GHC accepts / as path-separator. And relative paths don't depend on where Cygwin's root directory is located, or on which partition or network drive your source tree happens to reside, as long as you cd there first.
- If you have to use absolute paths (beware of the innocent-looking ROOT=\$(pwd) in make-file hierarchies or configure scripts), Cygwin provides a tool called `cygpath` that can convert Cygwin's Unix-style paths to their actual Windows-style counterparts. Many Cygwin tools actually accept absolute Windows-style paths (remember, though, that you either need to escape \\ or convert \\ to /), so you should be fine just using those everywhere. If you need to use tools that do some kind of path-mangling that depends on unix-style paths (one fun example is trying to interpret : as a separator in path lists),

you can still try to convert paths using `cygpath` just before they are passed to GHC and friends.

- If you don't have `cygpath`, you probably don't have `cygwin` and hence no problems with it... unless you want to write one build process for several platforms. Again, relative paths are your friend, but if you have to use absolute paths, and don't want to use different tools on different platforms, you can simply write a short Haskell program to print the current directory (thanks to George Russell for this idea): compiled with GHC, this will give you the view of the file system that GHC depends on (which will differ depending on whether GHC is compiled with `cygwin's gcc` or `mingw's gcc` or on a real Unix system..) - that little program can also deal with escaping `\\` in paths. Apart from the banner and the startup time, something like this would also do:

```
$ echo "Directory.getCurrentDirectory >=> putStrLn . init . tail . show  
↪ " | ghci
```

## 13.7 Building and using Win32 DLLs

Dynamic link libraries, Win32 DLLs, Win32 On Win32 platforms, the compiler is capable of both producing and using dynamic link libraries (DLLs) containing ghc-compiled code. This section shows you how to make use of this facility.

There are two distinct ways in which DLLs can be used:

- You can turn each Haskell package into a DLL, so that multiple Haskell executables using the same packages can share the DLL files. (As opposed to linking the libraries statically, which in effect creates a new copy of the RTS and all libraries for each executable produced.)

That is the same as the dynamic linking on other platforms, and it is described in [Using shared libraries](#) (page 294).

- You can package up a complete Haskell program as a DLL, to be called by some external (usually non-Haskell) program. This is usually used to implement plugins and the like, and is described below.

### 13.7.1 Creating a DLL

Creating a Win32 DLL -shared Sealing up your Haskell library inside a DLL is straightforward; compile up the object files that make up the library, and then build the DLL by issuing a command of the form:

```
ghc -shared -o foo.dll bar.o baz.o wibble.a -lfooble
```

By feeding the ghc compiler driver the option `-shared`, it will build a DLL rather than produce an executable. The DLL will consist of all the object files and archives given on the command line.

A couple of things to notice:

- By default, the entry points of all the object files will be exported from the DLL when using `-shared`. Should you want to constrain this, you can specify the *module definition file* to use on the command line as follows:

```
ghc -shared -o .... MyDef.def
```

See Microsoft documentation for details, but a module definition file simply lists what entry points you want to export. Here's one that's suitable when building a Haskell COM server DLL:

```
EXPORTS
DllCanUnloadNow      = DllCanUnloadNow@0
DllGetClassObject    = DllGetClassObject@12
DllRegisterServer    = DllRegisterServer@0
DllUnregisterServer  = DllUnregisterServer@0
```

- In addition to creating a DLL, the `-shared` option also creates an import library. The import library name is derived from the name of the DLL, as follows:

```
DLL: HScool.dll ==> import lib: libHScool.dll.a
```

The naming scheme may look a bit weird, but it has the purpose of allowing the co-existence of import libraries with ordinary static libraries (e.g., `libHSfoo.a` and `libHSfoo.dll.a`). Additionally, when the compiler driver is linking in non-static mode, it will rewrite occurrence of `-lHSfoo` on the command line to `-lHSfoo.dll`. By doing this for you, switching from non-static to static linking is simply a question of adding `-static` to your command line.

### 13.7.2 Making DLLs to be called from other languages

This section describes how to create DLLs to be called from other languages, such as Visual Basic or C++. This is a special case of *Making a Haskell library that can be called from foreign code* (page 627); we'll deal with the DLL-specific issues that arise below. Here's an example:

Use foreign export declarations to export the Haskell functions you want to call from the outside. For example:

```
-- Adder.hs
{-# LANGUAGE ForeignFunctionInterface #-}
module Adder where

adder :: Int -> Int -> IO Int -- gratuitous use of IO
adder x y = return (x+y)

foreign export stdcall adder :: Int -> Int -> IO Int
```

Add some helper code that starts up and shuts down the Haskell RTS:

```
// StartEnd.c
#include <Rts.h>

void HsStart()
{
    int argc = 1;
    char* argv[] = {"ghcDll", NULL}; // argv must end with NULL
```

(continues on next page)

(continued from previous page)

```
// Initialize Haskell runtime
char** args = argv;
hs_init(&argc, &args);
}

void HsEnd()
{
    hs_exit();
}
```

Here, `Adder` is the name of the root module in the module tree (as mentioned above, there must be a single root module, and hence a single module tree in the DLL). Compile everything up:

```
ghc -c Adder.hs
ghc -c StartEnd.c
ghc -shared -o Adder.dll Adder.o Adder_stub.o StartEnd.o
```

Now the file `Adder.dll` can be used from other programming languages. Before calling any functions in `Adder` it is necessary to call `HsStart`, and at the very end call `HsEnd`.

**Warning:** It may appear tempting to use `DllMain` to call `hs_init/hs_exit`, but this won't work (particularly if you compile with `-threaded`). There are severe restrictions on which actions can be performed during `DllMain`, and `hs_init` violates these restrictions, which can lead to your DLL freezing during startup (see [#3605](#)).

### 13.7.2.1 Using from VBA

An example of using `Adder.dll` from VBA is:

```
Private Declare Function Adder Lib "Adder.dll" Alias "adder@8" _
    (ByVal x As Long, ByVal y As Long) As Long

Private Declare Sub HsStart Lib "Adder.dll" ()
Private Declare Sub HsEnd Lib "Adder.dll" ()

Private Sub Document_Close()
    HsEnd
End Sub

Private Sub Document_Open()
    HsStart
End Sub

Public Sub Test()
    MsgBox "12 + 5 = " & Adder(12, 5)
End Sub
```

This example uses the `Document_Open/Close` functions of Microsoft Word, but provided `HsStart` is called before the first function, and `HsEnd` after the last, then it will work fine.

### 13.7.2.2 Using from C++

An example of using `Adder.dll` from C++ is:

```
// Tester.cpp
#include "HsFFI.h"
#include "Adder_stub.h"
#include <stdio.h>

extern "C" {
    void HsStart();
    void HsEnd();
}

int main()
{
    HsStart();
    // can now safely call functions from the DLL
    printf("12 + 5 = %i\n", adder(12,5))    ;
    HsEnd();
    return 0;
}
```

This can be compiled and run with:

```
$ ghc -o tester Tester.cpp Adder.dll.a
$ tester
12 + 5 = 17
```





## FFI AND THE JAVASCRIPT BACKEND

GHC's JavaScript backend supports its own calling convention for JavaScript-specific foreign imports. Any unapplied function is supported, including function names. Commonly, JavaScript foreign imports are written as an unapplied JavaScript `arrow function`, but function keyword anonymous functions are also supported.

By treating an import string as an unapplied function, arbitrary JavaScript can be included in an import, so a simple example might look like:

```
foreign import javascript "((x,y) => { return x + y; })"  
js_add :: Int -> Int -> Int
```

### 14.1 JavaScript FFI Types

Some types are able to be used directly in the type signatures of foreign exports, without conversion to a `JSVal`. We saw in the first example that `Int` is one of these.

There are a number of supported types that can be passed directly in this way, and they act as primitives within GHC's JavaScript RTS. This is in comparison to data structures that are implemented in Haskell, such as `String` - being a list, this doesn't have a primitive JavaScript implementation, and isn't equivalent to a JavaScript string.

The following types are supported in this way:

- `Int`, including `Int32` and other sized numerical values.
- `Int64`, and other 64 bit numbers are passed as two variables to the function, where the first includes the sign and the higher bits
- `Bool`
- `Char`
- `Any`
- `ByteArray#`
- `Double` and `Float`
- `MVar#`, and other RTS objects
- Unboxed tuples (e.g. `(# a, b #)`) can appear in the return type, and are constructed in JavaScript using macros such as `RETURN_UBX_TUP2(x, y)`.

As in the C FFI, types in the JavaScript FFI can't be type checked against the foreign code, so the following example would compile successfully - despite `5` not being a valid JavaScript value for the Haskell `Bool` type:

```
foreign import javascript "((x) => { return 5; })"
  type_error :: Bool -> Bool
```

### 14.1.1 JSVal

The JavaScript backend has a concept of an untyped ‘plain’ JavaScript value, under the guise of the type `JSVal`. Values having this type are mostly opaque to Haskell codes: you can think of *JSVal* as a data type whose data constructors aren’t exposed. Its main use case is to pass opaque JavaScript values from one FFI call to another.

Nevertheless the module `GHC.JS.Prim` from `base` contains functions for working with foreign `JSVal` objects. Currently, it provides the following conversions:

- `Int <-> JSVal (toJSInt, fromJSInt)`
- `String <-> JSVal (toJSString, fromJSString)`
- `[JSVal] <-> JSVal (toJSArray, fromJSArray)`

It also contains functions for working with objects:

- `jsNull :: JSVal` - the JavaScript null
- `isNull :: JSVal -> Bool` - test for the JavaScript null
- `isUndefined :: JSVal -> Bool` - test for the JavaScript undefined
- `getProp :: JSVal -> String -> JSVal` - object field access

### 14.1.2 JavaScript Callbacks

The JavaScript execution model is based around callback functions, and GHC’s JavaScript backend implements these as a type in order to support useful browser programs, and programs interacting with JavaScript libraries.

The module `GHC.JS.Foreign.Callback` in `base` defines the type `Callback a`, as well as several functions to construct callbacks from Haskell functions of up to three `JSVal` arguments. Unlike a regular function, a `Callback` function is passed in the FFI as a plain JavaScript function - enabling us to call these functions from within JavaScript:

```
foreign import javascript "((f) => { f('Example!'); })"
  callback_example :: Callback (JSVal -> IO ()) -> IO ()

printJSValAsString :: JSVal -> IO ()
printJSValAsString = putStrLn . fromJSString

main :: IO ()
main = do
  printJS <- syncCallback1 ThrowWouldBlock printJSValAsString
  callback_example printJS
  releaseCallback printJS
```

This example will call our `printJSValAsString` function, via JavaScript, with the JavaScript string `Example!` as an argument. On the last line, the callback memory is freed. Since there’s no way for the Haskell JS runtime to know if a function is still being referenced by JavaScript code, the memory must be manually released when no longer needed.

On the first line of `main`, we see where the `Callback` is actually created, by `syncCallback1`. `syncCallback` has versions up to three, including a zero-argument version with no suffix. To use callbacks with more than three pieces of data, it's recommended to package data into JavaScript objects or arrays as required.

There are three categories of functions that create callbacks, with the arity-1 type signatures shown here for demonstration:

- `syncCallback1 :: (JSVal -> IO ()) -> OnBlocked -> IO (Callback (JSVal -> IO ()))`: Synchronous callbacks that don't return a value. These take an additional data `OnBlocked = ThrowWouldBlock | ContinueAsync` argument for use in the case that the thread becomes blocked on e.g. an `MVar` transaction.
- `syncCallback' :: (JSVal -> IO JSVal) -> IO (Callback (JSVal -> IO ()))`: Synchronous callbacks that return a value. Because of the return value, there is no possibility of continuing asynchronously, so no `OnBlocked` argument is taken.
- `asyncCallback :: (JSVal -> IO ()) -> IO (Callback (JSVal -> IO ()))`: Asynchronous callbacks that immediately start in a new thread. Cannot return a value.

There is no checking that the passed arguments match the callback, so the following example compiles and correctly prints 10, despite the argument being passed as an `Int` to a `Callback` that accepts a `JSVal`:

```
foreign import javascript "((f,x) => { return f(x); })"
  apply_int :: Callback (JSVal -> IO JSVal) -> Int -> IO Int

main :: IO ()
main = do
  add3 <- syncCallback1' (return . (+3))
  print <=< apply_int add3 7
  releaseCallback add3
```

### 14.1.3 Callbacks as Foreign Exports

JavaScript callbacks allow for a sort of FFI exports via FFI imports. To do this, a global JavaScript variable is set, and that global variable can then be called from use cases that access plain JavaScript functions - such as interactive HTML elements. This would look like:

```
foreign import javascript "((f) => { globalF = f })"
  setF :: Callback (JSVal -> IO ()) -> IO ()

main :: IO ()
main = do
  log <- syncCallback1 ThrowWouldBlock (print . fromJSString)
  setF log
  -- don't releaseCallback log
```

```
<button onClick="globalF('Button pressed!')>Example</button>
```

We have to make sure not to use `releaseCallback` on any functions that are to be available in HTML, because we want these functions to be in memory indefinitely.

## 14.2 Writing Replacement Implementations for Libraries with C FFI Functions

Many libraries make use of C FFI functions to accomplish low-level or performance sensitive operations - known as `cbits` and often kept in a folder with this name. For such a library to support the JavaScript backend, the `cbits` must have replacement implementations.

In principle, it is possible for the JavaScript backend to automatically compile `cbits` using Emscripten, but this requires wrappers to convert data between the JS backend's RTS data format, and the format expected by Emscripten-compiled functions. Since C functions are often used where performance is more critical, there's potential for the data conversions to negate this purpose.

Instead, it is more effective for a library to provide an alternate implementation for functions using the C FFI - either by providing direct one-to-one replacement JavaScript functions, or by using C preprocessor directives to replace C FFI imports with some combination of JS FFI imports and pure-Haskell implementation.

### 14.2.1 Direct Implementation of C FFI Imports in JavaScript as `jsbits`

When the JavaScript backend generates code for a C FFI import, it will call the function named in the import string, prepended by `h$` - so the imported C function `open` will look for the JavaScript function `h$open`. No verification is done to ensure that these functions are actually implemented in the linked JavaScript files, so there can be runtime errors when a missing JavaScript function is called.

Based on this, implementing a C function in JavaScript is a matter of providing a function of the correct shape (based on the C FFI import type signature) in any of the linked JavaScript sources. External JavaScript sources are linked by either providing them as an argument to GHC, or listing them in the `js-sources` field of the cabal file - in which case it would usually be inside a predicate to detect the javascript architecture, such as:

```
library

if arch(javascript)
  js-sources:
    jsbits/example.js
```

Note that `js-sources` requires Cabal 3.10 to be used with library targets, and Cabal 3.12 to be used with executable targets.

The shape required of the JavaScript function will depend on the particular C types used:

- primitives, such as `CInt` will map directly to a single JavaScript argument using JavaScript primitives. In the case of `CInt`, this will be a JavaScript number. Note that in the case of return values, a JavaScript number will usually need to be rounded or cast back to an integral value in cases where mathematical operations are used
- pointer values, including `CString`, are passed as an unboxed (`ptr`, `offset`) pair. For arguments, being unboxed will mean these are passed as two top-level arguments to the function. For return values, unboxed values should be returned from JavaScript functions by using a special C preprocessor macro, `RETURN_UBX_TUP2(ptr, offset)`
- `CString`, in addition to the above pointer handling, will need to be decoded and encoded to convert them between character arrays and JavaScript strings.

- other RTS primitive types are discussed previously in *JavaScript FFI Types* (page 775).

As an example, let's consider the implementation of `getcwd`:

```
-- unix:System.Posix.Directory

foreign import ccall unsafe "getcwd" c_getcwd :: Ptr CChar -> CSize -> IO_
↳ (Ptr CChar)
```

```
// libraries/base/jsbits/base.js

//#OPTIONS: CPP

function h$getcwd(buf, off, buf_size) {
  try {
    var cwd = h$encodeUtf8(process.cwd());
    if (buf_size < cwd.len && buf_size !== 0) {
      h$setErrno("ERANGE");
      RETURN_UBX_TUP2(null, 0);
    } else if (buf !== null) {
      h$copyMutableByteArray(cwd, 0, buf, off, cwd.len);
      RETURN_UBX_TUP2(buf, off);
    } else if (buf_size === 0) {
      RETURN_UBX_TUP2(cwd, 0);
    } else {
      var out = h$newByteArray(buf_size);
      h$copyMutableByteArray(cwd, 0, out, off, cwd.len);
    }
  } catch (e) {
    h$setErrno(e);
    RETURN_UBX_TUP2(null, 0);
  }
}
```

Here, the C function `getcwd` maps to the JavaScript function `h$getcwd`, which exists in a `.js` file within `base`'s `jsbits` subdirectory. `h$getcwd` expects a `CString` (passed as the equivalent `Ptr CChar`) and a `CSize` argument. This results in three arguments to the JavaScript function - two for the string's pointer and offset, and one for the size, which will be passed as a JavaScript number.

Next, the JavaScript `h$getcwd` function demonstrates several details:

- In the `try` clause, the `cwd` value is first accessed using a NodeJS-provided method. This value is immediately encoded using `h$encodeUtf8`, which is provided by the JavaScript backend. This function will only return the pointer for the encoded value, and the offset will always be 0
- Next, we select one of several cases - based on the specification of the C function that we're trying to immitate
- In the first case where the given buffer size is too small, but not zero, the function must set the `ERANGE` error code, which we do here with `h$setErrno`, and return `null`. As we saw in the function arguments, pointers are passed as a `(ptr, offset)` pair - meaning `null` is represented by returning the unboxed pair `(null, 0)`
- In the second case where there is enough space in `buf` to successfully copy the bytes, we do so using `h$copyMutableByteArray` - a function supplied by GHC's JavaScript RTS

- In the third case where `buf_size` is 0, this indicates in the C function's specification that we can allocate a new buffer of the appropriate size to return. We already have this in the form of the previously encoded `cwd`, so we can just return it, along with the 0 offset
- In the last case where `buf` is null, and `buf_size` is large enough, we allocate a new buffer, this time with `buf_size` bytes of space using `h$newByteArray`, and we again perform a mutable copy
- To use C preprocessor macros in linked JavaScript files, the file must open with the `// #OPTIONS: CPP` line, as is shown towards the start of this snippet
- If an error occurs, the catch clause will pass it to `h$setErrno` and return the `(null, 0)` pointer and offset pair - which is a behaviour expected by the C function in the error case.

### 14.2.2 Writing JavaScript Functions to be NodeJS and Browser Aware

In the above example of implementing `getcwd`, the function we use in the JavaScript implementation is from NodeJS, and the behaviour doesn't make sense to implement in a browser. Therefore, the actual implementation will include a C preprocessor condition to check if we're compiling for the browser, in which case `h$unsupported(-1)` will be called. There can be multiple non-browser JavaScript runtimes, so we'll also have to check at runtime to make sure that NodeJS is in use.

```
function h$getcwd(buf, off, buf_size) {
#ifdef GHCJS_BROWSER
  if (h$isNode()) {
    try {
      var cwd = h$encodeUtf8(process.cwd());
      if (buf_size < cwd.len && buf_size !== 0) {
        h$setErrno("ERANGE");
        return (null, 0);
      } else if (buf !== null) {
        h$copyMutableByteArray(cwd, 0, buf, off, cwd.len);
        RETURN_UBX_TUP2(buf, off);
      } else if (buf_size === 0) {
        RETURN_UBX_TUP2(cwd, 0);
      } else {
        var out = h$newByteArray(buf_size);
        h$copyMutableByteArray(cwd, 0, out, off, cwd.len);
      }
    } catch (e) {
      h$setErrno(e);
      RETURN_UBX_TUP2(null, 0);
    }
  } else
#endif
  h$unsupported();
  RETURN_UBX_TUP2(null, 0);
}
```

### 14.2.3 Replacing C FFI Imports with Pure Haskell and JavaScript

Instead of providing a direct JavaScript implementation for each C FFI import, we can instead use the C preprocessor to conditionally remove these C imports (and possibly use sites as well). Then, some combination of JavaScript FFI imports and Haskell implementation can be added instead. As in the direct implementation section, any linked JavaScript files should usually be in a `if arch(javascript)` condition in the cabal file.

As an example of a mixed Haskell and JavaScript implementation replacing a C implementation, consider `base:GHC.Clock`:

```
#if defined(javascript_HOST_ARCH)
getMonotonicTimeNSec :: IO Word64
getMonotonicTimeNSec = do
  w <- getMonotonicTimeMSec
  return (floor w * 1000000)

foreign import javascript unsafe "performance.now"
  getMonotonicTimeMSec :: IO Double

#else
foreign import ccall unsafe "getMonotonicNSec"
  getMonotonicTimeNSec :: IO Word64
#endif
```

Here, the `getMonotonicTimeNSec` C FFI import is replaced by the JavaScript FFI import `getMonotonicTimeMSec`, which imports the standard JavaScript function `performance.now`. However, because this JavaScript implementation returns the time as a `Double` of floating point milliseconds, it must be wrapped by a Haskell function to extract the integral value that's expected.

In this case, the choice of using a mixed Haskell and JavaScript replacement implementation was caused by the limitation of clocks being system calls. In a lot of cases, C functions are used for similar system-level functionality. In such cases, it's recommended to import the required system functions from standard JavaScript libraries (or from the runtime, as was required for `getcwd`), and use Haskell wrapper functions to convert the imported functions to the appropriate format.

In other cases, C functions are used for performance. For these cases, pure-Haskell implementations are the preferred first step for compatibility with the JavaScript backend since it would be more future-proof against changes to the RTS data format. Depending on the use case, compiler-optimised JS code might be hard to complete with using hand-written JavaScript. Generally, the most likely performance gains from hand-written JavaScript come from functions with data that stays as JavaScript primitive types for a long time, especially strings. For this, `JSVal` allows values to be passed between Haskell and JavaScript without a marshalling penalty.

## 14.3 Linking with C sources

GHC supports compiling C sources into JavaScript (using Emscripten) and linking them with the rest of the JavaScript code (generated from Haskell codes and from the RTS).

C functions compiled with Emscripten get a “\_” prepended to their name in JavaScript. For example, C “malloc” becomes “\_malloc” in JavaScript.

### 14.3.1 EMCC pragmas

By default the EMCC linker drops code considered dead and it has no way to know which code is alive due to some call from Haskell or from a JavaScript wrapper. As such, you must explicitly add some pragmas at the top of one of your *.js* files to indicate which functions are alive:

```
` // #OPTIONS:EMCC:EXPORTED_RUNTIME_METHODS=foo,bar `
```

Enable methods *foo* and *bar* from the Emscripten runtime system. This is used for methods such as *ccall*, *cwrap*, *addFunction*, *removeFunction*... that are described in Emscripten documentation.

```
` // #OPTIONS:EMCC:EXPORTED_FUNCTIONS=_foo,_bar `
```

Enable C functions *foo* and *bar* to be exported respectively as *\_foo* and *\_bar* ( \_ prepended). This is used for C library functions (e.g. *\_malloc*, *\_free*, etc.) and for the C code compiled with your project (e.g. *\_sqlite3\_open* and others for the *sqlite* C library).

You can use both pragmas as many times as you want. Ultimately all the entries end up in sets of functions passed to the Emscripten linker via *-sEXPORTED\_RUNTIME\_METHODS* and *-sEXPORTED\_FUNCTIONS* (which can only be passed once; the latter argument overrides the former ones).

```
` // #OPTIONS:EMCC:EXTRA=-foo,-bar `
```

This pragma allows additional options to be passed to Emscripten if need be. We already pass:

- *-sSINGLE\_FILE=1*: required to create a single *.js* file as artefact (otherwise *.wasm* files corresponding to C codes need to be present in the current working directory when invoking the resulting *.js* file).
- *-sALLOW\_TABLE\_GROWTH*: required to support *addFunction*
- *-sEXPORTED\_RUNTIME\_METHODS* and *-sEXPORTED\_FUNCTIONS*: see above.

Be careful because some extra arguments may break the build in unsuspected ways.

### 14.3.2 Wrappers

The JavaScript backend doesn't generate wrappers for foreign imports to call directly into the compiled C code. I.e. given the following foreign import:

```
`haskell foreign import ccall "foo" foo :: ... `
```

The JavaScript backend will replace calls to *foo* with calls to the JavaScript function *h\$foo*. It's still up to the programmer to call *\_foo* or not from *h\$foo* on a case by case basis. If *h\$foo* calls the generated from C function *\_foo*, then we say that *h\$foo* is a wrapper function. These



wrapper functions are used to marshal arguments and returned values between the JS heap and the Emscripten heap.

On one hand, GHC's JavaScript backend creates a different array of bytes per allocation (in order to make use of the garbage collector of the JavaScript engine). On the other hand, Emscripten's C heap consists in a single array of bytes. To call C functions converted to JavaScript that have pointer arguments, wrapper functions have to:

1. allocate some buffer in the Emscripten heap (using `_malloc`) to get a valid Emscripten pointer
2. copy the bytes from the JS object to the buffer in the Emscripten heap
3. use the Emscripten pointer to make the call to the C function
4. optionally copy back the bytes from the Emscripten heap if the call may have changed the contents of the buffer
5. free the Emscripten buffer (with `_free`)

GHC's JavaScript rts provides helper functions for this in `rts/js/mem.js`. See `h$copyFromHeap`, `h$copyToHeap`, `h$initHeapBuffer`, etc.

### 14.3.3 Callbacks

Some C functions take function pointers as arguments (e.g. callbacks). This is supported by the JavaScript backend but requires some work from the wrapper functions.

1. On the Haskell side it is possible to create a pointer to an Haskell function (a *FunPtr*) by using a "wrapper" foreign import. See the documentation of `base:Foreign.Ptr.FunPtr`.
2. This *FunPtr* can be passed to a JavaScript wrapper function. However it's implemented as a *StablePtr* and needs to be converted into a function pointer that Emscripten understands. This can be done with `h$registerFunPtrOnHeap`.
3. When a callback is no longer needed, it can be freed with `h$unregisterFunPtrFromHeap`.

Note that in some circumstances you may not want to register an Haskell function directly as a callback. It is perfectly possible to register/free regular JavaScript function as Emscripten functions using `Module.addFunction` and `Module.removeFunction`. That's what the helper functions mentioned above do.



## USING THE GHC WEBASSEMBLY BACKEND

### 15.1 What does the WebAssembly “backend” mean

In order to compile Haskell to wasm, you need a custom GHC build that targets wasm. There isn’t a GHC option which allows you to use a stock GHC installed via `ghcup` or `stack` to generate wasm. That’s because GHC is still a single-target compiler, so each GHC build is only capable of compiling code that runs on a single architecture and operating system.

So, the term GHC wasm backend isn’t the same sense as the unregistered/LLVM/NCG backends. It merely describes GHC’s support as a cross compiler that targets wasm, and more specifically, `wasm32-wasi`.

The generated wasm module makes use of a few post-MVP extensions that are supported by default in latest releases of Chrome/Firefox/Safari/[wasmtime](#). The wasm module uses WASI as the system call layer, so it’s supported by any wasm engine that implements WASI (including browsers, which can provide the WASI layer via JavaScript).

### 15.2 Setting up the GHC wasm backend

The wasm backend is still a tech preview and not included in the official bindists yet. If you are using `x86_64-linux`, you can follow the “getting started” subsections in [ghc-wasm-meta](#) to quickly set up the GHC wasm backend using the nightly artifacts.

It’s also possible to build the GHC wasm backend manually, if your host system is one of `{x86_64,aarch64}-{linux,darwin}`. Refer to the [ghc-wasm-meta](#) readme for detailed instructions.

### 15.3 Using the GHC wasm backend to compile & link code

Once the GHC wasm backend is set up, you can use it to compile and link code. The compiler executables follow the cross compiler linking convention, so you need to call `wasm32-wasi-ghc`, `wasm32-wasi-ghc-pkg` and `wasm32-wasi-hsc2hs` instead of `ghc`, `ghc-pkg` and `hsc2hs`.

You can also use the `--with-compiler=`, `--with-hc-pkg=` and `--with-hsc2hs` flags of `cabal` to build `cabal` projects. The `wasm32-wasi-cabal` wrapper script set up by the `ghc-wasm-meta` installer does this automatically for you, but using flags manually also works with stock `cabal` installations. When `cabal` builds an executable component, that executable will be built as a wasm module, and you can use `cabal list-bin exe:foo` to find the wasm module’s location in the build directory.

## 15.4 Running the GHC wasm backend's output

Once you have a wasm module, you can run it with a dedicated wasm engine like wasmtime, or inside the browsers.

To run it with wasmtime, you can simply do:

```
$ wasmtime run foo.wasm
```

Just like native executables, you can pass command line arguments, and also RTS options, as long as it's built with `-rtsopts`:

```
$ wasmtime run foo.wasm --bar +RTS --nonmoving-gc -RTS
```

You can also mount some host directory into it:

```
$ wasmtime run --mapdir /::$PWD foo.wasm
```

As long as the filesystem capability is provided, in addition to filesystem I/O in Haskell code, you can use the RTS eventlog and profiling functionality, then inspect the report files:

```
$ wasmtime run --mapdir /::$PWD foo.wasm +RTS -hc -l -RTS
```

## 15.5 JavaScript FFI in the wasm backend

The GHC wasm backend supports the JavaScript FFI feature. For Haskell projects that are meant to be run in JavaScript environments like browsers or nodejs, the JavaScript FFI enables:

- Calling JavaScript from Haskell via foreign imports and vice versa via foreign exports.
- Representing JavaScript values as first-class garbage collected Haskell values on the Haskell heap.
- Blocking for asynchronous JavaScript computation in a single Haskell thread without blocking the entire runtime.
- Not paying for JavaScript when not using it, the same toolchain still generates self-contained wasm32-wasi modules by default.

The JavaScript FFI as implemented in the GHC wasm backend is pioneered by the `asterius` project and heavily inspired by `GHCJS`, the predecessor of the GHC JavaScript backend. Despite some similarities, it still differs from the GHC JavaScript backend's implementation significantly. The rest of this guide is a canonical reference for the GHC wasm backend's JavaScript FFI, which we'll now abbreviate as JSFFI.

### 15.5.1 Marshalable types and JSVal

JSFFI supports all boxed marshalable foreign types in C FFI:

- Bool
- Char
- Int / Word
- Int8 / Int16 / Int32 / Int64
- Word8 / Word16 / Word32 / Word64
- Ptr / FunPtr / StablePtr
- Float / Double

The above types and their newtypes can be used as argument/result types in JSFFI. Some caveats to keep in mind:

- Bool is marshaled to 0 / 1 instead of false / true in JavaScript. This is affected by implementation details of JSFFI, which is layered on top of C FFI and shares some characteristics of C FFI. It should be fine in most cases, since implicit conversion to boolean happens when it's used as a boolean. It's also fine to pass a JavaScript boolean into Haskell, since it'll be implicitly converted to a number first.
- Likewise, Char is marshaled to 32-bit integer that represents its Unicode code point. Do not pass a single character JavaScript string as Char, since implicit conversion to number results in NaN! If you absolutely need to use Char as a JSFFI argument/result type, you're in charge of handling Chars as code points. Most likely you only need to marshal between Haskell String or Text and JavaScript strings, for which there already exist conversion functions.
- 64-bit integer types are marshaled to JavaScript bigints. In JavaScript, mixing bigint and regular numbers in arithmetic results in type errors, so keep this in mind. As for Int / Word, they are 32-bit since the GHC wasm backend is based on wasm32.
- JSFFI doesn't support unboxed foreign types like Int#, ByteArray#, etc, even when UnliftedFFITypes is enabled.

In addition to the above types, JSFFI supports the JSVal type and its newtypes as argument/result types. JSVal is defined in GHC.Wasm.Prim in ghc-experimental, which represents an opaque reference to a JavaScript value.

JSVals are first-class Haskell values on the Haskell heap. You can get them via foreign import results or foreign export arguments, store them in Haskell data structures and pass them between Haskell/JavaScript. They are garbage-collected by the GHC RTS:

- There can be multiple JSVals that point to the same JavaScript value. As long as there's at least one JSVal still alive on the Haskell heap, that JavaScript value will still be alive on the JavaScript heap.
- If there's no longer any live JSVal that points to the JavaScript value, then after Haskell garbage collection, the runtime no longer retain any reference to it, allowing the JavaScript runtime to eventually garbage collect it as well.

In addition to garbage collection, GHC.Wasm.Prim also exports `freeJSVal :: JSVal -> IO ()`, allowing the user to drop the JavaScript reference from the runtime eagerly. You're encouraged to make use of `freeJSVal` when you're sure about a JSVal's lifetime, especially for the temporary JSVals. This will help reducing the memory footprint at runtime.

Note that `freeJSVal` is not idempotent and it's only safe to call it exactly once or not at all. Once it's called, any subsequent usage of that `JSVal` results in a runtime panic.

## 15.5.2 Foreign imports

One can embed a JavaScript code snippet in a foreign import declaration and call that piece of JavaScript code by calling the foreign import function:

```
import GHC.Wasm.Prim

foreign import javascript unsafe "console.log($1)"
  js_print :: JSString -> IO ()

foreign import javascript unsafe "typeof $1 === 'object'"
  js_is_obj :: JSVal -> Bool

foreign import javascript unsafe "let acc = 1; for (let i = 1; i <= $1; ++i) ↵
  ↵acc *= i; return acc;"
  js_fac :: Word -> Word
```

A JSFFI import code snippet can be either a single JavaScript expression or a series of JavaScript statements as function body, in which case you can use `return` to return the import result value. The import code snippet has access to:

- The import argument values, bound to arguments `$1`, `$2`, etc.
- The `__export` binding, which contain all wasm module exports. For instance, you could use `__exports.memory` to access the `WebAssembly.Memory` object and use it to copy blobs between the Haskell/JavaScript side. The memory export exists by default.
- The full Web API that exists in the JavaScript global scope.

There are two kinds of JSFFI imports: synchronous/asynchronous imports. `unsafe` indicates synchronous imports, which has the following caveats:

- The calling thread as well as the entire runtime blocks on waiting for the import result.
- If the JavaScript code throws, the runtime crashes with the same error. A JavaScript exception cannot be handled as a Haskell exception here, so you need to use a JavaScript catch explicitly shall the need arise.
- Like `unsafe C` imports, re-entrance is not supported, the imported foreign code must not call into Haskell again. Doing so would result in a runtime panic.

When a JSFFI import is marked as `safe` / `interruptible` or lacks safety annotation, then it's treated as an asynchronous import. The asynchronous JSFFI imports combine the Haskell concurrency model and the JavaScript event loop, allowing Haskell code to work with async JavaScript computation without blocking the entire runtime.

```
import Control.Exception

foreign import javascript safe "new Promise(res => setTimeout(res, $1))"
  js_sleep :: Int -> IO ()

sleep :: Int -> IO ()
sleep t = evaluate =<< js_sleep t
```

(continues on next page)

(continued from previous page)

```
foreign import javascript safe "const r = await fetch($1); return r.text();"
js_fetch :: JSString -> IO JSString
```

Asynchronous import code is wrapped in async JavaScript functions, therefore `await` is also supported. Async JavaScript functions always return Promises, and you can also explicitly create and return a Promise that resolves to the final result of the async computation.

When an asynchronous JSFFI import is called, the Haskell function returns immediately once the async JavaScript function returns a Promise. The value returned by the Haskell function is a thunk. When the thunk is evaluated later, the evaluating thread is suspended by the runtime, and resumed when the Promise actually resolves or rejects.

Compared to synchronous JSFFI imports, asynchronous JSFFI imports have the following notable pros/cons:

- Waiting for the result only blocks a single Haskell thread, other threads can still make progress and garbage collection may still happen.
- If the Promise rejects, Haskell code can catch JavaScript errors as `JSExceptions`.
- Re-entrance is supported. The JavaScript code may call into Haskell again and vice versa.
- Of course, it has higher overhead than synchronous JSFFI imports.

Using thunks to encapsulate Promise result allows cheaper concurrency without even needing to fork Haskell threads just for waiting for a bunch of async calls to return. Just like lazy I/O, the convenience comes with caveat, you need to take some care to force the result thunk before closing the underlying resource. And even if the result type is `()`, it's still a thunk that needs to be explicitly forced to ensure the Promise has actually resolved, so you likely need to write a worker/wrapper function pair for cases like `sleep`.

There's also a special kind of JSFFI import that allow converting a callable `JSVal` to a Haskell function:

```
type Logger = JSString -> IO ()

type JSFunction = JSVal

foreign import javascript unsafe "s => console.log(s)"
js_logger :: JSFunction

foreign import javascript unsafe "dynamic"
js_logger_to_hs :: JSFunction -> Logger
```

Much like `foreign import ccall "dynamic"` which wraps a C function pointer as a Haskell function, `foreign import javascript "dynamic"` wraps a `JSVal` that represent a JavaScript function as a Haskell function. The returned Haskell function retains the reference to that `JSVal`, and the `unsafe / safe` annotation indicates whether that JavaScript function is synchronous or asynchronous.

Of course, without `foreign import javascript "dynamic"`, one could still easily implement similar functionality:

```
foreign import javascript unsafe "$1($2)"
js_logger_to_hs :: JSFunction -> JSString -> IO ()
```

And that's how it's implemented under the hood. It's handled as a JSFFI import with an auto-generated code snippet that calls the first argument, passing the rest of arguments.

### 15.5.3 Foreign exports

One can use `foreign export javascript` to export a top-level Haskell binding as a wasm module export which can be called in JavaScript:

```
foreign export javascript "my_fib"
  fib :: Word -> Word
```

Give `fib :: Word -> Word`, the above declaration exports `fib` as `my_fib`. It is a wasm module export function without any JavaScript wrapper, and as long as the wasm instance is properly initialized, you can call `await instance.exports.my_fib(10)` to invoke the exported Haskell function and get the result.

Unlike JSFFI imports which have synchronous/asynchronous flavors, JSFFI exports are always asynchronous. Calling them always return a `Promise` in JavaScript that needs to be awaited for the real result. If the Haskell function throws, the `Promise` is rejected with a `WebAssembly.RuntimeError`, and the message field contains a JavaScript string of the Haskell exception.

Above is the static flavor of JSFFI exports. It's also possible to export a dynamically created Haskell function closure as a JavaScript function and obtain its `JSVal`:

```
type BinOp a = a -> a -> a

foreign import javascript "wrapper"
  js_func_from_hs :: BinOp Int -> IO JSVal
```

This is also much like `foreign import ccall "wrapper"`, which wraps a Haskell function closure as a C function pointer. Note that `unsafe / safe` annotation is ignored here, since the `JSVal` that represent the exported function is always returned synchronously, but it is always an asynchronous JavaScript function, just like static JSFFI exports.

The `JSVal` callbacks created by dynamic JSFFI exports can be passed to the rest of JavaScript world to be invoked later. But wait, didn't we say earlier that `JSVals` are garbage collected? Isn't a use-after-free trap waiting ahead of the road, when the `JSVal` is collected in Haskell but the JavaScript callback is invoked later?

So, normal `JSVals` created by JSFFI import results or JSFFI export arguments only manage a single kind of resource: the JavaScript value it refers to. But `JSVals` created by dynamic JSFFI exports manage two kinds of resources: the JavaScript callback it refers to, as well as a stable pointer that retains the Haskell function closure. If this `JSVal` is garbage collected, the Haskell runtime no longer retains the JavaScript callback, but the JavaScript side may still hold that callback and intends to call it later, so the Haskell function closure is still retained by default.

Still, the runtime can gradually drop these retainers by using `FinalizerRegistry` to invoke the finalizers to free the underlying stable pointers once the JavaScript callbacks are recycled.

One last corner case is cyclic reference between the two heaps: if a JavaScript callback is retained only by `JSVal` and that `JSVal` is retained only by a Haskell function closure that gets exported, this creates a cyclic reference that can't be automatically recycled. This is a fundamental limit of the GHC wasm backend today since the Haskell heap lives in the linear memory, distinct from the host JavaScript heap, and coordination between two heaps is always a non-trivial challenge. However, one can still use `freeJSVal` to break the cycle. When



`freeJSVal` is applied to a `JSVal` that represents a JavaScript callback created by a dynamic JSFFI export, both kinds of resources are freed at once: the JavaScript callback, as well as the Haskell function closure.

#### 15.5.4 Detect whether JSFFI is being used

If you're writing a Haskell library, you may want to detect whether the final linked module involves JSFFI logic, or is it still a self-contained `wasm32-wasi` module. One obvious reason is `wasi` implementations in JavaScript environments are often incomplete and lack certain features (e.g. the `poll_oneoff` syscall), so it makes sense to dispatch code.

`GHC.Wasm.Prim` exports `isJSFFIUsed :: Bool` that can be used for this purpose. As long as there's a single JSFFI import/export or anything involving `JSVal` linked into the final `wasm` module, it will be `True`. It is `False` if and only if the user code has absolutely no transitive dependency on anything related to JSFFI, in which case the linked `wasm` module will be a self-contained `wasm32-wasi` module. If something compiles fine with the GHC `wasm` backend before JSFFI feature is merged, but `isJSFFIUsed` is still `True`, then it's definitely a bug.

#### 15.5.5 Interaction with async exception

When a thread is blocked waiting for an async JSFFI import call to return, it can be interrupted by a Haskell async exception, with some caveats:

- The async exception would not magically cancel the `Promise`. In general, JavaScript Promises aren't cancelable anyway. There do exist third-party `Promise` libraries to provide a "cancel" interface, which only guarantees all `.then()` continuations registered on that `Promise` will no longer be invoked. For simplicity of implementation, we aren't using those for the time being.
- Normally, `throwTo` would block until the async exception has been delivered. In the case of JSFFI, `throwTo` would always return successfully immediately, while the target thread is still left in a suspended state. The target thread will only be woken up when the `Promise` actually resolves or rejects, though the `Promise` result will be discarded at that point.

The current way async exceptions are handled in JSFFI is subject to change though. Ideally, once the exception is delivered, the target thread can be woken up immediately and continue execution, and the pending `Promise` will drop reference to that thread and no longer invoke any continuations.

#### 15.5.6 Interaction with C FFI

User code can take advantage of JSFFI and C FFI together, and make use of third party C/C++ code as long as they work on `wasm32-wasi`. However, there is an important limitation to keep in mind when it comes to the interaction between JSFFI and C FFI:

A Haskell thread cannot force an async JSFFI import thunk when it represents a Haskell function exported via C FFI. Doing so would throw `WouldBlockException`.

For example, suppose we're using the Haskell bindings of a certain C library, and some of the C functions expect callers to pass a C function pointer as the callback argument. Yes, we can use `foreign import ccall "wrapper"` to wrap a Haskell function closure and pass it to that C function. The wrapped Haskell function can even call sync JSFFI imports, but it cannot call an async JSFFI import and block on the result.

The other direction is fine. Regardless of whether a C import is unsafe or safe, it can be called in a Haskell thread that represents a Haskell function exported to JavaScript. Do keep in mind that we're using the single-threaded runtime at the moment, so other than supporting re-entrancy, safe C calls don't offer extra advantage than unsafe.

As mentioned before, JSFFI is layered on top of C FFI under the hood, and they share the same C symbol namespace. In most cases, the JSFFI related symbols are auto-generated so they can't collide, but for each foreign export `javascript "my_func"`, there will be a `my_func` externally visible C symbol, so you need to take a bit of care not to duplicate symbol with the C side.

### 15.5.7 The JavaScript API

When linking a wasm module that makes use of JSFFI, correct link-time arguments must be passed to GHC and this needs to be adjusted on a per-project basis:

```
ghc -no-hs-main -optl-mexec-model=reactor -optl-WL,--export=my_func
```

Why?

Consider the case `ghc hello.hs` where `hello.hs` is just a good old `main = putStrLn "hello world"`. By default, `ghc` exports `main` as a C function, compiles and links a little C stub file that contain the actual `main` that initializes the runtime and call the Haskell `main`, and `clang` would link everything as a `wasm32-wasi` command module.

Conceptually, a `wasm32-wasi` command module is like an executable, with a single entry point and meant to be invoked only once and then exits. But certain link-time arguments can tell `clang` to target a `wasm32-wasi` reactor module instead. A reactor module is a bit like a shared library: it has internal functions as well as user-defined entry points, and once it's initialized, the entry points can be called as many times as the user wants.

Given the nature of JSFFI, if a project uses JSFFI, then it surely is meant to target a `wasm32-wasi` reactor module. And there's no sensible default entry point, not even `main`, you need to explicitly pass the export names you need via link-time arguments, otherwise those exports will be absent from the resulting wasm module due to linker dead code elimination.

Now, suppose a wasm module has already been linked and it makes use of JSFFI. This wasm module will contain `ghc_wasm_jsffi` custom sections, and the section payloads include information like JSFFI import code snippets and function arities. The next step is calling a small post-linker script, which will parse the wasm module and emit a JavaScript module. The [post-linker](#) is written in nodejs, though the resulting JavaScript module has nothing nodejs specific and work in browsers as well.

```
$ $(wasm32-wasi-ghc --print-libdir)/post-link.mjs -i hello.wasm -o hello.js
```

The generated JavaScript module contains a default export which is a function. The function takes an `__exports` argument and generates the `ghc_wasm_jsffi` wasm imports. There is knot-tying going on here: only after a wasm module is instantiated, you can access its exports, but the `ghc_wasm_jsffi` imports required for instantiation need access to the exports! JavaScript is not a lazy language, but we can achieve knot-tying less elegantly by using mutation:

```
let __exports = {};  
  
const { instance } = await WebAssembly.instantiateStreaming(  
  (continues on next page)
```

(continued from previous page)

```
    fetch(wasm_url),
    {
      ghc_wasm_jsffi: (await import(js_url)).default(__exports),
      wasi_snapshot_preview1: ...
    }
  );
Object.assign(__exports, wasm_instance.exports);
```

This way, the `ghc_wasm_jsffi` imports will have access to all exports of the wasm instance.

After the wasm instance is created, initialization needs to be done:

```
wasi.initialize(wasm_instance);
```

The `wasm32-wasi` reactor module ABI defines the `_initialize` export function, which is auto generated at link time and it must be called exactly once before any other wasm exports can be called. The correct way to call it depends on the wasi implementation provider in JavaScript.

Finally, in JavaScript, you can use `await __exports.my_func()` to call your exported `my_func` function and get its result, pass arguments, do error handling, etc etc.



## KNOWN BUGS AND INFELICITIES

### 16.1 Haskell standards vs. Glasgow Haskell: language non-compliance

This section lists Glasgow Haskell infelicities in its implementation of Haskell 98 and Haskell 2010. See also the “when things go wrong” section (*What to do when something goes wrong* (page 751)) for information about crashes, space leaks, and other undesirable phenomena.

The limitations here are listed in Haskell Report order (roughly).

#### 16.1.1 Divergence from Haskell 98 and Haskell 2010

GHC aims to be able to behave (mostly) like a Haskell 98 or Haskell 2010 compiler, if you tell it to try to behave like that with the *Haskell98* (page 316) and *Haskell2010* (page 315) flags. The known deviations from the standards are described below. Unless otherwise stated, the deviation applies in both Haskell 98 and Haskell 2010 mode.

##### 16.1.1.1 Lexical syntax

- Certain lexical rules regarding qualified identifiers are slightly different in GHC compared to the Haskell report. When you have `<module>.<reservedop>`, such as `M.\`, GHC will interpret it as a single qualified operator rather than the two lexemes `M` and `.\`.
- `forall` is always a reserved keyword. This is contrary to the Haskell Report, which allows variables and type variables to be named `forall`. Note that this does not imply that GHC always enables the *ExplicitForAll* (page 560) extension. Even without this extension enabled, reserving `forall` as a keyword has significance. For instance, GHC will not parse the type signature `foo :: forall x.`
- The `(!)` operator, when written in prefix form (preceded by whitespace and not followed by whitespace, as in `f !x = ...`), is interpreted as a bang pattern, contrary to the Haskell Report, which prescribes to treat `!` as an operator regardless of surrounding whitespace. Note that this does not imply that GHC always enables *BangPatterns* (page 595). Without the extension, GHC will issue a parse error on `f !x`, asking to enable the extension.
- Irrefutable patterns must be written in prefix form:

```
f ~a ~b = ...    -- accepted by both GHC and the Haskell Report
f ~ a ~ b = ...  -- accepted by the Haskell Report but not GHC
```

When written in non-prefix form, (`~`) is treated by GHC as a regular infix operator.

See [GHC Proposal #229](#) for the precise rules.

- Strictness annotations in data declarations must be written in prefix form:

```
data T = MkT !Int    -- accepted by both GHC and the Haskell Report
data T = MkT ! Int    -- accepted by the Haskell Report but not GHC
```

See [GHC Proposal #229](#) for the precise rules.

- As-patterns must not be surrounded by whitespace on either side:

```
f p@(x, y, z) = ...    -- accepted by both GHC and the Haskell Report

-- accepted by the Haskell Report but not GHC:
f p @ (x, y, z) = ...
f p @(x, y, z) = ...
f p@ (x, y, z) = ...
```

When surrounded by whitespace on both sides, (`@`) is treated by GHC as a regular infix operator.

When preceded but not followed by whitespace, (`@`) is treated as a visible type application.

See [GHC Proposal #229](#) for the precise rules.

- Haskell Report allows any Unicode Decimal Number in decimal literals. However, GHC accepts only ASCII numbers:

```
ascDigit    →  0 | 1 | ... | 9
decimal     →  ascDigit {ascDigit}
```

- GHC is more lenient in which characters are allowed in the identifiers. Unicode Other Letters are considered to be small letters, therefore variable identifiers can begin with them. Digit class contains all Unicode numbers instead of just Decimal Numbers. Modifier Letters and Non-Spacing Marks can appear in the tail of the identifiers.:

```
uniSmall    →  any Unicode Lowercase Letter or Other Letter
uniDigit     →  any Unicode Decimal Number, Letter Number or Other Number

uniIdchar    →  any Unicode Modifier Letter or Non-Spacing Mark
idchar       →  small | large | digit | uniIdchar | '

varid        →  small {idchar} {reservedid}
conid        →  large {idchar}
```

- GHC allows redundant parentheses around the function name in the *funlhs* part of declarations. That is GHC will succeed in parsing a declaration like `((f)) x = <rhs>` for any number of parentheses around `f`.

### 16.1.1.2 Context-free syntax

- In Haskell 98 mode (but not in Haskell 2010 mode), GHC is a little less strict about the layout rule when used in `do` expressions. Specifically, the restriction that “a nested context must be indented further to the right than the enclosing context” is relaxed to allow the nested context to be at the same level as the enclosing context, if the enclosing context is a `do` expression.

For example, the following code is accepted by GHC:

```
main = do args <- getArgs
        if null args then return [] else do
          ps <- mapM process args
          mapM print ps
```

This behaviour is controlled by the *NondecreasingIndentation* (page 797) extension.

#### NondecreasingIndentation

##### Since

7.2.1

##### Status

Included in *Haskell98* (page 316)

Allow nested contexts to be at the same indentation level as its enclosing context.

- GHC doesn't do the fixity resolution in expressions during parsing as required by Haskell 98 (but not by Haskell 2010). For example, according to the Haskell 98 report, the following expression is legal:

```
let x = 42 in x == 42 == True
```

and parses as:

```
(let x = 42 in x == 42) == True
```

because according to the report, the `let` expression “extends as far to the right as possible”. Since it can't extend past the second equals sign without causing a parse error (`==` is non-fix), the `let`-expression must terminate there. GHC simply gobbles up the whole expression, parsing like this:

```
(let x = 42 in x == 42 == True)
```

### 16.1.1.3 Expressions and patterns

By default, GHC makes some programs slightly more defined than they should be. For example, consider

```
f :: [a] -> b -> b
f [] = error "urk"
f (x:xs) = \v -> v

main = print (f [] `seq` True)
```

This should call error but actually prints True. Reason: GHC eta-expands `f` to

```
f :: [a] -> b -> b
f []      v = error "urk"
f (x:xs) v = v
```

For most programs this improves efficiency enough to be enabled & bad only in few rare cases. To suppress this optimisation use `-fpedantic-bottoms` (page 139).

#### 16.1.1.4 Failable patterns

Since the [MonadFail Proposal](#) (MFP), `do`-notation blocks that contain a failable pattern need a `MonadFail` constraint.

For example

```
mayFail :: (MonadIO m) => m ()
mayFail = do
  (Just value) <- fetchData
  putStrLn value
```

Will warn you with

```
• Could not deduce (MonadFail m)
  arising from a do statement
  with the failable pattern '(Just x)'
  from the context: MonadIO m
  bound by the type signature for:
    mayFail :: forall (m :: * -> *). MonadIO m => m ()
```

And indeed, since the `Monad` class does not have the `fail` method anymore, we need to explicitly add `(MonadFail m)` to the constraints of the function.

#### 16.1.1.5 Typechecking of recursive binding groups

The Haskell Report specifies that a group of bindings (at top level, or in a `let` or `where`) should be sorted into strongly-connected components, and then type-checked in dependency order ([Haskell Report, Section 4.5.1](#)). As each group is type-checked, any binders of the group that have an explicit type signature are put in the type environment with the specified polymorphic type, and all others are monomorphic until the group is generalised ([Haskell Report, Section 4.5.2](#)).

Following a suggestion of Mark Jones, in his paper [Typing Haskell in Haskell](#), GHC implements a more general scheme. In GHC *the dependency analysis ignores references to variables that have an explicit type signature*. As a result of this refined dependency analysis, the dependency groups are smaller, and more bindings will typecheck. For example, consider:

```
f :: Eq a => a -> Bool
f x = (x == x) || g True || g "Yes"

g y = (y <= y) || f True
```

This is rejected by Haskell 98, but under Jones's scheme the definition for `g` is typechecked first, separately from that for `f`, because the reference to `f` in `g`'s right hand side is ignored by the dependency analysis. Then `g`'s type is generalised, to get



```
g :: Ord a => a -> Bool
```

Now, the definition for `f` is typechecked, with this type for `g` in the type environment.

The same refined dependency analysis also allows the type signatures of mutually-recursive functions to have different contexts, something that is illegal in Haskell 98 (Section 4.5.2, last sentence). GHC only insists that the type signatures of a *refined* group have identical type signatures; in practice this means that only variables bound by the same pattern binding must have the same context. For example, this is fine:

```
f :: Eq a => a -> Bool
f x = (x == x) || g True

g :: Ord a => a -> Bool
g y = (y <= y) || f True
```

#### 16.1.1.6 Default Module headers with `-main-is`

The Haskell2010 Report specifies in [<https://www.haskell.org/onlinereport/haskell2010/haskellch5.html#x11-990005.1>](https://www.haskell.org/onlinereport/haskell2010/haskellch5.html#x11-990005.1) that

**“An abbreviated form of module, consisting only of the module body,**  
is permitted. If this is used, the header is assumed to be *module Main(main)*  
*where.*”

GHC's `-main-is` option can be used to change the name of the top-level entry point from `main` to any other variable. When compiling the main module and `-main-is` has been used to rename the default entry point, GHC will also use the alternate name in the default export list.

Consider the following program:

```
-- file: Main.hs
program :: IO ()
program = return ()
```

GHC will successfully compile this module with `ghc -main-is Main.program Main.hs`, because the default export list will include `program` rather than `main`, as the Haskell Report typically requires.

This change only applies to the main module. Other modules will still export `main` from a default export list, regardless of the `-main-is` flag. This allows use of `-main-is` with existing modules that export `main` via a default export list, even when `-main-is` points to a different entry point, as in this example (compiled with `-main-is MainWrapper.program`).

```
-- file MainWrapper.hs
module MainWrapper where
import Main

program :: IO ()
program = putStrLn "Redirecting..." >> main

-- file Main.hs
main :: IO ()
main = putStrLn "I am main."
```

#### 16.1.1.7 Module system and interface files

GHC requires the use of `hs-boot` files to cut the recursive loops among mutually recursive modules as described in *How to compile mutually recursive modules* (page 247). This more of an infelicity than a bug: the Haskell Report says (Section 5.7)

“Depending on the Haskell implementation used, separate compilation of mutually recursive modules may require that imported modules contain additional information so that they may be referenced before they are compiled. Explicit type signatures for all exported values may be necessary to deal with mutual recursion. The precise details of separate compilation are not defined by this Report.”

#### 16.1.1.8 Numbers, basic types, and built-in classes

##### Num superclasses

The `Num` class does not have `Show` or `Eq` superclasses.

You can make code that works with both Haskell98/Haskell2010 and GHC by:

- Whenever you make a `Num` instance of a type, also make `Show` and `Eq` instances, and
- Whenever you give a function, instance or class a `Num t` constraint, also give it `Show t` and `Eq t` constraints.

##### Bits superclass

The `Bits` class does not have a `Num` superclass. It therefore does not have default methods for the `bit`, `testBit` and `popCount` methods.

You can make code that works with both Haskell 2010 and GHC by:

- Whenever you make a `Bits` instance of a type, also make a `Num` instance, and
- Whenever you give a function, instance or class a `Bits t` constraint, also give it a `Num t` constraint, and
- Always define the `bit`, `testBit` and `popCount` methods in `Bits` instances.

##### Read class methods

The `Read` class has two extra methods, `readPrec` and `readListPrec`, that are not found in the Haskell 2010 since they rely on the `ReadPrec` data type, which requires the *RankNTypes* (page 451) extension. GHC also derives `Read` instances by implementing `readPrec` instead of `readsPrec`, and relies on a default implementation of `readsPrec` that is defined in terms of `readPrec`. GHC adds these two extra methods simply because `ReadPrec` is more efficient than `ReadS` (the type on which `readsPrec` is based).

##### Monad superclass

The `Monad` class has an `Applicative` superclass. You cannot write `Monad` instances that work for GHC and also for a Haskell 2010 implementation that does not define `Applicative`.

##### Extra instances

The following extra instances are defined:

```
instance Functor ((->) r)
instance Monad ((->) r)
instance Functor ((,) a)
instance Functor (Either a)
instance Monad (Either e)
```

**Multiply-defined array elements not checked**

This code fragment should elicit a fatal error, but it does not:

```
main = print (array (1,1) [(1,2), (1,3)])
```

GHC's implementation of array takes the value of an array slot from the last (index,value) pair in the list, and does no checking for duplicates. The reason for this is efficiency, pure and simple.

**16.1.1.9 In Prelude support****splitAt semantics**

Data.List.splitAt is more strict than specified in the Report. Specifically, the Report specifies that

```
splitAt n xs = (take n xs, drop n xs)
```

which implies that

```
splitAt undefined undefined = (undefined, undefined)
```

but GHC's implementation is strict in its first argument, so

```
splitAt undefined [] = undefined
```

**Showing records**

The Haskell 2010 definition of Show stipulates that the rendered string should only include parentheses which are necessary to unambiguously parse the result. For historical reasons, Show instances derived by GHC include parentheses around records despite the fact that record syntax binds more tightly than function application; e.g.,

```
data Hello = Hello { aField :: Int } deriving (Show)

-- GHC produces...
show (Just (Hello {aField=42})) == "Just (Hello {aField=42})"

-- whereas Haskell 2010 calls for...
show (Just (Hello {aField=42})) == "Just Hello {aField=42}"
```

**Reading integers**

GHC's implementation of the Read class for integral types accepts hexadecimal and octal literals (the code in the Haskell 98 report doesn't). So, for example,

```
read "0xf00" :: Int
```

works in GHC.

A possible reason for this is that readLitChar accepts hex and octal escapes, so it seems inconsistent not to do so for integers too.

**isAlpha**

The Haskell 98 definition of isAlpha is:

```
isAlpha c = isUpper c || isLower c
```

GHC's implementation diverges from the Haskell 98 definition in the sense that Unicode alphabetic characters which are neither upper nor lower case will still be identified as alphabetic by `isAlpha`.

### **hGetContents**

Lazy I/O throws an exception if an error is encountered, in contrast to the Haskell 98 spec which requires that errors are discarded (see Section 21.2.2 of the Haskell 98 report). The exception thrown is the usual IO exception that would be thrown if the failing IO operation was performed in the IO monad, and can be caught by `System.IO.Error.catch` or `Control.Exception.catch`.

#### **16.1.1.10 The Foreign Function Interface**

##### **hs\_init(), hs\_exit()**

The FFI spec requires the implementation to support re-initialising itself after being shut down with `hs_exit()`, but GHC does not currently support that. See [#13693](#).

#### **16.1.2 GHC's interpretation of undefined behaviour in Haskell 98 and Haskell 2010**

This section documents GHC's take on various issues that are left undefined or implementation specific in Haskell 98.

##### **Char**

Following the ISO-10646 standard, `maxBound :: Char` in GHC is `0x10FFFF`.

##### **Int**

In GHC the `Int` type follows the size of an address on the host architecture; in other words it holds 32 bits on a 32-bit machine, and 64-bits on a 64-bit machine.

Arithmetic on `Int` is unchecked for overflow, so all operations on `Int` happen modulo  $2^{(n)}$  where  $(n)$  is the size in bits of the `Int` type.

The `fromInteger` (and hence also `fromIntegral`) is a special case when converting to `Int`. The value of `fromIntegral x :: Int` is given by taking the lower  $(n)$  bits of `(abs x)`, multiplied by the sign of `x` (in 2's complement  $(n)$ -bit arithmetic). This behaviour was chosen so that for example writing `0xffffffff :: Int` preserves the bit-pattern in the resulting `Int`.

Negative literals, such as `-3`, are specified by (a careful reading of) the Haskell Report as meaning `Prelude.negate (Prelude.fromInteger 3)`. So `-2147483648` means `negate (fromInteger 2147483648)`. Since `fromInteger` takes the lower 32 bits of the representation, `fromInteger (2147483648::Integer)`, computed at type `Int` is `-2147483648::Int`. The `negate` operation then overflows, but it is unchecked, so `negate (-2147483648::Int)` is just `-2147483648`. In short, one can write `minBound::Int` as a literal with the expected meaning (but that is not in general guaranteed).

The `fromIntegral` function also preserves bit-patterns when converting between the sized integral types (`Int8`, `Int16`, `Int32`, `Int64` and the unsigned `Word` variants), see the modules `Data.Int` and `Data.Word` in the library documentation.

##### **Unchecked floating-point arithmetic**

Operations on `Float` and `Double` numbers are *unchecked* for overflow, underflow, and other sad occurrences. (note, however, that some architectures trap floating-point overflow and loss-of-precision and report a floating-point exception, probably terminating the program)

### Large tuple support

The Haskell Report only requires implementations to provide tuple types and their accompanying standard instances up to size 15. GHC limits the size of tuple types to 62 and provides instances of Eq, Ord, Bounded, Read, Show, and Ix for tuples up to size 15.

## 16.2 Known bugs or infelicities

The bug tracker lists bugs that have been reported in GHC but not yet fixed: see the [GHC issue tracker](#). In addition to those, GHC also has the following known bugs or infelicities. These bugs are more permanent; it is unlikely that any of them will be fixed in the short term.

### 16.2.1 Bugs in GHC

- GHC's runtime system implements cooperative multitasking, with context switching potentially occurring only when a program allocates. This means that programs that do not allocate may never context switch. This is especially true of programs using STM, which may deadlock after observing inconsistent state. See [#367](#) for further discussion.

If you are hit by this, you may want to compile the affected module with `-fno-omit-yields` (page 139) (see `-f*`: [platform-independent flags](#) (page 128)). This flag ensures that yield points are inserted at every function entrypoint (at the expense of a bit of performance).

- GHC does not allow you to have a data type with a context that mentions type variables that are not data type parameters. For example:

```
data C a b => T a = MkT a
```

so that MkT's type is

```
MkT :: forall a b. C a b => a -> T a
```

In principle, with a suitable class declaration with a functional dependency, it's possible that this type is not ambiguous; but GHC nevertheless rejects it. The type variables mentioned in the context of the data type declaration must be among the type parameters of the data type.

- GHC's inliner can be persuaded into non-termination using the standard way to encode recursion via a data type:

```
data U = MkU (U -> Bool)

russel :: U -> Bool
russel u@(MkU p) = not $ p u

x :: Bool
x = russel (MkU russel)
```

The non-termination is reported like this:

```
ghc: panic! (the 'impossible' happened)
(GHC version 8.2.1 for x86_64-unknown-linux):
  Simplifier ticks exhausted
```

(continues on next page)

(continued from previous page)

```
When trying UnfoldingDone x_alB
To increase the limit, use -fsimpl-tick-factor=N (default 100)
```

with the panic being reported no matter how high a *-fsimpl-tick-factor* (page 139) you supply.

We have never found another class of programs, other than this contrived one, that makes GHC diverge, and fixing the problem would impose an extra overhead on every compilation. So the bug remains un-fixed. There is more background in [Secrets of the GHC inliner](#).

- On 32-bit x86 platforms when using the native code generator, the *-fexcess-precision* (page 133) option is always on. This means that floating-point calculations are non-deterministic, because depending on how the program is compiled (optimisation settings, for example), certain calculations might be done at 80-bit precision instead of the intended 32-bit or 64-bit precision. Floating-point results may differ when optimisation is turned on. In the worst case, referential transparency is violated, because for example `let x = E1 in E2` can evaluate to a different value than `E2[E1/x]`.

One workaround is to use the *-msse2* (page 93) option (see [Platform-specific Flags](#) (page 93)), which generates code to use the SSE2 instruction set instead of the x87 instruction set. SSE2 code uses the correct precision for all floating-point operations, and so gives deterministic results. However, note that this only works with processors that support SSE2 (Intel Pentium 4 or AMD Athlon 64 and later), which is why the option is not enabled by default. The libraries that come with GHC are probably built without this option, unless you built GHC yourself.

- The *state hack* (page 138) optimization can result in non-obvious changes in evaluation ordering which may hide exceptions, even with *-fpedantic-bottoms* (page 139) (see, e.g., [#7411](#)). For instance,

```
import Control.Exception
import Control.DeepSeq
main = do
  evaluate (('a' : undefined) `deepseq` return () :: IO ())
  putStrLn "Hello"
```

Compiling this program with `-O` results in Hello to be printed, despite the fact that `evaluate` should have bottomed. Compiling with `-O -fno-state-hack` results in the exception one would expect.

- Programs compiled with *-fdefer-type-errors* (page 464) may fail a bit more eagerly than one might expect. For instance,

```
{-# OPTIONS_GHC -fdefer-type-errors #-}
main = do
  putStrLn "Hi there."
  putStrLn True
```

Will emit no output, despite the fact that the ill-typed term appears after the well-typed `putStrLn "Hi there."`. See [#11197](#).

- Despite appearances `*` and `Constraint` aren't really distinct kinds in the compiler's internal representation and can be unified producing unexpected results. See [#11715](#) for one example.

- Because of a toolchain limitation we are unable to support full Unicode paths on Windows. On Windows we support up to Latin-1. See [#12971](#) for more.

### 16.2.2 Bugs in GHCi (the interactive GHC)

- GHCi does not respect the default declaration in the module whose scope you are in. Instead, for expressions typed at the command line, you always get the default default-type behaviour; that is, `default(Int,Double)`.

It would be better for GHCi to record what the default settings in each module are, and use those of the 'current' module (whatever that is).

- On Windows, there's a GNU ld/BFD bug whereby it emits bogus PE object files that have more than 0xffff relocations. When GHCi tries to load a package affected by this bug, you get an error message of the form

```
Loading package javavm ... linking ... WARNING: Overflowed relocation_
→field (# relocs found: 30765)
```

The last time we looked, this bug still wasn't fixed in the BFD codebase, and there wasn't any noticeable interest in fixing it when we reported the bug back in 2001 or so.

The workaround is to split up the .o files that make up your package into two or more .o's, along the lines of how the base package does it.





## EVENTLOG ENCODINGS

This section documents the encodings of the events emitted to GHC's *event log* (page 234). These events can include information about the thread scheduling events, garbage collection statistics, profiling information, user-defined tracing events.

This section is intended for implementors of tooling which consume these events. GHC ships with a C header file (`EventLogFormat.h`) which provides symbolic names for the event type IDs described in this file.

### 17.1 Event log format

The log format is designed to be extensible: old tools should be able to parse (but not necessarily understand all of) new versions of the format, and new tools will be able to understand old log files.

- The format is endian-independent: all values are represented in big-endian order.
- The format is extensible:
  - The header describes each event type and its length. Tools that don't recognise a particular event type can skip those events.
  - There is room for extra information in the event type specification, which can be ignored by older tools.
  - Events can have extra information added, but existing fields cannot be changed. Tools should ignore extra fields at the end of the event record.

The event-log stream begins with a header describing the event types (`EventType`) present in the file. The header is followed by the event records (`Event`) themselves, each of which start with the event type id and a 64-bit timestamp:

```
EventLog :
    EVENT_HEADER_BEGIN
    EVENT_HET_BEGIN -- header event types begin
    EventType*
    EVENT_HET_END -- header event types end
    EVENT_HEADER_END
    EVENT_DATA_BEGIN
    Event*
    EVENT_DATA_END
```

EventType :

(continues on next page)

(continued from previous page)

```
EVENT_ET_BEGIN
  Word16      -- event type id, unique identifier for this event
  Int16       -- >=0  size of the event record in bytes (minus the
→event type id and timestamp fields)
              -- -1   variable size
  Word32      -- size of the event description in bytes
  Word8*      -- event description, UTF8 encoded string describing the
→event
  Word32      -- size of the extra info in bytes
  Word8*      -- extra info (for future extensions)
EVENT_ET_END

Event :
  Word16      -- event type id, as included in the event log header
  Word64      -- timestamp (nanoseconds)
  [Word16]    -- length of the rest (optional, for variable-sized
→events only)
  ... event specific info ...
```

There are two classes of event types:

- *Fixed size*: All event records of a fixed-sized type are of the same length, the size given in the header event-log header.
- *Variable size*: Each event record includes a length field.

## 17.2 Runtime system diagnostics

- ThreadId ~ Word32
- CapNo ~ Word16
- CapSetId ~ Word32

### 17.2.1 Capability sets

TODO

### 17.2.2 Environment information

These events are typically produced during program startup and describe the environment which the program is being run in.

#### RTS\_IDENTIFIER

**Tag**  
29

**Length**  
variable

**Field CapSetId**  
Capability set

**Field String**

Runtime system name and version.

Describes the name and version of the runtime system responsible for the indicated capability set.

**PROGRAM\_ARGS****Tag**

30

**Length**

variable

**Field CapSetId**

Capability set

**Field [String]**

The command-line arguments passed to the program

Describes the command-line used to start the program.

**PROGRAM\_ENV****Tag**

31

**Length**

variable

**Field CapSetId**

Capability set

**Field [String]**

The environment variable name/value pairs. (TODO: encoding?)

Describes the environment variables present in the program's environment.

**WALL\_CLOCK\_TIME****Tag**

43

**Length**

fixed

**Field CapSetId**

Capability set

**Field Word64**

Unix epoch seconds

**Field Word32**

Nanoseconds

Records the wall clock time to make it possible to correlate events from elsewhere with the eventlog.

### 17.2.3 Thread and scheduling events

#### CREATE\_THREAD

**Tag**  
0

**Length**  
fixed

**Field ThreadId**  
thread id

Marks the creation of a Haskell thread.

#### RUN\_THREAD

**Tag**  
1

**Length**  
fixed

**Field ThreadId**  
thread id

The indicated thread has started running.

#### STOP\_THREAD

**Tag**  
2

**Length**  
fixed

**Field ThreadId**  
thread id

**Field Word16**  
status

- 1: HeapOverflow
- 2: StackOverflow
- 3: ThreadYielding
- 4: ThreadBlocked
- 5: ThreadFinished
- 6: ForeignCall
- 7: BlockedOnMVar
- 8: BlockedOnBlackHole
- 9: BlockedOnRead
- 10: BlockedOnWrite
- 11: BlockedOnDelay
- 12: BlockedOnSTM
- 13: BlockedOnDoProc

- 16: BlockedOnMsgThrowTo
- 20: BlockedOnMVarRead

**Field ThreadId**

thread id of thread being blocked on (only for some status values)

The indicated thread has stopped running for the reason given by status.

**THREAD\_RUNNABLE****Tag**

3

**Length**

fixed

**Field ThreadId**

thread id

The indicated thread is has been marked as ready to run.

**MIGRATE\_THREAD****Tag**

4

**Length**

fixed

**Field ThreadId**

thread id

**Field CapNo**

capability

The indicated thread has been migrated to a new capability.

**THREAD\_WAKEUP****Tag**

8

**Length**

fixed

**Field ThreadId**

thread id

**Field CapNo**

other capability

The indicated thread has been woken up on another capability.

**THREAD\_LABEL****Tag**

44

**Length**

variable

**Field ThreadId**

thread id

**Field String**

label

The indicated thread has been given a label (e.g. with `GHC.Conc.labelThread`).

### 17.2.4 Garbage collector events

The following events mark various points of the lifecycle of a moving garbage collection.

A typical garbage collection will look something like the following:

1. A capability realizes that it needs a garbage collection (e.g. as a result of running out of nursery) and requests a garbage collection. This is marked by `REQUEST_SEQ_GC` (page 813) or `REQUEST_PAR_GC` (page 813).
2. As other capabilities reach yield points and suspend execution they emit `STOP_THREAD` (page 810) events.
3. When all capabilities have suspended execution, collection will begin, marked by a `GC_START` (page 812) event.
4. As individual parallel GC threads commence with scavenging they will emit `GC_WORK` (page 813) events.
5. If a parallel GC thread runs out of work it will emit a `GC_IDLE` (page 813) event. If it is later handed more work it will emit another `GC_WORK` (page 813) event.
6. Eventually when scavenging has finished a `GC_DONE` (page 813) event will be emitted by each GC thread.
7. A bit of book-keeping is performed.
8. A `GC_END` (page 813) event will be emitted marking the end of the GC cycle.
9. A `HEAP_SIZE` (page 815) event will be emitted giving the current size of the heap, in bytes, calculated by how many megablocks are allocated.
10. A `BLOCKS_SIZE` (page 815) event will be emitted giving the current size of the heap, in bytes, calculated by how many blocks are allocated.
11. A `GC_STATS_GHC` (page 813) event will be emitted containing various details of the collection and heap state.
12. In the case of a major collection, a `HEAP_LIVE` (page 815) event will be emitted describing the current size of the live on-heap data.
13. In the case of the `-threaded` (page ??) RTS, a `SPARK_COUNTERS` (page 816) event will be emitted giving details on how many sparks have been created, evaluated, and GC'd.
14. As mutator threads resume execution they will emit `RUN_THREAD` (page 810) events.
15. A `MEM_RETURN` (page 814) event will be emitted containing details about currently live mblocks, how many we think we need and whether we could return excess to the OS.

Note that in the case of the concurrent non-moving collector additional events will be emitted during the concurrent phase of collection. These are described in *Non-moving GC event output* (page 826).

**GC\_START****Tag**

9

**Length**  
fixed

A garbage collection pass has been started.

**GC\_END**

**Tag**  
10

**Length**  
fixed

A garbage collection pass has been finished.

**REQUEST\_SEQ\_GC**

**Tag**  
11

**Length**  
fixed

A sequential garbage collection has been requested by a capability.

**REQUEST\_PAR\_GC**

**Tag**  
12

**Length**  
fixed

A parallel garbage collection has been requested by a capability.

**GC\_IDLE**

**Tag**  
20

**Length**  
fixed

An idle-time garbage collection has been started.

**GC\_WORK**

**Tag**  
21

**Length**  
fixed

Marks the start of concurrent scavenging.

**GC\_DONE**

**Tag**  
22

**Length**  
fixed

Marks the end of concurrent scavenging.

**GC\_STATS\_GHC****Tag**

53

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word16**

generation of collection

**Field Word64**

bytes copied

**Field Word64**

bytes of slop found

**Field Word64**

bytes of fragmentation, the difference between total mblock size and total block size. When all mblocks are full of full blocks, this number is 0.

**Field Word32**

number of parallel garbage collection threads

**Field Word64**

maximum number of bytes copied by any single collector thread

**Field Word64**

total bytes copied by all collector threads

**Field Word64**

the amount of balanced data copied by all threads

Report various information about a major collection.

**GC\_GLOBAL\_SYNC****Tag**

54

**Length**

fixed

TODO

**MEM\_RETURN****Tag**

90

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word32**

currently allocated mblocks

**Field Word32**

the number of mblocks we would like to retain



**Field Word32**

the number of mblocks which we returned to the OS

Report information about currently allocation megablocks and attempts made to return them to the operating system. If your heap is fragmented then the current value will be greater than needed value but returned will be less than the difference between the two.

### 17.2.5 Heap events and statistics

**HEAP\_ALLOCATED****Tag**

49

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word64**

allocated bytes

A new chunk of heap has been allocated by the indicated capability set.

**HEAP\_SIZE****Tag**

50

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word64**

heap size in bytes

Report the heap size, calculated by the number of megablocks currently allocated.

**BLOCKS\_SIZE****Tag**

91

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word64**

heap size in bytes

Report the heap size, calculated by the number of blocks currently allocated.

**HEAP\_LIVE****Tag**

51

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word64**

heap size in bytes

Report the live heap size.

**HEAP\_INFO\_GHC****Tag**

52

**Length**

fixed

**Field CapSetId**

heap capability set

**Field Word16**

number of garbage collection generations

**Field Word64**

maximum heap size

**Field Word64**

allocation area size

**Field Word64**

MBlock size

**Field Word64**

Block size

Report various information about the heap configuration. Typically produced during RTS initialization..

## 17.2.6 Spark events

**CREATE\_SPARK\_THREAD****Tag**

15

**Length**

fixed

A thread has been created to perform spark evaluation.

**SPARK\_COUNTERS****Tag**

34

**Length**

fixed

A periodic reporting of various statistics of spark evaluation.

**SPARK\_CREATE**

**Tag**  
35

**Length**  
fixed

A spark has been added to the spark pool.

**SPARK\_DUD**

**Tag**  
36

**Length**  
fixed

TODO

**SPARK\_OVERFLOW**

**Tag**  
37

**Length**  
fixed

TODO

**SPARK\_RUN**

**Tag**  
38

**Length**  
fixed

Evaluation has started on a spark.

**SPARK\_STEAL**

**Tag**  
39

**Length**  
fixed

**Field Word16**  
capability from which the spark was stolen

A spark has been stolen from another capability for evaluation.

**SPARK\_FIZZLE**

**Tag**  
40

**Length**  
fixed

A spark has been GC'd before being evaluated.

#### SPARK\_GC

**Tag**  
41

**Length**  
fixed

An unevaluated spark has been garbage collected.

### 17.2.7 Capability events

#### CAP\_CREATE

**Tag**  
45

**Length**  
fixed

**Field CapNo**  
the capability number

A capability has been started.

#### CAP\_DELETE

**Tag**  
46

**Length**  
fixed

A capability has been deleted.

#### CAP\_DISABLE

**Tag**  
47

**Length**  
fixed

A capability has been disabled.

#### CAP\_ENABLE

**Tag**  
48

**Length**  
fixed

A capability has been enabled.

### 17.2.8 Task events

#### TASK\_CREATE

**Tag**

55

**Length**

fixed

**Field TaskId**

task id

**Field CapNo**

capability number

**Field KernelThreadId**

The thread-id of the kernel thread which created the task.

Marks the creation of a task.

#### TASK\_MIGRATE

**Tag**

56

**Length**

fixed

**Field TaskId**

task id

**Field CapNo**

old capability

**Field CapNo**

new capability

Marks the migration of a task to a new capability.

#### TASK\_DELETE

**Tag**

57

**Length**

fixed

**Field TaskId**

task id

Marks the deletion of a task.

## 17.2.9 Tracing events

### LOG\_MSG

**Tag**  
16

**Length**  
variable

**Field String**  
The message

A log message from the runtime system.

### BLOCK\_MARKER

**Tag**  
18

**Length**  
fixed

**Field Word32**  
block size

**Field Word64**  
end time in nanoseconds

**Field Word16**  
capability number, invalid if 0xffff.

Marks a chunk of events. The events that fit in the next `block size` bytes all belong to the block marker capability.

### USER\_MSG

**Tag**  
19

**Length**  
variable

**Field String**  
message

A user log message (from, e.g., `Control.Concurrent.traceEvent`).

### USER\_MARKER

**Tag**  
58

**Length**  
variable

**Field String**  
marker name

A user marker (from `Debug.Trace.traceMarker`).

## 17.3 Heap profiler event log output

The heap profiler can produce output to GHC's event log, allowing samples to be correlated with other event log events over the program's lifecycle.

This section defines the layout of these events. The `String` type below is defined to be a UTF-8 encoded NUL-terminated string.

### 17.3.1 Metadata event types

#### 17.3.1.1 Beginning of sample stream

A single fixed-width event emitted during program start-up describing the samples that follow.

##### HEAP\_PROF\_BEGIN

**Tag**

160

**Length**

variable

**Field Word8**

profile ID

**Field Word64**

sampling period in nanoseconds

**Field Word32**

sample breakdown type. One of,

- `HEAP_PROF_BREAKDOWN_COST_CENTER` (output from [-hc](#) (page 724))
- `HEAP_PROF_BREAKDOWN_CLOSURE_DESCR` (output from [-hd](#) (page 724))
- `HEAP_PROF_BREAKDOWN_RETAINER` (output from [-hr](#) (page 725))
- `HEAP_PROF_BREAKDOWN_MODULE` (output from [-hm](#) (page 724))
- `HEAP_PROF_BREAKDOWN_TYPE_DESCR` (output from [-hy](#) (page 724))
- `HEAP_PROF_BREAKDOWN_BIOGRAPHY` (output from [-hb](#) (page 725))
- `HEAP_PROF_BREAKDOWN_CLOSURE_TYPE` (output from [-hT](#) (page 234))

**Field String**

module filter

**Field String**

closure description filter

**Field String**

type description filter

**Field String**

cost centre filter

**Field String**

cost centre stack filter

**Field String**

retainer filter

**Field String**

biography filter

**17.3.1.2 Cost centre definitions**

A variable-length packet produced once for each cost centre,

**HEAP\_PROF\_COST\_CENTRE****Tag**

161

**Length**

fixed

**Field Word32**

cost centre number

**Field String**

label

**Field String**

module

**Field String**

source location

**Field Word8**

flags:

- bit 0: is the cost-centre a CAF?

**17.3.1.3 Info Table Provenance definitions**

A message which describes an approximate source position for info tables. See [\*-finfo-table-map\*](#) (page 747) for more information.

**IPE****Tag**

169

**Length**

fixed

**Field Word64**

info table address

**Field String**

table name

**Field String**

closure type

**Field String**

type



**Field String**

source position label

**Field String**

source position module

**Field String**

source position location

**17.3.1.4 Sample event types**

A sample (consisting of a list of break-down classes, e.g. cost centres, and heap residency sizes), is to be encoded in the body of one or more events.

We normally mark the beginning of a new sample with an `EVENT_HEAP_PROF_SAMPLE_BEGIN` event,

**HEAP\_PROF\_SAMPLE\_BEGIN****Length**

fixed

**Field Word64**

sample number

Marks the beginning of a heap profile sample.

Biographical profiling samples start with the `EVENT_HEAP_BIO_PROF_SAMPLE_BEGIN` event. These events also include a timestamp which indicates when the sample was taken. This is because all these samples will appear at the end of the eventlog due to how the biographical profiling mode works. You can use the timestamp to reorder the samples relative to the other events.

**HEAP\_BIO\_PROF\_SAMPLE\_BEGIN****Tag**

166

**Length**

fixed

**Field Word64**

sample number

**Field Word64**

eventlog timestamp in ns

A heap residency census will follow. Since events may only be up to  $2^{16}$  bytes in length a single sample may need to be split among multiple `EVENT_HEAP_PROF_SAMPLE` events. The precise format of the census entries is determined by the break-down type.

At the end of the sample period the `EVENT_HEAP_PROF_SAMPLE_END` event is emitted. This is useful to properly delimit the sampling period and to record the total time spent profiling.

**HEAP\_PROF\_SAMPLE\_END****Tag**

165

**Length**

fixed

**Field Word64**

sample number

Marks the end of a heap profile sample.

**17.3.1.5 Cost-centre break-down****A variable-length packet encoding a heap profile sample broken down by,**

- cost-centre (*-hc* (page 724))

**HEAP\_PROF\_SAMPLE\_COST\_CENTRE****Tag**

163

**Length**

variable

**Field Word8**

profile ID

**Field Word64**

heap residency in bytes

**Field Word8**

stack depth

**Field Word32[]**

cost centre stack starting with inner-most (cost centre numbers)

**17.3.1.6 String break-down****A variable-length event encoding a heap sample broken down by,**

- type description (*-hy* (page 724))
- closure description (*-hd* (page 724))
- module (*-hm* (page 724))

**HEAP\_PROF\_SAMPLE\_STRING****Tag**

164

**Length**

variable

**Field Word8**

profile ID

**Field Word64**

heap residency in bytes

**Field String**

type or closure description, or module name

## 17.4 Time profiler event log output

The time profiling mode enabled by `-p` (page 718) also emits sample events to the eventlog. At the start of profiling the tick interval is emitted to the eventlog and then on each tick the current cost centre stack is emitted. Together these enable a user to construct an approximate track of the execution of their program.

### 17.4.1 Profile begin event

#### PROF\_BEGIN

**Tag**  
168

**Length**  
fixed

**Field Word64**  
tick interval, in nanoseconds

Marks the beginning of a time profile.

### 17.4.2 Profile sample event

A variable-length packet encoding a profile sample.

#### PROF\_SAMPLE\_COST\_CENTRE

**Tag**  
167

**Length**  
variable

**Field Word32**  
capability

**Field Word64**  
current profiling tick

**Field Word8**  
stack depth

**Field Word32[]**  
cost centre stack starting with inner-most (cost centre numbers)

## 17.5 Biographical profile sample event

A variable-length packet encoding a profile sample.

### BIO\_PROF\_SAMPLE\_BEGIN

Tag  
166  
TODO

## 17.6 Non-moving GC event output

These events mark various stages of the *non-moving collection* (page 222) lifecycle. These are enabled with the `+RTS -lg` event-set.

A typical non-moving collection cycle will look something like the following:

1. The preparatory phase of collection will emit the usual events associated with a moving collection. See *Garbage collector events* (page 812) for details.
2. The concurrent write barrier is enabled and the concurrent mark thread is started. From this point forward mutator threads may emit *CONC\_UPD\_REM\_SET\_FLUSH* (page 827) events, indicating that they have flushed their capability-local update remembered sets.
3. Concurrent marking begins, denoted by a *CONC\_MARK\_BEGIN* (page 826) event.
4. When the mark queue is depleted a *CONC\_MARK\_END* (page 827) is emitted.
5. If necessary (e.g. due to weak pointer marking), the marking process will continue, returning to step (3) above.
6. When the collector has done as much concurrent marking as it can it will enter the post-mark synchronization phase of collection, denoted by a *CONC\_SYNC\_BEGIN* (page 827) event.
7. Mutator threads will suspend execution and, if necessary, flush their update remembered sets (indicated by *CONC\_UPD\_REM\_SET\_FLUSH* (page 827) events).
8. The collector will do any final marking necessary (indicated by *CONC\_MARK\_BEGIN* (page 826) and *CONC\_MARK\_END* (page 827) events).
9. The collector will do a small amount of sweeping, disable the write barrier, emit a *CONC\_SYNC\_END* (page 827) event, and allow mutators to resume
10. The collector will begin the concurrent sweep phase, indicated by a *CONC\_SWEEP\_BEGIN* (page 827) event.
11. Once sweeping has concluded a *CONC\_SWEEP\_END* (page 827) event will be emitted and the concurrent collector thread will terminate.
12. A *NONMOVING\_HEAP\_CENSUS* (page 828) event will be emitted describing the fragmentation state of the non-moving heap.
13. A *NONMOVING\_PRUNED\_SEGMENTS* (page 828) event will be emitted showing information about freeing of segments.

### CONC\_MARK\_BEGIN

Tag  
200

**Length**

fixed

Marks the beginning of marking by the concurrent collector.

**CONC\_MARK\_END****Tag**

201

**Length**

fixed

**Field Word32**

number of objects which were marked in this marking phase.

Marks the end of marking by the concurrent collector.

**CONC\_SYNC\_BEGIN****Tag**

202

**Length**

fixed

Marks the beginning of the concurrent garbage collector's post-mark synchronization phase.

**CONC\_SYNC\_END****Tag**

203

**Length**

fixed

Marks the end of the concurrent garbage collector's post-mark synchronization phase.

**CONC\_SWEEP\_BEGIN****Tag**

204

**Length**

fixed

Marks the beginning of the concurrent garbage collector's sweep phase.

**CONC\_SWEEP\_END****Tag**

205

**Length**

fixed

Marks the end of the concurrent garbage collector's sweep phase.

**CONC\_UPD\_REM\_SET\_FLUSH****Tag**

206

**Length**  
fixed

Marks a capability flushing its local update remembered set accumulator.

### 17.6.1 Non-moving heap census

The non-moving heap census events (enabled with the `+RTS -ln` (page 234) event-set) are intended to provide insight into fragmentation of the non-moving heap.

#### NONMOVING\_HEAP\_CENSUS

**Tag**  
207

**Length**  
fixed

**Field Word16**  
*blk\_sz* in bytes.

**Field Word32**  
number of active segments.

**Field Word32**  
number of filled segments.

**Field Word32**  
number of live blocks.

Describes the occupancy of the *blk\_sz* sub-heap.

#### NONMOVING\_PRUNED\_SEGMENTS

**Tag**  
208

**Length**  
fixed

**Field Word32**  
number of pruned segments.

**Field Word32**  
number of segments remaining on the free list.

Report the amount of segments pruned and those remaining on the nonmoving heap's segment free list. Segments will be retained on the free list until the entire megablock containing them can be freed.

### 17.6.2 Ticky counters

Programs compiled with `-ticky` (page 737) and `-eventlog` (page 291) and invoked with `+RTS -lT` (page 234) will emit periodic samples of the ticky entry counters to the eventlog.

#### TICKY\_COUNTER\_DEF

**Tag**  
210

**Length**  
variable

**Field Word64**  
counter ID

**Field Word16**  
arity/field count

**Field String**  
argument kinds. This is the same as the synonymous field in the textual ticky summary.

**Field String**  
counter name

Defines a ticky counter.

#### TICKY\_COUNTER\_BEGIN\_SAMPLE

**Tag**  
212

**Length**  
fixed

Denotes the beginning of an atomic set of ticky-ticky profiler counter samples.

#### TICKY\_COUNTER\_SAMPLE

**Tag**  
211

**Length**  
fixed

**Field Word64**  
counter ID

**Field Word64**  
number of times closures of this type has been entered.

**Field Word64**  
number of allocations (words)

**Field Word64**  
number of times this has been allocated (words). Only produced for modules compiled with `-ticky-allocd` (page 737).

Records the number of “ticks” recorded by a ticky-ticky counter single the last sample.





## GLOSSARY

### **technology preview**

GHC will occasionally ship features advertised as being in a *technology preview* state. Such features are generally opt-in in nature (e.g. new language extensions) and may have various shortcomings. These may include known bugs (which we will try to document), lacking optimisation, and unhandled interactions with other language features. As such, behavior of such features may change in the future. However, we do expect features to converge to non-preview state over the course of a few GHC major releases.



## CARE AND FEEDING OF YOUR GHC USER'S GUIDE

The GHC User's Guide is the primary reference documentation for the Glasgow Haskell Compiler. Even more than this, it at times serves (for better or for worse) as a de-facto language standard, being the sole non-academic reference for many widely used language extensions.

Since GHC 8.0, the User's Guide is authored in [reStructuredText](#) (or reST or RST, for short) a rich but light-weight mark-up language aimed at producing documentation. The [Sphinx](#) tool is used to produce the final PDF and HTML documentation.

This document (also written in reST) serves as a brief introduction to reST and to document the conventions used in the User's Guide. This document is *not* intended to be a thorough guide to reST. For this see the resources referenced [below](#) (page 839).

### 19.1 Basics

Unicode characters are allowed in the document.

The basic syntax works largely as one would expect. For instance,

This is a paragraph containing a few sentences of text. Purple turtles walk through green fields of lofty maize. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Some lists,

1. This is a list item

- a. Followed by a sub-item
- b. And another!
- c. Now with ``a bit of code`` and some *\*emphasis\**.

2. Back to the first list

Or perhaps you are more of a bullet list person,

- \* Foo
- \* Fizzle

- Bar
- Blah

Or perhaps a definition list is in order,

(continues on next page)

(continued from previous page)

**\*Chelonii\***

The taxonomic order consisting of modern turtles

**\*Meiolaniidae\***

The taxonomic order of an extinct variety of herbivorous turtles.

Note the blank lines between a list item and its sub-items. Sub-items should be on the same indentation level as the content of their parent items. Also note that no whitespace is necessary or desirable before the bullet or item number (lest the list be indented unnecessarily).

The above would be rendered as,

This is a paragraph containing a few sentences of text. Purple turtles walk through green fields of lofty maize. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Some lists,

1. This is a list item
  - a. Followed by a sub-item
  - b. And another!
  - c. Now with a bit of code and some *emphasis*.
2. Back to the first list

Or perhaps you are more of a bullet list person,

- Foo
- Fizzle
  - Bar
  - Blah

Or perhaps a definition list is in order,

**Chelonii**

The taxonomic order consisting of modern turtles

**Meiolaniidae**

The taxonomic order of an extinct variety of herbivorous turtles.

### 19.1.1 Headings

While reST can accommodate a wide range of heading styles, we have standardized on this convention in the User's Guide,

**Header level 1**

=====

**Header level 2**

-----

**Header level 3**

~~~~~

**Header level 4**

^^^^^^

## 19.1.2 Formatting code

### 19.1.2.1 Haskell

Code snippets can be included as both inline and block elements. Inline code is denoted with double-backticks whereas block of code are introduced by ending a paragraph with double-colons and indentation,

The ```fib``` function is defined as, `::`

```
fib :: Integer -> Integer
fib 1 = 1
fib n = n * fib (n - 1)
```

Which would be rendered as,

The fib function is defined as,

```
fib :: Integer -> Integer
fib 1 = 1
fib n = n * fib (n - 1)
```

### 19.1.2.2 Other languages

Double-colon blocks are syntax-highlighted as Haskell by default. To avoid this use a `..` code-block `directive` with explicit language designation,

This is a simple shell script,

```
.. code-block:: sh

#!/bin/bash
echo "Hello World!"
```

## 19.1.3 Links

### 19.1.3.1 Within the User's Guide

Frequently we want to give a name to a section so it can be referred to from other points in the document,

```
.. _options-platform:
```

**Platform-specific Flags**

-----

There are lots of platform-specific flags.

**Some other section**

-----

(continues on next page)

(continued from previous page)

GHC supports a variety of `:ref:`x86`` specific features `<options-platform>``.

See `:ref:`options-platform`` for details.

### 19.1.3.2 To GHC resources

There are special macros for conveniently linking to GHC Wiki articles and tickets,

See `:ghc-wiki:`commentary/compiler/demand`` for details on demand analysis.

See the `:ghc-wiki:`coding style <commentary/coding-style>`` for guidelines.

See the `:ghc-ticket:`123`` for further discussion.

See the `:ghc-ticket:`this bug <123>`` for what happens when this fails.

### 19.1.3.3 To external resources

External links can be written in either of these ways,

See the ``GHC Wiki <https://gitlab.haskell.org/ghc/ghc/wikis>`_`` for details.

See the ``GHC Wiki`_`` for details.

.. `_GHC Wiki`: `https://gitlab.haskell.org/ghc/ghc/wikis`

### 19.1.3.4 To core library Haddock documentation

It is often useful to be able to refer to the Haddock documentation of the libraries shipped with GHC. The users guide's build system provides commands for referring to documentation for the following core GHC packages,

- `base`: `:base-ref`:
- `cabal`: `:cabal-ref`:
- `ghc-prim`: `:ghc-prim-ref`:

These are defined in `docs/users_guide/ghc_config.py.in`.

For instance,

See the documentation for `:base-ref:`Control.Applicative.`` for details.

### 19.1.3.5 Math

You can insert type-set equations using `:math:`. For instance,

```
Fick's law of diffusion, :math:`J = -D \frac{d \varphi}{d x}` , ...
```

will render as,

Fick's law of diffusion,  $J = -D \frac{d\varphi}{dx}$ , ...

### 19.1.4 Index entries

Index entries can be included anywhere in the document as a block element. They look like,

Here is some discussion on the Strict Haskell extension.

```
.. index::
    single: strict haskell
    single: language extensions; StrictData
```

This would produce two entries in the index referring to the “Strict Haskell” section. One would be a simple “strict haskell” heading whereas the other would be a “StrictData” sub-heading under “language extensions”.

Sadly it is not possible to use inline elements (e.g. monotype inlines) inside index headings.

## 19.2 Citations

Citations can be marked-up like this,

See the original paper `[Doe2008]`\_

```
.. [Doe2008] John Doe and Leslie Conway.
    "This is the title of our paper" (2008)
```

## 19.3 Admonitions

**Admonitions** are block elements used to draw the readers attention to a point. They should not be over-used for the sake of readability but they can be quite effective in separating and drawing attention to points of importance,

```
.. important::

    Be friendly and supportive to your fellow contributors.
```

Would be rendered as,

---

**Important:** Be friendly and supportive to your fellow contributors.

---

There are a number of admonitions types,

- attention
- caution
- danger
- error
- hint
- important
- note
- tip
- warning

## 19.4 Documenting command-line options and GHCi commands

`conf.py` defines a few Sphinx object types for GHCi commands (`ghci-cmd`), **ghc** command-line options (`ghc-flag`), and runtime `:system` options (`rts-flag`),

### 19.4.1 Command-line options

The `ghc-flag` and `rts-flag` roles/directives can be used to document command-line arguments to the **ghc** executable and runtime system, respectively. For instance,

```
.. rts-flag:: -C {seconds}

:since: 8.2
:default: 20 milliseconds

Sets the context switch interval to {s} seconds.
```

Will be rendered as,

```
-C {seconds}

Since
  8.2

Default
  20 milliseconds

Sets the context switch interval to {s} seconds.
```

and will have an associated index entry generated automatically.

The `ghc-flag` directive requires a few extra parameters to be passed. This extra information is used to generate the [Flag reference](#) (page 153) and the man page. A `ghc-flag` directive looks like this,

```
.. ghc-flag:: -fasm
:shortdesc: Use the native code generator
:type: dynamic
:reverse: -fllvm
:category: codegen

Regular description...
```

When rendered, the extra parameters will be hidden, and the data stored for later use. For more details, see the Sphinx extension `flags.py`.

Note that, as in Style Conventions below, we use `{ }` instead of less-than/greater-than signs. To reference a `ghc-flag` or `rts-flag`, you must match the definition exactly, including the arguments. A quick way to find the exact names and special characters is,



```
$ git grep -- "flag:: -o "
```

which will generate the appropriate,

```
separate_compilation.rst:.. ghc-flag:: -o {file}
```

### 19.4.2 GHCi commands

The `ghci-cmd` role and directive can be used to document GHCi directives. For instance, we can describe the `GHCi :module` command,

```
.. ghci-cmd:: :module; [*]{file}
```

Load a module

which will be rendered as,

```
:module [*]{file}
```

Load a module

And later refer to it by just the command name, `:module`,

The GHCi `:ghci-cmd:``:load`` and `:ghci-cmd:``:module`` commands are used to modify the modules in scope.

Like command-line options, GHCi commands will have associated index entries generated automatically.

## 19.5 Style Conventions

When describing user commands and the like it is common to need to denote user-substitutable tokens. In this document we use the convention, `{subst}` (note that these are angle brackets, U+27E8 and U+27E9, not less-than/greater-than signs).

## 19.6 reST reference materials

- [Sphinx reST Primer](#): A great place to start.
- [Sphinx extensions](#): How Sphinx extends reST
- [reST reference](#): When you really need the details.
- [Directives reference](#)



## INDICES AND TABLES

- `genindex`
- `search`



## BIBLIOGRAPHY

- [AssocDataTypes2005] “[Associated Types with Class](#)”, M. Chakravarty, G. Keller, S. Peyton Jones, and S. Marlow. In Proceedings of “The 32nd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (POPL’05)”, pages 1-13, ACM Press, 2005.
- [AssocTypeSyn2005] “[Associated Type Synonyms](#)”, M. Chakravarty, G. Keller, and S. Peyton Jones. In Proceedings of “The Tenth ACM SIGPLAN International Conference on Functional Programming”, ACM Press, pages 241-253, 2005.
- [TypeFamilies2008] “[Type Checking with Open Type Functions](#)”, T. Schrijvers, S. Peyton-Jones, M. Chakravarty, and M. Sulzmann, in Proceedings of “ICFP 2008: The 13th ACM SIGPLAN International Conference on Functional Programming”, ACM Press, pages 51-62, 2008.
- [Jones2000] “[Type Classes with Functional Dependencies](#)”, Mark P. Jones, In *Proceedings of the 9th European Symposium on Programming, ESOP 2000*, Berlin, Germany, March 2000, Springer-Verlag LNCS 1782, .
- [Jones1999] “[Exploring the Design Space for Type-based Implicit Parameterization](#)”, Mark P. Jones, Oregon Graduate Institute of Science & Technology, Technical Report, July 1999.
- [Lewis2000] “Implicit parameters: dynamic scoping with static types”, J Lewis, MB Shields, E Meijer, J Launchbury, *27th ACM Symposium on Principles of Programming Languages (POPL’00)*, Boston, Jan 2000.
- [Generics2010] Jose Pedro Magalhaes, Atze Dijkstra, Johan Jeuring, and Andres Loeh. [A generic deriving mechanism for Haskell](#). Proceedings of the third ACM Haskell symposium on Haskell (Haskell’2010), pp. 37-48, ACM, 2010.



## Symbols

- +RTS, 217
- +t option
  - in GHCi, 30
- .ghci
  - file, 68
- .haskeline
  - file, 69
- .hc files, saving, 244
- .hi files, 240
- .ll files, saving, 244
- .o files, 240
- .s files, saving, 244
- :
- GHCi command, 57
- :! (command)
  - GHCi command, 65
- :: (builtin-command)
  - GHCi command, 65
- :?
  - GHCi command, 57
- :{
  - GHCi command, 29
- :}
  - GHCi command, 29
- :abandon
  - GHCi command, 53
- :add
  - GHCi command, 53
- :all-types
  - GHCi command, 53
- :back
  - GHCi command, 53
- :break
  - GHCi command, 53
- :browse
  - GHCi command, 53
- :cd
  - GHCi command, 54
- :cmd
  - GHCi command, 54
- :complete
  - GHCi command, 54
- :continue
  - GHCi command, 55
- :def
  - GHCi command, 55
- :delete
  - GHCi command, 56
- :disable
  - GHCi command, 56
- :doc
  - GHCi command, 56
- :edit
  - GHCi command, 56
- :enable
  - GHCi command, 57
- :force
  - GHCi command, 57
- :forward
  - GHCi command, 57
- :help
  - GHCi command, 57
- :history
  - GHCi command, 57
- :ignore
  - GHCi command, 58
- :info
  - GHCi command, 57
- :instances
  - GHCi command, 57
- :issafe
  - GHCi command, 58
- :kind
  - GHCi command, 58
- :list
  - GHCi command, 59
- :list [{module}]
  - GHCi command, 59
- :load, 24
  - GHCi command, 59
- :loc-at
  - GHCi command, 59
- :main

```

    GHCi command, 60
:module
    GHCi command, 60
:print
    GHCi command, 60
:quit
    GHCi command, 61
:reload, 25
    GHCi command, 61
:run
    GHCi command, 61
:script
    GHCi command, 61
:set
    command in GHCi, 65
    GHCi command, 61
:set +c
    GHCi command, 66
:set +m
    GHCi command, 66
:set +r
    GHCi command, 66
:set +s
    GHCi command, 66
:set +t
    GHCi command, 66
:set args
    GHCi command, 61
:set editor
    GHCi command, 61
:set local-config
    GHCi command, 61
:set prog
    GHCi command, 61
:set prompt
    GHCi command, 61
:set prompt-cont
    GHCi command, 62
:set prompt-cont-function
    GHCi command, 62
:set prompt-function
    GHCi command, 62
:set stop
    GHCi command, 62
:seti, 65
    GHCi command, 63
:show
    GHCi command, 63
:show bindings
    GHCi command, 63
:show breaks
    GHCi command, 63
:show context
    GHCi command, 63
:show imports
    GHCi command, 63
:show language
    GHCi command, 63
:show modules
    GHCi command, 63
:show packages
    GHCi command, 63
:show paths
    GHCi command, 63
:show targets
    GHCi command, 63
:showi language
    GHCi command, 63
:sprint
    GHCi command, 63
:step
    GHCi command, 63
:steplocal
    GHCi command, 64
:stepmodule
    GHCi command, 64
:trace
    GHCi command, 64
:type
    GHCi command, 64
:type +d
    GHCi command, 64
:type-at
    GHCi command, 64
:unadd
    GHCi command, 65
:undef
    GHCi command, 65
:unset
    GHCi command, 65
:uses
    GHCi command, 65
    __GLASGOW_HASKELL_FULL_VERSION__, 283
    __GLASGOW_HASKELL_LLVM__, 284
    __GLASGOW_HASKELL_PATCHLEVEL1__, 283
    __GLASGOW_HASKELL_PATCHLEVEL2__, 283
    __GLASGOW_HASKELL_TH__, 284
    __GLASGOW_HASKELL__, 4, 283
    __PARALLEL_HASKELL__, 284
-?
    GHC option, 79
    ghc-pkg option, 272
    hp2ps command line option, 730
-A {size}
    RTS option, 223
-AL {size}
    RTS option, 223
-A{size}

```



- RTS option, [753](#)
- B
  - RTS option, [236](#)
- C, [86](#)
  - GHC option, [78](#)
- C {s}
  - RTS option, [150](#)
- D {x}
  - RTS option, [236](#)
- DC DEBUG: compact
  - RTS option, [237](#)
- DG DEBUG: gccafs
  - RTS option, [237](#)
- DL DEBUG: linker (*verbose*)
  - implies :rts-flag:``-Dl``; RTS option, [237](#)
- DS DEBUG: sanity
  - RTS option, [237](#)
- DZ DEBUG: zero freed memory on GC
  - RTS option, [237](#)
- Da DEBUG: apply
  - RTS option, [237](#)
- Db DEBUG: block
  - RTS option, [237](#)
- Dc DEBUG: program coverage
  - RTS option, [237](#)
- Dg DEBUG: gc
  - RTS option, [237](#)
- Di DEBUG: interpreter
  - RTS option, [237](#)
- Dk DEBUG: continuation
  - RTS option, [237](#)
- Dl DEBUG: linker
  - RTS option, [237](#)
- Dm DEBUG: stm
  - RTS option, [237](#)
- Dn DEBUG: non-moving garbage collector
  - RTS option, [237](#)
- Dp DEBUG: prof
  - RTS option, [237](#)
- Dr DEBUG: sparks
  - RTS option, [237](#)
- Ds DEBUG: scheduler
  - RTS option, [237](#)
- Dt DEBUG: stable
  - RTS option, [237](#)
- Dw DEBUG: weak
  - RTS option, [237](#)
- Dz DEBUG: stack squeezing
  - RTS option, [237](#)
- D(symbol)[=(value)]
  - GHC option, [282](#)
- E, [86](#)
  - GHC option, [78](#)
- F
  - GHC option, [285](#)
- F {factor}
  - RTS option, [225](#)
- Fd {factor}
  - RTS option, [225](#)
- G RTS option, [757](#)
- G {generations}
  - RTS option, [225](#)
- H
  - RTS option, [753](#)
- H [{size}]
  - RTS option, [227](#)
- H {size}
  - GHC option, [95](#)
- I {seconds}
  - RTS option, [227](#)
- Iw {seconds}
  - RTS option, [227](#)
- I{dir}
  - GHC option, [282](#)
- K {size}
  - RTS option, [228](#)
- L {dir}
  - GHC option, [288](#)
- L {num}
  - RTS option, [727](#)
- L {n}
  - RTS option, [234](#)
- M
  - GHC option, [79](#)
- M {size}
  - RTS option, [229](#)
- M{size}={size}
  - RTS option, [229](#)
- N
  - RTS option, [151](#)
- N {x}
  - RTS option, [151](#)
- O
  - GHC option, [127](#)
- O {size}
  - RTS option, [224](#)
- O0
  - GHC option, [127](#)
- O1
  - GHC option, [127](#)
- O2
  - GHC option, [127](#)
- O{n}
  - GHC option, [128](#)
- P
  - RTS option, [718](#)

- R {size}
  - RTS option, [727](#)
- RTS, [217](#)
- Rghc-timing
  - GHC option, [92](#)
- S, [86](#)
  - GHC option, [79](#)
- S RTS option, [757](#)
- S [{file}]
  - RTS option, [231](#)
- T
  - RTS option, [231](#)
- U(symbol)
  - GHC option, [282](#)
- V
  - GHC option, [79](#)
  - ghc-pkg option, [272](#)
- V {secs}
  - RTS option, [718](#)
- W
  - GHC option, [97](#)
- Wall
  - GHC option, [97](#)
- Wall-missed-specialisations
  - GHC option, [101](#)
- Wall-missed-specializations
  - GHC option, [101](#)
- Wambiguous-fields
  - GHC option, [122](#)
- Wauto-orphans
  - GHC option, [122](#)
- Wbadly-staged-types
  - GHC option, [126](#)
- Wcompat
  - GHC option, [97](#)
- Wcompat-unqualified-imports
  - GHC option, [99](#)
- Wcpp-undef
  - GHC option, [120](#)
- Wdata-kinds-tc
  - GHC option, [126](#)
- Wdefault
  - GHC option, [96](#)
- Wdefaulted-exception-context
  - GHC option, [126](#)
- Wdeferred-out-of-scope-variables
  - GHC option, [100](#)
- Wdeferred-type-errors
  - GHC option, [100](#)
- Wdeprecated-flags
  - GHC option, [103](#)
- Wdeprecated-type-abstractions
  - GHC option, [125](#)
- Wdeprecations
  - GHC option, [102](#)
- Wderiving-defaults
  - GHC option, [104](#)
- Wderiving-typeable
  - GHC option, [122](#)
- Wdodgy-exports
  - GHC option, [104](#)
- Wdodgy-foreign-imports
  - GHC option, [103](#)
- Wdodgy-imports
  - GHC option, [104](#)
- Wduplicate-constraints
  - GHC option, [104](#)
- Wduplicate-exports
  - GHC option, [105](#)
- Wempty-enumerations
  - GHC option, [104](#)
- Werror
  - GHC option, [98](#)
- Weverything
  - GHC option, [97](#)
- Wextended-warnings
  - GHC option, [101](#)
- Wextra
  - GHC option, [97](#)
- Wforall-identifier
  - GHC option, [122](#)
- Wgadt-mono-local-binds
  - GHC option, [123](#)
- Whi-shadowing
  - GHC option, [105](#)
- Widentities
  - GHC option, [106](#)
- Wimplicit-kind-vars
  - GHC option, [106](#)
- Wimplicit-lift
  - GHC option, [106](#)
- Wimplicit-prelude
  - GHC option, [106](#)
- Wimplicit-rhs-quantification
  - GHC option, [124](#)
- Winaccessible-code
  - GHC option, [113](#)
- Wincomplete-export-warnings
  - GHC option, [125](#)
- Wincomplete-patterns
  - GHC option, [107](#)
- Wincomplete-record-selectors
  - GHC option, [108](#)
- Wincomplete-record-updates
  - GHC option, [107](#)
- Wincomplete-uni-patterns
  - GHC option, [107](#)
- Winconsistent-flags

- GHC option, [126](#)
- Winferred-safe-imports
  - GHC option, [644](#)
- Winline-rule-shadowing
  - GHC option, [119](#)
- Winvalid-haddock
  - GHC option, [121](#)
- Wloopy-superclass-solve
  - GHC option, [123](#)
- Wmisplaced-pragmas
  - GHC option, [100](#)
- Wmissed-extra-shared-lib
  - GHC option, [115](#)
- Wmissed-specialisations
  - GHC option, [101](#)
- Wmissed-specializations
  - GHC option, [101](#)
- Wmissing-deriving-strategies
  - GHC option, [108](#)
- Wmissing-export-lists
  - GHC option, [109](#)
- Wmissing-exported-pattern-synonym-signatures
  - GHC option, [111](#)
- Wmissing-exported-signatures
  - GHC option, [110](#)
- Wmissing-exported-sigs
  - GHC option, [110](#)
- Wmissing-fields
  - GHC option, [109](#)
- Wmissing-home-modules
  - GHC option, [120](#)
- Wmissing-import-lists
  - GHC option, [109](#)
- Wmissing-kind-signatures
  - GHC option, [111](#)
- Wmissing-local-signatures
  - GHC option, [110](#)
- Wmissing-local-sigs
  - GHC option, [110](#)
- Wmissing-methods
  - GHC option, [109](#)
- Wmissing-monadfail-instances
  - GHC option, [103](#)
- Wmissing-pattern-synonym-signatures
  - GHC option, [110](#)
- Wmissing-poly-kind-signatures
  - GHC option, [111](#)
- Wmissing-role-annotations
  - GHC option, [124](#)
- Wmissing-safe-haskell-mode
  - GHC option, [644](#)
- Wmissing-signatures
  - GHC option, [110](#)
- Wmissing-space-after-bang
  - GHC option, [122](#)
- Wmonomorphism-restriction
  - GHC option, [115](#)
- Wname-shadowing
  - GHC option, [111](#)
- Wnoncanonical-monad-instances
  - GHC option, [102](#)
- Wnoncanonical-monadfail-instances
  - GHC option, [102](#)
- Wnoncanonical-monoid-instances
  - GHC option, [102](#)
- Wnot
  - GHC option, [98](#)
- Woperator-whitespace
  - GHC option, [121](#)
- Woperator-whitespace-ext-conflict
  - GHC option, [121](#)
- Worphans
  - GHC option, [112](#)
- Woverflowed-literals
  - GHC option, [104](#)
- Woverlapping-patterns
  - GHC option, [112](#)
- Wpartial-fields
  - GHC option, [120](#)
- Wpartial-type-signatures
  - GHC option, [100](#)
- Wprepositive-qualified-module
  - GHC option, [99](#)
- Wredundant-bang-patterns
  - GHC option, [118](#)
- Wredundant-constraints
  - GHC option, [105](#)
- Wredundant-record-wildcards
  - GHC option, [119](#)
- Wredundant-strictness-flags
  - GHC option, [119](#)
- Wsafe
  - GHC option, [643](#)
- Wsemigroup
  - GHC option, [103](#)
- Wsimplifiable-class-constraints
  - GHC option, [114](#)
- Wstar-binder
  - GHC option, [113](#)
- Wstar-is-type
  - GHC option, [113](#)
- Wtabs
  - GHC option, [114](#)
- Wterm-variable-capture
  - GHC option, [124](#)
- Wtrustworthy-safe
  - GHC option, [643](#)
- Wtype-defaults

- GHC option, [114](#)
- Wtype-equality-out-of-scope
  - GHC option, [123](#)
- Wtype-equality-requires-operators
  - GHC option, [123](#)
- Wtyped-holes
  - GHC option, [99](#)
- Wunbanged-strict-patterns
  - GHC option, [120](#)
- Wunicode-bidirectional-format-characters
  - GHC option, [122](#)
- Wunrecognised-pragmas
  - GHC option, [100](#)
- Wunrecognised-warning-flags
  - GHC option, [99](#)
- Wunsafe
  - GHC option, [643](#)
- Wunsupported-calling-conventions
  - GHC option, [103](#)
- Wunsupported-llvm-version
  - GHC option, [115](#)
- Wunticked-promoted-constructors
  - GHC option, [115](#)
- Wunused-binds
  - GHC option, [115](#)
- Wunused-do-bind
  - GHC option, [117](#)
- Wunused-foralls
  - GHC option, [118](#)
- Wunused-imports
  - GHC option, [117](#)
- Wunused-local-binds
  - GHC option, [116](#)
- Wunused-matches
  - GHC option, [117](#)
- Wunused-packages
  - GHC option, [120](#)
- Wunused-pattern-binds
  - GHC option, [116](#)
- Wunused-record-wildcards
  - GHC option, [118](#)
- Wunused-top-binds
  - GHC option, [116](#)
- Wunused-type-patterns
  - GHC option, [117](#)
- Wwarn
  - GHC option, [98](#)
- Wwarnings-deprecations
  - GHC option, [102](#)
- Wwrong-do-bind
  - GHC option, [119](#)
- Wx-(category)
  - GHC option, [101](#)
- Z
  - RTS option, [238](#)
- RTS, [217](#)
- automatic-era-increment
  - RTS option, [726](#)
- copying-gc
  - RTS option, [222](#)
- disable-delayed-os-memory-return
  - RTS option, [220](#)
- eventlog-flush-interval={seconds}
  - RTS option, [235](#)
- force
  - ghc-pkg option, [271](#)
- frontend (module)
  - GHC option, [79](#)
- generate-crash-dumps
  - RTS option, [220](#)
- generate-stack-traces=<yes|no>
  - RTS option, [220](#)
- global
  - ghc-pkg option, [271](#)
- help
  - GHC option, [79](#)
  - ghc-pkg option, [272](#)
- info
  - GHC option, [79](#)
  - RTS option, [238](#)
- install-seh-handlers={yes|no}
  - RTS option, [220](#)
- install-signal-handlers={yes|no}
  - RTS option, [220](#)
- interactive, [51](#)
  - GHC option, [78](#)
- internal-counters
  - RTS option, [231](#)
- ipid
  - ghc-pkg option, [272](#)
- long-gc-sync
  - RTS option, [230](#)
- long-gc-sync=<seconds>
  - RTS option, [230](#)
- machine-readable
  - RTS option, [231](#)
- make
  - GHC option, [78](#)
  - mode of GHC, [82](#)
- merge-objs
  - GHC option, [79](#)
- no-automatic-heap-samples
  - RTS option, [726](#)
- no-automatic-time-samples
  - RTS option, [726](#)
- nonmoving-dense-allocator-count={count}
  - RTS option, [222](#)
- nonmoving-gc

- RTS option, [222](#)
- null-eventlog-writer
  - RTS option, [726](#)
- numa
  - RTS option, [229](#)
- numa=<mask>
  - RTS option, [229](#)
- numeric-version
  - GHC option, [79](#)
- print-booter-version
  - GHC option, [79](#)
- print-build-platform
  - GHC option, [79](#)
- print-c-compiler-flags
  - GHC option, [80](#)
- print-c-compiler-link-flags
  - GHC option, [80](#)
- print-debug-on
  - GHC option, [80](#)
- print-global-package-db
  - GHC option, [80](#)
- print-have-interpreter
  - GHC option, [80](#)
- print-have-native-code-generator
  - GHC option, [80](#)
- print-host-platform
  - GHC option, [80](#)
- print-ld-flags
  - GHC option, [80](#)
- print-leading-underscore
  - GHC option, [80](#)
- print-libdir
  - GHC option, [80](#)
- print-object-splitting-supported
  - GHC option, [80](#)
- print-project-git-commit-id
  - GHC option, [80](#)
- print-project-version
  - GHC option, [81](#)
- print-rts-ways
  - GHC option, [81](#)
- print-stage
  - GHC option, [81](#)
- print-support-smp
  - GHC option, [81](#)
- print-tables-next-to-code
  - GHC option, [81](#)
- print-target-platform
  - GHC option, [81](#)
- print-unregisterised
  - GHC option, [81](#)
- run {file}
  - GHC option, [78](#)
- show-iface {file}
  - GHC option, [79](#), [245](#)
- show-options
  - GHC option, [79](#)
- supported-extensions
  - GHC option, [79](#)
- supported-languages
  - GHC option, [79](#)
- unit-id
  - ghc-pkg option, [272](#)
- user
  - ghc-pkg option, [272](#)
- verbose
  - ghc-pkg option, [272](#)
- version
  - GHC option, [79](#)
  - ghc-pkg option, [272](#)
- write-tix-file
  - RTS option, [236](#)
- auto
  - GHC option, [717](#)
- auto-all
  - GHC option, [717](#)
- b
  - hp2ps command line option, [729](#)
- c, [86](#)
  - GHC option, [79](#), [288](#)
  - hp2ps command line option, [730](#)
  - RTS option, [224](#)
- c {n}
  - RTS option, [225](#)
- caf-all
  - GHC option, [717](#)
- clear-package-db
  - GHC option, [265](#)
- cpp
  - GHC option, [282](#)
- cpp vs string gaps, [285](#)
- d
  - hp2ps command line option, [729](#)
- dasm-lint
  - GHC option, [309](#)
- dcmm-lint
  - GHC option, [309](#)
- dcore-lint
  - GHC option, [309](#)
- ddisable-js-c-sources
  - GHC option, [306](#)
- ddisable-js-minifier
  - GHC option, [306](#)
- ddump-asm
  - GHC option, [306](#)
- ddump-asm-conflicts
  - GHC option, [305](#)
- ddump-asm-liveness

- GHC option, [305](#)
- ddump-asm-native
  - GHC option, [305](#)
- ddump-asm-regalloc
  - GHC option, [305](#)
- ddump-asm-regalloc-stages
  - GHC option, [305](#)
- ddump-asm-stats
  - GHC option, [305](#)
- ddump-bcos
  - GHC option, [306](#)
- ddump-c-backend
  - GHC option, [305](#)
- ddump-call-arity
  - GHC option, [301](#)
- ddump-cfg-weights
  - GHC option, [305](#)
- ddump-cmm
  - GHC option, [305](#)
- ddump-cmm-caf
  - GHC option, [304](#)
- ddump-cmm-cbe
  - GHC option, [304](#)
- ddump-cmm-cfg
  - GHC option, [304](#)
- ddump-cmm-cps
  - GHC option, [305](#)
- ddump-cmm-from-stg
  - GHC option, [304](#)
- ddump-cmm-info
  - GHC option, [304](#)
- ddump-cmm-opt
  - GHC option, [305](#)
- ddump-cmm-proc
  - GHC option, [304](#)
- ddump-cmm-procmap
  - GHC option, [304](#)
- ddump-cmm-raw
  - GHC option, [304](#)
- ddump-cmm-sink
  - GHC option, [304](#)
- ddump-cmm-sp
  - GHC option, [304](#)
- ddump-cmm-split
  - GHC option, [304](#)
- ddump-cmm-switch
  - GHC option, [304](#)
- ddump-cmm-thread-sanitizer
  - GHC option, [304](#)
- ddump-cmm-verbose
  - GHC option, [304](#)
- ddump-cmm-verbose-by-proc
  - GHC option, [304](#)
- ddump-core-stats
  - GHC option, [301](#)
- ddump-cpr-signatures
  - GHC option, [302](#)
- ddump-cpranal
  - GHC option, [302](#)
- ddump-cs-trace
  - GHC option, [300](#)
- ddump-cse
  - GHC option, [302](#)
- ddump-debug
  - GHC option, [306](#)
- ddump-deriv
  - GHC option, [300](#)
- ddump-dmd-signatures
  - GHC option, [302](#)
- ddump-dmdanal
  - GHC option, [302](#)
- ddump-ds
  - GHC option, [301](#)
- ddump-ds-preopt
  - GHC option, [301](#)
- ddump-ec-trace
  - GHC option, [300](#)
- ddump-exitify
  - GHC option, [301](#)
- ddump-faststrings
  - GHC option, [299](#)
- ddump-file-prefix={str}
  - GHC option, [298](#)
- ddump-float-in
  - GHC option, [303](#)
- ddump-float-out
  - GHC option, [303](#)
- ddump-foreign
  - GHC option, [306](#)
- ddump-full-laziness
  - GHC option, [303](#)
- ddump-hi
  - GHC option, [245](#)
- ddump-hi-diffs, [752](#)
  - GHC option, [245](#)
- ddump-hie
  - GHC option, [300](#)
- ddump-hpc
  - GHC option, [306](#)
- ddump-if-trace
  - GHC option, [299](#)
- ddump-inlinings
  - GHC option, [302](#)
- ddump-js
  - GHC option, [306](#)
- ddump-json
  - GHC option, [298](#)
- ddump-late-cc

- GHC option, [303](#)
- ddump-liberate-case
  - GHC option, [303](#)
- ddump-llvm
  - GHC option, [305](#)
- ddump-minimal-imports
  - GHC option, [245](#)
- ddump-mod-cycles
  - GHC option, [257](#)
- ddump-mod-map
  - GHC option, [306](#)
- ddump-occur-anal
  - GHC option, [303](#)
- ddump-opt-cmm
  - GHC option, [305](#)
- ddump-parsed
  - GHC option, [299](#)
- ddump-parsed-ast
  - GHC option, [299](#)
- ddump-prep
  - GHC option, [303](#)
- ddump-rn
  - GHC option, [300](#)
- ddump-rn-ast
  - GHC option, [300](#)
- ddump-rn-stats
  - GHC option, [300](#)
- ddump-rn-trace
  - GHC option, [300](#)
- ddump-rtti
  - GHC option, [306](#)
- ddump-rule-firings
  - GHC option, [301](#)
- ddump-rule-rewrites
  - GHC option, [302](#)
- ddump-rules
  - GHC option, [301](#)
- ddump-simpl
  - GHC option, [302](#)
- ddump-simpl-iterations
  - GHC option, [301](#)
- ddump-simpl-stats
  - GHC option, [301](#)
- ddump-simpl-trace
  - GHC option, [301](#)
- ddump-spec
  - GHC option, [301](#)
- ddump-spec-constr
  - GHC option, [301](#)
- ddump-splices
  - GHC option, [300](#)
- ddump-static-argument-transformation
  - GHC option, [303](#)
- ddump-stg
  - GHC option, [303](#)
- ddump-stg-cg
  - GHC option, [303](#)
- ddump-stg-final
  - GHC option, [303](#)
- ddump-stg-from-core
  - GHC option, [303](#)
- ddump-stg-tags
  - GHC option, [303](#)
- ddump-stg-unarised
  - GHC option, [303](#)
- ddump-str-signatures
  - GHC option, [302](#)
- ddump-stranal
  - GHC option, [302](#)
- ddump-tc
  - GHC option, [300](#)
- ddump-tc-ast
  - GHC option, [300](#)
- ddump-tc-trace
  - GHC option, [300](#)
- ddump-ticked
  - GHC option, [306](#)
- ddump-timings
  - GHC option, [299](#)
- ddump-to-file
  - GHC option, [298](#)
- ddump-types
  - GHC option, [300](#)
- ddump-verbose-inlinings
  - GHC option, [302](#)
- ddump-view-pattern-commoning
  - GHC option, [303](#)
- ddump-worker-wrapper
  - GHC option, [303](#)
- debug
  - GHC option, [290](#)
- dep-makefile {file}
  - GHC option, [257](#)
- dep-suffix {suffix}
  - GHC option, [257](#)
- dfaststring-stats
  - GHC option, [299](#)
- dhex-word-literals
  - GHC option, [307](#)
- dinitial-unique={s}
  - GHC option, [310](#)
- dinline-check={str}
  - GHC option, [302](#)
- dipe-stats
  - GHC option, [299](#)
- distrust {pkg}
  - GHC option, [641](#)
- distrust-all-packages

- GHC option, 642
- dkeep-comments
  - GHC option, 299
- dlinear-core-lint
  - GHC option, 309
- dlint
  - GHC option, 308
- dno-debug-output
  - GHC option, 307
- dno-typeable-binds
  - GHC option, 310
- dppr-case-as-let
  - GHC option, 307
- dppr-cols={n}
  - GHC option, 307
- dppr-debug
  - GHC option, 299
- dppr-user-length
  - GHC option, 307
- drule-check={str}
  - GHC option, 302
- dshow-passes
  - GHC option, 298
- dstg-lint
  - GHC option, 309
- dsuppress-all
  - GHC option, 307
- dsuppress-coercion-types
  - GHC option, 308
- dsuppress-coercions
  - GHC option, 308
- dsuppress-core-sizes
  - GHC option, 308
- dsuppress-idinfo
  - GHC option, 307
- dsuppress-module-prefixes
  - GHC option, 308
- dsuppress-stg-free-vars
  - GHC option, 308
- dsuppress-stg-reps
  - GHC option, 308
- dsuppress-ticks
  - GHC option, 307
- dsuppress-timestamps
  - GHC option, 308
- dsuppress-type-applications
  - GHC option, 308
- dsuppress-type-signatures
  - GHC option, 308
- dsuppress-unfoldings
  - GHC option, 308
- dsuppress-uniques
  - GHC option, 307
- dsuppress-var-kinds
  - GHC option, 308
- dtag-inference-checks
  - GHC option, 310
- dth-dec-file
  - GHC option, 300
- dumpdir {dir}
  - GHC option, 243
- dunique-increment={i}
  - GHC option, 310
- dverbose-core2core
  - GHC option, 301
- dverbose-stg2stg
  - GHC option, 303
- dylib-install-name {path}
  - GHC option, 293
- dynamic
  - GHC option, 289
- dynamic-too
  - GHC option, 287
- dynhisuf {suffix}
  - GHC option, 244
- dynload
  - GHC option, 289
- dyno {file}
  - GHC option, 242
- dynohi {file}
  - GHC option, 243
- dynosuf {suffix}
  - GHC option, 243
- e {expr}
  - GHC option, 78
- eventlog
  - GHC option, 291
- exclude-module={file}
  - GHC option, 258
- e(float)[in|mm|pt]
  - hp2ps command line option, 729
- f
  - ghc-pkg option, 271
- fPIC
  - GHC option, 286
- fPIE
  - GHC option, 287
- f\\* options (*GHC*), 128
- fabstract-refinement-hole-fits
  - GHC option, 354
- falignment-sanitisation
  - GHC option, 309
- fasm
  - GHC option, 286
- fasm-shortcutting
  - GHC option, 129
- fbinary-blob-threshold={n}
  - GHC option, 149



- fblock-layout-cfg  
GHC option, [130](#)
- fblock-layout-weightless  
GHC option, [130](#)
- fblock-layout-weights  
GHC option, [130](#)
- fbreak-on-error  
GHC option, [49](#)
- fbreak-on-exception  
GHC option, [49](#)
- fbreak-points  
GHC option, [41](#)
- fbyte-code  
GHC option, [286](#)
- fbyte-code-and-object-code  
GHC option, [286](#)
- fcall-arity  
GHC option, [129](#)
- fcase-folding  
GHC option, [128](#)
- fcase-merge  
GHC option, [128](#)
- fcatch-nonexhaustive-cases  
GHC option, [309](#)
- fcheck-prim-bounds  
GHC option, [310](#)
- fclear-plugins  
GHC option, [682](#)
- fcmm-control-flow  
GHC option, [129](#)
- fcmm-elim-common-blocks  
GHC option, [129](#)
- fcmm-sink  
GHC option, [129](#)
- fcmm-static-pred  
GHC option, [129](#)
- fcmm-thread-sanitizer  
GHC option, [310](#)
- fcompact-unwind  
GHC option, [294](#)
- fcore-constant-folding  
GHC option, [128](#)
- fcpr-anal  
GHC option, [130](#)
- fcross-module-specialise  
GHC option, [141](#)
- fcse  
GHC option, [131](#)
- fdefer-diagnostics  
GHC option, [90](#)
- fdefer-out-of-scope-variables  
GHC option, [465](#)
- fdefer-type-errors  
GHC option, [464](#)
- fdefer-typed-holes  
GHC option, [464](#)
- fdiagnostics-as-json  
GHC option, [91](#)
- fdiagnostics-color={always|auto|never}  
GHC option, [91](#)
- fdiagnostics-show-caret  
GHC option, [91](#)
- fdicts-cheap  
GHC option, [132](#)
- fdicts-strict  
GHC option, [132](#)
- fdistinct-constructor-tables  
GHC option, [748](#)
- fdmd-tx-dict-sel  
GHC option, [133](#)
- fdmd-unbox-width={n}  
GHC option, [140](#)
- fdo-clever-arg-eta-expansion  
GHC option, [133](#)
- fdo-eta-reduction  
GHC option, [133](#)
- fdo-lambda-eta-expansion  
GHC option, [133](#)
- fdump-with-ways  
GHC option, [298](#)
- feager-blackholing  
GHC option, [133](#)
- fenable-rewrite-rules  
GHC option, [645](#)
- fenable-th-splice-warnings  
GHC option, [588](#)
- ferror-spans  
GHC option, [92](#)
- fexcess-precision  
GHC option, [133](#)
- fexitification  
GHC option, [129](#)
- fexpose-all-unfoldings  
GHC option, [134](#)
- fexpose-internal-symbols  
GHC option, [287](#)
- fexternal-dynamic-refs  
GHC option, [287](#)
- fexternal-interpreter  
GHC option, [70](#)
- ffamily-application-cache  
GHC option, [393](#)
- ffloat-in  
GHC option, [134](#)
- fforce-recomp  
GHC option, [246](#)
- ffull-laziness  
GHC option, [134](#)

- ffun-to-thunk  
GHC option, [134](#)
- fghci-hist-size={n}  
GHC option, [48](#)
- fghci-leak-check  
GHC option, [52](#)
- fglasgow-exts  
GHC option, [316](#)
- fhelphful-errors  
GHC option, [100](#)
- fhide-source-paths  
GHC option, [87](#)
- fhpc  
GHC option, [733](#)
- fignore-asserts  
GHC option, [135](#)
- fignore-hpc-changes  
GHC option, [246](#)
- fignore-interface-pragmas  
GHC option, [135](#)
- fignore-optim-changes  
GHC option, [246](#)
- fimplicit-import-qualified  
GHC option, [35](#)
- finfo-table-map  
GHC option, [747](#)
- finfo-table-map-with-fallback  
GHC option, [748](#)
- finfo-table-map-with-stack  
GHC option, [748](#)
- finline-generics  
GHC option, [142](#)
- finline-generics-aggressively  
GHC option, [142](#)
- finter-module-far-jumps  
GHC option, [135](#)
- fkeep-auto-rules  
GHC option, [135](#)
- fkeep-cafs  
GHC option, [294](#)
- fkeep-going  
GHC option, [92](#)
- flate-dmd-anal  
GHC option, [135](#)
- flate-specialise  
GHC option, [142](#)
- fliberate-case  
GHC option, [136](#)
- fliberate-case-threshold={n}  
GHC option, [136](#)
- flink-rtss  
GHC option, [289](#)
- fllvm  
GHC option, [286](#)
- fllvm-fill-undef-with-garbage  
GHC option, [309](#)
- fllvm-pass-vectors-in-regs  
GHC option, [136](#)
- flocal-float-out  
GHC option, [137](#)
- flocal-float-out-top-level  
GHC option, [137](#)
- flocal-ghci-history  
GHC option, [51](#)
- floopification  
GHC option, [136](#)
- fmax-forced-spec-args={n}  
GHC option, [138](#)
- fmax-inline-alloc-size={n}  
GHC option, [136](#)
- fmax-inline-memcpy-insns={n}  
GHC option, [136](#)
- fmax-inline-memset-insns={n}  
GHC option, [136](#)
- fmax-pmcheck-models={n}  
GHC option, [107](#)
- fmax-refinement-hole-fits={n}  
GHC option, [354](#)
- fmax-relevant-binds={n}  
GHC option, [137](#)
- fmax-simplifier-iterations={n}  
GHC option, [137](#)
- fmax-uncovered-patterns={n}  
GHC option, [137](#)
- fmax-valid-hole-fits={n}  
GHC option, [352](#)
- fmax-worker-args={n}  
GHC option, [138](#)
- fno-\\* options (*GHC*), [128](#)
- fno-code  
GHC option, [286](#)
- fno-embed-manifest  
GHC option, [292](#)
- fno-gen-manifest  
GHC option, [292](#)
- fno-info-table-map-with-fallback  
GHC option, [748](#)
- fno-info-table-map-with-stack  
GHC option, [748](#)
- fno-it  
GHC option, [37](#)
- fno-opt-coercion  
GHC option, [138](#)
- fno-pre-inlining  
GHC option, [138](#)
- fno-prof-count-entries  
GHC option, [715](#)
- fno-safe-haskell

- GHC option, [643](#)
- fno-shared-implib
  - GHC option, [293](#)
- fno-show-valid-hole-fits
  - GHC option, [352](#)
- fno-sort-valid-hole-fits
  - GHC option, [355](#)
- fno-state-hack
  - GHC option, [138](#)
- fobject-code
  - GHC option, [286](#)
- fomit-interface-pragmas
  - GHC option, [138](#)
- fomit-yields
  - GHC option, [139](#)
- foptimal-applicative-do
  - GHC option, [326](#)
- forig-thunk-info
  - GHC option, [309](#)
- fpackage-trust, [640](#)
  - GHC option, [643](#)
- fpedantic-bottoms
  - GHC option, [139](#)
- fplugin=(module)
  - GHC option, [681](#)
- fplugin-library=(file-path)
  - (unit-id);(module);(args); GHC option, [682](#)
- fplugin-opt=(module):(args)
  - GHC option, [681](#)
- fplugin-trustworthy
  - GHC option, [682](#)
- fpolymorphic-specialisation
  - GHC option, [142](#)
- fprefer-byte-code
  - GHC option, [287](#)
- fprint-axiom-incomps
  - GHC option, [88](#)
- fprint-bind-result
  - GHC option, [29](#)
- fprint-equality-relations
  - GHC option, [89](#)
- fprint-error-index-links=(always|auto|never)
  - GHC option, [92](#)
- fprint-evld-with-show
  - GHC option, [42](#)
- fprint-expanded-synonyms
  - GHC option, [89](#)
- fprint-explicit-coercions
  - GHC option, [88](#)
- fprint-explicit-foralls
  - GHC option, [87](#)
- fprint-explicit-kinds
  - GHC option, [88](#)
- fprint-explicit-runtime-reps
  - GHC option, [432](#)
- fprint-potential-instances
  - GHC option, [87](#)
- fprint-redundant-promotion-ticks
  - GHC option, [89](#)
- fprint-typechecker-elaboration
  - GHC option, [90](#)
- fprint-unicode-syntax
  - GHC option, [87](#)
- fproc-alignment
  - GHC option, [309](#)
- fprof-auto
  - GHC option, [715](#)
- fprof-auto-calls
  - GHC option, [716](#)
- fprof-auto-exported
  - GHC option, [716](#)
- fprof-auto-top
  - GHC option, [716](#)
- fprof-cafs, [714](#)
  - GHC option, [717](#)
- fprof-callers=(name)
  - GHC option, [715](#)
- fprof-late
  - GHC option, [716](#)
- fprof-late-inline
  - GHC option, [716](#)
- fprof-late-overloaded
  - GHC option, [717](#)
- fprof-late-overloaded-calls
  - GHC option, [717](#)
- fprof-manual
  - GHC option, [717](#)
- framework (name)
  - GHC option, [288](#)
- framework-path (dir)
  - GHC option, [288](#)
- frefinement-level-hole-fits=(n)
  - GHC option, [354](#)
- fregs-graph
  - GHC option, [139](#)
- fregs-iterative
  - GHC option, [139](#)
- freverse-errors
  - GHC option, [92](#)
- fshow-docs-of-hole-fits
  - GHC option, [352](#)
- fshow-error-context
  - GHC option, [91](#)
- fshow-hole-constraints
  - GHC option, [351](#)
- fshow-hole-matches-of-hole-fits
  - GHC option, [355](#)

- fshow-loaded-modules  
GHC option, [24](#)
- fshow-provenance-of-hole-fits  
GHC option, [352](#)
- fshow-type-app-of-hole-fits  
GHC option, [352](#)
- fshow-type-app-vars-of-hole-fits  
GHC option, [352](#)
- fshow-type-of-hole-fits  
GHC option, [352](#)
- fshow-warning-groups  
GHC option, [98](#)
- fsimpl-tick-factor=(n)  
GHC option, [139](#)
- fsimplifier-phases=(n)  
GHC option, [139](#)
- fsolve-constant-dicts  
GHC option, [143](#)
- fsort-by-size-hole-fits  
GHC option, [355](#)
- fsort-by-subsumption-hole-fits  
GHC option, [355](#)
- fspec-constr  
GHC option, [140](#)
- fspec-constr-count=(n)  
GHC option, [141](#)
- fspec-constr-keen  
GHC option, [141](#)
- fspec-constr-threshold=(n)  
GHC option, [141](#)
- fspec-eval  
GHC option, [132](#)
- fspec-eval-dictfun  
GHC option, [132](#)
- fspecialise  
GHC option, [141](#)
- fspecialise-aggressively  
GHC option, [141](#)
- fspecialise-incoherents  
GHC option, [142](#)
- fsplit-sections  
GHC option, [289](#)
- fstatic-argument-transformation  
GHC option, [143](#)
- fstg-cse  
GHC option, [131](#)
- fstg-lift-lams  
GHC option, [143](#)
- fstg-lift-lams-known  
GHC option, [143](#)
- fstg-lift-lams-non-rec-args  
GHC option, [144](#)
- fstg-lift-lams-rec-args  
GHC option, [144](#)
- fstrictness  
GHC option, [144](#)
- fstrictness-before=(n)  
GHC option, [146](#)
- funbox-small-strict-fields  
GHC option, [146](#)
- funbox-strict-fields  
GHC option, [147](#)
- funclutter-valid-hole-fits  
GHC option, [353](#)
- funfolding-case-scaling=(n)  
GHC option, [148](#)
- funfolding-case-threshold=(n)  
GHC option, [148](#)
- funfolding-creation-threshold=(n)  
GHC option, [147](#)
- funfolding-dict-discount=(n)  
GHC option, [147](#)
- funfolding-fun-discount=(n)  
GHC option, [147](#)
- funfolding-keenness-factor=(n)  
GHC option, [147](#)
- funfolding-use-threshold0 option, [757](#)
- funfolding-use-threshold=(n)  
GHC option, [147](#)
- funoptimized-core-for-interpreter  
GHC option, [310](#)
- fuse-rpaths  
GHC option, [288](#)
- fvalidate-ide-info  
GHC option, [246](#)
- fvia-C, [278](#)  
GHC option, [278](#)
- fwhole-archive-hs-libs  
GHC option, [293](#)
- fworker-wrapper  
GHC option, [149](#)
- fworker-wrapper-cbv  
GHC option, [149](#)
- fwrite-ide-info  
GHC option, [246](#)
- fwrite-if-simplified-core  
GHC option, [286](#)
- fwrite-interface  
GHC option, [286](#)
- g  
GHC option, [741](#)  
hp2ps command line option, [729](#)
- ghci-script  
GHC option, [69](#)
- ghcversion-file {path to  
ghcversion.h}  
GHC option, [95](#)
- global-package-db

---

|                              |                                |
|------------------------------|--------------------------------|
| GHC option, 265              | -include-cpp-deps              |
| -g(n)                        | GHC option, 258                |
| GHC option, 741              | -include-pkg-deps              |
| -h                           | GHC option, 258                |
| RTS option, 234              | -interactive-print (name)      |
| -hT                          | GHC option, 39                 |
| RTS option, 234, 724         | -i(dir)[:<dir>]*               |
| -haddock                     | GHC option, 241                |
| GHC option, 95               | -jsem                          |
| -hb                          | GHC option, 83                 |
| RTS option, 725              | -j[{n}]                        |
| -hc                          | GHC option, 82                 |
| RTS option, 724              | -kb (size)                     |
| -hcsuf (suffix)              | RTS option, 228                |
| GHC option, 244              | -kc (size)                     |
| -hd                          | RTS option, 228                |
| RTS option, 724              | -keep-hc-file                  |
| -he                          | GHC option, 244                |
| RTS option, 725              | -keep-hc-files                 |
| -hi                          | GHC option, 244                |
| RTS option, 725              | -keep-hi-files                 |
| -hidden-module (module name) | GHC option, 244                |
| GHC option, 84               | -keep-hscpp-file               |
| -hide-all-packages           | GHC option, 244                |
| GHC option, 262              | -keep-hscpp-files              |
| -hide-all-plugin-packages    | GHC option, 244                |
| GHC option, 683              | -keep-llvm-file                |
| -hide-package (pkg)          | GHC option, 244                |
| GHC option, 262              | -keep-llvm-files               |
| -hidir (dir)                 | GHC option, 244                |
| GHC option, 243              | -keep-o-files                  |
| -hiedir (dir)                | GHC option, 245                |
| GHC option, 243              | -keep-s-file                   |
| -hiesuf (suffix)             | GHC option, 245                |
| GHC option, 244              | -keep-s-files                  |
| -hisuf (suffix)              | GHC option, 245                |
| GHC option, 244              | -keep-tmp-files                |
| -hm                          | GHC option, 245                |
| RTS option, 724              | -ki (size)                     |
| -hpcdir(dir)                 | RTS option, 228                |
| GHC option, 733              | -l                             |
| -hr                          | hp2ps command line option, 730 |
| RTS option, 725              | -l (flags)                     |
| -hy                          | RTS option, 234                |
| RTS option, 724              | -l (lib)                       |
| -h(break-down), 729          | GHC option, 288                |
| -i                           | -m (n)                         |
| GHC option, 241              | RTS option, 229                |
| -i (secs)                    | -m\* options, 93               |
| RTS option, 726              | -main-is (thing)               |
| -ignore-dot-ghci             | GHC option, 289                |
| GHC option, 68               | -mavx                          |
| -ignore-package (pkg)        | GHC option, 93                 |
| GHC option, 262              | -mavx2                         |

- GHC option, 93
- mavx512cd
  - GHC option, 93
- mavx512er
  - GHC option, 93
- mavx512f
  - GHC option, 93
- mavx512pf
  - GHC option, 93
- maxN {x}
  - RTS option, 151
- mbmi
  - GHC option, 94
- mbmi2
  - GHC option, 94
- mfma
  - GHC option, 94
- msse
  - GHC option, 93
- msse2
  - GHC option, 93
- msse2 option, 804
- msse3
  - GHC option, 94
- msse4
  - GHC option, 94
- msse4.2
  - GHC option, 94
- m{int}
  - hp2ps command line option, 730
- n {size}
  - RTS option, 224
- no-auto
  - GHC option, 717
- no-auto-all
  - GHC option, 717
- no-auto-link-packages
  - GHC option, 262
- no-caf-all
  - GHC option, 717
- no-global-package-db
  - GHC option, 265
- no-hs-main
  - GHC option, 290
- no-pie
  - GHC option, 293
- no-rtsopts-suggestions
  - GHC option, 292
- no-user-package-db
  - GHC option, 265
- o {file}
  - GHC option, 242
- odir {dir}
  - GHC option, 242
- ohi {file}
  - GHC option, 243
- ol{filename}
  - RTS option, 235
- optCmmP {option}
  - GHC option, 281
- optF {option}
  - GHC option, 281
- optJSP {option}
  - GHC option, 281
- optL {option}
  - GHC option, 281
- optP {option}
  - GHC option, 281
- opta {option}
  - GHC option, 281
- optc {option}
  - GHC option, 281
- optcxx {option}
  - GHC option, 281
- opti {option}
  - GHC option, 282
- optl {option}
  - GHC option, 281
- optlas {option}
  - GHC option, 281
- optlc {option}
  - GHC option, 281
- optlm {option}
  - GHC option, 281
- optlo {option}
  - GHC option, 281
- optwindres {option}
  - GHC option, 282
- osuf {suffix}
  - GHC option, 243
- outputdir {dir}
  - GHC option, 243
- p
  - hp2ps command line option, 730
  - RTS option, 709, 718
- pa
  - RTS option, 718
- package {name}
  - GHC option, 288
- package {pkg}
  - GHC option, 261
- package-db
  - ghc-pkg option, 271
- package-db {file}
  - GHC option, 265
- package-env {file}||{name}
  - GHC option, 267
- package-id {unit-id}

- GHC option, 262
- pgmCmmP {cmd}
  - GHC option, 280
- pgmF {cmd}
  - GHC option, 280
- pgmJSP {cmd}
  - GHC option, 280
- pgmL {cmd}
  - GHC option, 279
- pgmP {cmd}
  - GHC option, 279
- pgma {cmd}
  - GHC option, 280
- pgmc {cmd}
  - GHC option, 280
- pgmc-supports-no-pie
  - GHC option, 281
- pgmcxx {cmd}
  - GHC option, 280
- pgmi {cmd}
  - GHC option, 280
- pgminstall\_name\_tool {cmd}
  - GHC option, 280
- pgml {cmd}
  - GHC option, 280
- pgml-supports-no-pie
  - GHC option, 281
- pgmlas {cmd}
  - GHC option, 280
- pgmlc {cmd}
  - GHC option, 280
- pgmlm {cmd}
  - GHC option, 280
- pgmlo {cmd}
  - GHC option, 280
- pgmotoool {cmd}
  - GHC option, 280
- pgms {cmd}
  - GHC option, 280
- pgmwindres {cmd}
  - GHC option, 280
- pie
  - GHC option, 293
- pj
  - RTS option, 718
- plugin-package {pkg}
  - GHC option, 683
- plugin-package-id {pkg-id}
  - GHC option, 683
- po {stem}
  - RTS option, 718
- prof
  - GHC option, 715
- qa
  - RTS option, 152
- qb {gen}
  - RTS option, 226
- qg {gen}
  - RTS option, 226
- qm
  - RTS option, 152
- qn {x}
  - RTS option, 226
- r {file}
  - RTS option, 237
- rdynamic
  - GHC option, 293
- reexported-module {module name}
  - GHC option, 84
- rtsopts[={none|some|all|ignore|ignoreAll}]
  - GHC option, 291
- s
  - hp2ps command line option, 730
- s [{file}]
  - RTS option, 231
- shared
  - GHC option, 79, 289
- single-threaded
  - GHC option, 291
- split-sections
  - GHC option, 289
- static
  - GHC option, 289
- staticlib
  - GHC option, 288
- stubdir {dir}
  - GHC option, 243
- t [{file}]
  - RTS option, 231
- this-package-name {unit-id}
  - GHC option, 84
- this-unit-id {unit-id}
  - GHC option, 262
- threaded
  - GHC option, 290
- ticky
  - GHC option, 737
- ticky-LNE
  - GHC option, 737
- ticky-allocd
  - GHC option, 737
- ticky-ap-thunk
  - GHC option, 738
- ticky-dyn-thunk
  - GHC option, 737
- ticky-tag-checks
  - GHC option, 738
- tmpdir {dir}

- GHC option, 245
- trust {pkg}
  - GHC option, 641
- t(float)
  - hp2ps command line option, 730
- unit @(filename)
  - GHC option, 84
- user-package-db
  - GHC option, 265
- v
  - GHC option, 86, 754
  - ghc-pkg option, 272
- v [{flags}]
  - RTS option, 236
- v(n)
  - GHC option, 86
- w
  - GHC option, 98
  - RTS option, 223
- with-rtsopts={opts}
  - GHC option, 292
- working-dir {dir}
  - GHC option, 84
- x {suffix}
  - GHC option, 86
- xc
  - RTS option, 238, 718
- xm
  - RTS option, 221
- xm {address}
  - RTS option, 221
- xn
  - RTS option, 222
- xp
  - RTS option, 220
- xq {size}
  - RTS option, 221
- xr {size}
  - RTS option, 221
- y
  - hp2ps command line option, 730
- ``hs-boot`` files, 247

## A

- allocation area for large objects,
  - size, 223
- allocation area, chunk size, 224
- allocation area, size, 223
- AllowAmbiguousTypes
  - Language Extension, 562
- ANN pragma, 679
  - on modules, 680
  - on types, 680

- apparently erroneous do binding,
  - warning, 119
- Applicative do-notation, 325
- ApplicativeDo
  - Language Extension, 325
- arguments
  - command-line, 76
- Arrows
  - Language Extension, 355
- ASCII, 240
- Assertions, 658
- assertions
  - disabling, 658
- author
  - package specification, 275
- auto
  - package specification, 275

## B

- Bang patterns, 594
- BangPatterns
  - Language Extension, 595
- BinaryLiterals
  - Language Extension, 544
- binds, unused, 115, 116
- BIO\_PROF\_SAMPLE\_BEGIN
  - eventlog event type, 826
- BLOCK\_MARKER
  - eventlog event type, 820
- BlockArguments
  - Language Extension, 346
- BLOCKS\_SIZE
  - eventlog event type, 815
- bugs
  - reporting, 4

## C

- C calls, function headers, 628
- C code generator, 278
- C pre-processor options, 282
- C++
  - linking, 277
- CAFs
  - in GHCi, 66
- CAP\_CREATE
  - eventlog event type, 818
- CAP\_DELETE
  - eventlog event type, 818
- CAP\_DISABLE
  - eventlog event type, 818
- CAP\_ENABLE
  - eventlog event type, 818
- CApiFFI
  - Language Extension, 622



- category
  - package specification, 275
- cc-options
  - package specification, 277
- Char
  - size of, 802
- code coverage, 731
- COLUMN
  - pragma, 671
- command-line
  - arguments, 76
  - order of arguments, 76
- compacting garbage collection, 224
- compilation phases, changing, 279
- compiled code
  - in GHCi, 25
- compiler problems, 751
- compiling faster, 753
- COMPLETE
  - pragma, 676
- complete user-supplied kind signature, 415
- CONC\_MARK\_BEGIN
  - eventlog event type, 826
- CONC\_MARK\_END
  - eventlog event type, 827
- CONC\_SWEEP\_BEGIN
  - eventlog event type, 827
- CONC\_SWEEP\_END
  - eventlog event type, 827
- CONC\_SYNC\_BEGIN
  - eventlog event type, 827
- CONC\_SYNC\_END
  - eventlog event type, 827
- CONC\_UPD\_REM\_SET\_FLUSH
  - eventlog event type, 827
- concurrency, 604
- Concurrent Haskell
  - using, 150
- concurrent mark and sweep, 222
- CONLIKE
  - pragma, 670
- consistency checks, 308
- Constant Applicative Form, 66
- ConstrainedClassMethods
  - Language Extension, 523
- ConstraintKinds
  - Language Extension, 553
- constructor fields, strict, 146, 147
- copyright
  - package specification, 275
- cost centres
  - automatically inserting, 716
- cost-centre profiling, 709
- CPP
  - Language Extension, 282
- cpp, pre-processing with, 282
- CREATE\_SPARK\_THREAD
  - eventlog event type, 816
- CREATE\_THREAD
  - eventlog event type, 810
- CUSK, 415
- CUSKs
  - Language Extension, 415
- Custom printing function
  - in GHCi, 39
- D
- DataKinds
  - Language Extension, 404
- DatatypeContexts
  - Language Extension, 367
- debugger
  - in GHCi, 40
- debugging options (*for GHC*), 297
- DeepSubsumption
  - Language Extension, 454
- default declarations, 38
- defaulting mechanism, warning, 114
- DefaultSignatures
  - Language Extension, 524
- dependencies in Makefiles, 256
- dependency-generation mode
  - of GHC, 79
- depends
  - package specification, 277
- DEPRECATED
  - pragma, 663
- deprecated flags, 103
- deprecations
  - warnings, 101, 102
- DeriveAnyClass
  - Language Extension, 504
- DeriveDataTypeable
  - Language Extension, 496
- DeriveFoldable
  - Language Extension, 493
- DeriveFunctor
  - Language Extension, 489
- DeriveGeneric
  - Language Extension, 655
- DeriveLift
  - Language Extension, 497
- DeriveTraversable
  - Language Extension, 495
- DerivingStrategies
  - Language Extension, 507
- DerivingVia

- Language Extension, 508
- description
  - package specification, 275
- deterministic builds, 310
- disabling
  - assertions, 658
- DisambiguateRecordFields
  - Language Extension, 473
- displaying type
  - in GHCi, 66
- DLL-creation mode, 79
- do binding, apparently erroneous, 119
- do binding, unused, 117
- do-notation
  - Applicative, 325
  - in GHCi, 28
  - Qualified, 328
- dumping GHC intermediates, 298
- duplicate constraints, warning, 104
- duplicate exports, warning, 105
- DuplicateRecordFields
  - Language Extension, 475
- dynamic
  - options, 66, 77
- Dynamic libraries
  - using, 294

## E

- editions
  - language, 313
- EDITOR, 56
- EmptyCase
  - Language Extension, 343
- EmptyDataDecls
  - Language Extension, 366
- EmptyDataDeriving
  - Language Extension, 486
- encodings
  - of source files, 240
- endEventLogging (*C function*), 219
- environment file, 266
- environment variable
  - EDITOR, 56
  - for setting RTS options, 218
  - GHC\_CHARENC, 95
  - GHC\_ENVIRONMENT, 267
  - GHC\_NO\_UNICODE, 95
  - GHC\_PACKAGE\_PATH, 264, 265, 269
  - GHCRTS, 217, 218, 291
  - HOME, 53, 54
  - HPCTIXFILE, 732, 737
  - LD\_LIBRARY\_PATH, 52, 297
  - LIBRARY\_PATH, 52
  - PATH, 265, 286
  - RPATH, 297
  - RUNPATH, 297
  - TMPDIR, 245
  - VISUAL, 56, 57
- environment variables, 95
- eval mode
  - of GHC, 78
- eventlog
  - and heap profiling, 725
- eventlog event type
  - BIO\_PROF\_SAMPLE\_BEGIN, 826
  - BLOCK\_MARKER, 820
  - BLOCKS\_SIZE, 815
  - CAP\_CREATE, 818
  - CAP\_DELETE, 818
  - CAP\_DISABLE, 818
  - CAP\_ENABLE, 818
  - CONC\_MARK\_BEGIN, 826
  - CONC\_MARK\_END, 827
  - CONC\_SWEEP\_BEGIN, 827
  - CONC\_SWEEP\_END, 827
  - CONC\_SYNC\_BEGIN, 827
  - CONC\_SYNC\_END, 827
  - CONC\_UPD\_REM\_SET\_FLUSH, 827
  - CREATE\_SPARK\_THREAD, 816
  - CREATE\_THREAD, 810
  - GC\_DONE, 813
  - GC\_END, 813
  - GC\_GLOBAL\_SYNC, 814
  - GC\_IDLE, 813
  - GC\_START, 812
  - GC\_STATS\_GHC, 813
  - GC\_WORK, 813
  - HEAP\_ALLOCATED, 815
  - HEAP\_BIO\_PROF\_SAMPLE\_BEGIN, 823
  - HEAP\_INFO\_GHC, 816
  - HEAP\_LIVE, 815
  - HEAP\_PROF\_BEGIN, 821
  - HEAP\_PROF\_COST\_CENTRE, 822
  - HEAP\_PROF\_SAMPLE\_BEGIN, 823
  - HEAP\_PROF\_SAMPLE\_COST\_CENTRE, 824
  - HEAP\_PROF\_SAMPLE\_END, 823
  - HEAP\_PROF\_SAMPLE\_STRING, 824
  - HEAP\_SIZE, 815
  - IPE, 822
  - LOG\_MSG, 820
  - MEM\_RETURN, 814
  - MIGRATE\_THREAD, 811
  - NONMOVING\_HEAP\_CENSUS, 828
  - NONMOVING\_PRUNED\_SEGMENTS, 828
  - PROF\_BEGIN, 825
  - PROF\_SAMPLE\_COST\_CENTRE, 825
  - PROGRAM\_ARGS, 809
  - PROGRAM\_ENV, 809

- REQUEST\_PAR\_GC, 813
- REQUEST\_SEQ\_GC, 813
- RTS\_IDENTIFIER, 808
- RUN\_THREAD, 810
- SPARK\_COUNTERS, 816
- SPARK\_CREATE, 816
- SPARK\_DUD, 817
- SPARK\_FIZZLE, 817
- SPARK\_GC, 817
- SPARK\_OVERFLOW, 817
- SPARK\_RUN, 817
- SPARK\_STEAL, 817
- STOP\_THREAD, 810
- TASK\_CREATE, 819
- TASK\_DELETE, 819
- TASK\_MIGRATE, 819
- THREAD\_LABEL, 811
- THREAD\_RUNNABLE, 811
- THREAD\_WAKEUP, 811
- TICKY\_COUNTER\_BEGIN\_SAMPLE, 829
- TICKY\_COUNTER\_DEF, 829
- TICKY\_COUNTER\_SAMPLE, 829
- USER\_MARKER, 820
- USER\_MSG, 820
- WALL\_CLOCK\_TIME, 809
- eventlog files, 234
- eventLogStatus (*C function*), 219
- EventLogStatus (*C type*), 219
- EventLogWriter (*C type*), 219
- EventLogWriter.flushEventLog (*C member*), 219
- EventLogWriter.initEventLogWriter (*C member*), 219
- EventLogWriter.stopEventLogWriter (*C member*), 219
- EventLogWriter.writeEventLog (*C member*), 219
- events, 234
- ExistentialQuantification
  - Language Extension, 370
- ExplicitForAll
  - Language Extension, 560
- ExplicitNamespaces
  - Language Extension, 364
- export lists, duplicates, 105
- export lists, missing, 109
- exposed
  - package specification, 275
- exposed-modules
  - package specification, 276
- extended interface files, options, 246
- extended list comprehensions, 332
- ExtendedDefaultRules
  - Language Extension, 37
- ExtendedLiterals
  - Language Extension, 546
- extensions
  - options controlling, 313
- extra-libraries
  - package specification, 276
- F**
  - faster compiling, 753
  - faster programs, how to produce, 754
  - FFI
    - GHCi support, 23
  - FFI and the JavaScript Backend, 775
  - fields, missing, 109
  - FieldSelectors
    - Language Extension, 476
  - file names
    - of source files, 240
  - file suffixes for GHC, 77
  - filenames
    - of modules, 25
  - finding interface files, 241
  - FlexibleContexts
    - Language Extension, 552
  - FlexibleInstances
    - Language Extension, 533
  - Floating point
    - and the FFI, 632
  - floating-point exceptions., 802
  - forall, 320
  - foralls, unused, 118
  - forcing GHC-phase options, 281
  - foreign, 320
  - foreign export
    - with GHC, 624
  - Foreign Function Interface
    - GHCi support, 23
  - Foreign function interface, 616
  - ForeignFunctionInterface
    - Language Extension, 616
  - formatting dumps, 307
  - framework-dirs
    - package specification, 277
  - frameworks
    - package specification, 277
  - fromInteger function, 802
  - fromIntegral function, 802
  - frontend plugins
    - using, 79
  - FunctionalDependencies
    - Language Extension, 528
- G**
  - GADTs

- Language Extension, 380
- GADTSyntax
  - Language Extension, 374
- garbage collection
  - compacting, 224
- garbage collector
  - options, 222
- GC sync time, measuring, 230
- GC threads, setting the number of, 226
- GC\_DONE
  - eventlog event type, 813
- GC\_END
  - eventlog event type, 813
- GC\_GLOBAL\_SYNC
  - eventlog event type, 814
- GC\_IDLE
  - eventlog event type, 813
- GC\_START
  - eventlog event type, 812
- GC\_STATS\_GHC
  - eventlog event type, 813
- GC\_WORK
  - eventlog event type, 813
- GeneralisedNewtypeDeriving
  - Language Extension, 499
- GeneralizedNewtypeDeriving
  - Language Extension, 499
- generations, number of, 225
- getArgs, behavior in GHCi, 61
- getProgName, behavior in GHCi, 61
- GHC backends, 278
- GHC code generators, 278
- GHC option
  - , 79
  - C, 78
  - D(symbol)[={value}], 282
  - E, 78
  - F, 285
  - H {size}, 95
  - I(dir), 282
  - L {dir}, 288
  - M, 79
  - O, 127
  - O0, 127
  - O1, 127
  - O2, 127
  - O(n), 128
  - Rghc-timing, 92
  - S, 79
  - U(symbol), 282
  - V, 79
  - W, 97
  - Wall, 97
  - Wall-missed-specialisations, 101
  - Wall-missed-specializations, 101
  - Wambiguous-fields, 122
  - Wauto-orphans, 122
  - Wbadly-staged-types, 126
  - Wcompat, 97
  - Wcompat-unqualified-imports, 99
  - Wcpp-undef, 120
  - Wdata-kinds-tc, 126
  - Wdefault, 96
  - Wdefaulted-exception-context, 126
  - Wdeferred-out-of-scope-variables, 100
  - Wdeferred-type-errors, 100
  - Wdeprecated-flags, 103
  - Wdeprecated-type-abstractions, 125
  - Wdeprecations, 102
  - Wderiving-defaults, 104
  - Wderiving-typeable, 122
  - Wdodgy-exports, 104
  - Wdodgy-foreign-imports, 103
  - Wdodgy-imports, 104
  - Wduplicate-constraints, 104
  - Wduplicate-exports, 105
  - Wempty-enumerations, 104
  - Werror, 98
  - Weverything, 97
  - Wextended-warnings, 101
  - Wextra, 97
  - Wforall-identifier, 122
  - Wgadt-mono-local-binds, 123
  - Whi-shadowing, 105
  - Widentities, 106
  - Wimplicit-kind-vars, 106
  - Wimplicit-lift, 106
  - Wimplicit-prelude, 106
  - Wimplicit-rhs-quantification, 124
  - Winaccessible-code, 113
  - Wincomplete-export-warnings, 125
  - Wincomplete-patterns, 107
  - Wincomplete-record-selectors, 108
  - Wincomplete-record-updates, 107
  - Wincomplete-uni-patterns, 107
  - Winconsistent-flags, 126
  - Winferred-safe-imports, 644
  - Winline-rule-shadowing, 119
  - Winvalid-haddock, 121
  - Wloopy-superclass-solve, 123
  - Wmisplaced-pragmas, 100
  - Wmissed-extra-shared-lib, 115
  - Wmissed-specialisations, 101
  - Wmissed-specializations, 101
  - Wmissing-deriving-strategies, 108
  - Wmissing-export-lists, 109

- Wmissing-exported-pattern-synonym-signatures, 111
- Wmissing-exported-signatures, 110
- Wmissing-exported-sigs, 110
- Wmissing-fields, 109
- Wmissing-home-modules, 120
- Wmissing-import-lists, 109
- Wmissing-kind-signatures, 111
- Wmissing-local-signatures, 110
- Wmissing-local-sigs, 110
- Wmissing-methods, 109
- Wmissing-monadfail-instances, 103
- Wmissing-pattern-synonym-signatures, 110
- Wmissing-poly-kind-signatures, 111
- Wmissing-role-annotations, 124
- Wmissing-safe-haskell-mode, 644
- Wmissing-signatures, 110
- Wmissing-space-after-bang, 122
- Wmonomorphism-restriction, 115
- Wname-shadowing, 111
- Wnoncanonical-monad-instances, 102
- Wnoncanonical-monadfail-instances, 102
- Wnoncanonical-monoid-instances, 102
- Wnot, 98
- Woperator-whitespace, 121
- Woperator-whitespace-ext-conflict, 121
- Worphans, 112
- Woverflowed-literals, 104
- Woverlapping-patterns, 112
- Wpartial-fields, 120
- Wpartial-type-signatures, 100
- Wprepositive-qualified-module, 99
- Wredundant-bang-patterns, 118
- Wredundant-constraints, 105
- Wredundant-record-wildcards, 119
- Wredundant-strictness-flags, 119
- Wsafe, 643
- Wsemigroup, 103
- Wsimplifiable-class-constraints, 114
- Wstar-binder, 113
- Wstar-is-type, 113
- Wtabs, 114
- Wterm-variable-capture, 124
- Wtrustworthy-safe, 643
- Wtype-defaults, 114
- Wtype-equality-out-of-scope, 123
- Wtype-equality-requires-operators, 123
- Wtyped-holes, 99
- Wunbanged-strict-patterns, 120
- Wunicode-bidirectional-format-characters, 122
- Wunrecognised-pragmas, 100
- Wunrecognised-warning-flags, 99
- Wunsafe, 643
- Wunsupported-calling-conventions, 103
- Wunsupported-llvm-version, 115
- Wunticked-promoted-constructors, 115
- Wunused-binds, 115
- Wunused-do-bind, 117
- Wunused-foralls, 118
- Wunused-imports, 117
- Wunused-local-binds, 116
- Wunused-matches, 117
- Wunused-packages, 120
- Wunused-pattern-binds, 116
- Wunused-record-wildcards, 118
- Wunused-top-binds, 116
- Wunused-type-patterns, 117
- Wwarn, 98
- Wwarnings-deprecations, 102
- Wwrong-do-bind, 119
- Wx-(category), 101
- frontend (module), 79
- help, 79
- info, 79
- interactive, 78
- make, 78
- merge-objs, 79
- numeric-version, 79
- print-booter-version, 79
- print-build-platform, 79
- print-c-compiler-flags, 80
- print-c-compiler-link-flags, 80
- print-debug-on, 80
- print-global-package-db, 80
- print-have-interpreter, 80
- print-have-native-code-generator, 80
- print-host-platform, 80
- print-ld-flags, 80
- print-leading-underscore, 80
- print-libdir, 80
- print-object-splitting-supported, 80
- print-project-git-commit-id, 80
- print-project-version, 81
- print-rts-ways, 81
- print-stage, 81
- print-support-smp, 81
- print-tables-next-to-code, 81

- print-target-platform, 81
- print-unregisterised, 81
- run {file}, 78
- show-iface {file}, 79, 245
- show-options, 79
- supported-extensions, 79
- supported-languages, 79
- version, 79
- auto, 717
- auto-all, 717
- c, 79, 288
- caf-all, 717
- clear-package-db, 265
- cpp, 282
- dasm-lint, 309
- dcmm-lint, 309
- dcore-lint, 309
- ddisable-js-c-sources, 306
- ddisable-js-minifier, 306
- ddump-asm, 306
- ddump-asm-conflicts, 305
- ddump-asm-liveness, 305
- ddump-asm-native, 305
- ddump-asm-regalloc, 305
- ddump-asm-regalloc-stages, 305
- ddump-asm-stats, 305
- ddump-bcos, 306
- ddump-c-backend, 305
- ddump-call-arity, 301
- ddump-cfg-weights, 305
- ddump-cmm, 305
- ddump-cmm-caf, 304
- ddump-cmm-cbe, 304
- ddump-cmm-cfg, 304
- ddump-cmm-cps, 305
- ddump-cmm-from-stg, 304
- ddump-cmm-info, 304
- ddump-cmm-opt, 305
- ddump-cmm-proc, 304
- ddump-cmm-procmap, 304
- ddump-cmm-raw, 304
- ddump-cmm-sink, 304
- ddump-cmm-sp, 304
- ddump-cmm-split, 304
- ddump-cmm-switch, 304
- ddump-cmm-thread-sanitizer, 304
- ddump-cmm-verbose, 304
- ddump-cmm-verbose-by-proc, 304
- ddump-core-stats, 301
- ddump-cpr-signatures, 302
- ddump-cpranal, 302
- ddump-cs-trace, 300
- ddump-cse, 302
- ddump-debug, 306
- ddump-deriv, 300
- ddump-dmd-signatures, 302
- ddump-dmdanal, 302
- ddump-ds, 301
- ddump-ds-preopt, 301
- ddump-ec-trace, 300
- ddump-exitify, 301
- ddump-faststrings, 299
- ddump-file-prefix={str}, 298
- ddump-float-in, 303
- ddump-float-out, 303
- ddump-foreign, 306
- ddump-full-laziness, 303
- ddump-hi, 245
- ddump-hi-diffs, 245
- ddump-hie, 300
- ddump-hpc, 306
- ddump-if-trace, 299
- ddump-inlinings, 302
- ddump-js, 306
- ddump-json, 298
- ddump-late-cc, 303
- ddump-liberate-case, 303
- ddump-llvm, 305
- ddump-minimal-imports, 245
- ddump-mod-cycles, 257
- ddump-mod-map, 306
- ddump-occur-anal, 303
- ddump-opt-cmm, 305
- ddump-parsed, 299
- ddump-parsed-ast, 299
- ddump-prep, 303
- ddump-rn, 300
- ddump-rn-ast, 300
- ddump-rn-stats, 300
- ddump-rn-trace, 300
- ddump-rtti, 306
- ddump-rule-firings, 301
- ddump-rule-rewrites, 302
- ddump-rules, 301
- ddump-simpl, 302
- ddump-simpl-iterations, 301
- ddump-simpl-stats, 301
- ddump-simpl-trace, 301
- ddump-spec, 301
- ddump-spec-constr, 301
- ddump-splices, 300
- ddump-static-argument-transformation, 303
- ddump-stg, 303
- ddump-stg-cg, 303
- ddump-stg-final, 303
- ddump-stg-from-core, 303
- ddump-stg-tags, 303



- ddump-stg-unarised, 303
- ddump-str-signatures, 302
- ddump-stranal, 302
- ddump-tc, 300
- ddump-tc-ast, 300
- ddump-tc-trace, 300
- ddump-ticked, 306
- ddump-timings, 299
- ddump-to-file, 298
- ddump-types, 300
- ddump-verbose-inlinings, 302
- ddump-view-pattern-commoning, 303
- ddump-worker-wrapper, 303
- debug, 290
- dep-makefile (file), 257
- dep-suffix (suffix), 257
- dfaststring-stats, 299
- dhex-word-literals, 307
- dinitial-unique=(s), 310
- dinline-check=(str), 302
- dipe-stats, 299
- distrust (pkg), 641
- distrust-all-packages, 642
- dkeep-comments, 299
- dlinear-core-lint, 309
- dlint, 308
- dno-debug-output, 307
- dno-typeable-binds, 310
- dppr-case-as-let, 307
- dppr-cols=(n), 307
- dppr-debug, 299
- dppr-user-length, 307
- drule-check=(str), 302
- dshow-passes, 298
- dstg-lint, 309
- dsuppress-all, 307
- dsuppress-coercion-types, 308
- dsuppress-coercions, 308
- dsuppress-core-sizes, 308
- dsuppress-idinfo, 307
- dsuppress-module-prefixes, 308
- dsuppress-stg-free-vars, 308
- dsuppress-stg-reps, 308
- dsuppress-ticks, 307
- dsuppress-timestamps, 308
- dsuppress-type-applications, 308
- dsuppress-type-signatures, 308
- dsuppress-unfoldings, 308
- dsuppress-uniques, 307
- dsuppress-var-kinds, 308
- dtag-inference-checks, 310
- dth-dec-file, 300
- dumpdir (dir), 243
- dunique-increment=(i), 310
- dverbose-core2core, 301
- dverbose-stg2stg, 303
- dylib-install-name (path), 293
- dynamic, 289
- dynamic-too, 287
- dynhisuf (suffix), 244
- dynload, 289
- dyno (file), 242
- dynohi (file), 243
- dynosuf (suffix), 243
- e (expr), 78
- eventlog, 291
- exclude-module=(file), 258
- fPIC, 286
- fPIE, 287
- fabstract-refinement-hole-fits, 354
- falignment-sanitisation, 309
- fasm, 286
- fasm-shortcutting, 129
- fbinary-blob-threshold=(n), 149
- fblock-layout-cfg, 130
- fblock-layout-weightless, 130
- fblock-layout-weights, 130
- fbreak-on-error, 49
- fbreak-on-exception, 49
- fbreak-points, 41
- fbyte-code, 286
- fbyte-code-and-object-code, 286
- fcall-arity, 129
- fcase-folding, 128
- fcase-merge, 128
- fcatch-nonexhaustive-cases, 309
- fcheck-prim-bounds, 310
- fclear-plugins, 682
- fcmm-control-flow, 129
- fcmm-elim-common-blocks, 129
- fcmm-sink, 129
- fcmm-static-pred, 129
- fcmm-thread-sanitizer, 310
- fcompact-unwind, 294
- fcore-constant-folding, 128
- fcpr-anal, 130
- fcross-module-specialise, 141
- fcse, 131
- fdefer-diagnostics, 90
- fdefer-out-of-scope-variables, 465
- fdefer-type-errors, 464
- fdefer-typed-holes, 464
- fdiagnostics-as-json, 91
- fdiagnostics-color=(always|auto|never), 91
- fdiagnostics-show-caret, 91
- fdicts-cheap, 132

- fdicts-strict, 132
- fdistinct-constructor-tables, 748
- fdmd-tx-dict-sel, 133
- fdmd-unbox-width={n}, 140
- fdo-clever-arg-eta-expansion, 133
- fdo-eta-reduction, 133
- fdo-lambda-eta-expansion, 133
- fdump-with-ways, 298
- feager-blackholing, 133
- fenable-rewrite-rules, 645
- fenable-th-splice-warnings, 588
- ferror-spans, 92
- fexcess-precision, 133
- fexitification, 129
- fexpose-all-unfoldings, 134
- fexpose-internal-symbols, 287
- fexternal-dynamic-refs, 287
- fexternal-interpreter, 70
- ffamily-application-cache, 393
- ffloat-in, 134
- fforce-recomp, 246
- ffull-laziness, 134
- ffun-to-thunk, 134
- fghci-hist-size={n}, 48
- fghci-leak-check, 52
- fglasgow-exts, 316
- fhelphful-errors, 100
- fhide-source-paths, 87
- fhpc, 733
- fignore-asserts, 135
- fignore-hpc-changes, 246
- fignore-interface-pragmas, 135
- fignore-optim-changes, 246
- fimplicit-import-qualified, 35
- finfo-table-map, 747
- finfo-table-map-with-fallback, 748
- finfo-table-map-with-stack, 748
- finline-generics, 142
- finline-generics-aggressively, 142
- finter-module-far-jumps, 135
- fkeep-auto-rules, 135
- fkeep-cafs, 294
- fkeep-going, 92
- flate-dmd-anal, 135
- flate-specialise, 142
- fliberate-case, 136
- fliberate-case-threshold={n}, 136
- flink-rts, 289
- fllvm, 286
- fllvm-fill-undef-with-garbage, 309
- fllvm-pass-vectors-in-regs, 136
- flocal-float-out, 137
- flocal-float-out-top-level, 137
- flocal-ghci-history, 51
- floopification, 136
- fmax-forced-spec-args={n}, 138
- fmax-inline-alloc-size={n}, 136
- fmax-inline-memcpy-insns={n}, 136
- fmax-inline-memset-insns={n}, 136
- fmax-pmcheck-models={n}, 107
- fmax-refinement-hole-fits={n}, 354
- fmax-relevant-binds={n}, 137
- fmax-simplifier-iterations={n}, 137
- fmax-uncovered-patterns={n}, 137
- fmax-valid-hole-fits={n}, 352
- fmax-worker-args={n}, 138
- fno-code, 286
- fno-embed-manifest, 292
- fno-gen-manifest, 292
- fno-info-table-map-with-fallback, 748
- fno-info-table-map-with-stack, 748
- fno-it, 37
- fno-opt-coercion, 138
- fno-pre-inlining, 138
- fno-prof-count-entries, 715
- fno-safe-haskell, 643
- fno-shared-implib, 293
- fno-show-valid-hole-fits, 352
- fno-sort-valid-hole-fits, 355
- fno-state-hack, 138
- fobject-code, 286
- fomit-interface-pragmas, 138
- fomit-yields, 139
- foptimal-applicative-do, 326
- forig-thunk-info, 309
- fpackage-trust, 643
- fpedantic-bottoms, 139
- fplugin={module}, 681
- fplugin-opt={module}:{args}, 681
- fplugin-trustworthy, 682
- fpolynomial-specialisation, 142
- fprefer-byte-code, 287
- fprint-axiom-incomps, 88
- fprint-bind-result, 29
- fprint-equality-relations, 89
- fprint-error-index-links={always|auto|never}, 92
- fprint-evld-with-show, 42
- fprint-expanded-synonyms, 89
- fprint-explicit-coercions, 88
- fprint-explicit-foralls, 87
- fprint-explicit-kinds, 88
- fprint-explicit-runtime-reps, 432
- fprint-potential-instances, 87
- fprint-redundant-promotion-ticks, 89



- fprint-typechecker-elaboration, 90
- fprint-unicode-syntax, 87
- fproc-alignment, 309
- fprof-auto, 715
- fprof-auto-calls, 716
- fprof-auto-exported, 716
- fprof-auto-top, 716
- fprof-cafs, 717
- fprof-callers=(name), 715
- fprof-late, 716
- fprof-late-inline, 716
- fprof-late-overloaded, 717
- fprof-late-overloaded-calls, 717
- fprof-manual, 717
- framework (name), 288
- framework-path (dir), 288
- frefinement-level-hole-fits=(n), 354
- fregs-graph, 139
- fregs-iterative, 139
- freverse-errors, 92
- fshow-docs-of-hole-fits, 352
- fshow-error-context, 91
- fshow-hole-constraints, 351
- fshow-hole-matches-of-hole-fits, 355
- fshow-loaded-modules, 24
- fshow-provenance-of-hole-fits, 352
- fshow-type-app-of-hole-fits, 352
- fshow-type-app-vars-of-hole-fits, 352
- fshow-type-of-hole-fits, 352
- fshow-warning-groups, 98
- fsimpl-tick-factor=(n), 139
- fsimplifier-phases=(n), 139
- fsolve-constant-dicts, 143
- fsort-by-size-hole-fits, 355
- fsort-by-subsumption-hole-fits, 355
- fspec-constr, 140
- fspec-constr-count=(n), 141
- fspec-constr-keen, 141
- fspec-constr-threshold=(n), 141
- fspec-eval, 132
- fspec-eval-dictfun, 132
- fspecialise, 141
- fspecialise-aggressively, 141
- fspecialise-incoherents, 142
- fsplit-sections, 289
- fstatic-argument-transformation, 143
- fstg-cse, 131
- fstg-lift-lams, 143
- fstg-lift-lams-known, 143
- fstg-lift-lams-non-rec-args, 144
- fstg-lift-lams-rec-args, 144
- fstrictness, 144
- fstrictness-before=(n), 146
- funbox-small-strict-fields, 146
- funbox-strict-fields, 147
- funclutter-valid-hole-fits, 353
- funfolding-case-scaling=(n), 148
- funfolding-case-threshold=(n), 148
- funfolding-creation-threshold=(n), 147
- funfolding-dict-discount=(n), 147
- funfolding-fun-discount=(n), 147
- funfolding-keenness-factor=(n), 147
- funfolding-use-threshold=(n), 147
- funoptimized-core-for-interpreter, 310
- fuse-rpaths, 288
- fvalidate-ide-info, 246
- fvia-C, 278
- fwhole-archive-hs-libs, 293
- fworker-wrapper, 149
- fworker-wrapper-cbv, 149
- fwrite-ide-info, 246
- fwrite-if-simplified-core, 286
- fwrite-interface, 286
- g, 741
- ghci-script, 69
- ghcversion-file (path to ghcversion.h), 95
- global-package-db, 265
- g(n), 741
- haddock, 95
- hcsuf (suffix), 244
- hidden-module (module name), 84
- hide-all-packages, 262
- hide-all-plugin-packages, 683
- hide-package (pkg), 262
- hidir (dir), 243
- hiedir (dir), 243
- hiesuf (suffix), 244
- hisuf (suffix), 244
- hpcdir(dir), 733
- i, 241
- ignore-dot-ghci, 68
- ignore-package (pkg), 262
- include-cpp-deps, 258
- include-pkg-deps, 258
- interactive-print (name), 39
- i(dir)[:<dir>]\*, 241
- jsem, 83
- j[(n)], 82
- keep-hc-file, 244
- keep-hc-files, 244

- keep-hi-files, [244](#)
- keep-hscpp-file, [244](#)
- keep-hscpp-files, [244](#)
- keep-llvm-file, [244](#)
- keep-llvm-files, [244](#)
- keep-o-files, [245](#)
- keep-s-file, [245](#)
- keep-s-files, [245](#)
- keep-tmp-files, [245](#)
- l {lib}, [288](#)
- main-is {thing}, [289](#)
- mavx, [93](#)
- mavx2, [93](#)
- mavx512cd, [93](#)
- mavx512er, [93](#)
- mavx512f, [93](#)
- mavx512pf, [93](#)
- mbmi, [94](#)
- mbmi2, [94](#)
- mfma, [94](#)
- msse, [93](#)
- msse2, [93](#)
- msse3, [94](#)
- msse4, [94](#)
- msse4.2, [94](#)
- no-auto, [717](#)
- no-auto-all, [717](#)
- no-auto-link-packages, [262](#)
- no-caf-all, [717](#)
- no-global-package-db, [265](#)
- no-hs-main, [290](#)
- no-pie, [293](#)
- no-rtsopts-suggestions, [292](#)
- no-user-package-db, [265](#)
- o {file}, [242](#)
- odir {dir}, [242](#)
- ohi {file}, [243](#)
- optCmmP {option}, [281](#)
- optF {option}, [281](#)
- optJSP {option}, [281](#)
- optL {option}, [281](#)
- optP {option}, [281](#)
- opta {option}, [281](#)
- optc {option}, [281](#)
- optcxx {option}, [281](#)
- opti {option}, [282](#)
- optl {option}, [281](#)
- optlas {option}, [281](#)
- optlc {option}, [281](#)
- optlm {option}, [281](#)
- optlo {option}, [281](#)
- optwindres {option}, [282](#)
- osuf {suffix}, [243](#)
- outputdir {dir}, [243](#)
- package {name}, [288](#)
- package {pkg}, [261](#)
- package-db {file}, [265](#)
- package-env {file}|{name}, [267](#)
- package-id {unit-id}, [262](#)
- pgmCmmP {cmd}, [280](#)
- pgmF {cmd}, [280](#)
- pgmJSP {cmd}, [280](#)
- pgmL {cmd}, [279](#)
- pgmP {cmd}, [279](#)
- pgma {cmd}, [280](#)
- pgmc {cmd}, [280](#)
- pgmc-supports-no-pie, [281](#)
- pgmcxx {cmd}, [280](#)
- pgmi {cmd}, [280](#)
- pgminstall\_name\_tool {cmd}, [280](#)
- pgml {cmd}, [280](#)
- pgml-supports-no-pie, [281](#)
- pgmlas {cmd}, [280](#)
- pgmlc {cmd}, [280](#)
- pgmlm {cmd}, [280](#)
- pgmlo {cmd}, [280](#)
- pgmotool {cmd}, [280](#)
- pgms {cmd}, [280](#)
- pgmwindres {cmd}, [280](#)
- pie, [293](#)
- plugin-package {pkg}, [683](#)
- plugin-package-id {pkg-id}, [683](#)
- prof, [715](#)
- rdynamic, [293](#)
- reexported-module {module name},  
[84](#)
- rtsopts[={none|some|all|ignore|ignoreAll}],  
[291](#)
- shared, [79](#), [289](#)
- single-threaded, [291](#)
- split-sections, [289](#)
- static, [289](#)
- staticlib, [288](#)
- stubdir {dir}, [243](#)
- this-package-name {unit-id}, [84](#)
- this-unit-id {unit-id}, [262](#)
- threaded, [290](#)
- ticky, [737](#)
- ticky-LNE, [737](#)
- ticky-allocd, [737](#)
- ticky-ap-thunk, [738](#)
- ticky-dyn-thunk, [737](#)
- ticky-tag-checks, [738](#)
- tmpdir {dir}, [245](#)
- trust {pkg}, [641](#)
- unit @(filename), [84](#)
- user-package-db, [265](#)
- v, [86](#)

- v{n}, 86
- w, 98
- with-rtsopts={opts}, 292
- working-dir {dir}, 84
- x {suffix}, 86
- GHC vs the Haskell standards, 795
- GHC, using, 75
- GHC2021
  - Language Extension, 314
- GHC2024
  - Language Extension, 314
- GHC\_ENVIRONMENT, 267
- GHC\_PACKAGE\_PATH, 264, 265, 269
- GHCForeignImportPrim
  - Language Extension, 621
- GHCi, 23, 78
- GHCi command
  - :, 57
  - ! {command}, 65
  - :: {builtin-command}, 65
  - ?, 57
  - {, 29
  - }, 29
  - :abandon, 53
  - :add, 53
  - :all-types, 53
  - :back, 53
  - :break, 53
  - :browse, 53
  - :cd, 54
  - :cmd, 54
  - :complete, 54
  - :continue, 55
  - :def, 55
  - :delete, 56
  - :disable, 56
  - :doc, 56
  - :edit, 56
  - :enable, 57
  - :force, 57
  - :forward, 57
  - :help, 57
  - :history, 57
  - :ignore, 58
  - :info, 57
  - :instances, 57
  - :issafe, 58
  - :kind, 58
  - :list, 59
  - :list [{module}], 59
  - :load, 59
  - :loc-at, 59
  - :main, 60
  - :module, 60
  - :print, 60
  - :quit, 61
  - :reload, 61
  - :run, 61
  - :script, 61
  - :set, 61
  - :set +c, 66
  - :set +m, 66
  - :set +r, 66
  - :set +s, 66
  - :set +t, 66
  - :set args, 61
  - :set editor, 61
  - :set local-config, 61
  - :set prog, 61
  - :set prompt, 61
  - :set prompt-cont, 62
  - :set prompt-cont-function, 62
  - :set prompt-function, 62
  - :set stop, 62
  - :seti, 63
  - :show, 63
  - :show bindings, 63
  - :show breaks, 63
  - :show context, 63
  - :show imports, 63
  - :show language, 63
  - :show modules, 63
  - :show packages, 63
  - :show paths, 63
  - :show targets, 63
  - :showi language, 63
  - :sprint, 63
  - :step, 63
  - :steplocal, 64
  - :stepmodule, 64
  - :trace, 64
  - :type, 64
  - :type +d, 64
  - :type-at, 64
  - :unadd, 65
  - :undef, 65
  - :unset, 65
  - :uses, 65
  - import, 60
  - GHCi prompt
    - setting, 61
  - GHCi prompt function
    - setting, 62
  - GHCRTS, 217, 218, 291
  - GHCRTS environment variable, 218
  - Glasgow Haskell mailing lists, 4
  - group, 332

## H

- haddock, 95
- haddock-html
  - package specification, 277
- haddock-interfaces
  - package specification, 277
- Happy, 761
- happy parser generator, 761
- Haskell Program Coverage, 731
- Haskell standards vs GHC, 795
- Haskell2010
  - Language Extension, 315
- Haskell98
  - Language Extension, 316
- heap profiles, 729
- heap size, factor, 225
- heap size, grace, 229
- heap size, maximum, 229
- heap size, suggested, 227
- heap space, using less, 757
- heap, minimum free, 229
- HEAP\_ALLOCATED
  - eventlog event type, 815
- HEAP\_BIO\_PROF\_SAMPLE\_BEGIN
  - eventlog event type, 823
- HEAP\_INFO\_GHC
  - eventlog event type, 816
- HEAP\_LIVE
  - eventlog event type, 815
- HEAP\_PROF\_BEGIN
  - eventlog event type, 821
- HEAP\_PROF\_COST\_CENTRE
  - eventlog event type, 822
- HEAP\_PROF\_SAMPLE\_BEGIN
  - eventlog event type, 823
- HEAP\_PROF\_SAMPLE\_COST\_CENTRE
  - eventlog event type, 824
- HEAP\_PROF\_SAMPLE\_END
  - eventlog event type, 823
- HEAP\_PROF\_SAMPLE\_STRING
  - eventlog event type, 824
- HEAP\_SIZE
  - eventlog event type, 815
- help options, 78
- HexFloatLiterals
  - Language Extension, 544
- hidden-modules
  - package specification, 276
- HOME, 53, 54
- homepage
  - package specification, 275
- hooks
  - RTS, 218
- hp2ps, 729
  - hp2ps command line option
    - ?, 730
    - b, 729
    - c, 730
    - d, 729
    - e(float)[in|mm|pt], 729
    - g, 729
    - l, 730
    - m(int), 730
    - p, 730
    - s, 730
    - t(float), 730
    - y, 730
- hpc, 731
- HPCTIXFILE, 732, 737
- hs\_exit, 802
- hs\_init, 802
- hs-libraries
  - package specification, 276
- hsc2hs, 761
- hugs-options
  - package specification, 277
- I
- id
  - package specification, 275
- idle GC, 227
- implicit parameters, 320
- implicit prelude, warning, 106
- ImplicitParams
  - Language Extension, 570
- implies :rts-flag:`-DL`; RTS option
  - DL DEBUG: linker(verbose), 237
- import
  - GHCi command, 60
- import lists, missing, 109
- import-dirs
  - package specification, 276
- importing, ``hi-boot`` files, 247
- ImportQualifiedPost
  - Language Extension, 366
- imports, unused, 117
- ImpredicativeTypes
  - Language Extension, 457
- improvement, code, 127
- in GHCi
  - Repeating last command, 57
- inaccessible, 113
- inaccessible code, warning, 113
- include-dirs
  - package specification, 277
- includes
  - package specification, 277
- INCOHERENT, 678

- pragma, 678
- IncoherentInstances
  - Language Extension, 538
- incomplete patterns, warning, 107
- incomplete record selectors, warning, 108
- incomplete record updates, warning, 108
- INLINE
  - pragma, 669
- INLINE
  - pragma, 666
- inlining, controlling, 142, 143, 147, 148, 758
- instance, specializing, 675
- InstanceSigs
  - Language Extension, 542
- Int
  - size of, 802
- interactive, 23
- Interactive classes, 38
- interactive mode, 78
- interface files, 240
- interface files, finding them, 241
- interface files, options, 245
- interfacing with native code, 616
- intermediate files, saving, 244
- intermediate passes, output, 298
- interpreter, 23
- InterruptibleFFI
  - Language Extension, 621
- invoking
  - GHCi, 51
- IPE
  - eventlog event type, 822
- it variable, 36
- J**
- JavaScript code generator, 279
- K**
- kind heterogeneous
  - Type equality constraints, 553
- kind signatures, missing, 111
- KindSignatures
  - Language Extension, 564
- L**
- LambdaCase
  - Language Extension, 343
- LANGUAGE
  - pragma, 662
- language
  - option, 313
- Language Extension
  - AllowAmbiguousTypes, 562
  - ApplicativeDo, 325
  - Arrows, 355
  - BangPatterns, 595
  - BinaryLiterals, 544
  - BlockArguments, 346
  - CApiFFI, 622
  - ConstrainedClassMethods, 523
  - ConstraintKinds, 553
  - CPP, 282
  - CUSKs, 415
  - DataKinds, 404
  - DatatypeContexts, 367
  - DeepSubsumption, 454
  - DefaultSignatures, 524
  - DeriveAnyClass, 504
  - DeriveDataTypeable, 496
  - DeriveFoldable, 493
  - DeriveFunctor, 489
  - DeriveGeneric, 655
  - DeriveLift, 497
  - DeriveTraversable, 495
  - DerivingStrategies, 507
  - DerivingVia, 508
  - DisambiguateRecordFields, 473
  - DuplicateRecordFields, 475
  - EmptyCase, 343
  - EmptyDataDecls, 366
  - EmptyDataDeriving, 486
  - ExistentialQuantification, 370
  - ExplicitForAll, 560
  - ExplicitNamespaces, 364
  - ExtendedDefaultRules, 37
  - ExtendedLiterals, 546
  - FieldSelectors, 476
  - FlexibleContexts, 552
  - FlexibleInstances, 533
  - ForeignFunctionInterface, 616
  - FunctionalDependencies, 528
  - GADTs, 380
  - GADTSyntax, 374
  - GeneralisedNewtypeDeriving, 499
  - GeneralizedNewtypeDeriving, 499
  - GHC2021, 314
  - GHC2024, 314
  - GHCForeignImportPrim, 621
  - Haskell2010, 315
  - Haskell98, 316
  - HexFloatLiterals, 544
  - ImplicitParams, 570
  - ImportQualifiedPost, 366
  - ImpredicativeTypes, 457
  - IncoherentInstances, 538
  - InstanceSigs, 542

- InterruptibleFFI, 621
- KindSignatures, 564
- LambdaCase, 343
- LexicalNegation, 362
- LiberalTypeSynonyms, 369
- LinearTypes, 458
- ListTuplePuns, 409
- MagicHash, 321
- MonadComprehensions, 333
- MonoLocalBinds, 580
- MultiParamTypeClasses, 522
- MultiWayIf, 344
- NamedFieldPuns, 478
- NamedWildCards, 576
- NegativeLiterals, 543
- NoImplicitPrelude, 339
- NoMonomorphismRestriction, 579
- NondecreasingIndentation, 797
- NoPatternGuards, 510
- NoTraditionalRecordSyntax, 471
- NPlusKPatterns, 513
- NullaryTypeClasses, 527
- NumDecimals, 545
- NumericUnderscores, 546
- OverlappingInstances, 538
- OverloadedLabels, 549
- OverloadedLists, 336
- OverloadedRecordDot, 483
- OverloadedRecordUpdate, 484
- OverloadedStrings, 548
- PackageImports, 363
- ParallelListComp, 331
- PartialTypeSignatures, 574
- PatternSynonyms, 513
- PolyKinds, 411
- PostfixOperators, 341
- QualifiedDo, 328
- QuantifiedConstraints, 555
- QuasiQuotes, 592
- Rank2Types, 451
- RankNTypes, 451
- RebindableSyntax, 339
- RecordWildCards, 479
- RecursiveDo, 322
- RequiredTypeArguments, 444
- RoleAnnotations, 469
- Safe, 642
- ScopedTypeVariables, 565
- StandaloneDeriving, 487
- StandaloneKindSignatures, 417
- StarIsType, 426
- StaticPointers, 606
- Strict, 597
- StrictData, 597
- TemplateHaskell, 582
- TemplateHaskellQuotes, 582
- TransformListComp, 332
- Trustworthy, 643
- TupleSections, 342
- TypeAbstractions, 439
- TypeApplications, 435
- TypeData, 410
- TypeFamilies, 384
- TypeFamilyDependencies, 402
- TypeInType, 411
- TypeOperators, 368
- TypeSynonymInstances, 533
- UnboxedSums, 612
- UnboxedTuples, 611
- UndecidableInstances, 537
- UndecidableSuperClasses, 522
- UnicodeSyntax, 320
- UnliftedDatatypes, 615
- UnliftedFFITypes, 618
- UnliftedNewtypes, 613
- Unsafe, 643
- ViewPatterns, 511
- language, GHC extensions, 313
- Latin-1, 240
- ld options, 288
- LD\_LIBRARY\_PATH, 52, 297
- ld-options
  - package specification, 277
- levity polymorphism, 429
- LexicalNegation
  - Language Extension, 362
- lhs file extension, 77
- libdir, 80
- LiberalTypeSynonyms
  - Language Extension, 369
- libraries
  - with GHCi, 52
- LIBRARY\_PATH, 52
- library-dirs
  - package specification, 276
- license-file
  - package specification, 275
- LINE
  - pragma, 671
- LinearTypes
  - Language Extension, 458
- linker options, 288
- linking Haskell libraries with foreign code, 290
- lint, 308
- list comprehensions
  - ambiguity with quasi-quotes, 593
  - generalised, 332

- parallel, 331
- ListTuplePuns
  - Language Extension, 409
- LLVM code generator, 278
- LOG\_MSG
  - eventlog event type, 820
- M**
- machine-specific options, 93
- MagicHash
  - Language Extension, 321
- mailing lists, Glasgow Haskell, 4
- maintainer
  - package specification, 275
- make
  - building programs with, 255
- make and recompilation, 240
- make mode
  - of GHC, 78
- Makefile dependencies, 256
- Makefiles
  - avoiding, 82
- MallocFailHook (*C function*), 219
- matches, unused, 117
- mdo, 320
- MEM\_RETURN
  - eventlog event type, 814
- memory, using less heap, 757
- methods, missing, 109
- MIGRATE\_THREAD
  - eventlog event type, 811
- MIN\_VERSION\_GLASGOW\_HASKELL, 284
- MINIMAL
  - pragma, 666
- miscellaneous flags, 95
- missing export lists, warning, 109
- missing fields, warning, 109
- missing import lists, warning, 109
- missing methods, warning, 109
- mode
  - options, 77
- module system, recursion, 247
- modules
  - and filenames, 25
- monad comprehensions, 333
- MonadComprehensions
  - Language Extension, 333
- MonoLocalBinds
  - Language Extension, 580
- monomorphism restriction, warning, 115
- multiline input
  - in GHCi, 66
- MultiParamTypeClasses
  - Language Extension, 522

- MultiWayIf
  - Language Extension, 344
- N**
- name
  - package specification, 275
- NamedFieldPuns
  - Language Extension, 478
- NamedWildCards
  - Language Extension, 576
- native code generator, 278
- NegativeLiterals
  - Language Extension, 543
- NoImplicitPrelude
  - Language Extension, 339
- NOINLINE
  - pragma, 669
- nominal
  - role, 467
- NoMonomorphismRestriction
  - Language Extension, 579
- NondecreasingIndentation
  - Language Extension, 797
- NONMOVING\_HEAP\_CENSUS
  - eventlog event type, 828
- NONMOVING\_PRUNED\_SEGMENTS
  - eventlog event type, 828
- NoPatternGuards
  - Language Extension, 510
- NOTINLINE, 669
- NoTraditionalRecordSyntax
  - Language Extension, 471
- NOUNPACK
  - pragma, 676
- NPlusKPatterns
  - Language Extension, 513
- NullaryTypeClasses
  - Language Extension, 527
- NUMA, enabling in the runtime, 229
- NumDecimals
  - Language Extension, 545
- NumericUnderscores
  - Language Extension, 546
- O**
- object files, 240
- old generation, size, 224
- OPAQUE
  - pragma, 671
- optimisation, 127
- optimise
  - aggressively, 127, 128
  - normally, 127
- optimization



- and GHCi, 71
- options
  - for profiling, 715
  - GHCi, 66
  - language, 313
- OPTIONS\_GHC
  - pragma, 662
- orphan instances, warning, 112
- orphan rules, warning, 112
- OutOfHeapHook (*C function*), 219
- output-directing options, 242
- OVERLAPPABLE, 678
  - pragma, 678
- OVERLAPPING, 678
  - pragma, 678
- overlapping patterns, warning, 112
- OverlappingInstances
  - Language Extension, 538
- OVERLAPS, 678
  - pragma, 678
- OverloadedLabels
  - Language Extension, 549
- OverloadedLists
  - Language Extension, 336
- OverloadedRecordDot
  - Language Extension, 483
- OverloadedRecordUpdate
  - Language Extension, 484
- OverloadedStrings
  - Language Extension, 548
- overloading, death to, 672, 675, 754

## P

- package environments, 266
- package trust, 641
- package-url
  - package specification, 275
- PackageImports
  - Language Extension, 363
- packages, 259
  - building, 272
  - management, 269
  - system-cxx-std-lib, 277
  - using, 260
  - with GHCi, 52
- parallel list comprehensions, 331
- parallelism, 150, 604
- ParallelListComp
  - Language Extension, 331
- parser generator for Haskell, 761
- PartialTypeSignatures
  - Language Extension, 574
- PATH, 265, 286
- patterns, incomplete, 107

- patterns, overlapping, 112
- PatternSynonyms
  - Language Extension, 513
- phantom
  - role, 467
- platform-specific options, 93
- PolyKinds
  - Language Extension, 411
- PostfixOperators
  - Language Extension, 341
- postscript, from heap profiles, 729
- pragma, 661
  - ANN, 679
  - COLUMN, 671
  - COMPLETE, 676
  - CONLIKE, 670
  - DEPRECATED, 663
  - INCOHERENT, 678
  - INLINABLE, 669
  - INLINE, 666
  - LANGUAGE, 662
  - LINE, 671
  - MINIMAL, 666
  - NOINLINE, 669
  - NOUNPACK, 676
  - OPAQUE, 671
  - OPTIONS\_GHC, 662
  - OVERLAPPABLE, 678
  - OVERLAPPING, 678
  - OVERLAPS, 678
  - RULES, 645
  - SOURCE, 676
  - SPECIALIZE, 672
  - SPECIALIZE-INLINE, 673
  - SPECIALIZE-instance, 675
  - UNPACK, 675
  - WARNING, 663
- pragma, SPECIALIZE, 672
- pre-processing: cpp, 282
- pre-processing: custom, 285
- pre-processor options, 285
- problems, 751
- problems running your program, 752
- problems with the compiler, 751
- proc, 320
- PROF\_BEGIN
  - eventlog event type, 825
- PROF\_SAMPLE\_COST\_CENTRE
  - eventlog event type, 825
- profiling, 709
  - options, 715
  - ticky ticky, 237
  - with Template Haskell, 591
- PROGRAM\_ARGS



- eventlog event type, 809
- PROGRAM\_ENV
  - eventlog event type, 809
- promoted constructor, warning, 115
- prompt
  - GHCi, 23

## Q

- Qualified do-notation, 328
- QualifiedDo
  - Language Extension, 328
- QuantifiedConstraints
  - Language Extension, 555
- quasi-quotation, 320
- Quasi-quotes, 320
- quasi-quotes
  - ambiguity with list comprehensions, 593
- QuasiQuotes
  - Language Extension, 592

## R

- Rank2Types
  - Language Extension, 451
- RankNTypes
  - Language Extension, 451
- RebindableSyntax
  - Language Extension, 339
- recompilation checker, 240, 246
- record selectors, incomplete, 108
- record updates, incomplete, 108
- RecordWildCards
  - Language Extension, 479
- recursion, between modules, 247
- RecursiveDo
  - Language Extension, 322
- redirecting compilation output, 242
- redundant constraints, warning, 105
- redundant, warning, bang patterns, 118
- reexported-modules
  - reexport specification, 276
- Repeating last command
  - in GHCi, 57
- reporting bugs, 4
- representation polymorphism, 429
- representational
  - role, 467
- REQUEST\_PAR\_GC
  - eventlog event type, 813
- REQUEST\_SEQ\_GC
  - eventlog event type, 813
- RequiredTypeArguments
  - Language Extension, 444
- rewrite rules, 645

- RoleAnnotations
  - Language Extension, 469
- roles, 467
- roles, missing, 124
- RPATH, 297
- RTS, 238
- RTS behaviour, changing, 218
- RTS hooks, 218
- RTS option
  - A (size), 223
  - AL (size), 223
  - B, 236
  - C (s), 150
  - D (x), 236
  - DC DEBUG: compact, 237
  - DG DEBUG: gccafs, 237
  - DS DEBUG: sanity, 237
  - DZ DEBUG: zero freed memory on GC, 237
  - Da DEBUG: apply, 237
  - Db DEBUG: block, 237
  - Dc DEBUG: program coverage, 237
  - Dg DEBUG: gc, 237
  - Di DEBUG: interpreter, 237
  - Dk DEBUG: continuation, 237
  - Dl DEBUG: linker, 237
  - Dm DEBUG: stm, 237
  - Dn DEBUG: non-moving garbage collector, 237
  - Dp DEBUG: prof, 237
  - Dr DEBUG: sparks, 237
  - Ds DEBUG: scheduler, 237
  - Dt DEBUG: stable, 237
  - Dw DEBUG: weak, 237
  - Dz DEBUG: stack squeezing, 237
  - F (factor), 225
  - Fd (factor), 225
  - G (generations), 225
  - H [(size)], 227
  - I (seconds), 227
  - Iw (seconds), 227
  - K (size), 228
  - L (num), 727
  - L (n), 234
  - M (size), 229
  - Mgrace=(size), 229
  - N, 151
  - N (x), 151
  - O (size), 224
  - P, 718
  - R (size), 727
  - S [(file)], 231
  - T, 231
  - V (secs), 718

- Z, 238
- automatic-era-increment, 726
- copying-gc, 222
- disable-delayed-os-memory-return, 220
- eventlog-flush-interval={seconds}, 235
- generate-crash-dumps, 220
- generate-stack-traces=<yes|no>, 220
- info, 238
- install-seh-handlers={yes|no}, 220
- install-signal-handlers={yes|no}, 220
- internal-counters, 231
- long-gc-sync, 230
- long-gc-sync=<seconds>, 230
- machine-readable, 231
- no-automatic-heap-samples, 726
- no-automatic-time-samples, 726
- nonmoving-dense-allocator-count={count}, 222
- nonmoving-gc, 222
- null-eventlog-writer, 726
- numa, 229
- numa=<mask>, 229
- write-tix-file, 236
- c, 224
- c {n}, 225
- h, 234
- hT, 234, 724
- hb, 725
- hc, 724
- hd, 724
- he, 725
- hi, 725
- hm, 724
- hr, 725
- hy, 724
- i {secs}, 726
- kb {size}, 228
- kc {size}, 228
- ki {size}, 228
- l {flags}, 234
- m {n}, 229
- maxN {x}, 151
- n {size}, 224
- ol{filename}, 235
- p, 718
- pa, 718
- pj, 718
- po {stem}, 718
- qa, 152
- qb {gen}, 226
- qg {gen}, 226
- qm, 152
- qn {x}, 226
- r {file}, 237
- s [{file}], 231
- t [{file}], 231
- v [{flags}], 236
- w, 223
- xc, 238, 718
- xm {address}, 221
- xn, 222
- xp, 220
- xq {size}, 221
- xr {size}, 221
- RTS options, 217
  - concurrent, 150
  - from the environment, 218
  - garbage collection, 222
  - RTS options, hacking/debugging, 236
  - RTS options, hpc, 236
  - RTS options, setting, 217
- RTS\_IDENTIFIER
  - eventlog event type, 808
- RULES
  - pragma, 645
- run mode, 78
- RUN\_THREAD
  - eventlog event type, 810
- runghc, 73
- runhaskell, 73
- running, compiled program, 217
- RUNPATH, 297
- runtime control of Haskell programs, 217
- S**
  - Safe
    - Language Extension, 642
  - safe compilation, 644
  - safe haskell, 633
  - Safe Haskell flags, 642
  - safe haskell imports, warning, 644
  - safe haskell mode, missing, 644
  - safe haskell trust, 639
  - safe haskell uses, 634
  - safe imports, 639
  - safe inference, 642
  - safe language, 636
  - sanity-checking options, 96
  - ScopedSort, 436
  - ScopedTypeVariables
    - Language Extension, 565
  - search path, 241

- source code, 241
  - secure haskell, 634
  - semigroup
    - warning, 103
  - separate compilation, 82, 240
  - shadowing
    - interface files, 106
  - shadowing, warning, 112
  - Shared libraries
    - using, 294
  - Shared-object creation mode, 79
  - shell commands
    - in GHCi, 65
  - Show class, 37
  - signature files
    - Backpack; hsig files, 250
  - simple: stack trace
    - in GHCi, 40
  - simplifiable class constraints,
    - warning, 114
  - single : -osuf
    - using with profiling, 591
  - size\_t (*C type*), 219
  - smaller programs, how to produce, 757
  - SMP, 150, 605
  - SOURCE
    - pragma, 676
  - source annotations, 679
  - source-file options, 76
  - space-leaks, avoiding, 757
  - SPARK\_COUNTERS
    - eventlog event type, 816
  - SPARK\_CREATE
    - eventlog event type, 816
  - SPARK\_DUD
    - eventlog event type, 817
  - SPARK\_FIZZLE
    - eventlog event type, 817
  - SPARK\_GC
    - eventlog event type, 817
  - SPARK\_OVERFLOW
    - eventlog event type, 817
  - SPARK\_RUN
    - eventlog event type, 817
  - SPARK\_STEAL
    - eventlog event type, 817
  - SPECIALIZE
    - pragma, 672
  - SPECIALIZE pragma, 672, 754
  - SPECIALIZE-INLINE
    - pragma, 673
  - SPECIALIZE-instance
    - pragma, 675
  - specifying your own main function, 290
  - SQL, 332
  - stability
    - package specification, 275
  - stack
    - chunk buffer size, 228
    - chunk size, 228
  - stack, initial size, 228
  - stack, maximum size, 228
  - StackOverflowHook (*C function*), 219
  - standalone kind signature, 417
  - StandaloneDeriving
    - Language Extension, 487
  - StandaloneKindSignatures
    - Language Extension, 417
  - StarIsType
    - Language Extension, 426
  - startEventLogging (*C function*), 219
  - startup
    - files, GHCi, 68, 69
  - statements
    - in GHCi, 28
  - static
    - options, 67
  - Static pointers, 606
  - StaticPointers
    - Language Extension, 606
  - STOP\_THREAD
    - eventlog event type, 810
  - Strict
    - Language Extension, 597
  - strict constructor fields, 146, 147
  - strict haskell, 594
  - StrictData
    - Language Extension, 597
  - string gaps vs -cpp., 285
  - structure, command-line, 76
  - suffixes, file, 77
  - suppression
    - of unwanted dump output, 307
  - system-cxx-std-lib, 277
- ## T
- tabs, warning, 114
  - TASK\_CREATE
    - eventlog event type, 819
  - TASK\_DELETE
    - eventlog event type, 819
  - TASK\_MIGRATE
    - eventlog event type, 819
  - technology preview, 831
  - Template Haskell, 320
  - TemplateHaskell
    - Language Extension, 582
  - TemplateHaskellQuotes

- Language Extension, 582
- temporary files
  - keeping, 244, 245
  - redirecting, 245
- THREAD\_LABEL
  - eventlog event type, 811
- THREAD\_RUNNABLE
  - eventlog event type, 811
- THREAD\_WAKEUP
  - eventlog event type, 811
- ticky ticky profiling, 237
- TICKY\_COUNTER\_BEGIN\_SAMPLE
  - eventlog event type, 829
- TICKY\_COUNTER\_DEF
  - eventlog event type, 829
- TICKY\_COUNTER\_SAMPLE
  - eventlog event type, 829
- ticky-ticky profiling, 737
- time profile, 718
- TMPDIR, 245
- TMPDIR environment variable, 245
- tracing, 234
- TransformListComp
  - Language Extension, 332
- trust, 639
- trust check, 639, 640
- trusted
  - package specification, 276
- Trustworthy
  - Language Extension, 643
- trustworthy, 641
- TupleSections
  - Language Extension, 342
- TYPE, 429
- Type defaulting
  - in GHCi, 37
- Type equality constraints
  - kind heterogeneous, 553
- type patterns, unused, 117
- type signatures, missing, 110
- type signatures, missing, pattern synonyms, 110, 111
- type variable
  - inferred vs. specified, 435
- TypeAbstractions
  - Language Extension, 439
- TypeApplications
  - Language Extension, 435
- TypeData
  - Language Extension, 410
- TypeFamilies
  - Language Extension, 384
- TypeFamilyDependencies
  - Language Extension, 402

- TypeInType
  - Language Extension, 411
- TypeOperators
  - Language Extension, 368
- TypeSynonymInstances
  - Language Extension, 533

## U

- UnboxedSums
  - Language Extension, 612
- UnboxedTuples
  - Language Extension, 611
- UndecidableInstances
  - Language Extension, 537
- UndecidableSuperClasses
  - Language Extension, 522
- unfolding, controlling, 142, 143, 147, 148, 758
- Unicode, 240
- UnicodeSyntax
  - Language Extension, 320
- UnliftedDatatypes
  - Language Extension, 615
- UnliftedFFITypes
  - Language Extension, 618
- UnliftedNewtypes
  - Language Extension, 613
- UNPACK
  - pragma, 675
- unregisterised compilation, 279
- Unsafe
  - Language Extension, 643
- unused binds, warning, 115, 116
- unused do binding, warning, 117
- unused forall's, warning, 118
- unused imports, warning, 117
- unused matches, warning, 117
- unused type patterns, warning, 117
- unused, warning, record wildcards, 118, 119
- USER\_MARKER
  - eventlog event type, 820
- USER\_MSG
  - eventlog event type, 820
- using GHC, 75
- UTF-8, 240
- utilities, Haskell, 761

## V

- verbosity options, 86
- version
  - package specification, 275
- version, of ghc, 4
- ViewPatterns

Language Extension, [511](#)  
VISUAL, [56](#)

## W

WALL\_CLOCK\_TIME  
    eventlog event type, [809](#)  
WARNING  
    pragma, [663](#)  
warnings, [96](#)  
    deprecations, [101](#), [102](#)  
Whitespace, [661](#)  
windres, [292](#)

## Y

Yacc for Haskell, [761](#)



`<unit-id>;<module>;<args>;` GHC option  
    `-fplugin-library={file-path}`, [682](#)

**Some radii options for box corners used; they were ignored as pict2e was not found**